

FlexPDE 8

**Version 8.00
12/1/2023**

FlexPDE 8

Copyright © 2023 PSI

Complying with all copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, or otherwise) without the express written permission of PDE Solutions Inc.

PDE Solutions Inc. may have patents, patent applications, trademarks, and copyrights or other intellectual property rights covering subject matter in this document. Except as provided in any written license agreement from PDE Solutions Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights or other intellectual property.

PDE Solutions, and FlexPDE are either registered trademarks or trademarks of PDE Solutions Inc. in the United States of America and/or other countries.

Products that are referred to in this document may be either trademarks and/or registered trademarks of the respective owners. The publisher and the author make no claim to these trademarks.

While every precaution has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document or from the use of programs and source code that may accompany it. In no event shall the publisher and the author be liable for any loss of profit or any other commercial damage caused or alleged to have been caused directly or indirectly by this document.

Note :

This version of this manual is current as of the indicated release date. Electronic versions of this manual together with subsequent release notices in the FlexPDE documentation are available online at www.pdesolutions.com. Electronic versions are updated more frequently than printed versions, and may reflect recent developments in FlexPDE more accurately.

Table of Contents

Part I Getting Started	1
1 Installation	2
2 Starting FlexPDE	2
3 FlexPDE Working Files	4
4 The Main Menu Bar	6
.....The File Menu	7
.....The Controls Menu	10
.....The Stop Menu	11
5 The Tool Bar	13
6 Editing Descriptor Files	14
7 Domain Review	16
8 While the Problem Runs	18
9 When the Problem Finishes	24
10 Viewing Saved Graphic Files	26
11 Preferences Window	28
.....General Settings Tab	28
.....Font Settings Tab	30
.....Web Proxy Settings Tab	31
.....License Registration Tab	32
12 Registering FlexPDE	33
.....Internet Key Registration	35
.....Dongle Registration	38
.....Network Dongle Registration	41
.....Software Key Registration	44
Part II User Guide	45
1 Overview	46
.....What Is FlexPDE?	46
.....What Can FlexPDE Do?	47
.....How Does It Do It?	48
.....Who Can Use FlexPDE?	49
.....What Does A Script Look Like?	49
.....What About Boundary Conditions?	51
2 Basic Usage	51

.....How Do I Set Up My Problem?	51
.....Problem Setup Guidelines	52
.....Notation	53
.....Variables and Equations	53
.....Mapping the Domain	54
.....An Example Problem	55
.....Generating A Mesh	56
.....Defining Material Parameters	58
.....Setting the Boundary Conditions	58
.....Requesting Graphical Output	59
.....Putting It All Together	60
.....Interpreting a Script	65
3 Some Common Variations	66
.....Controlling Accuracy	66
.....Computing Integrals	67
.....Reporting Numerical Results	67
.....Summarizing Numerical Results	68
.....Parameter Studies Using STAGES	68
.....Cylindrical Geometry	71
.....Integrals In Cylindrical Geometry.....	71
.....A Cylindrical Example.....	71
.....Time Dependence	74
.....Bad Things To Do In Time Dependent Problems.....	77
.....Eigenvalues and Modal Analysis	78
.....The Eigenvalue Summary.....	81
4 Addressing More Difficult Problems	82
.....Nonlinear Coefficients and Equations	82
.....Complications Associated with Nonlinear Problems.....	84
.....Natural Boundary Conditions	85
.....Some Typical Cases.....	86
.....An Example of a Flux Boundary Condition.....	88
.....Discontinuous Variables	89
.....Contact Resistance.....	89
.....Decoupling.....	91
.....Using JUMP in problems with many variables.....	92
5 Using FlexPDE in One-Dimensional Problems	93
6 Using FlexPDE in Three-Dimensional Problems	94
.....The Concept of Extrusion	95
.....Extrusion Notation in FlexPDE	95

.....Layering	97
.....Setting Material Properties by Region and Layer	98
.....More Complex Extrusions	99
.....Void Compartments	105
.....Limited Regions	105
.....Specifying Plots on Cut Planes	106
.....The Complete 3D Canister	107
.....Setting Boundary Conditions in 3D	110
.....Shaped Layer Interfaces	113
.....Surface-Generating Functions	115
.....Integrals in Three Dimensions	117
.....More Advanced Plot Controls	120
.....3D Mesh Generation	121
7 Complex Variables	123
.....The Time-Sinusoidal Heat	124
.....Interpreting Time-Sinusoidal Results	128
8 Vector Variables	130
.....Curvilinear Coordinates	132
.....Magnetic Vector Potential	132
9 Variables Inactive in Some Regions	135
.....A Chemical Beaker	136
10 Variables Explicit in Some Regions	139
11 Moving Meshes	140
.....Mesh Balancing	141
.....The Pulsating Blob	142
.....Mesh Reconnection	144
12 Controlling Mesh Density	144
13 Post-processing with FlexPDE	146
14 Exporting Data to Other Applications	147
15 Importing Data from Other Applications	150
16 Using ARRAYS and MATRICES	150
17 Solving Nonlinear Problems	152
18 Using Multiple Processors	154
19 Running FlexPDE from the Command Line	155
20 Running FlexPDE Without A Graphical Interface	156
21 Importing DXF Files	157

22	Importing OBJ Files	157
23	Getting Help	159
Part III Problem Descriptor Reference		161
1	Introduction	162
Preparing a Descriptor File	163
File Names and Extensions	163
Problem Descriptor Structure	164
Problem Descriptor Format	165
Case Sensitivity	165
"Include" Files	165
A Simple Example	166
2	The Elements of a Descriptor	167
Comments	167
Reserved Words and Symbols	168
Separators	171
Literal Strings	172
Numeric Constants	172
Built-in Functions	173
Analytic Functions.....	173
Non-Analytic Functions.....	174
Unit Functions.....	176
String Functions.....	177
The FIT Function.....	178
The LUMP Function.....	178
The RAMP Function.....	179
The SAVE Function.....	180
The SUM Function.....	180
The SWAGE Function.....	181
The VAL and EVAL functions.....	182
Boundary Search Functions.....	182
Operators	183
Arithmetic Operators.....	183
Complex Operators.....	183
Differential Operators.....	184
Integral Operators.....	185
Time Integrals.....	186
Line Integrals.....	186
2 D Surface Integrals.....	187
3 D Surface Integrals.....	187
2 D Volume Integrals.....	188
3 D Volume Integrals.....	189

.....Relational Operators.....	189
.....String Operators.....	190
.....Vector Operators.....	190
.....Tensor Operators.....	192
.....Predefined Elements	193
.....Expressions	194
.....Repeated Text	195
3 The Sections of a Descriptor	196
.....Title	196
.....Select	197
..... Mesh Generation Controls.....	197
..... Solution Controls.....	199
..... Global Graphics Controls.....	205
.....Coordinates	207
.....Variables	209
..... The THRESHOLD Clause.....	210
..... The ORDER Clause.....	211
..... Complex Variables.....	211
..... Moving Meshes.....	211
..... Variable Arrays.....	212
..... Vector Variables.....	212
.....Global Variables	213
.....Definitions	214
..... ARRAY Definitions.....	215
..... MATRIX Definitions.....	217
..... COMPLEX Definitions.....	220
..... Function Definitions.....	220
..... STAGED Definitions.....	221
..... POINT Definitions.....	222
..... TABLE Import Definitions.....	222
..... The TABLE Input function.....	223
..... The TABLEDEF input statement	224
..... TABLE Modifiers.....	224
..... TABLE File format.....	225
..... TABULATE definitions.....	226
..... TRANSFER Import Definitions.....	227
..... The PASSIVE Modifier.....	228
..... Mesh Control Parameters.....	228
.....Materials	229
.....Boundary Conditions	230
.....Initial Values	231
.....Equations	232

Association between Equations, Variables and Boundary	
.....Conditions.....	233
.....Sequencing of Equations.....	233
.....Initial Equations.....	235
.....Eigenvalues and Modal Analysis.....	235
.....Moving Meshes.....	236
.....Constraints.....	238
.....Extrusion.....	238
.....Rotation.....	240
.....Boundaries.....	241
.....Points.....	241
.....Boundary Paths.....	242
.....Regions.....	245
.....Reassigning Regional Parameters.....	246
.....Regions in One Dimension.....	246
.....Regions in Three Dimensions.....	247
.....Regional Parameter Values in 3D.....	247
.....Limited Regions in 3D.....	248
.....Empty Layers in 3D.....	249
.....Excludes.....	249
.....Features.....	249
.....Node Points.....	250
.....Ordering Regions.....	250
.....Numbering Regions.....	251
.....Fillet and Bevels.....	251
.....Specifying Boundary Conditions.....	251
.....Syntax of Boundary Condition Statements.....	253
.....Point Boundary Conditions.....	253
.....Boundary conditions in 1D.....	254
.....Boundary Conditions in 3D.....	254
.....Jump Boundaries.....	255
.....Periodic Boundaries.....	256
.....Complex and Vector Boundary Conditions.....	258
.....Front.....	258
.....Maximize.....	258
.....Minimize.....	259
.....Resolve.....	259
.....Time.....	260
.....Monitors and Plots.....	261
.....Graphics Display Specifications.....	262
.....Graphic Display Modifiers.....	264
.....Controlling the Plot Domain.....	271
.....Reports.....	273
.....The ERROR Variable.....	274
.....Window Tiling.....	274

..... Monitors in Steady State Problems.....	274
..... Monitors and Plots in Time Dependent Problems.....	274
..... Harcopy	275
..... Graphics Export.....	275
..... Data Export.....	276
..... Data Export Specifications.....	276
..... TRANSFER File format.....	278
..... TRANSFER6 File format.....	283
..... Examples.....	285
..... Histories	286
..... End	287
4 Batch Processing	287
Part IV Technical Notes	289
1 Applications in Electromagnetics	290
..... Introduction	299
..... Finite Element Methods.....	300
..... Principles.....	300
..... Boundary Conditions.....	301
..... Integration by Parts and Natural Boundary Conditions.....	301
..... Adaptive Mesh Refinement.....	303
..... Time Integration.....	303
..... Summary.....	303
..... Electrostatics	304
..... Electrostatic Fields in 2D.....	305
..... Electrostatics in 3D.....	310
..... Capacitance per Unit Length in 2D Geometry.....	312
..... Magnetostatics	318
..... A Magnet Coil in 2D Cylindrical Coordinates.....	320
..... Nonlinear Permeability in 2D.....	323
..... Divergence Form.....	327
..... Boundary Conditions.....	328
..... Magnetic Materials in 3D.....	329
..... Waveguides	335
..... Homogeneous Waveguides.....	337
..... TE and TM Modes.....	338
..... Non-Homogeneous Waveguides.....	342
..... Boundary Conditions.....	344
..... Material Interfaces.....	345
..... References	350
2 Natural Boundary Conditions	351
3 Solving Nonlinear Problems	352
4 Avoid Discontinuities!	354

5	Smoothing Operators in PDE's	356
6	Interpreting Error Estimates	358
7	Coordinate Scaling	360
8	Making Movies	362
9	Converting from Version 4 to Version 5	363
10	Converting from Version 5 to Version 6	363
11	Converting from Version 6 to Version 7	364
12	How FlexPDE Works	365
Part V Sample Problems		370
1	Applications	371
Chemistry	371
chemburn.....	371
melting.....	373
reaction.....	375
Control	377
control_steady.....	377
control_transient.....	378
Electricity	379
3d_capacitor.....	379
3d_capacitor_check.....	380
3d_dielectric.....	381
capacitance.....	382
dielectric	383
fieldmap.....	384
plate_capacitor.....	385
space_charge.....	386
Fluids	387
1d_eulerian_shock.....	387
1d_lagrangian_shock.....	388
2d_eulerian_shock.....	389
2d_piston_movingmesh.....	390
3d_flowbox.....	392
airfoil.....	394
black_oil.....	395
buoyant.....	397
buoyant+time.....	399
cavity_1k.....	400
channel.....	402
contaminant_transport.....	403
coupled_contaminant.....	404
coupled_contaminant_initeq.....	406

.....flowslab.....	407
.....geoflow.....	408
.....hyperbolic.....	409
.....landfill_gas_flow.....	410
.....lowvisc.....	414
.....swirl.....	416
.....viscous.....	418
.....Groundwater	420
.....porous.....	420
.....richards.....	420
.....water.....	421
.....Heatflow	422
.....1d_float_zone.....	422
.....3d_bricks.....	424
.....3d_bricks+time.....	425
.....axisymmetric_heat.....	426
.....float_zone.....	427
.....heat_boundary.....	428
.....radiation_flow.....	430
.....radiative_boundary.....	431
.....slider.....	432
.....Lasers	433
.....laser_heatflow.....	433
.....self_focus.....	435
.....Magnetism	436
.....3d_helmholtz_coil.....	436
.....3d_magnetron.....	438
.....3d_vector_magnetron.....	439
.....magnet_coil.....	440
.....permanent_magnet.....	442
.....saturation.....	443
.....Misc	445
.....diffusion.....	445
.....minimal_surface.....	446
.....surface_fit.....	447
.....Quantun_Mechanics	448
.....1d_finite_potential_well.....	448
.....2d_finite_potential_well.....	449
.....morse_potential.....	450
.....Stress	451
.....3d_bimetal.....	451
.....anisotropic_stress.....	454
.....axisymmetric_stress.....	456
.....bentbar.....	457

.....bentbar_moving.....	459
.....elasticity.....	460
.....fixed_plate.....	463
.....free_plate.....	465
.....harmonic.....	466
.....plasticity.....	468
.....prestube.....	470
.....tension.....	471
.....vibrate.....	473
2 Usage	476
..... 1D	476
.....1d_cylinder.....	476
.....1d_cylinder_transient.....	476
.....1d_float_zone.....	477
.....1d_slab.....	478
.....1d_sphere.....	478
..... 3D_domains	479
.....2d_sphere_in_cylinder.....	479
.....3d_box_in_sphere.....	479
.....3d_cocktail.....	481
.....3d_cylspec.....	481
.....3d_ellipsoid.....	483
.....3d_ellipsoid_shell.....	483
.....3d_extrusion_spec.....	484
.....3d_fillet.....	485
.....3d_guitar.....	486
.....3d_helix_layered.....	487
.....3d_helix_wrapped.....	490
.....3d_lenses.....	492
.....3d_limited_region.....	493
.....3d_pinchout.....	494
.....3d_pipes.....	495
.....3d_planespec.....	497
.....3d_pyramid.....	498
.....3d_shell.....	499
.....3d_shells.....	501
.....3d_sphere.....	502
.....3d_spherebox.....	503
.....3d_spherespec.....	504
.....3d_spool.....	505
.....3d_thermocouple.....	506
.....3d_toggle.....	507
.....3d_torus.....	509
.....3d_torus_tube.....	509

.....3d_twist.....	511
.....3d_void.....	513
.....off_axis_disks_2.....	514
.....off_axis_disks_3.....	515
.....regional_surfaces.....	517
.....tabular_surfaces.....	518
.....two_spheres.....	519
.....twoz_direct.....	520
.....twoz_import.....	521
.....twoz_export.....	523
.....twoz_planar.....	524
.....3D_Rotations.....	525
.....Rotated_heat_ring.....	525
.....Accuracy.....	528
.....forever.....	528
.....gaus1d.....	528
.....gaus2d.....	529
.....gaus3d.....	530
.....rotating_shape.....	531
.....sine1d.....	532
.....sine2d.....	533
.....sine3d.....	533
.....Arrays+Matrices.....	534
.....arrays.....	534
.....array_boundary.....	535
.....matrices.....	536
.....matrix_boundary.....	537
.....wave_boundary.....	537
.....CAD_Import.....	538
.....arrow_OBJimport.....	538
.....boxinbox_OBJimport.....	538
.....canincan_OBJimport.....	539
.....cube_OBJimport.....	539
.....cube2_OBJimport.....	540
.....cube2_validate.....	541
.....cubes_bigsmall_OBJimport.....	541
.....cubes_bigsmall_validate.....	542
.....gourd_OBJimport.....	543
.....helix_OBJimport.....	543
.....horn_OBJimport.....	545
.....torus_OBJimport.....	545
.....tubefaces_OBJimport.....	546
.....wineglass_OBJimport.....	547
.....Constraints.....	547

.....3d_constraint.....	547
.....3d_surf_constraint.....	549
.....boundary_constraint.....	550
.....constraint.....	551
.....Contact_Boundaries	551
.....3d_contact.....	551
.....3d_contact_region.....	552
.....contact_resistance_heating.....	553
.....thermal_contact_resistance.....	555
.....transient_contact_resistance_heating.....	556
.....Coordinate_Scaling	557
.....scaled_z.....	557
.....unscaled_z.....	559
.....Eigenvalues	560
.....3d_oildrum.....	560
.....3d_plate.....	561
.....drumhead.....	562
.....drumhole.....	563
.....drumhole_animate.....	564
.....filledguide.....	565
.....shiftguide.....	566
.....vibar.....	567
.....waveguide.....	569
.....waveguide20.....	570
.....Functions	571
.....complex_functions.....	571
.....floor_ceiling.....	572
.....function_definition.....	574
.....error_reporting.....	574
.....globalmax.....	576
.....globalmax_3d.....	577
.....standard_functions.....	578
.....sum.....	580
.....swage_pulse.....	580
.....swage_test.....	581
.....unit_functions.....	582
.....vector_functions.....	582
.....Implicit_Curves	583
.....implicit_curve_boundary.....	583
.....implicit_curve_surface.....	584
.....sine_boundary.....	584
.....sine_boundary_3d.....	585
.....Import_Export	586
.....3d_mesh_export.....	586

.....3d_mesh_import.....	587
.....3d_post_processing.....	588
.....3d_surf_export.....	588
.....blocktable.....	589
.....export.....	590
.....export_format.....	591
.....export_history.....	591
.....mesh_export.....	592
.....mesh_import.....	593
.....post_processing.....	594
.....smoothtable.....	595
.....splinetable.....	595
.....table.....	596
.....tabledef.....	597
.....table_export.....	597
.....table_import.....	598
.....transfer_export.....	599
.....transfer_import.....	599
.....Integrals	601
.....2d_integrals.....	601
.....3d_integrals.....	602
.....time_integral.....	604
.....Mesh_Control	604
.....3d_curvature.....	604
.....boundary_density.....	605
.....boundary_spacing.....	606
.....front.....	607
.....mesh_density.....	608
.....mesh_spacing.....	608
.....resolve.....	609
.....Misc	610
.....askuser.....	610
.....bc_sets.....	611
.....bc_switching.....	612
.....data_fitting.....	613
.....edge_distance.....	614
.....fillet.....	615
.....fit+weight.....	615
.....ifthen.....	616
.....lump.....	616
.....material_sets.....	617
.....moving_source.....	618
.....point_load.....	619
.....polar_coordinates.....	619

.....regional_equations.....	620
.....repeat.....	621
.....rotated_ellipse.....	621
.....save.....	622
.....spacetime1.....	623
.....spacetime2.....	624
.....spline_boundary.....	625
.....staged_geometry.....	626
.....stages.....	626
.....tabulate.....	627
.....tensors.....	628
.....two_histories.....	629
.....Moving_Mesh.....	630
.....1d_stretch_x.....	630
.....2d_blob_position.....	631
.....2d_blob_velocity.....	632
.....2d_bubble_reconnect.....	633
.....2d_lagrangian_shock.....	634
.....2d_movepoint.....	635
.....2d_stretch_x.....	637
.....2d_stretch_xy.....	638
.....3d_blob_position.....	639
.....3d_blob_velocity.....	640
.....3d_bubble_reconnect.....	642
.....3d_intrusion_reconnect.....	643
.....gaussian_valve_reconnect.....	645
.....sliptube_explicit_reconnect.....	646
.....ODE.....	648
.....linearode.....	648
.....nonlinode.....	649
.....second_order_time.....	650
.....Optimization.....	651
.....criticality.....	651
.....criticality_size.....	652
.....power_control.....	653
.....size_control.....	655
.....Periodicity.....	656
.....1d_periodic.....	656
.....2d_wave_propagation.....	657
.....3d_antiperiodic.....	658
.....3d_periodic_exchange.....	659
.....3d_xperiodic.....	660
.....3d_zperiodic.....	661
.....antiperiodic.....	662

.....azimuthal_periodic.....	663
.....periodic+time.....	664
.....periodic.....	665
.....periodic_contaminant.....	666
.....periodic_map.....	667
.....three-way_periodic_3d.....	668
.....two-way_periodic.....	669
.....two-way_periodic_3d.....	670
.....Plotting	671
.....3d_ploton.....	671
.....export_test.....	672
.....plot_on_grid.....	673
.....plot_test.....	674
.....Sequenced_Equations	675
.....equation_iteration.....	675
.....initialeq.....	677
.....smoothing_discontinuities.....	678
.....theneq+time.....	679
.....theneq.....	680
.....Stop+Restart	681
.....restart_export.....	681
.....restart_import.....	682
.....Variable_Types	684
.....array_variables.....	684
.....complex_emw21.....	684
.....complex_sinusoidal_heat.....	685
.....complex_variables.....	686
.....complex+time.....	687
.....inactive_variables.....	687
.....vector_lowvisc.....	689
.....vector_variables.....	690
.....vector+time.....	690
Index	692

Part



Getting Started

1 Getting Started

This section presents an overview of how to install and interact with FlexPDE on your computer. It does not address the issues of how to pose a partial differential equations problem in the scripting language of FlexPDE. These issues are addressed in the sections [User Guide](#)^[46] and [Problem Descriptor Reference](#)^[162].

1.1 Installation

The general principles of installation for FlexPDE are the same across all platforms: the set of installation files must be extracted from the compressed distribution archive and placed in the system file hierarchy. The details of how this is done vary with computer platform.

There are two media options for FlexPDE installation:

Installation from Internet download

Browse www.pdesolutions.com to the download page. Click the file name of the desired version, and store the downloaded file at a convenient place in your file system. For more information, click the "Installation Guide" link next to the version download you have chosen.

Installation from CDROM

The optional CDROM has an installation page that is organized in the same fashion as the website download page. Open the main index page and browse to the "Installation" page. Click the file name of the desired version, and run the file (or store the downloaded file at a convenient place in your file system then run it). For more information, click the "Installation Guide" link next to the version download you have chosen.

In addition to the "FlexPDE8" application folder, the installer will create a "FlexPDE8user" folder containing a duplicate copy of the sample scripts and the FlexPDE user settings file ("flexpde8.ini"). On Windows this will be in the user's "Documents" folder.

1.2 Starting FlexPDE

Windows

The FlexPDE installation program will place an icon on your desktop, as well as an entry in the Start menu. You can start FlexPDE by double-clicking the desktop icon, or single-clicking the Start menu entry. Alternatively, you can use the File Manager to navigate to the folder where FlexPDE was installed, and then double-click on the file "FlexPDE8.exe" (the default installation location is "C:\Program Files\FlexPDE8").

The installation program will also create associations of the ".pde" and ".pg8" extensions with the installed FlexPDE executable, so that FlexPDE can be started by double-clicking any file of these types in the File Manager.

Mac OS X

FlexPDE is installed in the "Applications/FlexPDE8" folder by default, but you can choose to install it in any location you wish. Navigate to this folder and open the FlexPDE8 application.

The installation program will also create associations of the ".pde" and ".pg8" extensions with the installed FlexPDE application, so that FlexPDE can be started by double-clicking any file of these types in the Finder.


Linux

FlexPDE is installed in the directory you choose when extracting the archive. You can start FlexPDE by typing a command line in a console window, or from the file manager by navigating to the installation directory and opening the FlexPDE8 application.

Associations of the ".pde" and ".pg8" extensions with FlexPDE8 can be made manually using the standard procedures of the operating system. You can also place a FlexPDE icon on your desktop using the "fpde8icon.png" file included in the installation files.

The About Banner and Window Caption

When you start FlexPDE (or go to the ["About FlexPDE"](#) menu), you will see a screen like this:

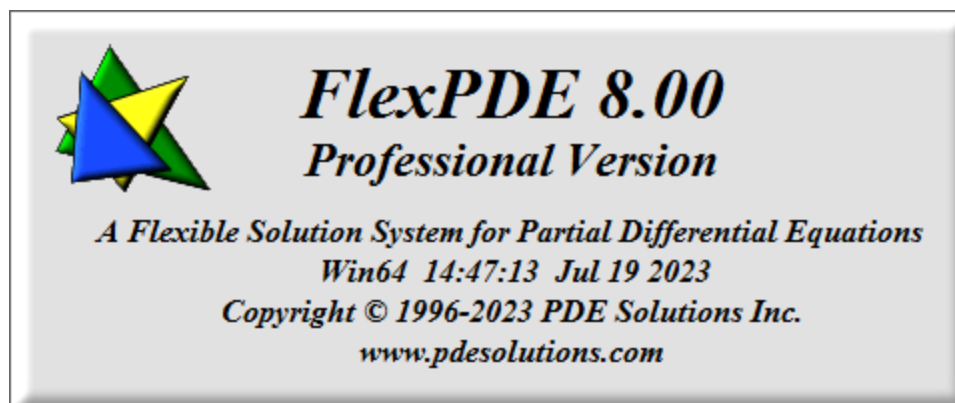

The About banner reports the version number, license class, OS platform, and date of creation of the running version of FlexPDE.

The main window caption bar will also report the license class, version, OS platform, and license level (1D, 2D, or 3D, depending on the current licensing level of the running program*). Temporary licenses will display the time remaining in the license.

The main window presents a standard menu bar and a tool bar, most items of which at this point are disabled, unless you have opened FlexPDE with a file-click.

* **Note:** Software and Internet keys are read at invocation of FlexPDE. Dongles are merely checked for their presence but a license is not acquired until a problem is run. At that time a license of the required level, 1D, 2D or 3D will be requested and displayed in FlexPDE's About banner and title bar.

1.3 FlexPDE Working Files

FlexPDE works with an assortment of files differing in the file extension. All have the structure <problem name><extension>, where <problem name> is the unique identifier for the model being run. The meaning of the most commonly used extensions are described below. Other file extensions can be created and used in other circumstances as described later in the documentation.

Input

.PDE

FlexPDE reads a model description from a script file with the extension ".pde". This file is created by the user and contains the full description of the model to be run. The name of this file establishes the <problem name> used by the other files. This is a UTF-8 text file and can be opened with any text editor. This file should not be modified by formatting editors like Word as they may insert illegal characters. If using an alternate editor that supports unicode etc., be sure to save it in UTF-8 format not one of the many other page codings.

Output

.PG8

FlexPDE writes primary graphical output into a file with the extension ".pg8". This file can be viewed later and used to print or export graphical data to various other formats. The format of this file is unique to FlexPDE and cannot be read by other programs.

_LOG.TXT

FlexPDE writes a summary of the progress of each run into a text file with the extension "_log.txt". This file contains information about time steps, error estimates, memory use and other data. This is an

ordinary text file and can be opened with any text editor. In previous versions this file had the extension ".log".

_DEBUG.TXT

FlexPDE writes a more elaborate summary of each run into a file with the extension "_debug.txt". This file is sometimes useful in determining errors or locating trouble spots in the domain. This is an ordinary text file and can be opened with any text editor. In previous versions this file had the extension ".dbg".

_EIG.TXT

In eigenvalue problems, FlexPDE writes a summary of final system eigenvalues into a file with the extension "_eig.txt". This is an ordinary text file and can be opened with any text editor. In previous versions this file had the extension ".eig".

_INITIALMESH.XFR


If requested in the Preferences [General Settings](#)^[28] tab, FlexPDE will automatically export a transfer file of the initial mesh into a file with the extension "_initialmesh.xfr" and reload this file when possible to save time creating the initial grid.

_RESTART.XFR

If requested in the Preferences [General Settings](#)^[28] tab, when FlexPDE completes a problem it will automatically export a [RESTART](#)^[227] transfer file with all variables into a file with the extension "_restart.xfr". This file can be used for post-processing of the solution data when needed.

Note: By default Windows hides the file name extensions, relying on distinctive icons to indicate file type. Windows can be configured to show file extensions and we encourage users to do this. FlexPDE has unique icons for ".pde" and ".pg8" files, but not for the other files.

1.4 The Main Menu Bar



The items of the main menu present many of the conventional functions of graphical applications. The availability and precise meaning of these menu items depends on the current state of processing of the problem. We summarize the menu items here, and describe them in more detail in the following sections.

File

The "File" menu item allows you to begin operation by opening a problem descriptor file, importing a DXF file, importing an OBJ file, or viewing previously stored graphical output from a FlexPDE run. It also allows you to save your work or exit the application. These operations are performed using standard dialogs of the computer operating system. (See ["The File Menu"](#)⁷)

Controls

This menu contains an assortment of functions that may be performed during the generation and running of a problem descriptor, such as running the script or switching between edit and plot modes. (See ["The Controls Menu"](#)¹⁰)

View

When a stored FlexPDE graphics file has been opened, the View menu item will present a menu of options for controlling the display of the stored images. (See ["Viewing Saved Graphic Files"](#)²⁶)

Stop


While a problem is being run, the Stop menu item will display a selection of termination strategies of various levels of urgency. (See ["The Stop Menu"](#)¹¹)

Edit

When a descriptor is being edited, this menu provides standard editing commands. (See ["Editing Descriptor Files"](#)¹⁴)

Help


The Help menu contains five items as shown below:

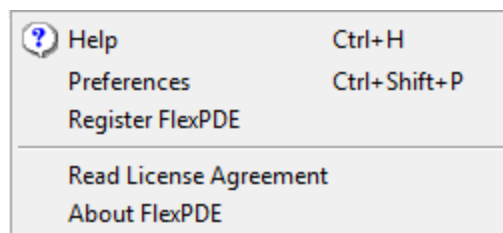

- On Windows, the "Help" sub-item will initiate the help system. On Mac and Linux, you must manually initiate your browser and direct it to "Help | Html | Index.html" in the FlexPDE installation directory.
- The "Preferences" sub-item allows you to inspect or modify the various FlexPDE preferences. (See ["Preferences Window"](#)^[28])
- The "Register FlexPDE" sub-item brings you to the License Registration Preferences tab and allows you to inspect or modify the FlexPDE license registration. (See ["License Registration Tab"](#)^[32])
- The "Read License Agreement" sub-item displays the End-User License Agreement.
- The "About FlexPDE" sub-item redisplay the [About banner](#)^[2]. Note that on Mac this item appears in the FlexPDE "Application" menu.

1.4.1 The File Menu

The File Menu allows the creation of new files, opening existing files, saving and closing active problems, importing DXF and OBJ files, and viewing saved graphics:

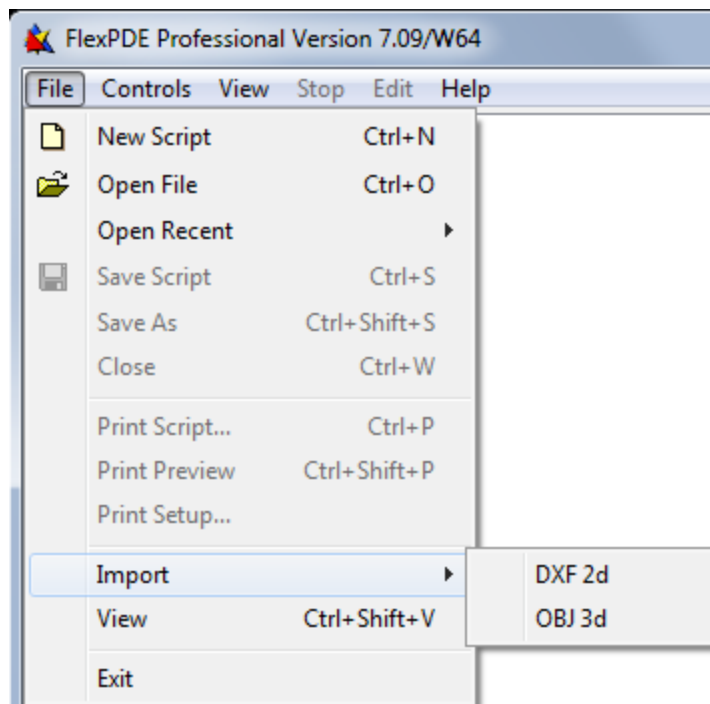


The menu items have the following functions:

New Script

Use this menu item to create a new problem descriptor file (or "script"). FlexPDE will initialize the descriptor with the most common section headings. In most cases, it will be more convenient to create a new descriptor by editing an existing one which is close in function to the new problem. There are many starting scripts in the Samples folder.

Open File

This menu item can be used to open an existing descriptor file (either to modify it or to run the problem), to open a stored graphics file for viewing, or to open a DXF or OBJ file for import. A standard Open_File dialog will appear. Navigate to the folder which contains the descriptor you wish to open. For example, navigating to the standard samples folder "Samples | Usage | 3D_domains" will display the following screen:

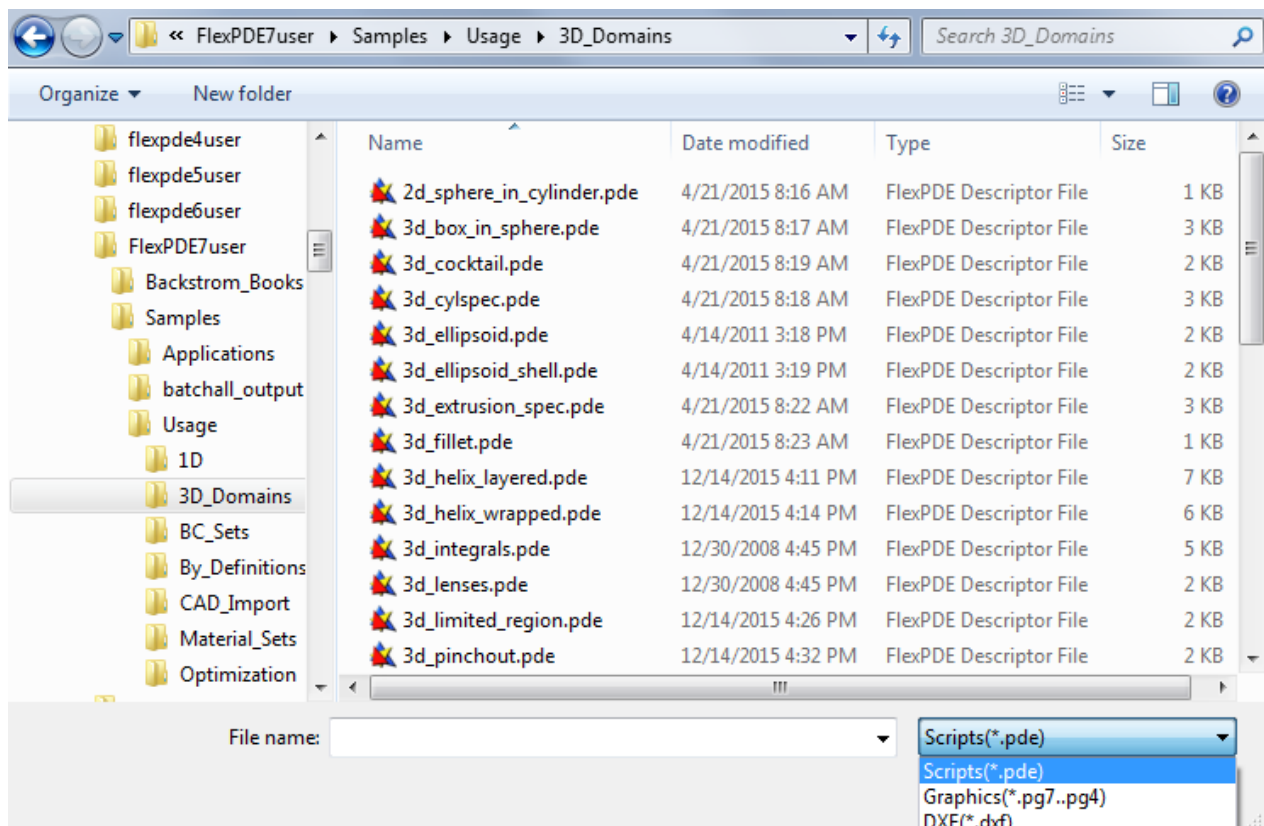

(If your system is configured to hide file extensions, you will not see the ".pde" part of the file names, but you can still recognize the FlexPDE icon.)

The default display shows script files (.pde extension). You can select other file types using the dropdown list. (On Macintosh or Linux, the selection of alternate file types is slightly different, but follows the customary methods for the operating system.) Double-click on the file of your choice, or single-click and click Open. A new tab will be displayed, showing the name of the selected problem

file. You can switch between tabs at will. You can open as many descriptors as you wish, and any number of them can be running at the same time. Files can also be opened by drag-and-dropping them onto the running FlexPDE application. See the following section "[Editing Descriptor Files](#)"^[14] for more information on editing the open file.

Open Recent

This dynamically updated sub menu will present the last 20 files opened by FlexPDE. Selecting one will cause that file to be opened as if it were selected in the open dialog or it was drag-and-dropped onto the FlexPDE window.

Save Script

Use this menu item to save a descriptor which you have modified. The currently displayed file is saved in place of the original file. This function is automatically activated when a problem is run.

Save As

Use this menu item to save to a descriptor to a new file name. If you have modified it, the original source file will remain unchanged.

Close

Use this menu item to remove the currently displayed problem and disconnect from the associated files.

Print Script

Use this menu item to print a copy of the current script.

Print Preview

Use this menu item to preview the printing of the current script.

Print Setup

Use this menu item to set page information for script printing.

Import

Use this menu item to import descriptors from other formats. The DXF option will import a descriptor from AutoCad version R14. See the Technical Note "[Importing DXF Files](#)"^[157] for more information. The OBJ option will create a descriptor to load the selected OBJ mesh file. See the Technical Note "[Importing OBJ Files](#)"^[157] for more information. (These functions are the same as "Open File" with the DXF or OBJ file type selected.)

View

Use this menu item to open a file of saved graphical output from a FlexPDE problem which was run and completed at an earlier time. A standard Open_File dialog will appear. Navigate the folder containing the desired ".pg8" file. Double-click on the file of your choice, or single-click and click Open. See the following section "[Viewing Saved Graphics Files](#)"^[26] for more information. You may View more than one saved problem, and you may open files for viewing while other descriptors are


open, but you should not open the same problem for simultaneous viewing and running, since file access conflicts may occur. (This function is the same as "Open File" with the "Graphics" file type selected.)

Exit

Click here to terminate your FlexPDE session. All open descriptors and Views will be closed. If changes have been made and not saved, you will be prompted.

1.4.2 The Controls Menu

The Controls menu presents several optional functions for processing descriptors.

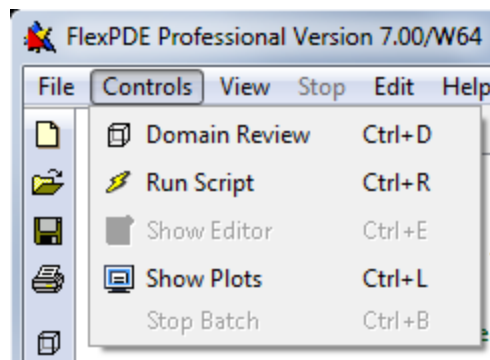

FlexPDE has two different operating modes, Edit and Plot. When in edit mode, the text of the current descriptor is displayed for editing. When in Plot mode, graphics are displayed, either the monitors and plots being constructed as a problem runs, or the final state of plots when a run is completed.

Domain Review



This is a modified form of the "Run" item. When FlexPDE is in Edit mode, the Domain Review menu item will begin processing the displayed problem descriptor, halting at various stages of the mesh generation to display the current state of the mesh construction. This is an aid to constructing problem domains. (See topic ["Domain Review"](#)¹⁶ below.)

Run Script

When FlexPDE is in Edit mode, the Run Script menu item will begin processing of the displayed problem descriptor. Execution will proceed without interruption through the mesh generation, execution and graphic display phases. (See topic ["While the Problem Runs"](#)¹⁸ below.)

Show Editor

When a problem is in Plot mode with graphics being displayed, the Show Editor menu item will enter Edit mode and display the current problem text. (See topic ["Editing Scripts"](#)¹⁴ below.) If the

problem is stopped or has not yet been run, the tab will show the  icon. If the problem is running while the editor is displayed, the  icon will display on the problem tab.

Show Plots

When a problem is in the Edit mode, the Show Plots menu item will switch to Plot mode and display the current state of the problem graphics. (See topic ["While the Problem Runs"](#)¹⁸ below.)


Stop Batch

When a batch script is running, the Stop Batch menu item will stop the batch after the currently running script finishes. This is particularly important when each individual problem in the batch runs quickly and the user cannot intercept the Stop button of the currently running script. (See topic ["Batch Processing"](#)²⁸⁷.)

1.4.3 The Stop Menu

When a problem is running, it is sometimes necessary to request an abnormal termination of the solution process. This may be because the user has discovered an error in his problem setup and wishes to modify it and restart, or because the solution is satisfactory for his needs and additional computation would be unnecessary.


The Stop menu provides several ways to do this, with the most imperative controls at the top, descending to less immediate terminations:

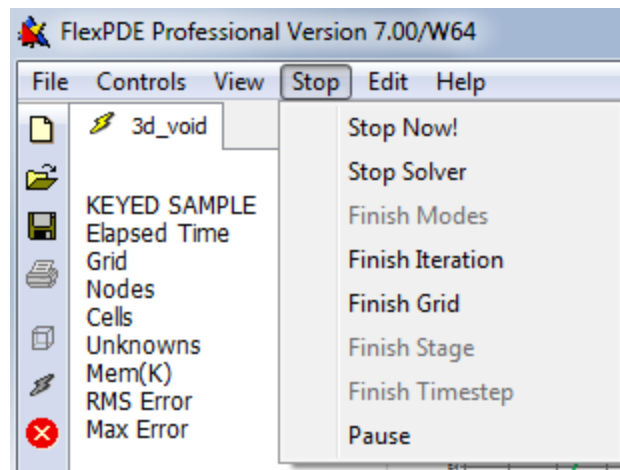

The contents of this menu will depend on the type of problem that is being run. Below are the most common.

Stop Now!

This is a panic stop that causes processing to be interrupted as soon as possible. No attempt is made to complete processing or write output. You will be given a chance to change your mind:

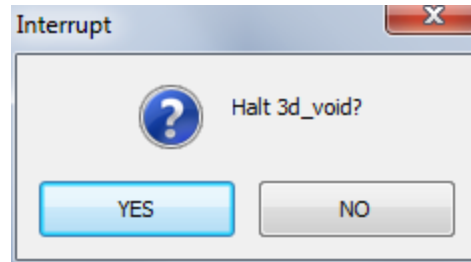

If you click "No", the "Stop Now!" will be ignored.

Stop Solver

The current iteration phase will be terminated, and the processing will be completed as if convergence had been achieved. Final plots will be written, and FlexPDE will halt in Plot mode.

Finish Modes

Only available in [eigenvalue](#)^[78] problems. Halt after the last eigenvalue for the current iteration has been completed.

Finish Iteration

At the conclusion of the current iteration phase, the processing will be completed as if convergence had been achieved. Final plots will be written, and FlexPDE will halt in Plot mode.

Finish Grid

Processing will continue until convergence requirements have been met for the current mesh. No additional adaptive mesh refinement will be attempted, and the problem will terminate as if final convergence had been achieved. Final plots will be written, and FlexPDE will halt in Plot mode.

Finish Stage


In a ["Staged"](#)^[68] problem (q.v.), the current stage will be completed, including any necessary mesh refinement. Final plots will be written for the current stage, but no more stages will be begun. FlexPDE will halt in Plot mode.

Finish Timestep

Only available in [time dependent](#)^[74] problems. Processing will continue for the current timestep, then calculation will end as if the final time had been reached.


Pause

FlexPDE will stop processing and go into an idle state waiting for a mouse click response to the displayed dialog:

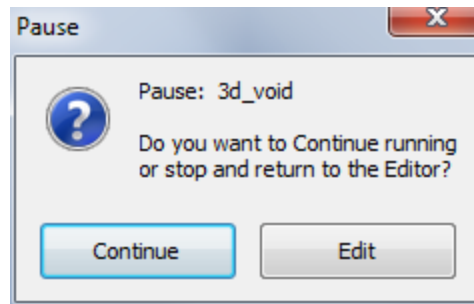

"Continue" will resume processing at the point where it was interrupted. "Edit" will terminate processing as if "Stop Now!" had been clicked. This function can be used to temporarily free computer resources for a more important task without terminating the FlexPDE run.

1.5 The Tool Bar

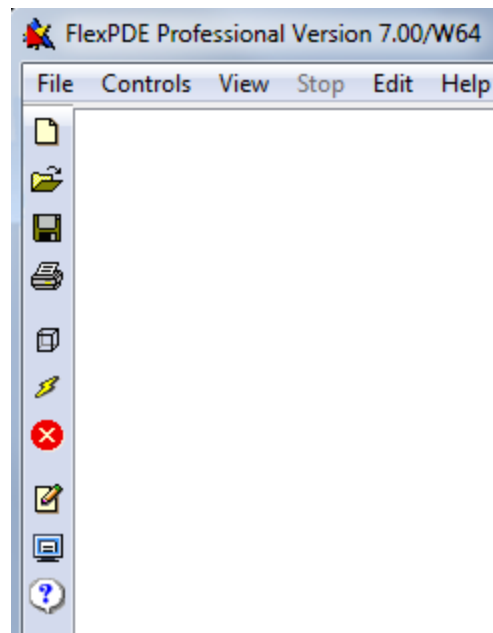

The buttons in the tool bar replicate some of the common entries in the various menus:

Icon	Function	from Menu
	New Script	File
	Open Script	File
	Save Script	File
	Print Script	Edit
	Domain Review	Controls
	Run Script	Controls
	Stop Menu	Stop



Show Editor
Show Plots

Controls
Controls

The tool bar icons also appear on the menu bar entries with corresponding function.


1.6 Editing Descriptor Files

A FlexPDE problem descriptor file is a complete description of the PDE modeling problem. It describes the system of partial differential equations, the parameters and boundary conditions used in the solution, the domain of the problem, and the graphical output to generate. See the section "[User Guide](#)^[46]" for a tutorial on the use of FlexPDE problem descriptors. See the section "[Problem Descriptor Reference](#)^[162]" for a complete description of the format and content of the descriptor file.

You can open a descriptor file in either of two ways: 1) by running FlexPDE from the desktop icon or from your file manager program, and then following the "File|Open" menu sequence; or 2) if an association of FlexPDE with the ".pde" extension has been made, either automatically in Windows or manually in other operating systems, you can double-click on the .pde file in your file manager. In either case, the descriptor file will be opened, a new tab will be created, and an edit window will appear.


For example, suppose we follow the "Open" sequence to the "Samples | Usage | 3D_domains" folder and select "3d_void.pde". The newly opened problem file will be recorded in a tab along the top of the window, allowing it to be selected if a number of scripts are open simultaneously.

The Edit window appears as follows:

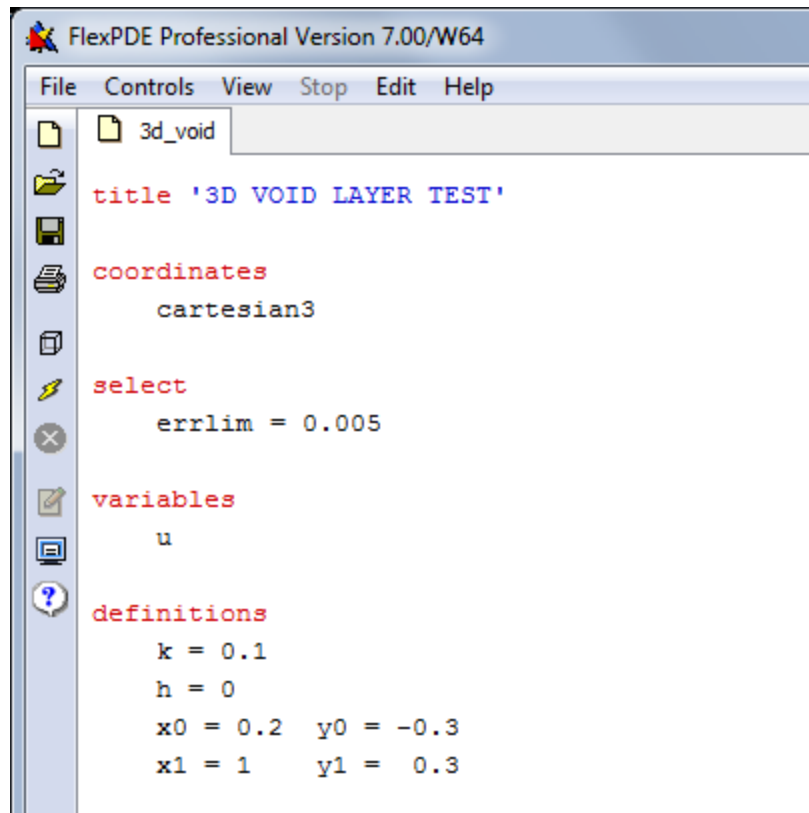

This is a standard editing window, showing the contents of the selected descriptor. You can scroll and edit in the usual way. FlexPDE keywords are highlighted in red, comments in green, and text strings in blue.

The "Edit" item in the main menu contains the editing functions:

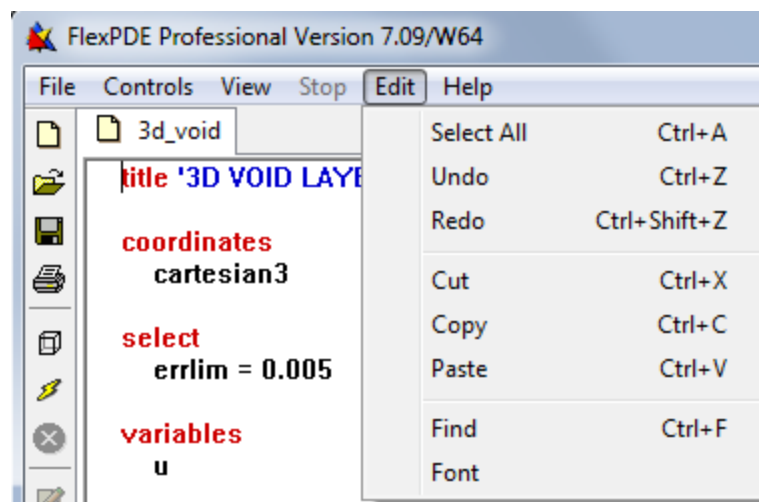

The menu items have the conventional meanings, and the control key equivalents are shown. The Find and Font items have the following use:

Find

This item allows you to search the file for occurrences of a string. The search will find imbedded patterns, not just full words.

Font

This item will take you directly to the [Font Settings Tab](#) ³⁰ of the Preferences Panel.

In addition to the main menu Edit item, you can *right-click* the text window to bring up the same editing menu.

At any time, you can click "File | Save" or "File | Save_As..." in the main menu to save your work before proceeding.

Now click "Domain Review" or "Run Script" in the Controls menu, and your problem will begin execution.

The file will be automatically saved in the currently open file, so if you wish to retain the unedited file, you must use "Save_As" before "Run".

Note: The FlexPDE script editor is a "programming" editor, not a word processor. There are no sophisticated facilities for text manipulation.

1.7 Domain Review

The "Domain Review" menu item is provided in the Controls menu as a way to validate your problem domain before continuing with the analysis.


2D Problems

When you click "Domain Review", the descriptor file will be saved to disk, and the domain construction phase will begin. FlexPDE will halt with a display of the domain boundaries specified in the descriptor. If these are as you intended, click "Continue". If they are not correct, click "Edit", and you will be returned to the edit phase to correct the domain definition. If you continue, the mesh generation process will be activated, and FlexPDE will halt again to display the final mesh. Again, you can continue or return to the editor.

3D Problems


The 3D domain review is more extensive. Echoing the mesh generation process used in FlexPDE, the review will halt after each of the following stages:

- A domain plot showing the boundaries of each extrusion surface and layer in order from lower to higher Z coordinate. The surface plots show the boundaries that exist in the surface. The layer plot shows the boundaries that extend through the layer and therefore form material compartments. If at any point you detect an error, you can click "Edit" to return to the editor and correct the error.
- After the display of individual surfaces and layers, you will be presented a composite view of all the boundaries of the domain, which might look like this:

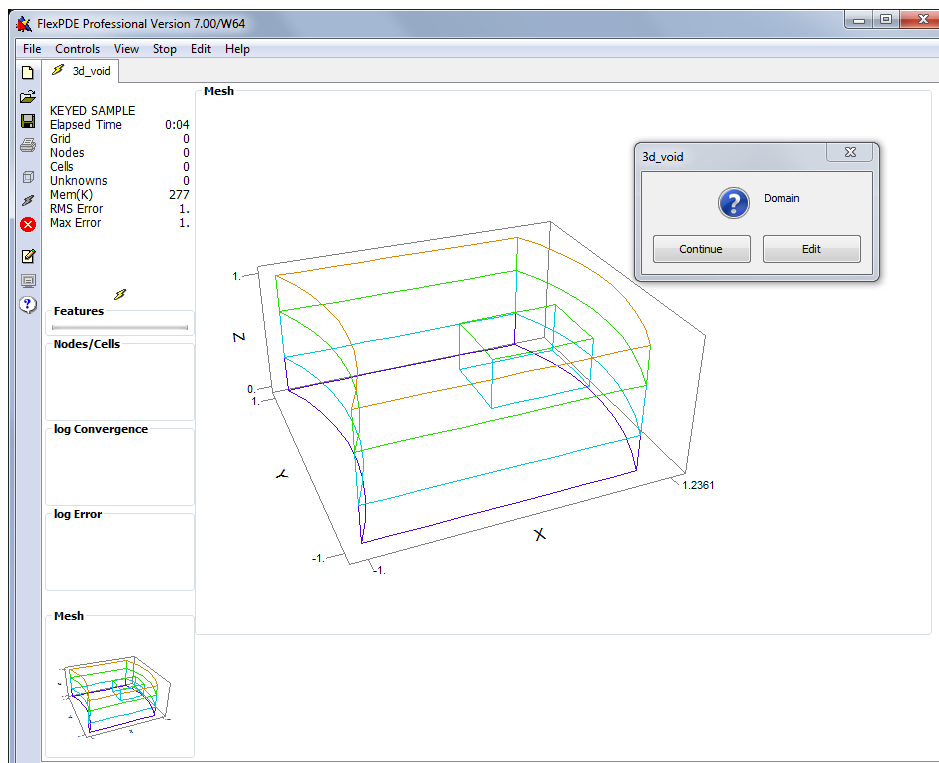




- Once the domain boundaries are correct, FlexPDE will proceed to the generation of the 2D finite element mesh for each extrusion surface. These will be displayed in order from lower to upper surfaces. You can return to "Edit" after any surface.
- Once the surface meshes are correct, FlexPDE will proceed to the generation of the 3D finite element mesh. Each subregion of the first layer will be displayed and meshed. When the layer is complete, the full layer will be displayed. When all layers are complete, the full 3D mesh will be displayed. You can return to "Edit" at any point.

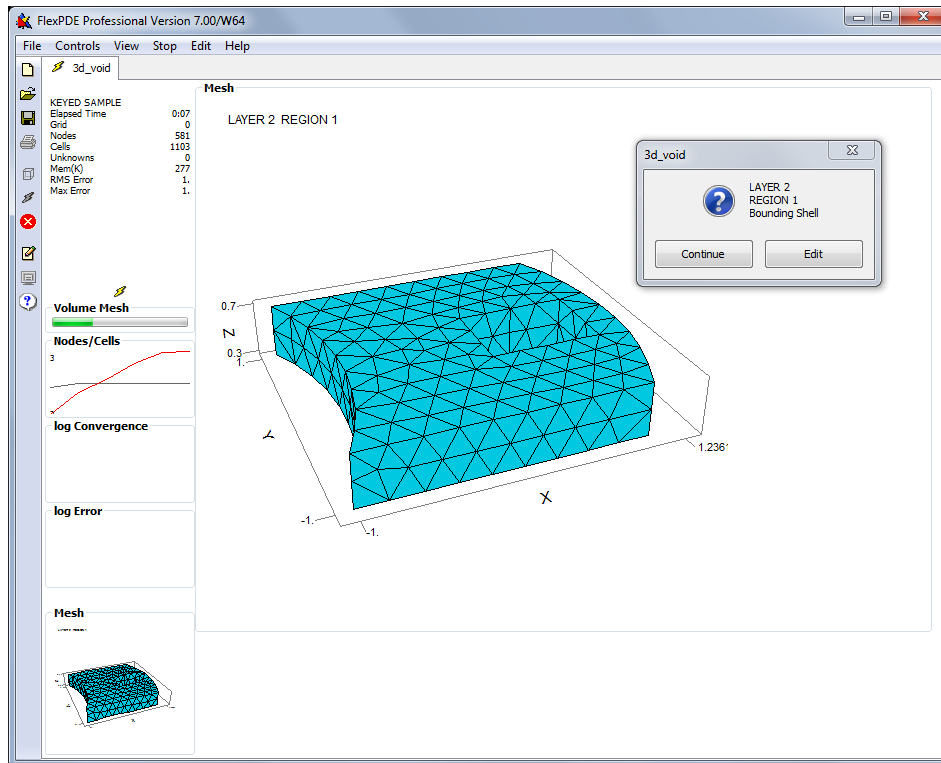A 3D "Domain Review" plot might look like this:



1.8 While the Problem Runs

Whether you click "Run" or proceed through the "Domain Review", once the problem begins running, the icon on the problem tab will change from the Edit icon () to the Run icon (). The screen will look something like this:

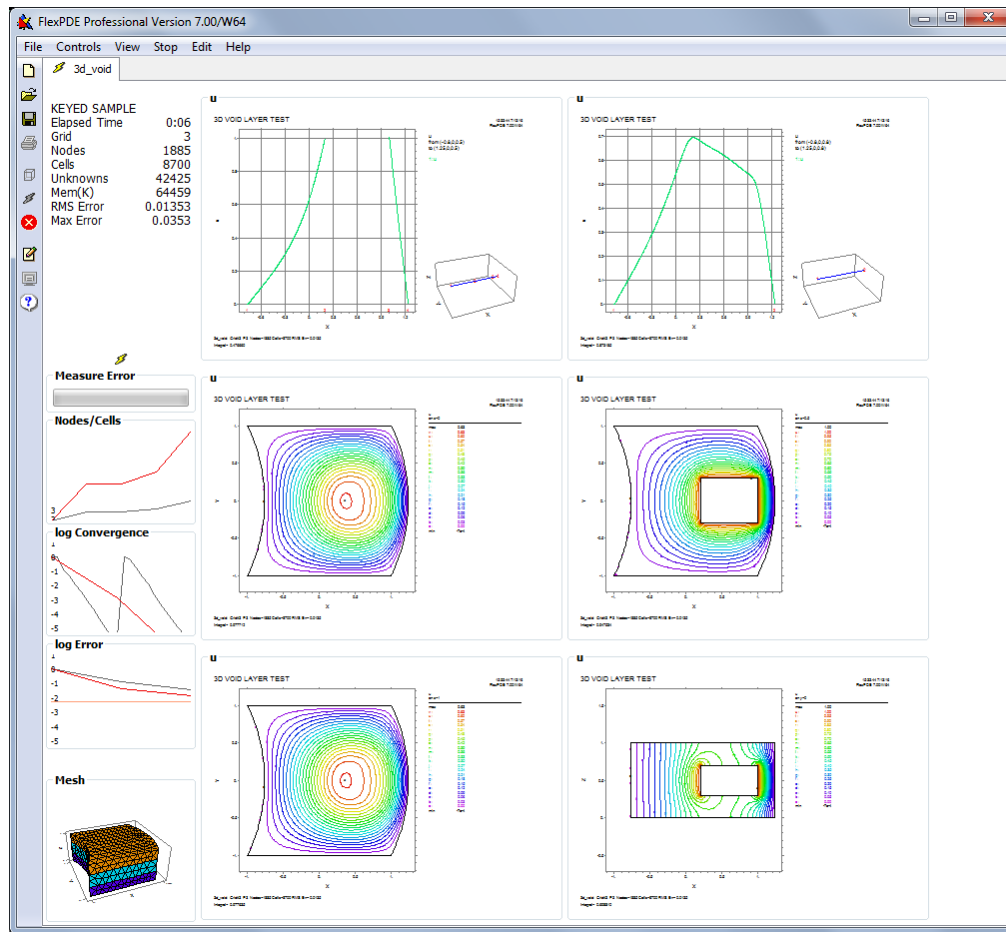

The STATUS Panel

On the left is the "Status Panel", which presents an active report of the state of the problem execution. It contains a text based report, a progress bar for the current operation, several history plots summarizing the activity, and a "Thumbnail" window of the current computational grid.

The history plots summarize the number of nodes/cells in the mesh, the convergence of the current solver, the error estimates for the solution, and the current time step (in the case of time dependent problems). Clicking on any plot will display a legend indicating meaning of the plot traces.

The format of the printed data will depend upon the kind of problem, but the common features will be:

- The elapsed computer time charged to this problem.
- The current regrid number.
- The number of computation Nodes (Mesh Vertices).
- The number of Finite Element Cells.
- The total Degrees of Freedom per variable (number of interpolation coefficients).

- The number of Unknowns (DOF times variables).
- The amount of memory allocated for working storage (in KiloBytes).
- The current estimate of RMS (root-mean-square) spatial error.
- The current estimate of Maximum spatial error in any cell.

Other items which may appear are:

- The current problem time and timestep
- The stage number
- The RMS and Maximum temporal error for the most recent iteration
- The iteration count
- A report of the current activity

The PLOT Windows

On the right side of the screen are separate "Thumbnail" windows for each of the PLOTS or MONITORS requested by the descriptor.


In steady-state problems, only MONITORS will be displayed during the run. They will be replaced by PLOTS when the solution is complete.

In time-dependent problems, all MONITORS and PLOTS will be displayed simultaneously, and updated as the sequencing specifications of the descriptor dictate.

PLOTS will be sent to the ".pg8" graphic record on disk for later recovery. MONITORS will not.

In eigenvalue problems, there will be one set of MONITORS or PLOTS for each requested mode. In other respects, eigenvalue problems behave as steady-state problems.

A right-click in any "thumbnail" plot brings up a menu from which several options can be selected:

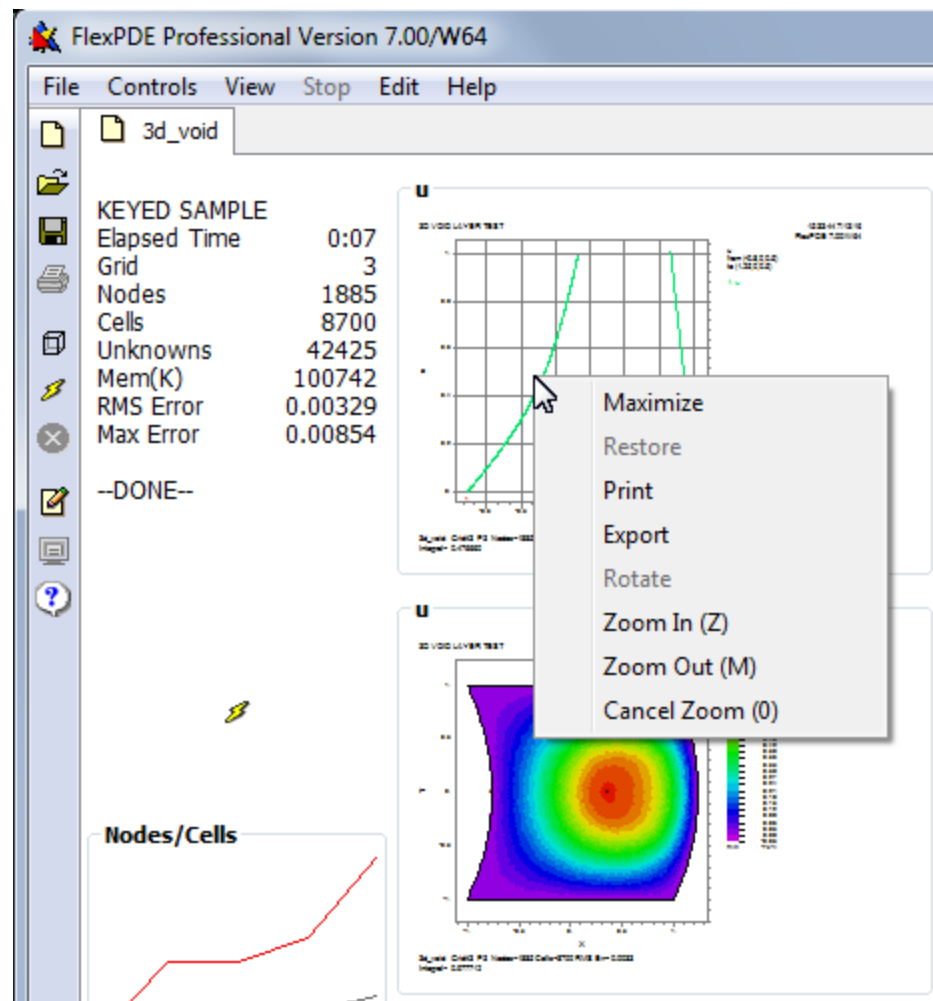

The menu items are:

Maximize

Causes the selected plot to be expanded to fill the display panel. You can also maximize a thumbnail by double-clicking in the selected plot.

Restore

Causes a maximized plot to be returned to thumbnail size.

Print

Sends the window to the printer using a standard Print dialog.

Export

Invokes a dialog which allows the selection of a format for exporting the plot in standard format to other processes. Currently, the options are BMP, EMF, EPS, PNG, PPG and XPG. For bitmap formats (BMP, PNG, PPG and XPG) the dialog allows the selection of the drawing

linewidth and resolution of the bitmap, independent of the resolution of the screen. For vector formats (EMF, EPS) no resolution is necessary (FlexPDE uses a fixed resolution of 7200x5400). EPS produces an 8.5x11 inch landscape mode PostScript file suitable for printing.

Rotate


3D plots can be rotated in polar and azimuthal angle.

Zoom

The zoom level of a plot can be dynamically changed using "Zoom In", "Zoom Out", and "Cancel Zoom". With the right-click, the zoom will be centered around the click-position. This may also be done with the keyboard. Left-click once inside the plot first to ensure the plot has focus (clicking and holding will report the plot coordinates of mouse position). Then Z will zoom in, M will zoom out, and O will cancel the zoom and restore the zoom level to 100%. L, R, U, and P or the arrow keys will pan left, right, up, and down. The zoom change is centered around the most recent mouse position.

Plot Labeling

A typical CONTOUR plot might appear as follows:

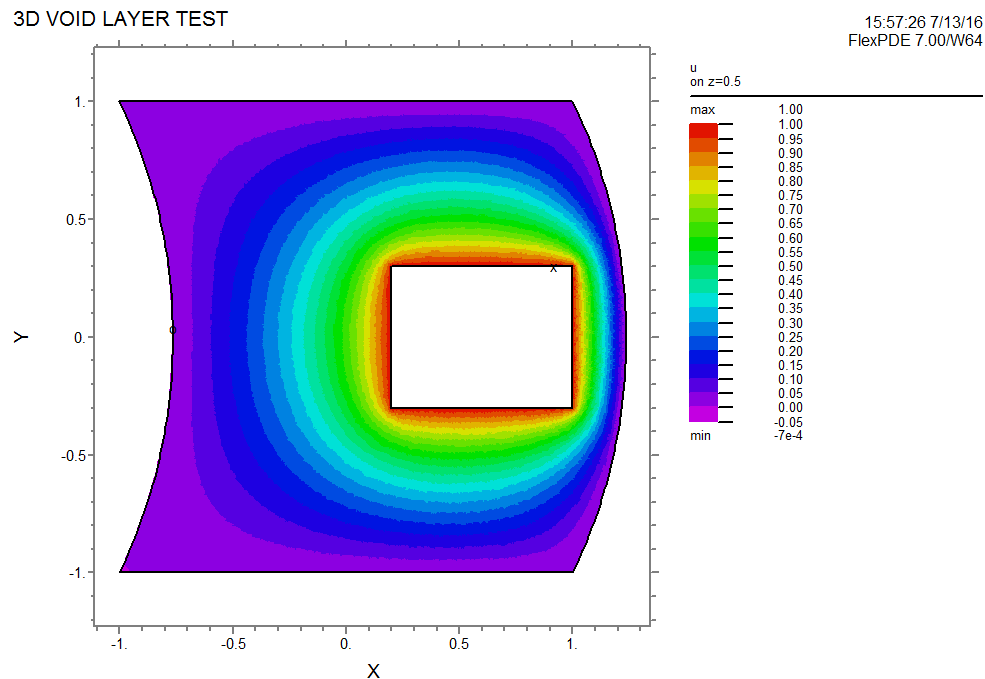

3d_void: Grid#3 P3 Nodes=1885 Cells=8700 RMS Err= 0.0033
Integral= 0.947534

At the top of the display the "Title" field from the problem descriptor appears, with the time and date of problem execution at the right corner, along with the version of FlexPDE which performed the computation.

At the bottom of the page is a summary of the problem statistics, similar to that shown in the Status Window:

- The problem name
- The number of gridding cycles performed so far
- The polynomial order of the Finite-Element basis (p2 = quadratic, p3 = cubic)
- The number of computation nodes (vertices)
- The number of computation cells
- The estimated RMS value of the relative error in the variables

In staged problems, the stage number will be reported.


In eigenvalue problems, the mode number will be reported.

In time dependent problems, the current problem time and timestep will be reported.

By default, FlexPDE computes the integral under the displayed curve, and this value is reported as "Integral".




Any requested REPORTS will appear in the bottom line.

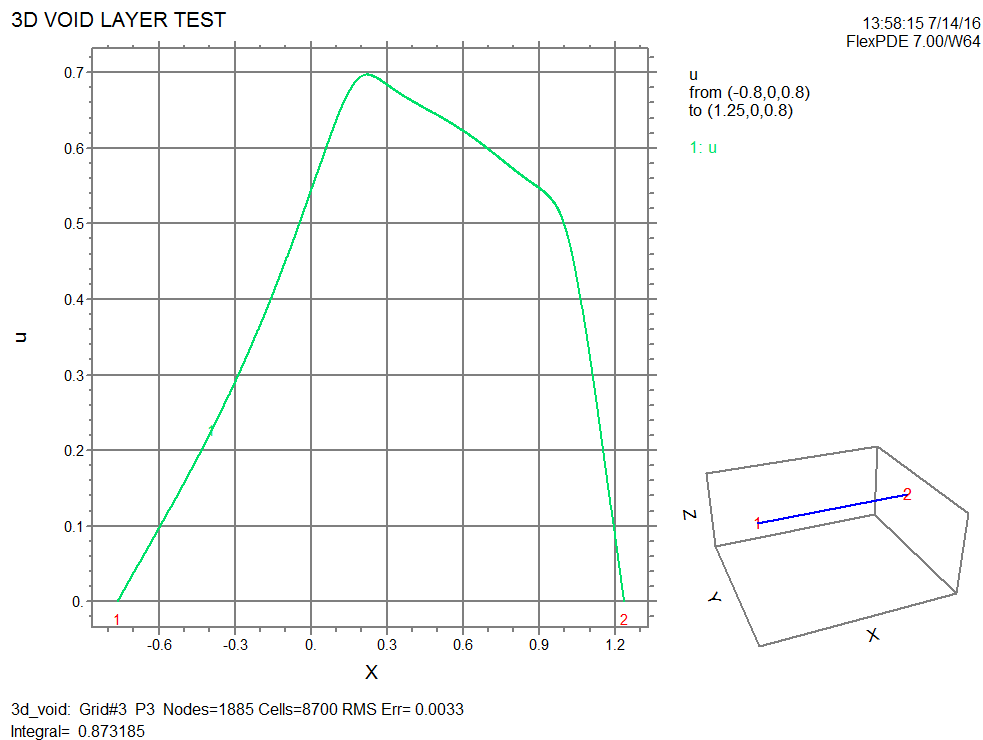
A typical ELEVATION plot might appear as follows:




Here all the labeling of the contour plot appears, as well as a thumbnail plot of the problem domain, showing the position of the elevation in the figure. For boundary plots, the joints of the boundary are numbered on the thumbnail. The numbers also appear along the baseline of the elevation plot for positional reference.


Editing While Running

While the problem is running, you can return the display panel to the editor mode by clicking the Edit Script tool () or the Show Editor item in the Controls menu. The Run icon () will continue to be displayed in the problem tab as long as the problem is running. When the problem terminates, the problem tab will again display the Edit icon ().

You can return to the graphic display panel by clicking the Show Plots tool () or the Show Plots item in the Controls menu.




1.9 When the Problem Finishes

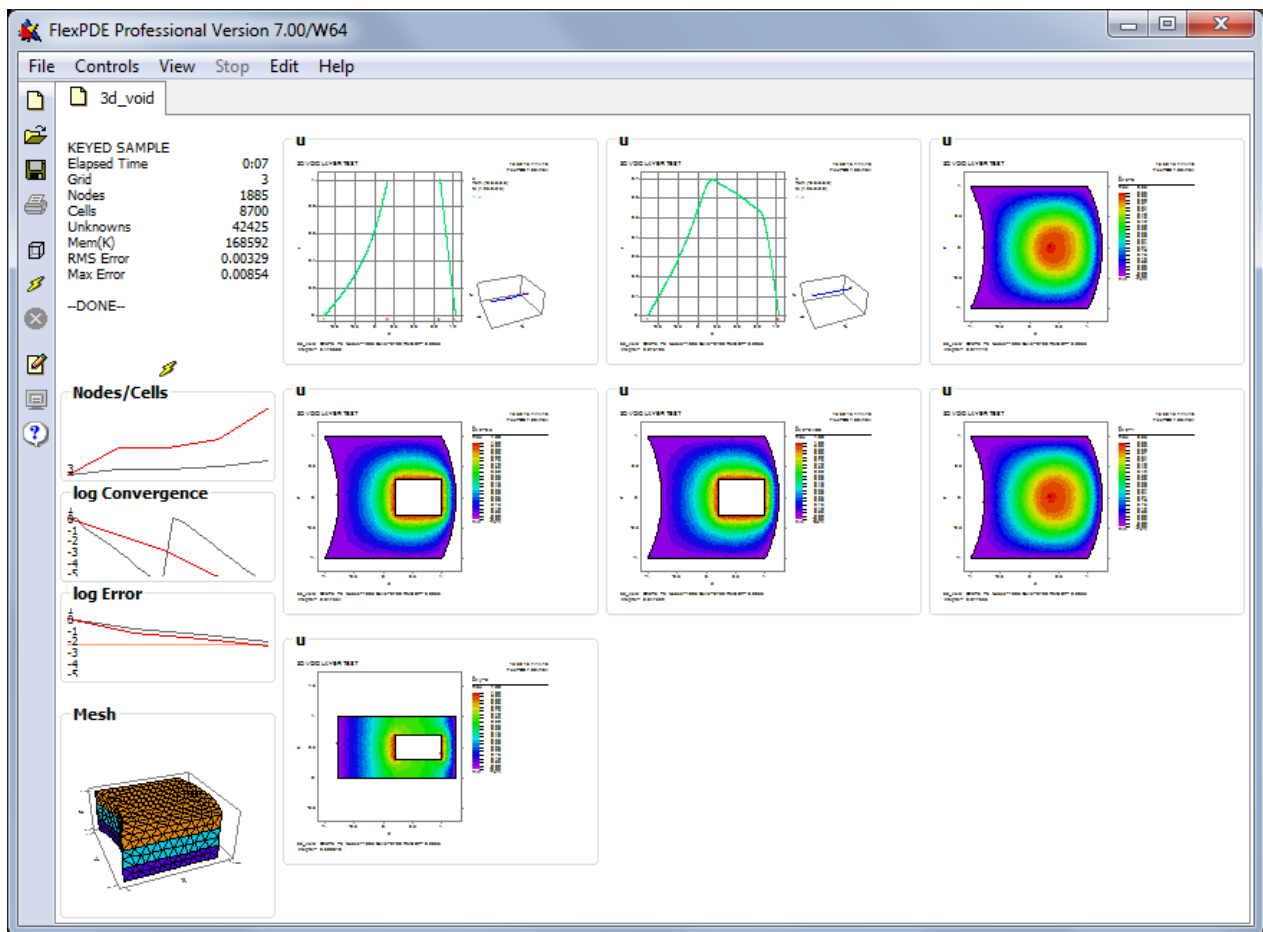When FlexPDE completes the solution of the current problem, it will leave the displays requested in the PLOTS section of the descriptor displayed on the screen. The problem tab will display the Edit icon ()).



At this point you have several options:


- **Edit or Save the Script**

Click "Controls|Show Editor" (or the  Tool) to switch the display into Edit mode, allowing you to change the problem and run again. From Edit mode, you can click "Controls|Show Plots" (or the  Tool) to redisplay the plots. You can also click "File|Save" (or the  Tool) to save the file, "File|Save _As" to save with a new name, or "File|Close" to close the problem.

- **Switch to Another Problem**

Each currently open problem is represented by a named tab on the tab bar. You can switch back and forth among open problems by selecting any tab.

- **Open a New File**

Click "File|Open" (or the  Tool) to open another problem script without closing the current problem.

1.10 Viewing Saved Graphic Files

Whenever a problem is run by FlexPDE, the graphical output selected by the PLOTS section of the descriptor is written to a file with the extension ".pg8". These files can later be viewed by FlexPDE without re-running the job. You can open these files from the "File | View File" or the "View | View File" menu items on the main FlexPDE menu, or from the "File | Open File" menu using suffix selection. A standard "Open_File" dialog will appear, from which you may select from the available files on your system. Once a file is selected, the first block of plots will be displayed.


On the left is a "Status" window, much like the one that appears during the run. Not all the runtime information will appear here, but only those items necessary to identify the current group of plots.

In steady-state problems, all the PLOT windows will be displayed. If the problem is staged, then each stage will appear in a separate group.

In time-dependent problems, each plot time group specified in the PLOTS section of the descriptor will form a display group.

The Problem Tab shows the View icon () to indicate that this is a "View" file, not a PDE problem.

You can use the "View" item in the main menu to control the viewing of these stored graphics:

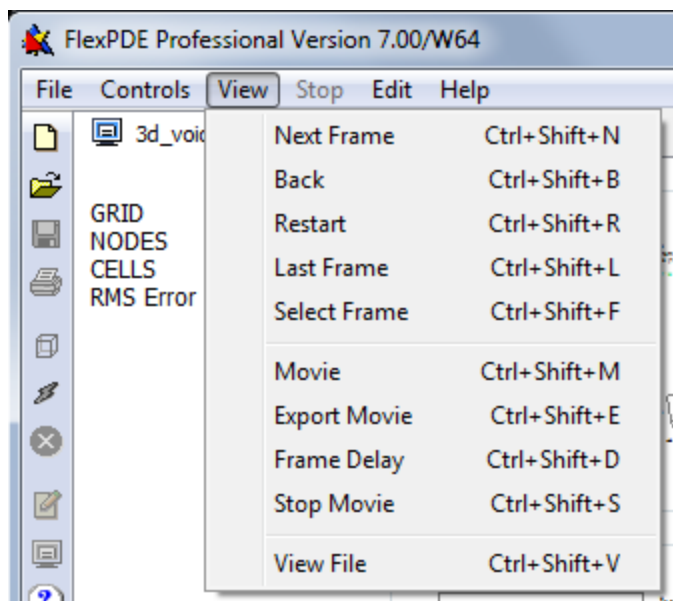

Thumbnail Plot Displays

In the normal thumbnail display, all the plots of a group are displayed simultaneously. In this case, the "View" menu items have the following meanings:

Next

Use this item to advance to the next group of plots in the file. If there are no more groups, a message box will appear.

Back

Causes FlexPDE to back up and redisplay the previous group. If there are no earlier groups, a message box will appear.

Restart

Returns to the beginning of the file and displays the first group.

Last

Scans to the end of the file and displays the last group.

Select

Displays a list of plot times that can be viewed. Double-clicking an entry views the selected plot group.

Movie

This item is active only for time-dependent or staged problems. It will cause all groups to be displayed sequentially, with a default delay of 500 milliseconds between groups (plus the file reading time).

Frame Delay

Allows redefining of the delay time between movie frames.

Stop

During the display of a movie, you can use Stop to halt the display.

View File

Selects a new graphics file to be opened in a new tab.

Maximized Plot Windows

When a selected View plot is maximized, either by the right-click menu or by double-click, the behavior of some of the View menu items is modified:

Next

Advances to the next instance of the currently maximized plot. If there are no more instances, a message box will appear.

Back

Backs up and redisplay the previous instance of the currently maximized plot. If there are no earlier instances, a message box will appear.

Movie

This item is active only for time-dependent or staged problems. It will cause all instances of the current plot to be displayed sequentially, separated by the currently active Frame Delay time (plus the file read time).

Export Movie

An export parameters dialog will appear, allowing you to select the file format and resolution. A movie will then be displayed as with "Movie". Each frame of the movie will be exported to a file of the selected type and resolution. The files will be numbered sequentially, and can be subsequently imported into an animation program such as "Animation Shop" to create animations.

1.11 Preferences Window


The Preferences Window can be accessed from the [main menu bar](#)⁶ and has four tabs where the user can adjust the behavior of FlexPDE :

- [General Settings](#)²⁸
- [Font Settings](#)³⁰
- [Web Proxy Settings](#)³¹
- [License Registration](#)³²

The settings of these tabs are saved and loaded from the "flexpde8.ini" file which is located in the FlexPDE8user directory. (In MyDocuments on Windows, Home on Linux.)

1.11.1 General Settings Tab

The General Settings tab presents a variety of settings for the user :

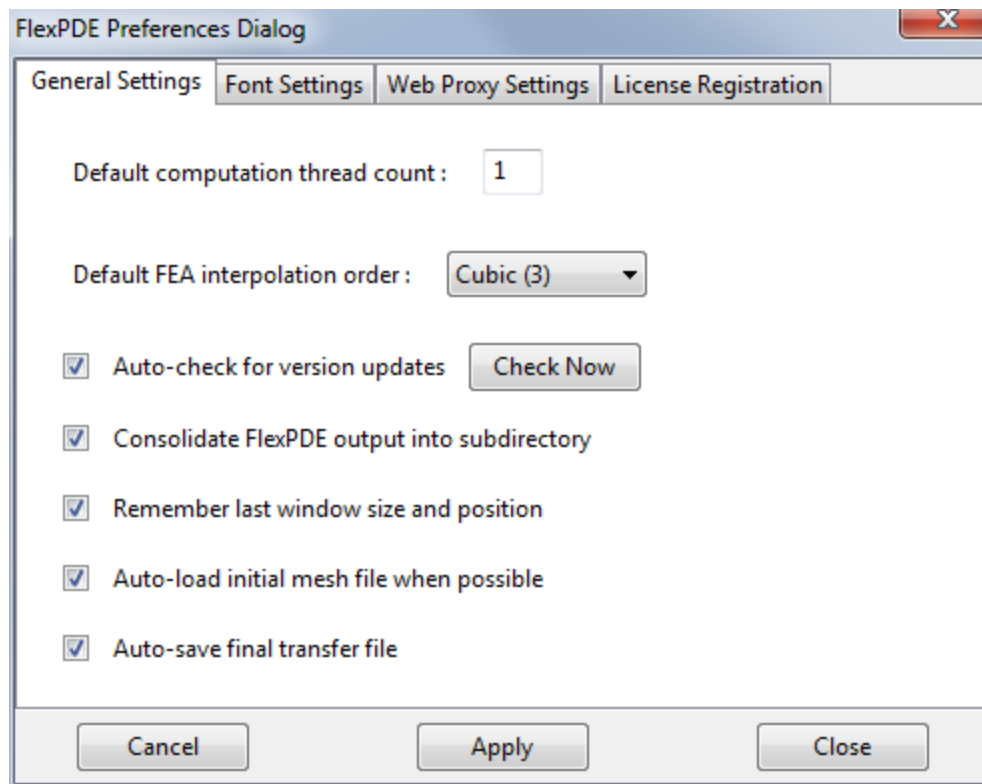

Default computation thread count

Specifies the default number of computation threads that will be used while running a script. This value can be overridden within the [SELECT](#)^[197] section of a script, using the selector [THREADS](#)^[203]. It may also be set using the [command-line switch -T](#)^[155]. If a value larger than the maximum 24 is entered, the value will be set to 24.

Default FEA interpolation order

Specifies the default FEA interpolation order used while running a script. The choices are Cubic (3rd order), Quadratic (2nd order), and Linear (1st order.) This value can be overridden within the [SELECT](#)^[197] section, using the selector [ORDER](#)^[202].

Auto-check for version updates

Specifies whether or not FlexPDE should contact the PDE Solutions website to determine if version updates/upgrades are available. Updates/upgrades will not be automatically downloaded or installed. The automatic check is performed on a random basis when you run FlexPDE (approximately 5% of the time.) Clicking the "Check Now" button will force the check to take place immediately.

Consolidate FlexPDE output into subdirectory

Specifies whether or not FlexPDE should write all output files generated by a script into a subdirectory named "<pdename>_output". For example, a script with the name "test.pde" would output

all files into the sub-directory "test_output". Changes made to this setting do not effect scripts that are currently open. They must be closed and reopened for the setting to take effect.

Remember last window size and position

Specifies whether or not FlexPDE will remember the size and position of the main window when it last closed, and use that size and position when it starts next. If turned off, FlexPDE will open at full screen size.

Auto-load initial mesh file when possible

Specifies whether or not FlexPDE will automatically save the initial mesh and try to reload it on subsequent runs. This can save significant time in gridding when a user is adjusting plots or other settings not related to the grid. If the domain layout changes in any way, the previous grid will not be used and a new grid will be generated. The output file name is "<pdename>_initialmesh.xfr". This value can be overridden within the [SELECT](#)^[197] section, using the selector [AUTOMESH](#)^[197]. It may also be turned off using the [command-line switch -NM](#)^[155].


Auto-save final transfer file

Specifies whether or not FlexPDE will automatically save the final grid and all of the primary variables. This can simplify post-processing of primary variable data. The output file name is "<pdename>_restart.xfr". This value can be overridden within the [SELECT](#)^[197] section, using the selector [AUTOTRANSFER](#)^[197].

Note : any changes made will not take place until the "Apply" button is clicked. Clicking "Cancel" will discard any changes. Clicking "Close" will prompt the user if there are unsaved changes.

1.11.2 Font Settings Tab

The Font Settings tab allows the user to set various aspects of the editor font :

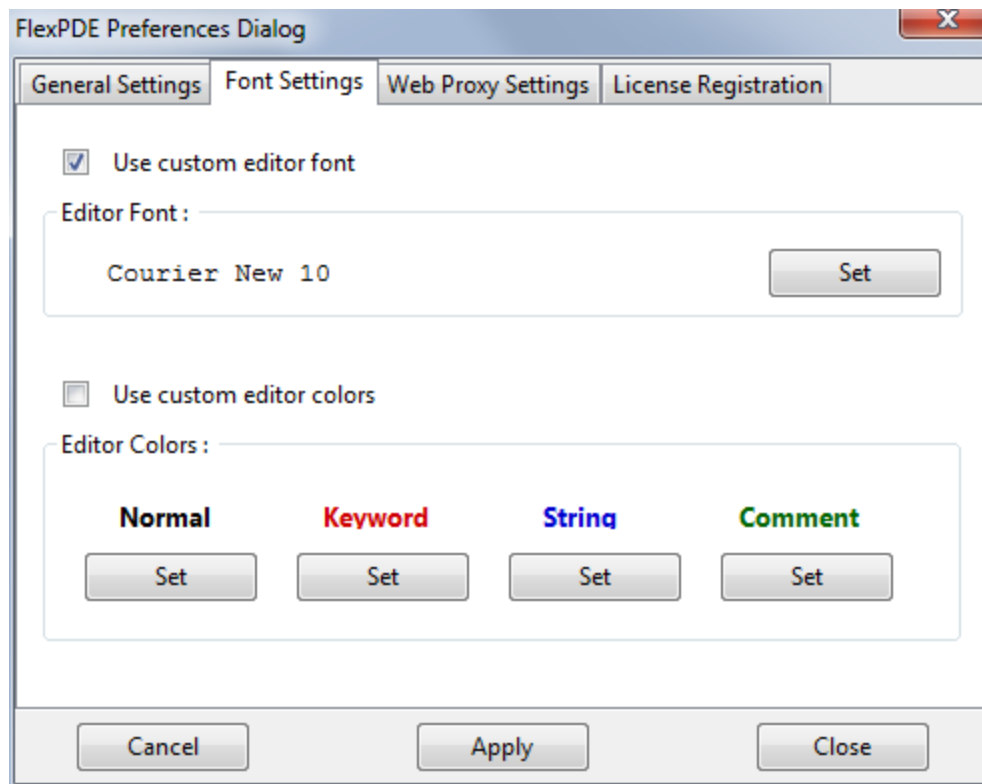

Use custom editor font

This check box indicates if the user has selected a custom editor font. To choose a custom font, select the check box or click the "Set" button. A font selection dialog will be presented. When this option is unselected, FlexPDE will revert to the default font.


Use custom editor colors

This check box indicates if the user has selected a custom editor color. To choose a custom color, click one of the "Set" buttons. A color selection dialog will be presented. When this option is unselected, FlexPDE will revert to the default colors.

Note : any changes made will not take place until the "Apply" button is clicked. Clicking "Cancel" will discard any changes. Clicking "Close" will prompt the user if there are unsaved changes.

1.11.3 Web Proxy Settings Tab

The Web Proxy Settings tab allows the user to enter appropriate proxy information :

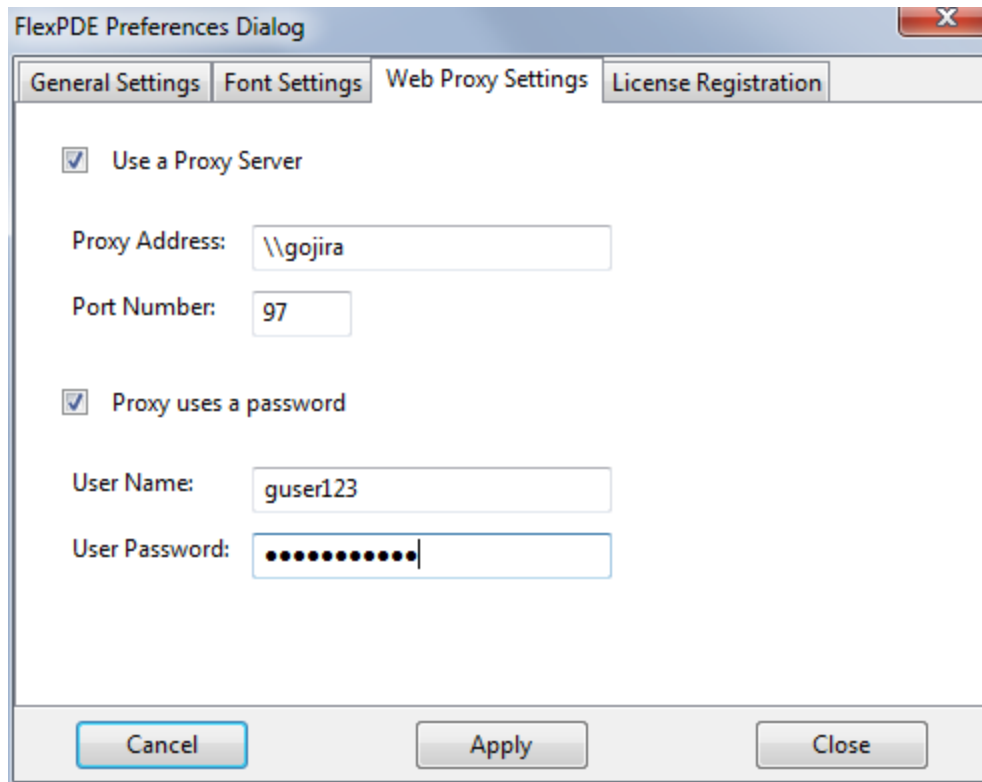


This tab is only needed if the user's computer accesses the internet through a proxy web server. The user may need to contact their system administrator to obtain the necessary information.

Note : any changes made will not take place until the "Apply" button is clicked. Clicking "Cancel" will discard any changes. Clicking "Close" will prompt the user if there are unsaved changes.

1.11.4 License Registration Tab

The License Registration tab presents various controls for license registration :

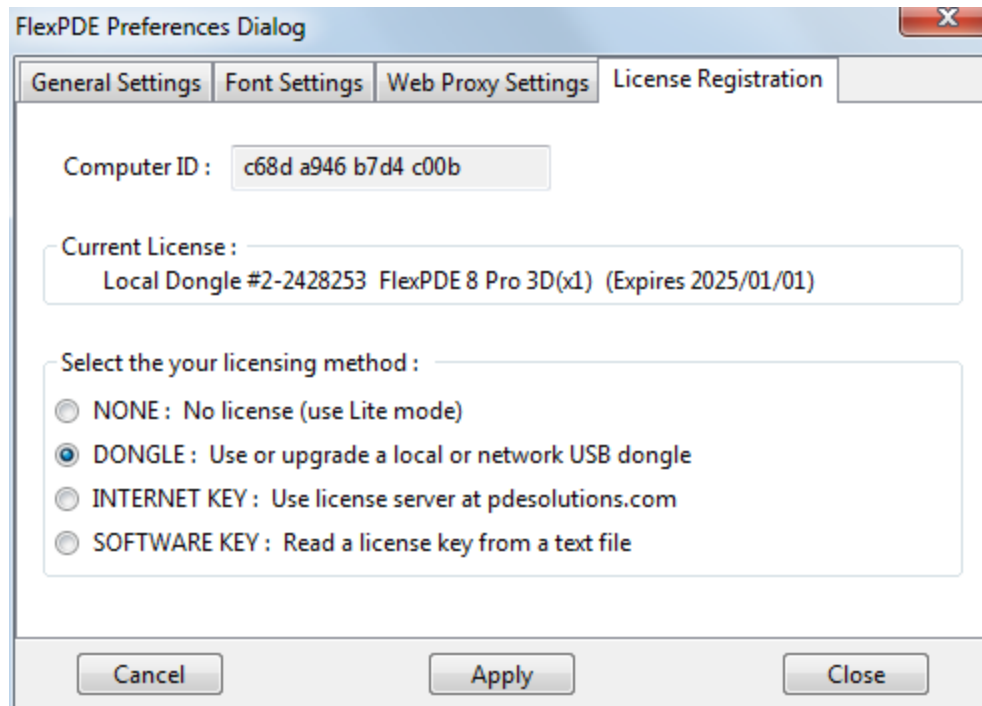

Computer ID

This text is the unique identification of your computer. It may be used to request a software key or trial license for FlexPDE Professional. It is also used automatically by the [Internet Key](#)^[35] license to identify the current computer. The ID is four groups of four hexadecimal numbers.

Current License

The current licensing information is displayed here. In the currently shown case, FlexPDE is registered to a local dongle. The dongle's serial number is 2-2428253 and it contains one 3D license that expires on Jan 1, 2025.

License Method

Changes to the licensing method can be made here. Additional windows will open to complete the process. See note below and the section ["Registering FlexPDE"](#)^[33].

Note : any changes made will not take place until the "Apply" button is clicked. Clicking "Cancel" will discard any changes. Clicking "Close" will prompt the user if there are unsaved changes.

1.12 Registering FlexPDE

The standard distribution of FlexPDE will run in Lite mode when no Professional license is present. The Lite mode is restricted in the number of nodes and simultaneous equations a problem can have. In order

to enable Professional mode and create larger problems, FlexPDE will need to be registered to a professional license. There are several forms for the license :

Internet Key

The standard method of licensing FlexPDE Professional is by internet activation. This mode of licensing generates a text key that locks the execution of FlexPDE to a specific computer. Access to the internet is required on a periodic basis to validate the key. The key can be released from one machine and reactivated on another without difficulty. If you need to use a proxy server for internet access, you can set this information on the [Web Proxy Settings](#)^[31] preference tab. A serial number will be sent via email. Use the serial number to configure the license in the [License Registration](#)^[32] preference tab. See "[Internet Key Registration](#)"^[35] for details.

Dongle

On request, Professional configurations can be licensed by use of a portable hardware license key (dongle). The standard dongle for use with FlexPDE 8 is a Wibu USB Cm Stick. This dongle can be used in local or network mode. See "[Dongle Registration](#)"^[38] for details.

In order for FlexPDE to find the dongle, you must

- 1) Run the appropriate dongle driver install program to load it into your system.
- 2) Install the dongle in an appropriate USB connector or hub. (Note : On Windows, an autoplay window may appear. Simply dismiss it.)
- 3) Register the dongle in the [License Registration](#)^[32] preference tab.

The request for a dongle license will not be made until you actually "Run" a problem. At that time, a license of the appropriate class, 1D, 2D or 3D will be requested from the dongle. If a license is successfully acquired, the corresponding license class will be appended to the main window's title bar. The acquired license will be held until the current invocation of FlexPDE is terminated or two hours of idle time has elapsed. In this way, networks of FlexPDE users can get optimal use out of the mix of 1D, 2D and 3D licenses that have been purchased.

Software Key

The primary use for the software key is for trial usage prior to purchasing a Professional license. On request, Professional configurations can be licensed in the form of a text key that locks the execution of FlexPDE to a specific computer. This license method has been superseded by the Internet Key method and PDE Solutions strongly encourages users not to use this method for a permanent license.


If you prefer a software license key, you must first download and install the software and record the computer ID from the [License Registration](#)^[32] preference tab. Include the computer ID on the license application form. Your software key will be sent to you by Email. Save the key and configure the license in the [License Registration](#)^[32] preference tab (you may need administrator privileges to do this). See "[Software Key Registration](#)"^[44] for details.

1.12.1 Internet Key Registration

If your license is to be acquired from the PDE Solutions website, select the "Internet Key" option in the [License Registration](#)³² tab and click "Apply". When unlicensed, FlexPDE will automatically select "Acquire License" in the Internet Key registration dialog. When currently licensed, FlexPDE will automatically select "Release License".

Activation


Enter your serial number into text field and click "Contact Web Server". If successful, FlexPDE will be activated on the local machine. If not, it will report an error. (If this activation is performed in public places, you can choose to "Hide" the Serial Number.)

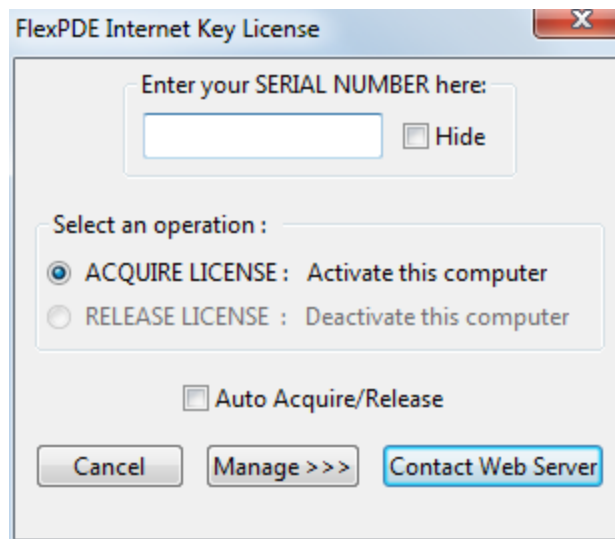

The screenshot shows a dialog box titled "FlexPDE Internet Key License". It contains a text input field for the "SERIAL NUMBER" with a "Hide" checkbox to its right. Below this is a "Select an operation:" section with two radio buttons: "ACQUIRE LICENSE : Activate this computer" (selected) and "RELEASE LICENSE : Deactivate this computer". There is also an "Auto Acquire/Release" checkbox. At the bottom are three buttons: "Cancel", "Manage >>>", and "Contact Web Server".

Deactivation

Enter your serial number into the text field and click "Contact Web Server". If successful, FlexPDE will release the license on the local machine. If not, it will report an error. (If this activation is performed in public places, you can choose to "Hide" the Serial Number.)

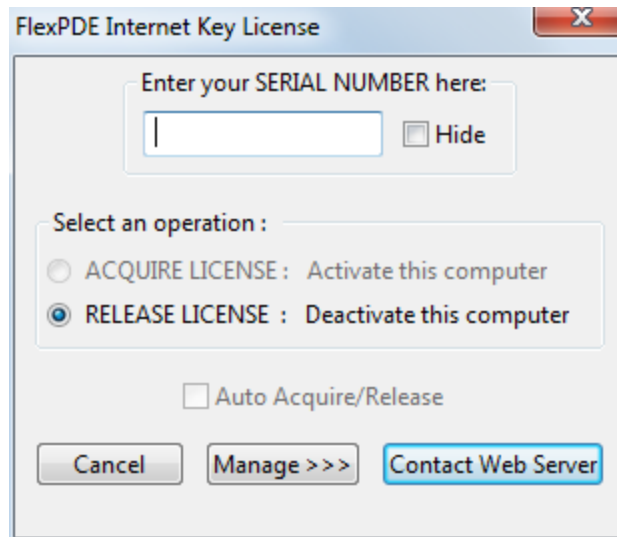


Auto Acquire/Release :

If the "Auto Acquire/Release" check box is selected, then FlexPDE will automatically contact the license server to acquire the license each time it is run, and automatically release the license when exiting. This is particularly useful when using one license at multiple locations.

Managing License State :

A user can request to see the license state of any serial number. Click the "Manage >>>" button and an extended dialog will appear. Enter the serial number and click "Get Status". All available details of the license will be displayed. The license state can be released by clicking "Flush State". If the serial number supports multiple seats, the states must be managed through a web browser and www.pdesolutions.com/flexmanager.html.

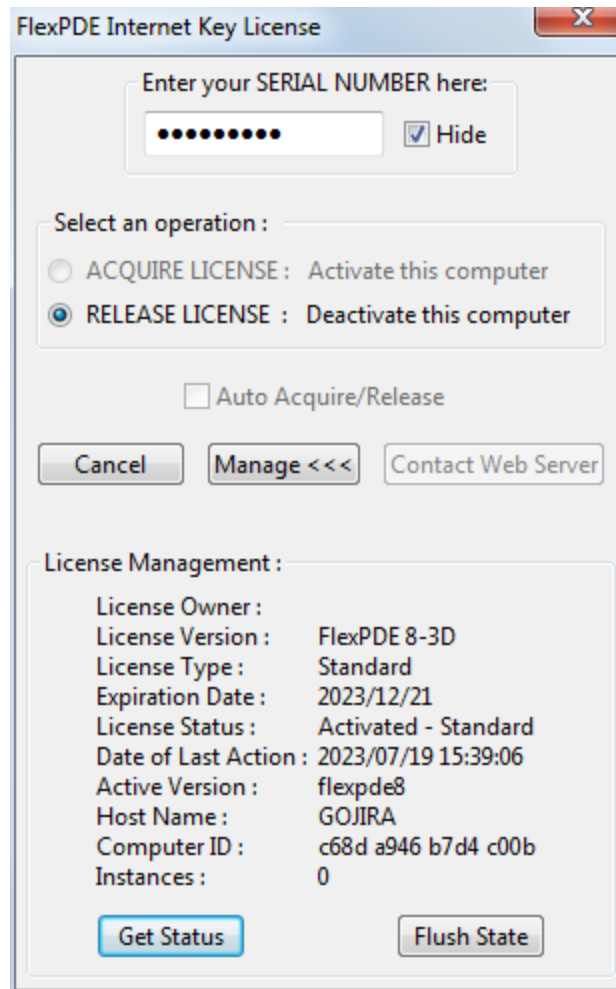


Notes :

A computer's identification is constructed in part from its MAC address and the operating system's report of a unique identifier for that installation. Sometimes the MAC address can change (usually on laptops connecting to different networks or when connected by Wi-Fi instead of a wired connection). If this happens after the machine is licensed, FlexPDE will issue an error telling the user that the license authorizes a different computer. When that happens, the user can simply release and reacquire the license in order to resolve the issue.


If you need to use a proxy server for internet access, you can set this information in the [Web Proxy Settings](#)³¹ preference tab.

1.12.2 Dongle Registration


If your license is to be read from a local or network dongle, select the "Dongle" option in the [License Registration](#)³²⁾ tab and click "Apply". The following dialog will appear :

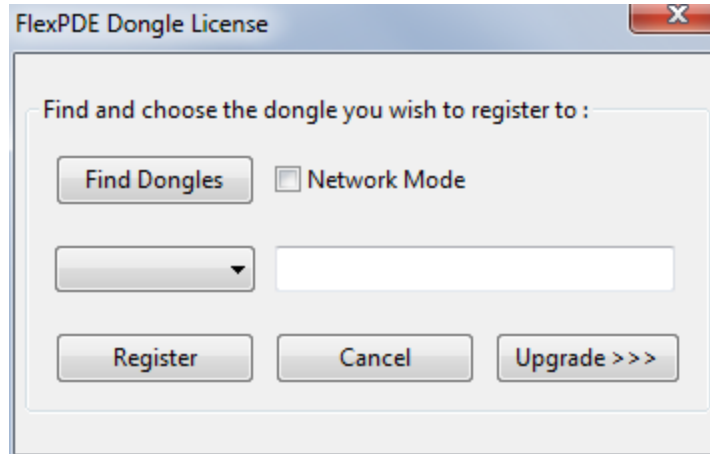

Click the "Find Dongles" button. FlexPDE will search the USB ports for all Wibu dongles and enter their serial numbers into the popup menu. If no dongle is found, or if the dongle driver has not been installed, the search will fail, and FlexPDE will report an error. If the dongle you wish to register to is on another machine on the network, select the "Network Mode" checkbox and click "Find Dongles". The machine with the dongle attached must be configured to allow network access to the dongle. See ["Network Dongle Registration"](#)⁴¹⁾ for more details.

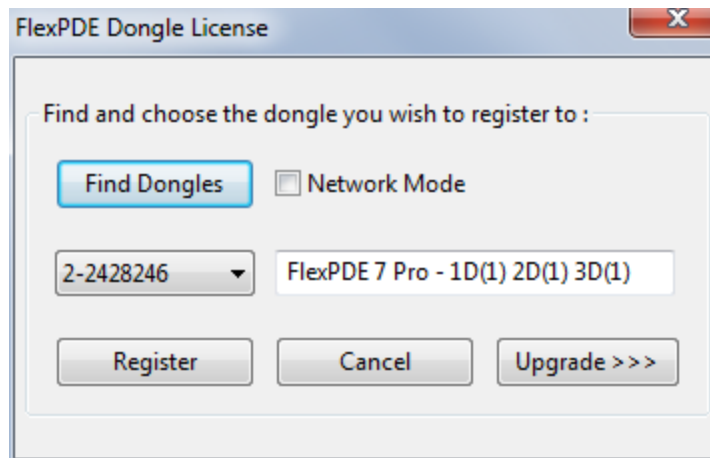

If there are multiple dongles installed, then they can be selected by clicking the popup menu and scrolling to the desired dongle serial number. After choosing a dongle, the corresponding FlexPDE license content of the selected dongle will be displayed to the right of the serial number. In the case displayed above the license encodes three FlexPDE 7 Professional licenses; one for 1D, one for 1D+2D, and one for 1D+2D+3D problems.

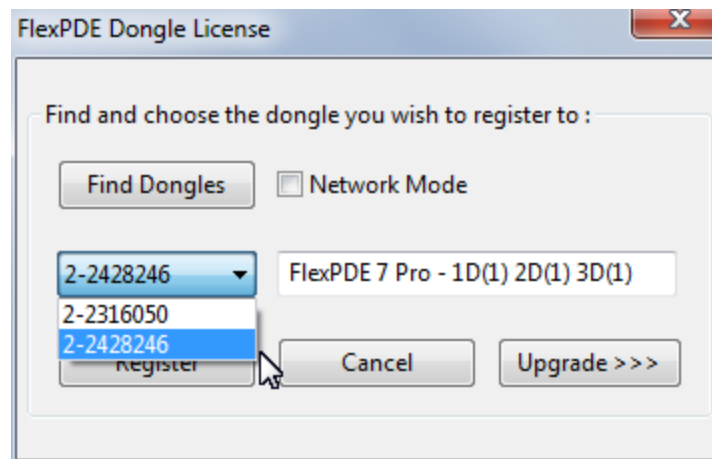


After selecting the desired dongle, click "Register" to install the dongle as the active license method. Subsequently, every time you start FlexPDE it will search the USB ports for this specific dongle. If it is found, FlexPDE will start up in Professional mode. If the dongle is unable to be found, FlexPDE will report that and run in Lite mode. Once the dongle is reconnected, you will have to restart FlexPDE to return to Professional mode, or go back to the registration dialog to search for the dongle.

Clicking "Cancel" will abort without changing the active license method.

Upgrading a Dongle

You can use the Register dialog to field-upgrade a dongle. Click on the "Upgrade >>>" button and the dongle upgrade panel will be shown.

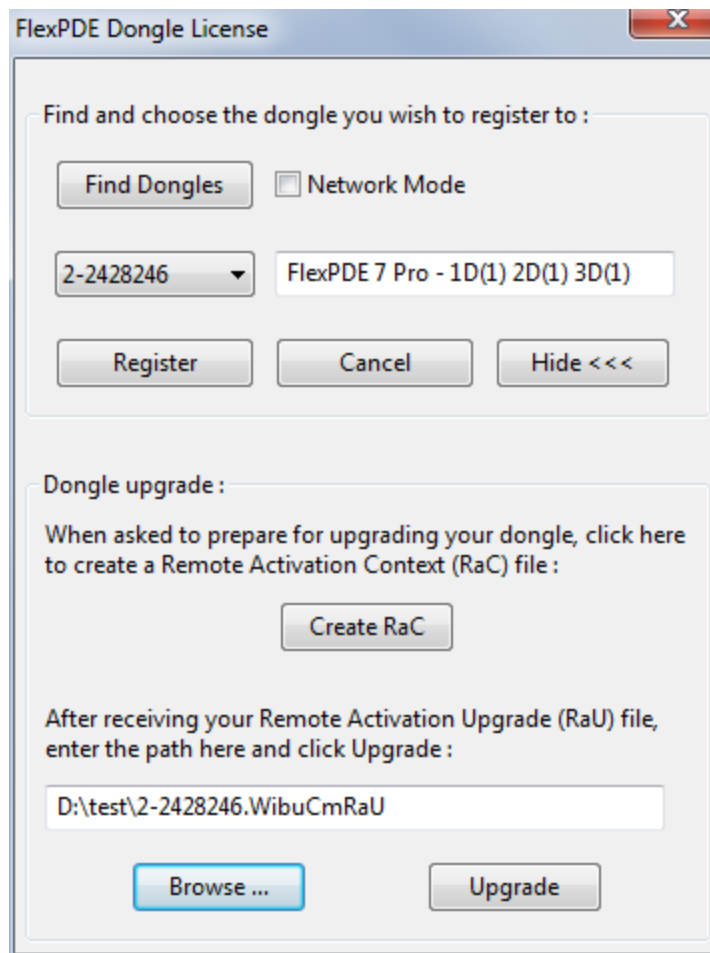

In order to upgrade the dongle, PDE Solutions will need a Remote Activation Content (RaC) file. When requested, create this file by clicking the "Create RaC" button and send the resulting file to PDE Solutions. The file name will be the dongle serial number and the extension will be "WibuCmRaC". In the above example, the resulting file would be named "2-2428246.WibuCmRaC".

After receiving the RaC file, PDE Solutions will send you a Remote Activation Upgrade (RaU) file. Enter the path to the upgrade file, or use the "Browse" button to find the location, and select "Upgrade". Your dongle will be updated with the information encoded in the key. The upgrade file name will also be the dongle serial number and the extension will be "WibuCmRaU". In the above example, the upgrade file would be named "2-2428246.WibuCmRaU".

Note that the dongle upgrade facility will rewrite the dongle only if the serial number of the dongle matches the serial number encoded in the upgrade key, and the state of the dongle must be exactly the same as when the RaC file was created. Any changes to the dongle after creating the RaC for PDE Solutions will invalidate the upgrade file they will send. This includes the creation of another RaC file, so DO NOT create an RaC file if you have already sent one to PDE Solutions for an upgrade.


Dongles cannot be upgraded over the network. The upgrade must be performed from the computer to which the dongle is physically connected.

Clicking on the "Hide <<<" button will hide the upgrade panel.


Note : Dongles issued with FlexPDE versions 4, 5 or 6 cannot be upgraded to newer versions since they are from a different manufacturer. They will need to be replaced.

1.12.3 Network Dongle Registration

If you wish to use your Wibu dongle in network mode, it will have to be configured to allow access from the network. This is done using the vendor's "CodeMeter Control Center". On Windows it can be accessed in the Start menu under "All Programs > CodeMeter" (or in the file system at "C:\Program Files (x86)\CodeMeter\Runtime\bin\CodeMeterCC.exe"). On Linux, it can be accessed at "/usr/bin/CodeMeterCC". On Mac OS X it can be found at "Applications/CodeMeter/CodeMeter Control Center".

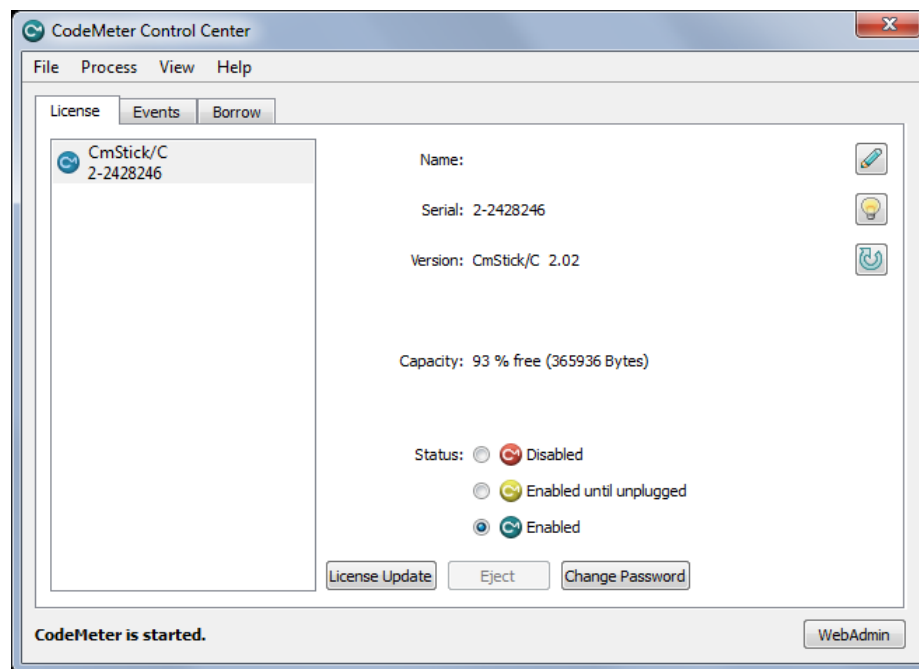


Select the dongle to be configured and click "WebAdmin" in the lower right corner to open the administration panel.

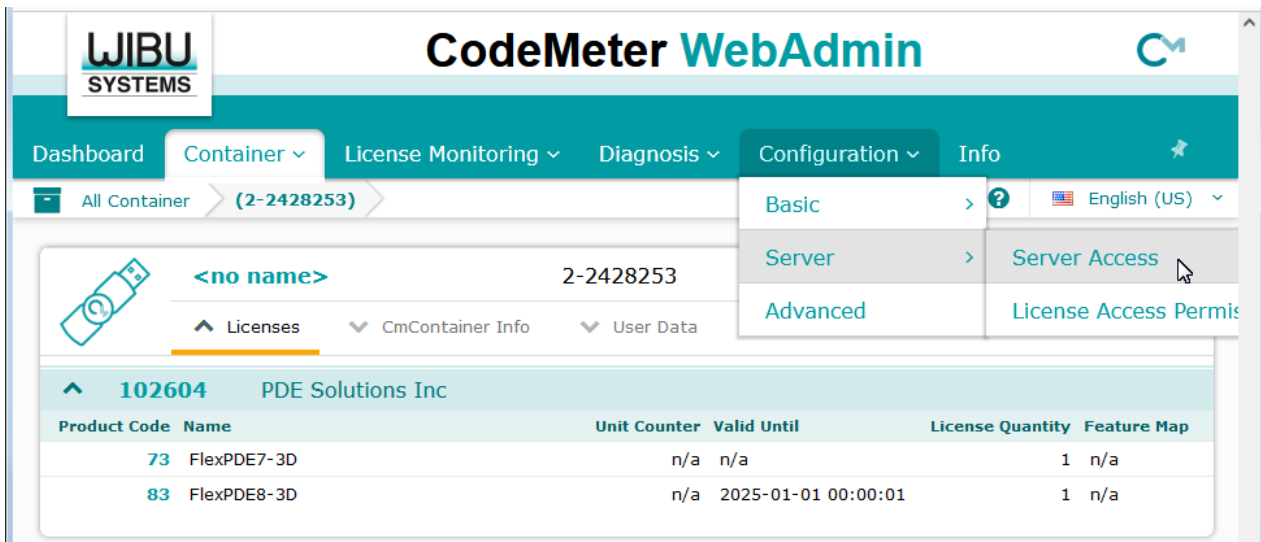

The screenshot shows the CodeMeter WebAdmin interface. The top navigation bar includes 'Dashboard', 'Container', 'License Monitoring', 'Diagnosis', 'Configuration', and 'Info'. The 'Configuration' menu is open, showing 'Basic', 'Server', and 'Advanced' options. The 'Server' option is selected, and the 'Server Access' subtab is highlighted. Below the navigation, the container ID is '2-2428253'. A table lists licenses for 'PDE Solutions Inc' with the following data:

Product Code	Name	Unit Counter	Valid Until	License Quantity	Feature Map
73	FlexPDE7-3D	n/a	n/a	1	n/a
83	FlexPDE8-3D	n/a	2025-01-01 00:00:01	1	n/a


Hover over the 'Configuration' tab and select the 'Server | Server Access' subtab.

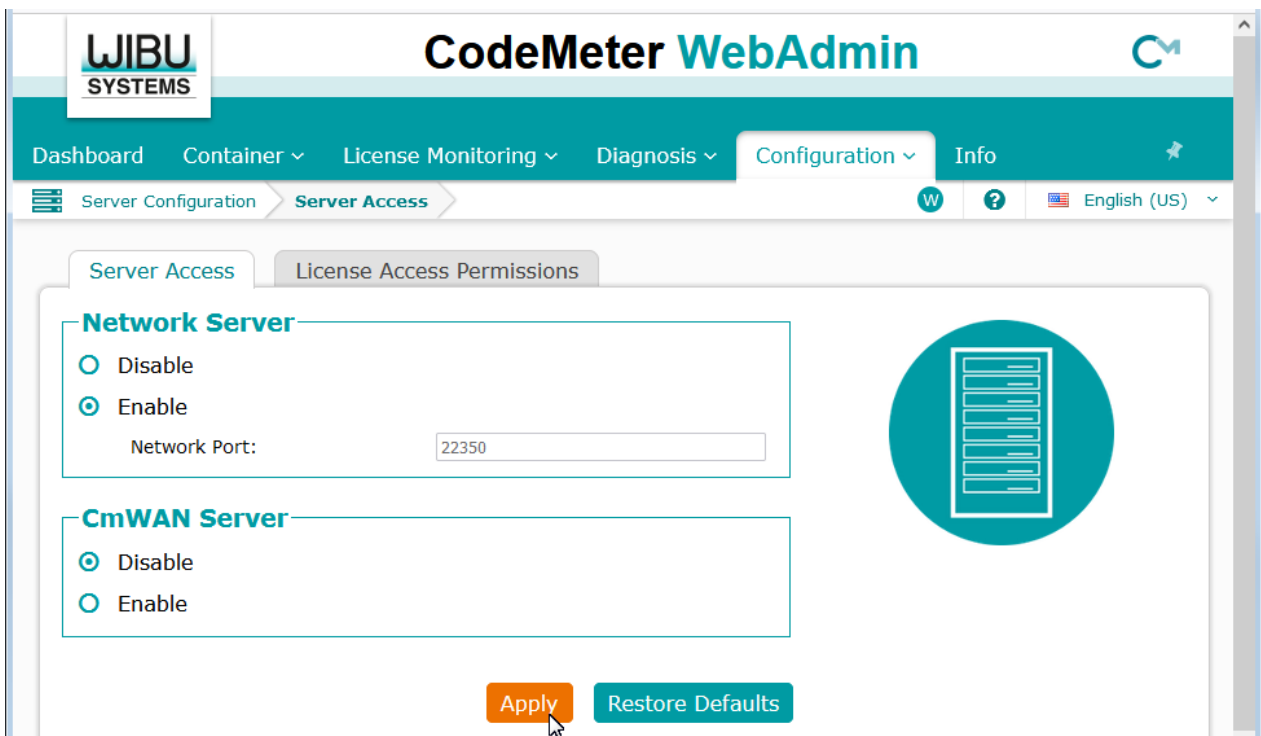


The screenshot shows the 'Server Access' configuration page in CodeMeter WebAdmin. The 'Server Access' subtab is selected. The page contains two sections: 'Network Server' and 'CmWAN Server'. The 'Network Server' section has radio buttons for 'Disable' and 'Enable', with 'Enable' selected. A text input field for 'Network Port' contains the value '22350'. The 'CmWAN Server' section has radio buttons for 'Disable' and 'Enable', with 'Disable' selected. At the bottom, there are 'Apply' and 'Restore Defaults' buttons.

Check the box next to 'Run Network Server' and click 'Apply'. This will make the dongle accessible over the network.

If the server and client are on different networks or different subnets, it may be necessary to specify the server address to the CodeMeter WebAdmin on the client machine. This means the dongle driver will need to be installed on the client as well as the server machine. The server address can be specified on the 'Basic | Server Search List' subtab of the 'Configuration' tab on the client.

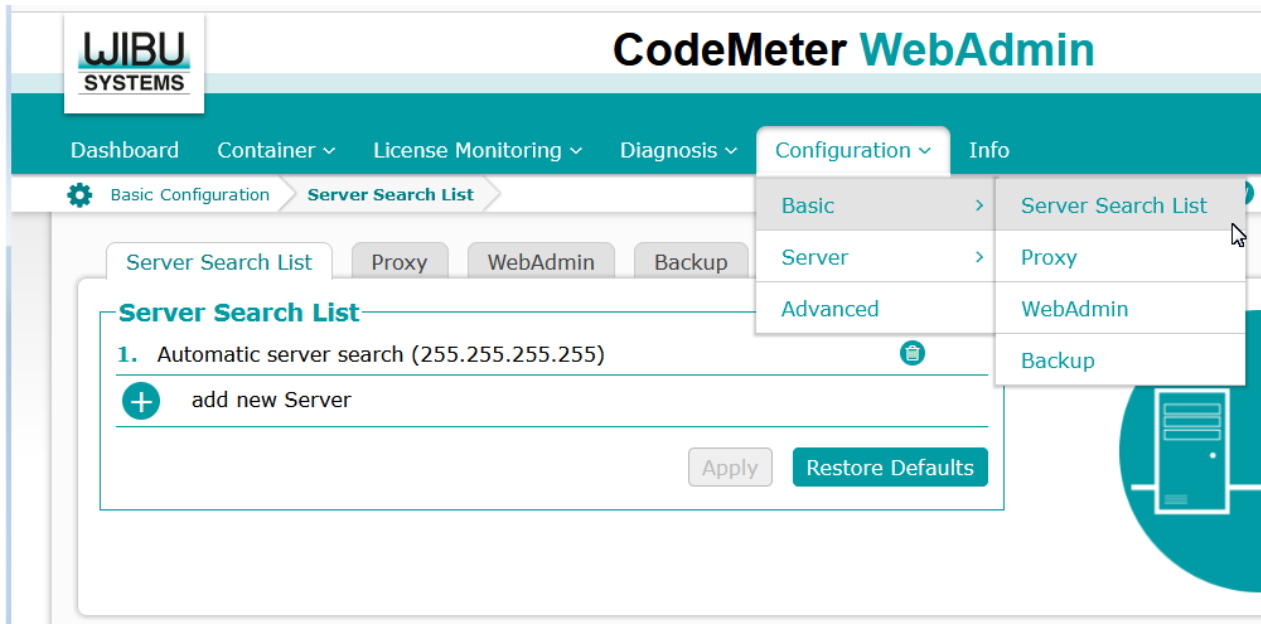


Enter the IP of the server, click "Add" and "Apply".

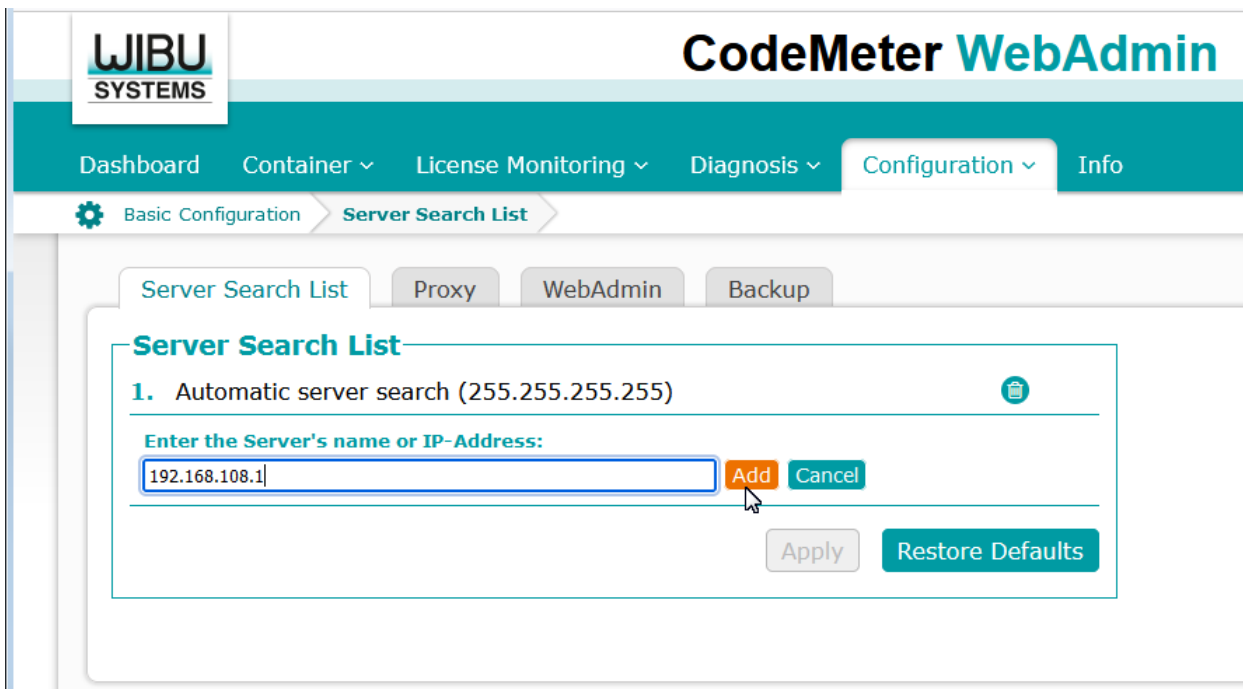

1.12.4 Software Key Registration

If your license is to be read from a software key file, select the "Software Key" option in the [License Registration](#) ³² tab and click "Continue". The following dialog will appear:

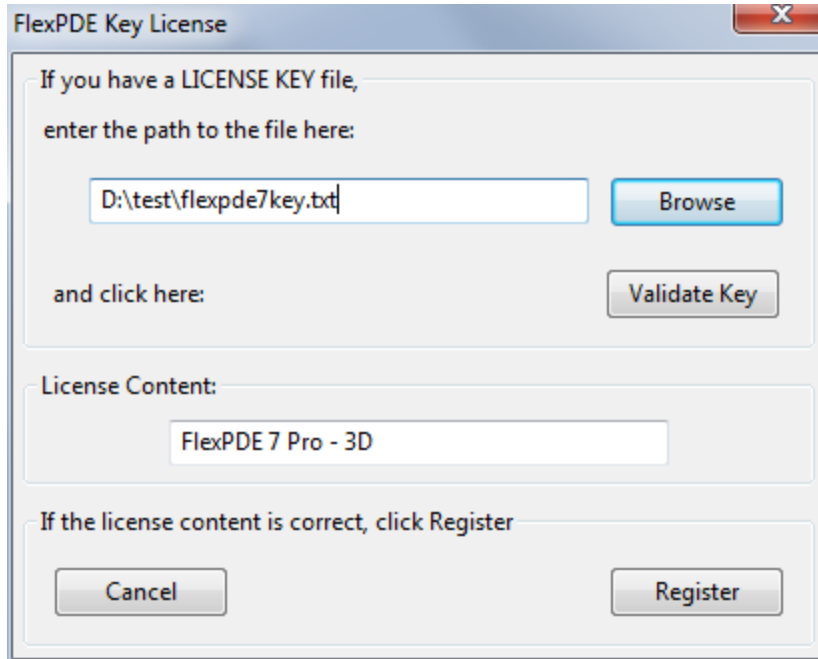

The screenshot shows a dialog box titled "FlexPDE Key License" with a close button (X) in the top right corner. The dialog is divided into several sections:

- Top Section:** "If you have a LICENSE KEY file, enter the path to the file here:" followed by a text input field containing "D:\test\flexpde7key.txt" and a "Browse" button.
- Middle Section:** "and click here:" followed by a "Validate Key" button.
- Bottom Section:** "License Content:" followed by a text input field containing "FlexPDE 7 Pro - 3D".
- Footer Section:** "If the license content is correct, click Register" followed by "Cancel" and "Register" buttons.

Enter the path to your license key file, or use the "Browse" button to find the location of the software key file, and select "Validate Key". This button will read the contents of the license file without installing it as the selected license method. FlexPDE will validate the license file entered and display the contents in the text field. This step is optional, but always a good idea to ensure that the key file is valid. Click "Register" to install this key file as the active license, or click "Cancel" to abort without changing the active license method.

Part



User Guide

2 User Guide

This section introduces the reader gradually to the use of FlexPDE in the solution of systems of partial differential equations.

We begin with a discussion of the basic character of FlexPDE. We then construct a simple model problem and proceed to add features to the model.

The result is a description of the most common features of FlexPDE in what we hope is a meaningful and understandable evolution that will allow users to very quickly become accustomed to the use of FlexPDE and to use it in their own work.

No attempt is made in this manual to present a complete description of each command or circumstance which can arise. Detailed descriptions of each command are presented in the [Problem Descriptor Reference](#) section.

2.1 Overview

2.1.1 What Is FlexPDE?

FlexPDE is a "scripted finite element model builder and numerical solver".

By this we mean that from a script written by the user, FlexPDE performs the operations necessary to turn a description of a partial differential equations system into a finite element model, solve the system, and present graphical and tabular output of the results.

FlexPDE is also a "problem solving environment".

It performs the entire range of functions necessary to solve partial differential equation systems: an editor for preparing scripts, a mesh generator for building finite element meshes, a finite element solver to find solutions, and a graphics system to plot results. The user can edit the script, run the problem and observe the output, then re-edit and re-run repeatedly without leaving the FlexPDE application environment.

FlexPDE has no pre-defined problem domain or equation list.

The choice of partial differential equations is totally up to the user.

The FlexPDE scripting language is a "natural" language.

It allows the user to describe the mathematics of his partial differential equations system and the geometry of his problem domain in a format similar to the way he might describe it to a co-worker.

For instance, there is an EQUATIONS section in the script, in which Laplace's equation would be presented as

$$\text{Div}(\text{grad}(u)) = 0.$$

Similarly, there is a BOUNDARIES section in the script, where the geometric boundaries of a two-dimensional problem domain are presented merely by walking around the perimeter:

Start(x1,y1) line to (x2,y1) to (x2,y2) to (x1,y2) to close

This scripted form has many advantages

- The script completely describes the equation system and problem domain, so there is no uncertainty about what equations are being solved, as might be the case with a fixed-application program.
- New variables, new equations or new terms may be added at will, so there is never a case of the software being unable to represent a different loss term, or a different physical effect.
- Many different problems can be solved with the same software, so there is not a new learning curve for each problem

There is also a corollary requirement with the scripted model:

- The user must be able to pose his problem in mathematical form.

In an educational environment, this is good. It's what the student wants to learn.

In an industrial environment, a single knowledgeable user can prepare scripts which can be used and modified by less skilled workers. And a library of application scripts can show how it is done.

2.1.2 What Can FlexPDE Do?

- FlexPDE can solve systems of first or second order partial differential equations in one, two or three-dimensional Cartesian geometry, in one-dimensional spherical or cylindrical geometry, or in axisymmetric two-dimensional geometry. (Other geometries can be supported by including the proper terms in the PDE.)
 - The system may be steady-state or time-dependent, or alternatively FlexPDE can solve eigenvalue problems. Steady-state and time-dependent equations can be mixed in a single problem.
 - Any number of simultaneous equations can be solved, subject to the limitations of the computer on which FlexPDE is run.
 - The equations can be linear or nonlinear. (FlexPDE automatically applies a modified Newton-Raphson iteration process in nonlinear systems.)
 - Any number of regions of different material properties may be defined.
-

- Modeled variables are assumed to be continuous across material interfaces. Jump conditions on derivatives follow from the statement of the PDE system. (CONTACT boundary conditions can handle discontinuous variables.)
- FlexPDE can be extremely easy to use, and this feature recommends it for use in education. But FlexPDE is not a toy. By full use of its power, it can be applied successfully to extremely difficult problems.

2.1.3 How Does It Do It?

FlexPDE is a fully integrated PDE solver, combining several internal facilities to provide a complete problem solving system:

- **A script editing facility** with syntax highlighting provides a full text editing facility and a graphical domain preview.
- **A symbolic equation analyzer** expands defined parameters and equations, performs spatial differentiation, and symbolically applies integration by parts to reduce second order terms to create symbolic Galerkin equations. It then symbolically differentiates these equations to form the Jacobian coupling matrix.
- **A mesh generation facility** constructs a triangular or tetrahedral finite element mesh over a two or three-dimensional problem domain. In two dimensions, an arbitrary domain is filled with an unstructured triangular mesh. In three-dimensional problems, an arbitrary two-dimensional domain is extruded into a the third dimension and cut by arbitrary dividing surfaces. The resulting three-dimensional figure is filled with an unstructured tetrahedral mesh.
- **A Finite Element numerical analysis facility** selects an appropriate solution scheme for steady-state, time-dependent or eigenvalue problems, with separate procedures for linear and nonlinear systems. The finite element basis may be linear, quadratic or cubic.
- **An adaptive mesh refinement procedure** measures the adequacy of the mesh and refines the mesh wherever the error is large. The system iterates the mesh refinement and solution until a user-defined error tolerance is achieved.
- **A dynamic timestep control procedure** measures the curvature of the solution in time and adapts the time integration step to maintain accuracy.
- **A graphical output facility** accepts arbitrary algebraic functions of the solution and plots contour, surface, vector or elevation plots.
- **A data export facility** can write text reports in many formats, including simple tables, full finite element mesh data, CDF, VTK or TecPlot compatible files.

2.1.4 Who Can Use FlexPDE?

Most of physics and engineering is described at one level or another in terms of partial differential equations. This means that a scripted solver like FlexPDE can be applied to *virtually any* area of engineering or science.

- **Researchers** in many fields can use FlexPDE to model their experiments or apparatus, make predictions or test the importance of various effects. Parameter variations or dependencies are not limited by a library of forms, but can be programmed at will.
- **Engineers** can use FlexPDE to do design optimization studies, feasibility studies and conceptual analyses. The same software can be used to model all aspects of a design -- no need for a separate tool for each effect.
- **Application developers** can use FlexPDE as the core of a special-purpose applications that need finite element modeling of partial differential equation systems.
- **Educators** can use FlexPDE to teach physics or engineering. A single software tool can be used to examine the full range of systems of interest in a discipline.
- **Students** see the actual equations, and can experiment interactively with the effects of modifying terms or domains.

2.1.5 What Does A Script Look Like?

A problem description script is a readable text file. The contents of the file consist of a number of sections, each identified by a header. The fundamental sections are:

- TITLE a descriptive label for the output.
 - SELECT user controls that override the default behavior of FlexPDE.
 - VARIABLES here the dependent variables are named.
 - DEFINITIONS useful parameters, relationships or functions are defined.
 - EQUATIONS each variable is associated with a partial differential equation.
 - BOUNDARIES the geometry is described by walking the perimeter of the domain, stringing together line or arc segments to bound the figure.
 - MONITORS and PLOTS desired graphical output is listed, including any combination of CONTOUR, SURFACE, ELEVATION or VECTOR plots.
-

- END completes the script.

Note: There are several other optional sections for describing special aspects of the problem. Some of these will be introduced later in this document. Detailed rules for all sections are presented in the FlexPDE Problem Descriptor Reference chapter "[The Sections of a Descriptor](#)".

COMMENTS can be placed anywhere in a script to describe or clarify the work. Two forms of comment are available:

- { Anything inside curly brackets is a comment. }
- ! from an exclamation to the end of the line is a comment.

Example:

A simple diffusion equation on a square might look like this:

```
TITLE 'Simple diffusion equation'
{ this problem lacks sources and boundary conditions }
VARIABLES
    u
DEFINITIONS
    k=3      { conductivity }
EQUATIONS
    div(k*grad(u)) =0
BOUNDARIES
    REGION 1
    START(0,0)
    LINE TO (1,0) TO (1,1) TO (0,1) TO CLOSE
PLOTS
    CONTOUR(u)
    VECTOR(k*grad(u))
END
```

Later on, we will show detailed examples of the development of a problem script.

2.1.6 What About Boundary Conditions?

Proper specification of boundary conditions is crucial to the solution of a PDE system.

In a FlexPDE script, boundary conditions are presented as the boundary is being described.

The primary types of boundary condition are VALUE and NATURAL.

The VALUE (or Dirichlet) boundary condition specifies the value that a variable must take on at the boundary of the domain.

The NATURAL boundary condition specifies a flux at the boundary of the domain. (The precise meaning of the NATURAL boundary condition depends on the PDE for which the boundary condition is being specified. Details are discussed in the Chapter "[Natural Boundary Conditions](#)"^[85].)

In the diffusion problem presented above, for example, we may add fixed values on the bottom and top edges, and zero-flux conditions on the sides as follows:

```
...
BOUNDARIES
  REGION 1
  START(0,0)
    VALUE(u) = 0      LINE TO (1,0) { fixed value on bottom }
    NATURAL(u)=0     LINE TO (1,1) { insulated right side }
    VALUE(u)=1      LINE TO (0,1) { fixed value on top }
    NATURAL(u)=0     LINE TO CLOSE   { insulated left side }
...

```

Notice that a VALUE or NATURAL statement declares a condition which will apply to the subsequent boundary segments until the declaration is changed.

2.2 Basic Usage

2.2.1 How Do I Set Up My Problem?

FlexPDE reads a text script that describes in readable language the characteristics of the problem to be solved. In simple applications, the script can be very simple. Complex applications may require much more familiarity with the abilities of FlexPDE.

In the following discussion, we will begin with the simpler features of FlexPDE and gradually introduce more complex features as we proceed.

FlexPDE has a built-in editor with which you can construct your problem script. You can edit the script, run it, edit it some more, and run it again until the result satisfies your needs. You can save the script for later use or as a base for later modifications.

The easiest way to begin a problem setup is to copy a similar problem that already exists.

Whether you start fresh or copy an existing file, there are five basic parts to be defined:

- Define the variables and equations
- Define the domain
- Define the material parameters
- Define the boundary conditions
- Specify the graphical output.

These steps will be described in the following sections. We will use a simple 2D heatflow problem as an example, and start by building the script from the most basic elements of FlexPDE. In later sections, we will elaborate the script, and address the more advanced capabilities of FlexPDE in an evolutionary manner. 3D applications rely heavily on 2D concepts, and will be discussed in a separate chapter.

Note: We will make no attempt in the following to describe all the options that are available to the user at any point, but try to keep the concept clear by illustrating the most common forms. The full range of options is detailed in the FlexPDE [Problem Descriptor Reference](#)^[162]. Many will also be addressed in subsequent topics.

2.2.2 Problem Setup Guidelines

In posing any problem for FlexPDE, there are some guidelines that should be followed.

- **Start with a fundamental statement of the physical system.** Descriptions of basic conservation principles usually work better than the heavily massaged pseudo-analytic "simplifications" which frequently appear in textbooks.
- **Start with a simple model, preferably one for which you know the answer.** This allows you both to validate your presentation of the problem, and to increase your confidence in the reliability of FlexPDE. (One useful technique is to assume an analytic answer and plug it into the PDE to generate the source terms necessary to produce that solution. Be sure to take into account the appropriate boundary conditions.)
- **Use simple material parameters at first.** Don't worry about the exact form of nonlinear coefficients or material properties at first. Try to get a simple problem to work, and add the complexities later.
- **Map out the domain.** Draw the outer boundary first, placing boundary conditions as you go. Then overlay the other material regions. Later regions will overlay and replace anything under them, so you don't have to replicate a lot of complicated interfaces.
- **Use MONITORS** of anything that might help you see what is happening in the solution. Don't just plot the final value you want to see and then wonder why it's wrong. Get feedback! That's what the MONITORS section is there for.

- **Annotate your script** with frequent comments. Later you will want to know just what it was you were thinking when you wrote the script. Include references to sources of the equations or notes on the derivation.
- **Save your work.** FlexPDE will write the script to disk whenever you click "Domain Review" or "Run Script". But if you are doing a lot of typing, use "Save" or "Save_as" to protect your work from unforeseen interruptions.

2.2.3 Notation

In most cases, FlexPDE notation is simple text as in a programming language.

- Differentiation, such as du/dx , is denoted by the form $dx(u)$. All active coordinate names are recognized, as are second derivatives like $dxx(u)$ and differential operators Div, Grad and Curl.
- Names are NOT case sensitive. "F" is the same as "f".
- Comments can be placed liberally in the text. Use { } to enclose comments or ! to ignore the remainder of the line.

Note: See the Problem Descriptor Reference chapter on [Elements](#)^[167] for a full description of FlexPDE notation.

2.2.4 Variables and Equations

The two primary things that FlexPDE needs to know are:

- what are the variables that you want to analyze?
- what are the partial differential equations that define them?

The [VARIABLES](#)^[209] and [EQUATIONS](#)^[232] sections of a problem script supply this information. The two are closely linked, since you must have one equation for each variable in a properly posed system.

In a simple problem, you may have only a single variable, like voltage or temperature. In this case, you can simply state the variable and equation:

VARIABLES

Phi

EQUATIONS

Div(grad(Phi)) = 0

In a more complex case, there may be many variables and many equations. FlexPDE will want to know how to associate equations with variables, because some of the details of constructing the model will depend on this association.

Each equation must be labeled with the variable to which it is associated (name and colon), as indicated below:

VARIABLES

A,B

EQUATIONS

A: $\text{Div}(\text{grad}(A)) = 0$

B: $\text{Div}(\text{grad}(B)) = 0$

Later, when we specify boundary conditions, these labels will be used to associate boundary conditions with the appropriate equation.

2.2.5 Mapping the Domain

Two-Dimensional Domain Description

A two-dimensional problem domain is described in the BOUNDARIES section, and is made up of REGIONS, each assumed to contain unique material properties. A REGION may contain many closed loops or islands, but they are all assumed to have the same material properties.

- A REGION specification begins with the statement REGION <number> (or REGION "name") and all loops following the header are included in the region.
- REGIONS occurring later in the script overlay and cover up parts of earlier REGIONS.
- The first REGION should contain the entire domain. This is an unenforced convention that makes the attachment of boundary conditions easier.

Region shapes are described by walking the perimeter, stepping from one joint to another with LINE, SPLINE, ARC or CURVE segments. Each segment assumes that it will continue from the end of the previous segment, and the START clause gets things rolling. You can make a segment return to the beginning with the word CLOSE (or TO CLOSE).

- A rectangular region, for example, is made up of four line segments:

START(x1,y1)

LINE TO(x2,y1)

TO (x2,y2)

TO (x1,y2)

TO CLOSE

(Of course, any quadrilateral figure can be made with the same structure, merely by changing the coordinates. And any polygonal figure can be constructed by adding more points.)

- Arcs can be built in several ways, the simplest of which is by specifying a center and an angle:

```
START(r,0)
ARC(CENTER=0,0) ANGLE=360
```

- Arcs can also be built by specifying a center and an end point:

```
START(r,0)
ARC(CENTER=0,0) TO (0,r)    { a 90 degree arc }
```

An elliptical arc will be built if the distance from the center to the endpoint is different than the distance from the center to the beginning point. The axes of the ellipse will extend along the horizontal and vertical coordinate axes. The axes can be rotated with the ROTATE=degrees command.

- Curves can be built by specifying a start point and an expression for the curve:

```
START(r,0)
CURVE(x^2+y^2=r^2) BY (+X) TO (0,r)    { a 90 degree arc }
```

A curve.

- Loops can be named for use in later references, as in:

```
START "Name" (...)
```

The prototype form of The BOUNDARIES section is then:

```
BOUNDARIES
  REGION 1
  <closed loops around the domain>
  REGION 2
  <closed loops around overlays of the second material>
  ...
```

You can build your domain a little at a time, using the "domain review" menu button to preview a drawing of what you have created so far.

The "Save" and "Save_As" menu buttons allow you to frequently save your work, just in case.


2.2.6 An Example Problem

Let us build as an example a circular inclusion between two plates. We will simply treat the plates as the top and bottom surfaces of a square enclosure, with the circle centered between them. Using the statements above and adding the required control labels, we get:

```
BOUNDARIES
  REGION 1 'box'    { the bounding box }
```


```
START(-1,-1)
  LINE TO(1,-1)
  TO (1,1)
  TO (-1,1)
  TO CLOSE
  REGION 2 'blob' { the embedded circular 'blob' }
START 'ring' (1/2,0)
  ARC(CENTER=0,0) ANGLE=360 TO CLOSE
```

The resulting figure displayed by the "domain review" button is this:

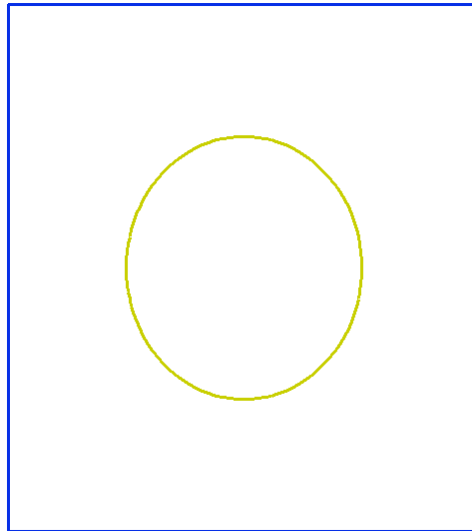


Note: The detailed Rules for constructing domain boundaries is included in the Reference chapter "[Sections | Boundaries](#)^[241]".

2.2.7 Generating A Mesh

When you select "Run Script" from the Controls menu (or the  button), FlexPDE will begin execution by automatically creating a finite element mesh to fit the domain you have described. In the automatic mesh, cell sizes will be determined by the spacing between explicit points in the domain boundary, by the curvature of arcs, or by explicit user density controls.

In our example, the automatic mesh looks like this:

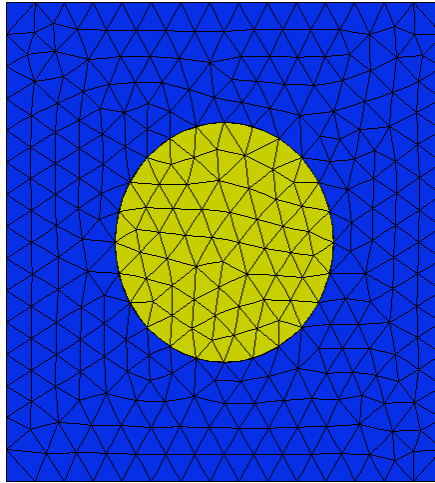


Notice that the circular boundary of region 2 is mapped onto cell legs.

There are several controls that the user can apply to change the behavior of the automatic mesh. These are described in detail in the chapter ["Controlling Mesh Density"](#)¹⁴⁴ below.

As an example, we can cause the circular boundary of region 2 to be gridded more densely by using the modifier MESH_SPACING:

```
REGION 2 'blob'           { the embedded 'blob' }  
  START(1/2,0)  
  MESH_SPACING = 0.05  
  ARC(CENTER=0,0) ANGLE=360
```

The resulting mesh looks like this:

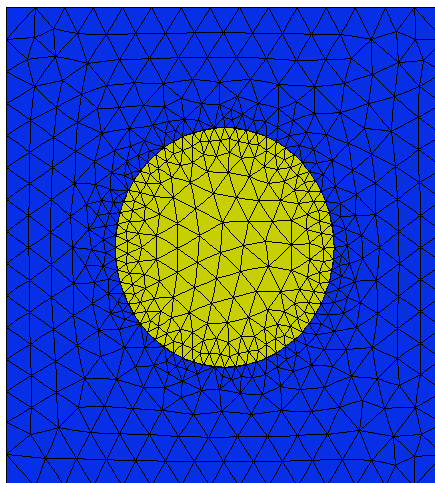

In most cases, it is not necessary to intervene in the mesh generation, because as we will see later, FlexPDE will adaptively refine the mesh wherever it detects that there are strong curvatures in the solution.

2.2.8 Defining Material Parameters

Much of the complexity of real problems comes in the fact that the coefficients that enter into the partial differential equation system take on different values in the various materials of which a structure is composed.

This is handled in FlexPDE by two facilities. First, the material parameters are given names and default values in the DEFINITIONS section. Second, the material parameters are given regional values within the domain REGIONS.

So far, it has been of little consequence whether our test problem was heat flow or electrostatics or something else entirely. However, for concreteness in what follows, let us assume it is a heat equation, describing an insulator imbedded in a conductor between two heat reservoirs. We will give the circular insulator a conductivity of 0.001 and the surrounding conductor a conductivity of 1.

First, we define the name of the constant and give it a default value in the definitions section:

```
DEFINITIONS
k = 1
```

This default value will be used as the value of "k" in every REGION of the problem, unless specifically redefined in a region.

Now we introduce the constant into the equation:

```
EQUATIONS
Div(-k*grad(phi)) = 0
```

Then we specify the regional value in region 2:

```
...
REGION 2 'blob' { the embedded blob }
k = 0.001
START(1/2,0)
ARC(CENTER=0,0) ANGLE=360
```

We could also define the parameter k=1 for the conductor in REGION 1, if it seemed useful for clarity.

See also [MATERIALS](#)^[229] section.

2.2.9 Setting the Boundary Conditions

Boundary conditions are specified as modifiers during the walk of the perimeter of the domain.

The primary types of boundary condition are VALUE and NATURAL.

The VALUE (or Dirichlet) boundary condition specifies the value that a variable must take on at the boundary of the domain. Values may be any legal arithmetic expression, including nonlinear dependences on variables.

The NATURAL boundary condition specifies a flux at the boundary of the domain. Definitions may be any legal arithmetic expression, including nonlinear dependence on variables. With Laplace's equation, the NATURAL boundary condition is equivalent to the Neumann or normal derivative boundary condition.

Note: The precise meaning of the NATURAL boundary condition depends on the PDE for which the boundary condition is being specified. Details are discussed in the Chapter "[Natural Boundary Conditions](#)"

Each boundary condition statement takes as an argument the name of a variable. This name associates the boundary condition with one of the listed equations, for it is in reality the equation that is modified by the boundary condition. The equation modified by VALUE(u)=0, for example, is the equation which has previously been identified as defining u. NATURAL(u)=0 will depend for its meaning on the form of the equation which defines u.

In our sample problem, suppose we wish to define a zero temperature along the bottom edge, an insulating boundary on the right side, a temperature of 1 on the top edge, and an insulating boundary on the left. We can do this with these commands:

```
...
REGION 1 'box' { the bounding box }
START(-1,-1)
  { Phi=0 on base line: }
  VALUE(Phi)=0 LINE TO(1,-1)
  { normal derivative =0 on right side: }
  NATURAL(Phi)=0 LINE TO (1,1)
  { Phi = 1 on top: }
  VALUE(Phi)=1 LINE TO (-1,1)
  { normal derivative =0 on left side: }
  NATURAL(Phi)=0 LINE TO CLOSE
```

Notice that a VALUE or NATURAL statement declares a condition which will apply to the subsequent boundary segments until the declaration is changed.

Notice also that the segment shape (Line or Arc) must be restated after a change of boundary condition.

Note: Other boundary condition forms are allowed. See the Reference chapter "[Sections | Boundaries](#)"

2.2.10 Requesting Graphical Output

The MONITORS and PLOTS sections contain requests for graphical output.

MONITORS are used to get ongoing information about the progress of the solution.

PLOTS are used to specify final output, and these graphics will be saved in a disk file for later viewing.

FlexPDE recognizes several forms of output commands, but the primary forms are:

- CONTOUR a plot of contours of the argument; it may be color-filled
- SURFACE a 3D surface of the argument
- VECTOR a field of arrows
- ELEVATION a "lineout" along a defined path
- SUMMARY text-only reports

Any number of plots may be requested, and the values plotted may be any consistent algebraic combination of variables, coordinates and defined parameters.

In our example, we will request a contour of the temperature, a vector map of the heat flux, $k*\text{grad}(\text{Phi})$, an elevation of temperature along the center line, and an elevation of the normal heat flux on the surface of the blob:

```
PLOTS
  CONTOUR(Phi)
  VECTOR(-k*grad(Phi))
  ELEVATION(Phi) FROM (0,-1) TO (0,1)
  ELEVATION(Normal(-k*grad(Phi))) ON 'ring'
```

Output requested in the PLOTS section is produced when FlexPDE has finished the process of solving and regridding, and is satisfied that all cells are within tolerance. An alternative section, identical in form to the PLOTS section but named MONITORS, will produce transitory output at more frequent intervals, as an ongoing report of the progress of the solution.

A record of all PLOTS is written in a file with suffix .PG8 and the name of the .PDE script file. These recorded plots may be viewed at a later time by invoking the VIEW item in the FlexPDE main menu.

MONITORS are not recorded in the .PG8 file. It is strongly recommended that MONITORS be used liberally during script development to determine that the problem has been properly set up and that the solution is proceeding as expected.

Note: FlexPDE accepts other forms of plot command, including GRID plots and HISTORIES. See the Reference chapter "[Sections | Monitors and Plots](#)"^[261].

2.2.11 Putting It All Together

In the previous sections, we have gradually built up a problem specification.

Putting it all together and adding a TITLE, it looks like this:

```
TITLE 'Heat flow around an Insulating blob'
VARIABLES
  Phi          { the temperature }
DEFINITIONS
  K = 1        { default conductivity }
  R = 0.5      { blob radius }
```

EQUATIONS

$$\text{Div}(-k*\text{grad}(\text{phi})) = 0$$

BOUNDARIES

REGION 1 'box'

START(-1,-1)

VALUE(Phi)=0 LINE TO (1,-1)

NATURAL(Phi)=0 LINE TO (1,1)

VALUE(Phi)=1 LINE TO (-1,1)

NATURAL(Phi)=0 LINE TO CLOSE

REGION 2 'blob' { the embedded blob }

k = 0.001

START 'ring' (R,0)

ARC(CENTER=0,0) ANGLE=360 TO CLOSE

PLOTS

CONTOUR(Phi)

VECTOR(-k*grad(Phi))

ELEVATION(Phi) FROM (0,-1) to (0,1)

ELEVATION(Normal(-k*grad(Phi))) ON 'ring'


END

We have defined a complete and meaningful problem in twenty-three readable lines.

The output from this script looks like this:


Heat flow around an Insulating blob

22:19:22 11/6/08
FlexPDE 6.00

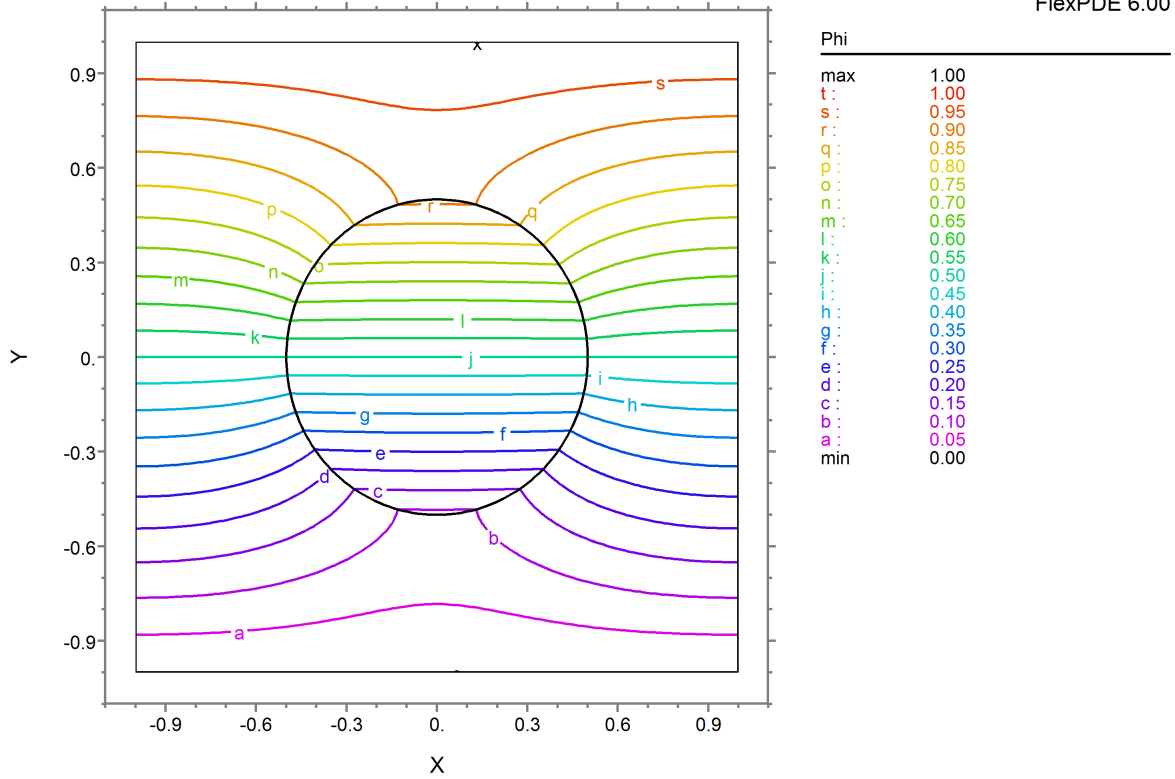

ex1: Grid#4 P2 Nodes=7727 Cells=3806 RMS Err= 5.4e-6
k= 1.000000 INTEGRAL(Phi, 'blob')= 0.392695 Integral= 1.999995


Heat flow around an Insulating blob

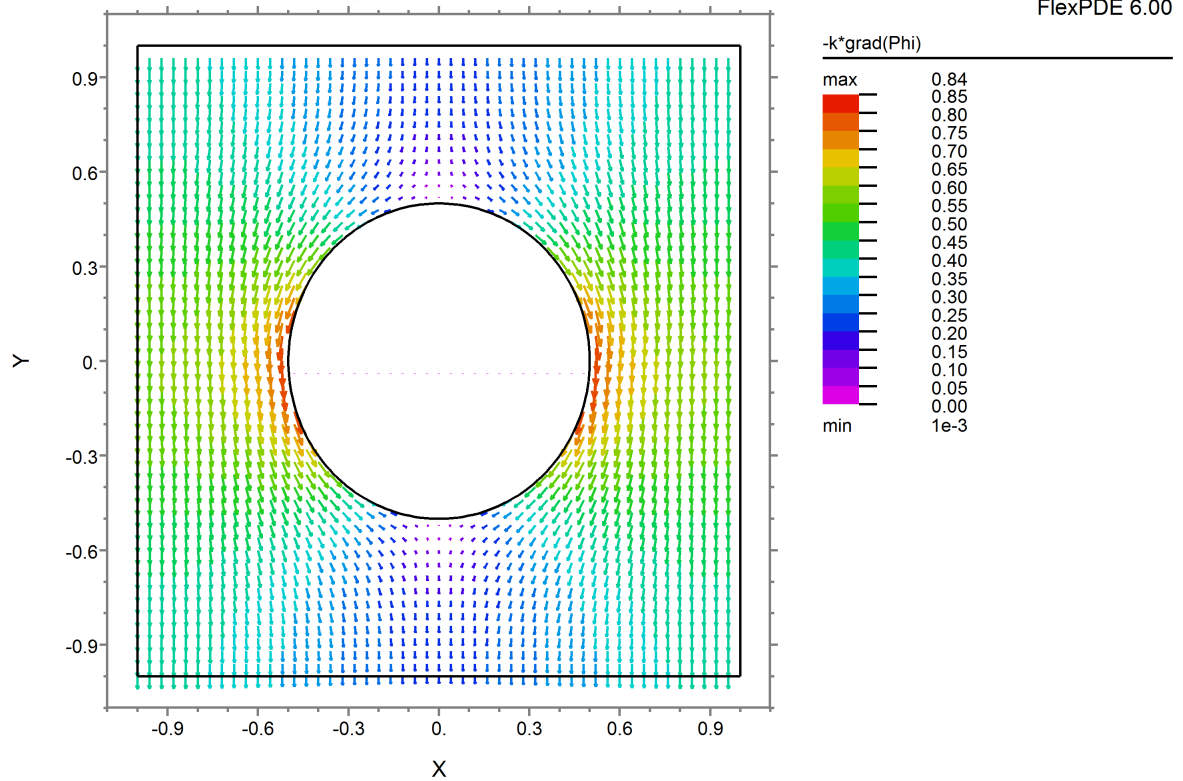

ex1: Grid#4 P2 Nodes=7727 Cells=3806 RMS Err= 5.4e-6


Heat flow around an Insulating blob

18:27:37 11/8/08
FlexPDE 6.00

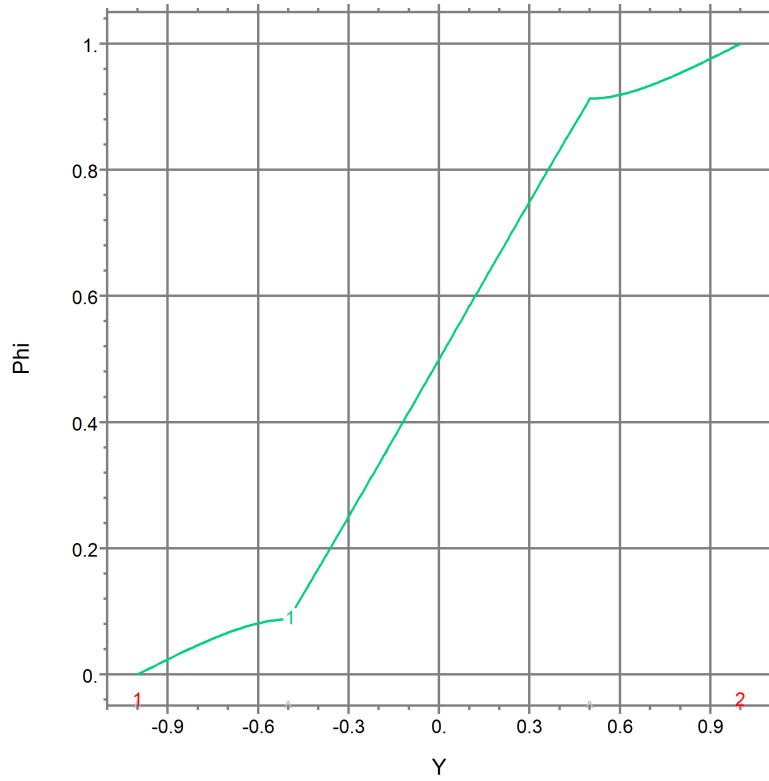


Phi
FROM (0,-1)
to (0,1)

1: Phi




ex1: Grid#4 P2 Nodes=7727 Cells=3806 RMS Err= 5.4e-6
Integral= 0.999959

Heat flow around an Insulating blob

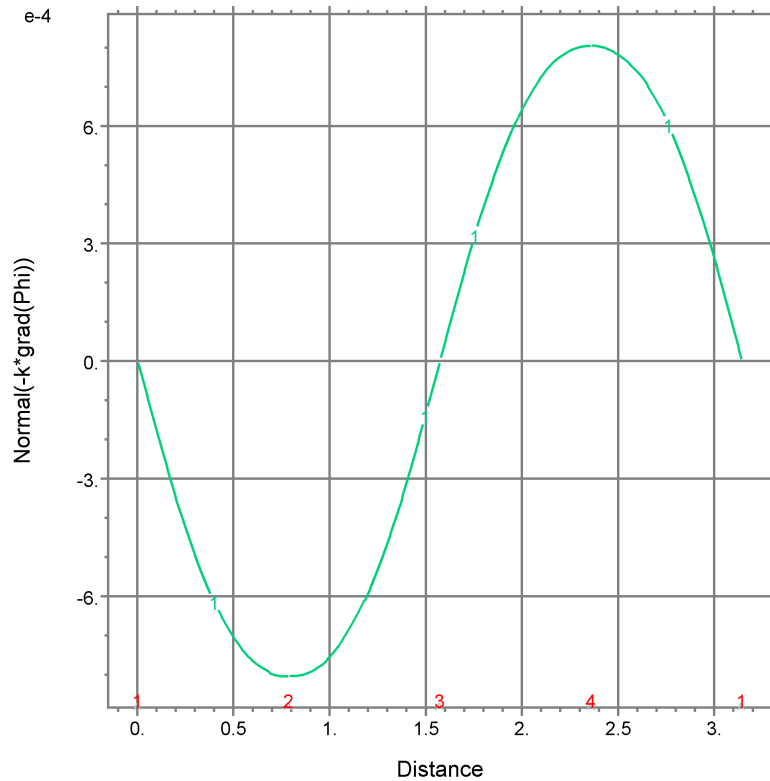12:58:33 10/24/10
FlexPDE 6.14Normal(-k*grad(Phi))
ON ring

1: Normal(-k*grad(Phi))

ex1: Grid#2 P2 Nodes=815 Cells=386 RMS Err= 6.5e-4
Integral= 3.936190e-7

2.2.12 Interpreting a Script

It is important to understand that a FlexPDE script is not a procedural description of the steps to be performed in solving the PDE system. It is instead a description of the dependencies between various elements of the model.

A parameter defined as $P = 10$ means that whenever P is used in the script, it represents the constant value 10.

If the parameter is defined as $P = 10 * X$, then whenever P is used in the script, it represents 10 times the value of X at each point of the domain at which the value of P is needed for the solution of the system. In other words, P will have a distribution of values throughout the domain.

If the parameter is defined as $P = 10 * U$, where U has been declared as a VARIABLE, then whenever P is used in the script, it represents 10 times the current value of U at each point of the domain, and at each stage of the solution process. That is, the single definition $P = 10 * U$ implies repeated re-evaluation as necessary throughout the computation.

2.3 Some Common Variations

2.3.1 Controlling Accuracy

FlexPDE applies a consistency check to integrals of the PDE's over the mesh cells. From this it estimates the relative uncertainty in the solution variables and compares this to an accuracy tolerance. If any mesh cell exceeds the tolerance, that cell is split, and the solution is recomputed.

The error tolerance is called ERRLIM, and can be set in the SELECT section of the script.

The default value of ERRLIM is 0.002, which means that FlexPDE will refine the mesh until the estimated error in any variable (relative to the variable range) is less than 0.2% over every cell of the mesh.


Note: This does not mean that FlexPDE can guarantee that the solutions is accurate to 0.2% over the domain. Individual cell errors may cancel or accumulate in ways that are hard to predict.

In our sample problem, we can insert the statement

```
SELECT ERRLIM=1e-5
```

as a new section. This tells FlexPDE to split any cell in which the consistency check implies an error of more than 0.001% over the cell.

FlexPDE refines the mesh twice, and completes with a mesh that looks like this:

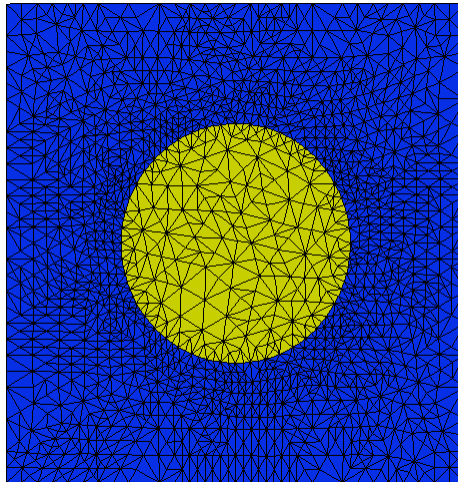

In this particular case, the result plots are not noticeably different from the default case.

Note: In time-dependent problems, spatial and temporal errors are both set by ERRLIM, but they can also be independently controlled by XERRLIM and TERRLIM. See the [Problem Descriptor Reference](#)^[199].

2.3.2 Computing Integrals

In many cases, it is an integral of some function that is of interest in the solution of a PDE problem. FlexPDE has an extensive repertoire of integration facilities, including volume integrals, surface integrals on bounding surfaces and line integrals on bounding lines. The two-dimensional forms are

- `Result = LINE_INTEGRAL(expression, boundary_name)`

Computes the integral of expression over the named boundary.

Note: BINTEGRAL is a pseudonym for LINE_INTEGRAL.

- `Result = VOL_INTEGRAL(expression, region_name)`

Computes the integral of expression over the named region.

If region_name is omitted, the integral is over the entire domain.

Note: INTEGRAL is a pseudonym for VOL_INTEGRAL.

Note: In 2D Cartesian geometry, AREA_INTEGRAL is also the same as VOL_INTEGRAL, since the domain is assumed to have a unit thickness in Z.

In our example problem, we might define

DEFINITIONS

```
{ the total flux across 'ring':
  (recall that 'ring' is the name of the boundary of 'blob') }
Tflux = LINE_INTEGRAL(NORMAL(-k*grad(Phi)), 'ring')
{ the total heat energy in 'blob': }
Tenergy = VOL_INTEGRAL(Phi, 'blob')
```

In the case of internal boundaries, there is sometimes a different value of the integral on the two sides of the boundary. The two values can be distinguished by further specifying the region in which the integral is to be evaluated:

```
{ the total flux across 'ring': }
Tflux = LINE_INTEGRAL(NORMAL(-k*grad(Phi)), 'ring', 'box')
{ evaluated on the 'box' side of the boundary }
```

Note: Three-dimensional integral forms will be addressed in a later section. A full description of integral operators is presented in the Problem Descriptor Reference section "[Elements | Operators | Integral Operators](#)¹⁸⁵".

2.3.3 Reporting Numerical Results

In many cases, there are numerical quantities of interest in evaluating or classifying output plots. Any plot command can be followed by the REPORT statement:

REPORT value AS "title"
Or just

REPORT value

Any number of REPORTs can be requested following any plot, subject to the constraint that the values are printed on a single line at the bottom of the plot, and too many reports will run off and be lost.

For instance, we might modify the contour plot of our example plot to say

```
CONTOUR(Phi) REPORT(k) REPORT(INTEGRAL(Phi, 'blob'))
```

On running the problem, we might see something like this at the bottom of the plot:

```
ex1: Grid#1 p2 Nodes=1121 Cells=530 RMS Err= 5.e-5
k= 1.000000 INTEGRAL(Phi, 'blob')= 0.392695 Integral= 1.999999
```

2.3.4 Summarizing Numerical Results

A special form of plot command is the SUMMARY. This plot command does not generate any pictorial output, but instead creates a page for the placement of numerous REPORTs.

SUMMARY may be given a text argument, which will be printed as a header.

For example,

```
SUMMARY
REPORT(k)
REPORT(INTEGRAL(Phi, 'blob')) as "Heat energy in blob"
REPORT('no more to say')
```

In our sample, we will see a separate report page with the following instead of a graphic:

```
SUMMARY
k= 1.000000
Heat energy in blob= 0.392695
no more to say
```

2.3.5 Parameter Studies Using STAGES

FlexPDE supports a facility for performing parameter studies within a single invocation. This facility is referred to as "staging". Using staging, a problem can be solved repeatedly, with a range of values for a single parameter or a group of parameters.

The fundamental form for invoking a staged run is to define one or more parameters as STAGED:

```
DEFINITIONS
Name = STAGED(value1, value2, ...)
```

The problem will be re-run as many times as there are values in the value list, with "Name" taking on consecutive values from the list in successive runs.

If the STAGED parameter does not affect the domain dimensions, then each successive run will use the result and mesh from the previous run as a starting condition.

Note: This technique can also be used to approach the solution of a strongly nonlinear problem, by starting with a linear system and gradually increasing the weight on a nonlinear component.

If the STAGED parameter is used as a dimension in the domain definition, then each successive run will be restarted from the domain definition, and there will be no carry-over of solutions from one run to the next.

As for time-dependent problems (which we will discuss later), variation of arbitrary quantities across the stages of a problem can be displayed by HISTORY plots. In staged runs the history is plotted against stage number.

As an example, let us run our sample heat flow problem for a range of conductivities and plot a history of the top edge temperature.

We will modify the definition of κ in the insulator as follows:

DEFINITIONS

```
Kins = STAGED(0.01, 0.1, 1, 10)
```

```
{ Notice that the STAGED specification must appear at the initial declaration of a name. It cannot be used in a regional redefinition. }
```

```
...
```

```
REGION 2 'blob' { the embedded blob }
```

```
  K = Kins
```


```
  START (R,0) ARC(CENTER=0,0) ANGLE=360
```

```
...
```

```
HISTORY(Phi) AT (0,-R)
```


When this modified descriptor is run, the history plot produces the following:

Heat flow around an Insulating blob

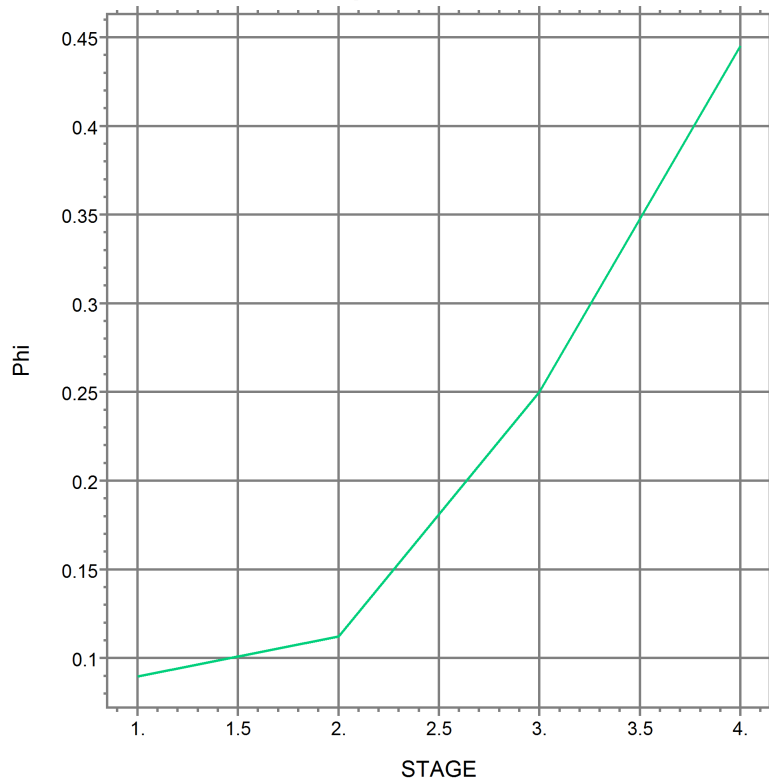22:34:07 11/6/08
FlexPDE 6.00

HISTORY

1: Phi

ex1s: Grid#1 P2 Nodes=1201 Cells=570 RMS Err= 3.e-4
Stage 4

In a staged run, all PLOTS and MONITORS requested will be presented for each stage of the run.

Other Staging Controls

- The global selector STAGES can be used to control the number of stages to run. If this selector appears, it overrides any STAGED lists in the DEFINITIONS section (lists shorter than STAGES will report an error). It also defines the global name STAGE, which can be used subsequently in arithmetic expressions. See the [Problem Descriptor Reference](#)^[221] for details.
- The default action is to proceed at once from one stage to the next, but you can cause FlexPDE to pause while you examine the plots by placing the command AUTOSTAGE=OFF in the SELECT section of the script.

Note: The STAGE facility can only be used on steady-state problems. It cannot be used with time dependent problems.

2.3.6 Cylindrical Geometry

In addition to two-dimensional Cartesian geometry, FlexPDE can solve problems in axisymmetric cylindrical coordinates, (r,z) or (z,r).

Cylindrical coordinates are invoked in the COORDINATES section of the script. Two forms are available, XCYLINDER and YCYLINDER. The distinction between the two is merely in the orientation of the graphical displays.

- XCYLINDER places the rotation axis of the cylinder, the Z coordinate, along the abscissa (or "x"-axis) of the plot, with radius along the ordinate. Coordinates in this system are (Z,R)
- YCYLINDER places the rotation axis of the cylinder, the Z coordinate, along the ordinate (or "y" axis) of the plot, with radial position along the abscissa. Coordinates in this system are (R,Z)

Either form may optionally be followed by a parenthesized renaming of the coordinates. Renaming cannot be used to change the geometric character of the coordinate. Radius remains radius, even if you rename it "Z".

The default names are

XCYLINDER implies XCYLINDER('Z','R').

YCYLINDER implies YCYLINDER('R','Z').

2.3.6.1 Integrals In Cylindrical Geometry

The VOL_INTEGRAL (alias INTEGRAL) operator in Cylindrical geometry is weighted by $2\pi R$, representing the fact that the equations are solved in a revolution around the axis.

An integral over the cross-sectional area of a region may be requested by the operator AREA_INTEGRAL. This form differs from VOL_INTEGRAL in that the $2\pi R$ weighting is absent.

Similarly, the operator SURF_INTEGRAL will form the integral over a boundary, analogous to the LINE_INTEGRAL operator, but with an area weight of $2\pi R$.

2.3.6.2 A Cylindrical Example

Let us now convert our Cartesian test problem into a cylindrical one. If we rotate the box and blob around the left boundary, we will form a torus between two circular plates (like a donut in a round box).

These changes will be required:

- We must offset the coordinates, so the left boundary becomes $R=0$.
- Since we want the rotation axis in the Y-direction, we must use YCYLINDER coordinates.
- Since 'R' is now a coordinate name, we must rename the 'R' used for the blob radius.

The full script, converted to cylindrical coordinates is then:

```
TITLE 'Heat flow around an Insulating Torus'  
COORDINATES
```

YCYLINDER

VARIABLES

Phi { the temperature }

DEFINITIONS

K = 1 { default conductivity }

Rad = 0.5 { blob radius (renamed)}

EQUATIONS

Div(-k*grad(phi)) = 0

BOUNDARIES

REGION 1 'box'

START(0,-1)

VALUE(Phi)=0 LINE TO (2,-1)

NATURAL(Phi)=0 LINE TO (2,1)

VALUE(Phi)=1 LINE TO (0,1)

NATURAL(Phi)=0 LINE TO CLOSE

REGION 2 'blob' { the embedded blob }

k = 0.001

START 'ring' (**1,Rad**)

ARC(CENTER=1,0) ANGLE=360 TO CLOSE

PLOTS

CONTOUR(Phi)

VECTOR(-k*grad(Phi))


ELEVATION(Phi) FROM (**1,-1**) to (**1,1**)

ELEVATION(Normal(-k*grad(Phi))) ON 'ring'

END


The resulting contour and boundary plot look like this:

Heat flow around an Insulating Torus

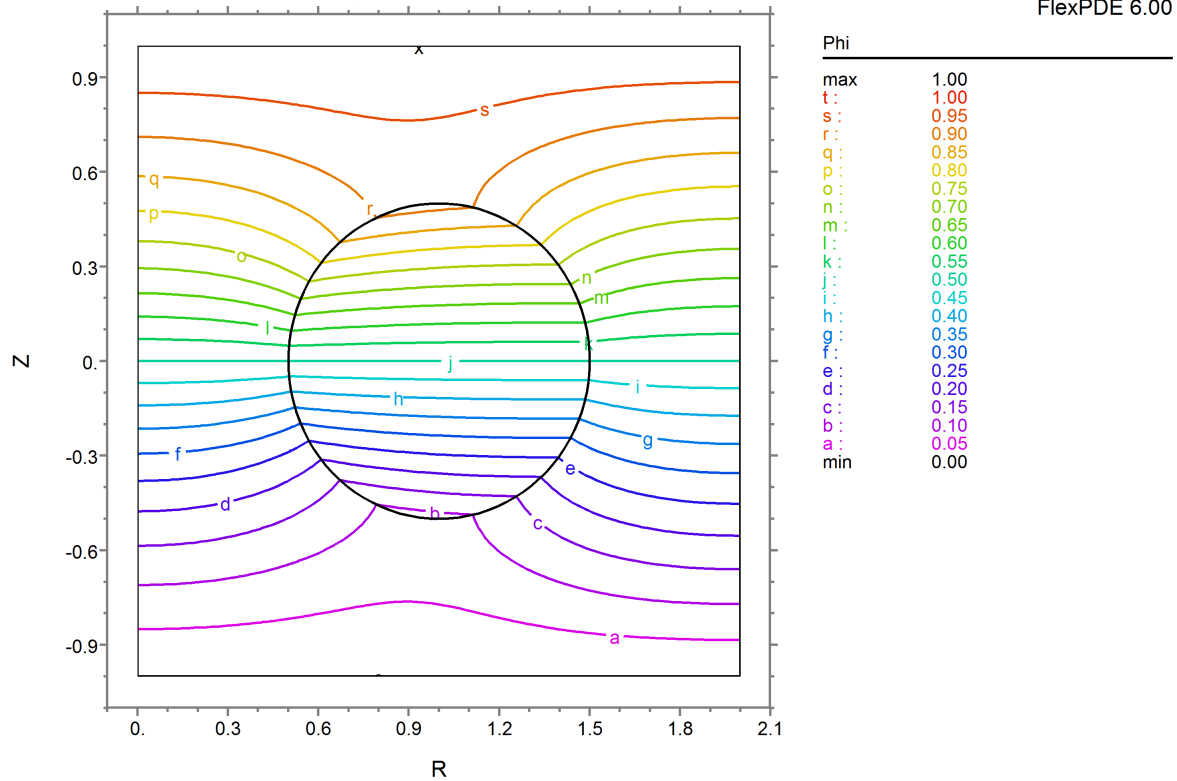
22:36:02 11/6/08
FlexPDE 6.00

ex2: Grid#1 P2 Nodes=1201 Cells=570 RMS Err= 2.8e-4
Vol_Integral= 12.56647

Heat flow around an Insulating Torus

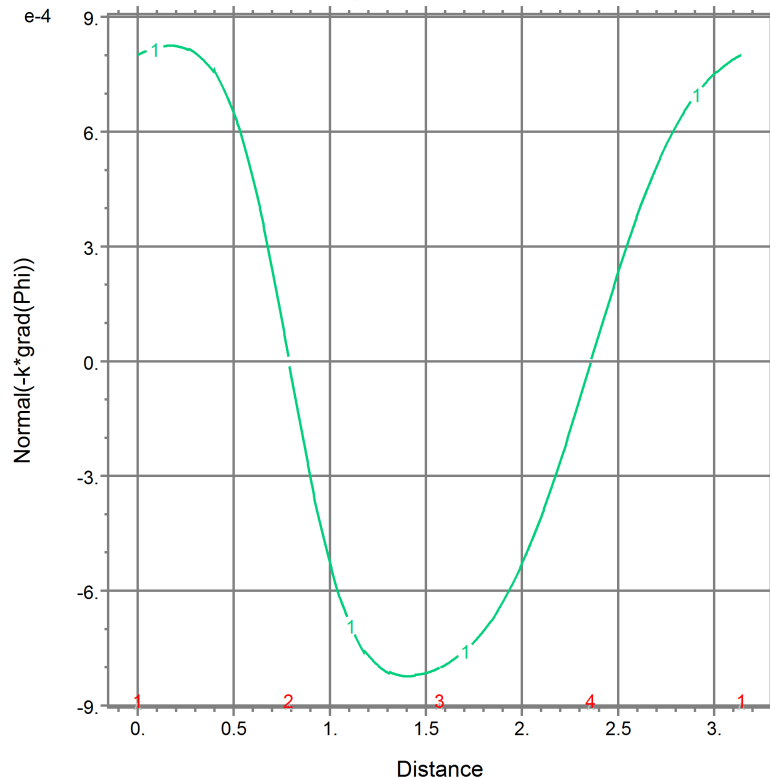22:36:02 11/6/08
FlexPDE 6.00Normal(-k*grad(Phi))
ON ring

1: Normal(-k*grad(Phi))

ex2: Grid#1 P2 Nodes=1201 Cells=570 RMS Err= 2.8e-4
Surf_Integral= -1.806200e-5

2.3.7 Time Dependence

Unless otherwise defined, FlexPDE recognizes the name "T" (or "t") as representing time. If references to time appear in the definitions or equations, FlexPDE will invoke a solution method appropriate to initial-value problems.

FlexPDE will apply a heuristic control on the timestep used to track the evolution of the system. Initially, this will be based on the time derivatives of the variables, and later it will be chosen so that the time behavior of the variables is nearly quadratic. This is done by shortening or lengthening the time intervals so that the cubic term in a Taylor expansion of the variables in time is below the value of the global selector ERRLIM.

In time dependent problems, several new things must be specified:

- The THRESHOLD of meaningful values for each variable (if not apparent from initial values).
- The time-dependent PDE's
- The time range of interest,
- The times at which plots should be produced
- Any history plots that may be desired

Note: FlexPDE can treat only first derivatives in time. Equations that are second-order in time must be split into two equations by defining an intermediate variable.

The time range is specified by a new script section

```
TIME start TO finish
```

Plot times are specified by preceding any block of plot commands by a time control, in which specific times may be listed, or intervals and end times, or a mixture of both:

```
FOR T = t1, t2 BY step TO t3 ....
```

We can convert our heat flow problem to a time dependent one by including a time term in the heat equation:

$$\text{Div}(k*\text{grad}(\text{Phi})) = c*dt(\text{Phi})$$

To make things interesting, we will impose a sinusoidal driving temperature at the top plate, and present a history plot of the temperature at several internal points.


The whole script with pertinent modifications now looks like this:

```
TITLE 'Transient Heat flow around an Insulating blob'
VARIABLES
  Phi (threshold=0.01)      { the temperature }
DEFINITIONS
  K = 1      { default conductivity }
  C = 1    { default heat capacity }
  R = 1/2
EQUATIONS
  Div(-K*grad(phi)) + C*dt(Phi) = 0
BOUNDARIES
  REGION 1 'box'
  START(-1,-1)
    VALUE(Phi)=0      LINE TO (1,-1)
    NATURAL(Phi)=0    LINE TO (1,1)
    VALUE(Phi)=sin(t) LINE TO (-1,1)
    NATURAL(Phi)=0    LINE TO CLOSE
  REGION 2 'blob' { the embedded blob }
  K = 0.001
  C = 0.1
  START(R,0)
    ARC(CENTER=0,0) ANGLE=360
TIME 0 TO 2*pi
PLOTS
  FOR T = pi/2 BY pi/2 TO 2*pi
    CONTOUR(Phi)
    VECTOR(-K*grad(Phi))
    ELEVATION(Phi) FROM (0,-1) to (0,1)
HISTORIES
  HISTORY(Phi) AT (0,r/2) (0,r) (0,3*r/2)
END
```


At the end of the run ($t=2*\pi$), the contour and history look like this:

Transient Heat flow around an Insulating blob


22:37:27 11/6/08
FlexPDE 6.00

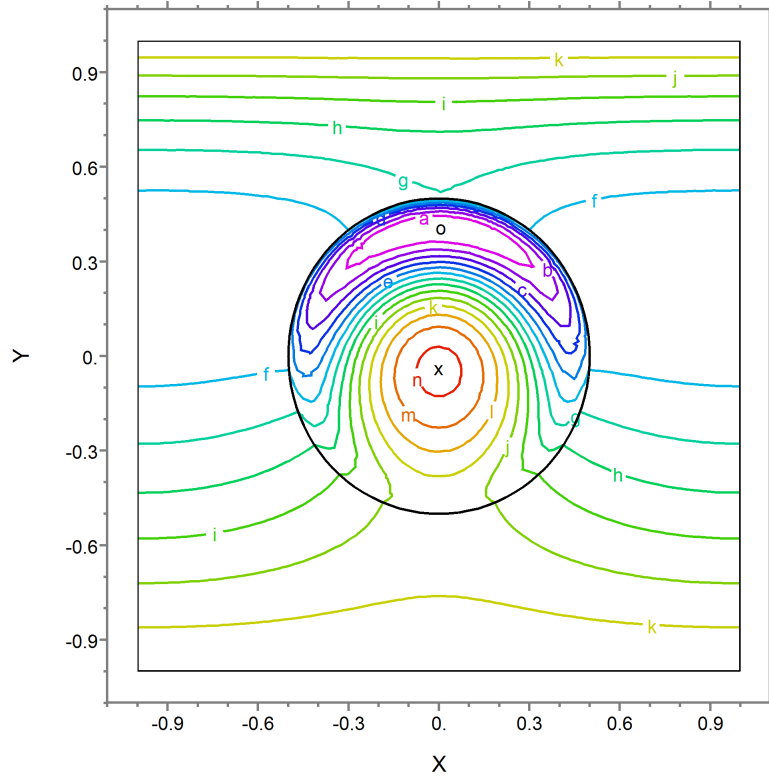

Phi	
max	0.07
n :	0.06
m :	0.03
l :	0.00
k :	-0.03
j :	-0.06
i :	-0.09
h :	-0.12
g :	-0.15
f :	-0.18
e :	-0.21
d :	-0.24
c :	-0.27
b :	-0.30
a :	-0.33
min	-0.36


ex3: Cycle=88 Time= 6.2832 dt= 0.1741 P2 Nodes=1449 Cells=694 RMS Err= 0.0015
Integral= -0.453983

Transient Heat flow around an Insulating blob

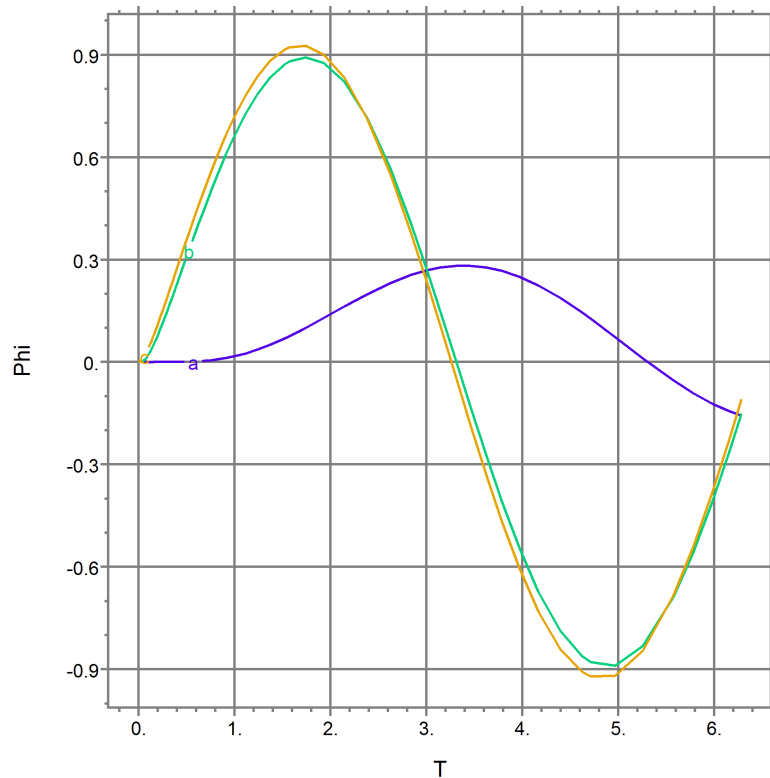22:37:27 11/6/08
FlexPDE 6.00

HISTORY

1: Phi



ex3: Cycle=88 Time= 6.2832 dt= 0.1741 P2 Nodes=1449 Cells=694 RMS Err= 0.0015

2.3.7.1 Bad Things To Do In Time Dependent Problems

Inconsistent Initial Conditions and Instantaneous Switching

If you start off a time-dependent calculation with initial conditions that are inconsistent, or turn on boundary values instantaneously at the start time (or some later time), you induce strong transient signals in the system. This will cause the time step, and probably the mesh size as well, to be cut to tiny values to track the transients.

Unless it is specifically the details of these transients that you want to know, you should start with initial conditions that are a consistent solution to a steady problem, and then turn on the boundary values, sources or driving fluxes over a time interval that is meaningful in your problem.

It is a common mistake to think that simply turning on a source is a smooth operation. It is not. Mathematically, the turn-on time is significantly less than a femtosecond (zero, in fact), with attendant terahertz transients. If that's the problem you pose, then that's the problem FlexPDE will try to solve. More realistically, you should turn on your sources over a finite time. Electrical switches take milliseconds, solid state switches take microseconds. But if you only want to see what happens after a second or two, then fuzz the turn-on.

Turning on a driving flux or a volume source is somewhat more gentle than a boundary value, because it implies a finite time to raise the boundary value to a given level. But there is still a meaningful time interval over which to turn it on.

2.3.8 Eigenvalues and Modal Analysis

FlexPDE can also compute the eigenvalues and eigenfunctions of a PDE system.

Consider the homogeneous time-dependent heat equation as in our example above,

$$C \left(\frac{\partial \phi}{\partial t} \right) - \nabla \cdot K \nabla \phi = 0$$

together with homogeneous boundary conditions

$$\phi = 0$$

and/or

$$\frac{\partial \phi}{\partial n} + \alpha \phi = 0$$

on the boundary.

If we wish to solve for steady oscillatory solutions to this equation, we may assert

$$\phi(x, y, t) = \psi(x, y) \exp(-\beta t)$$

The PDE then becomes

$$\begin{aligned} \nabla \cdot K \nabla \psi + \lambda \psi &= 0 \\ \lambda &= -C\beta \end{aligned}$$

The values of λ and ψ for which this equation has nontrivial solutions are known as the eigenvalues and eigenfunctions of the system, respectively. All steady oscillatory solutions to the PDE can be made up of combinations of the various eigenfunctions, together with a particular solution that satisfies any non-homogeneous boundary conditions.

Two modifications are necessary to our basic steady-state script for the sample problem to cause FlexPDE to solve the eigenvalue problem.

- A value must be given to the MODES parameter in the SELECT section. This number determines the number of distinct values of λ that will be calculated. The values reported will be those with lowest magnitude.
- The equation must be written using the reserved name LAMBDA for the eigenvalue.
- The equation should be written so that values of LAMBDA are positive, or problems with the ordering during solution will result. The full descriptor for the eigenvalue problem is then:

```

TITLE 'Modal Heat Flow Analysis'
SELECT
  modes=4
VARIABLES
  Phi          { the temperature }
DEFINITIONS
  K = 1        { default conductivity }
  R = 0.5      { blob radius }
EQUATIONS
  Div(k*grad(Phi)) + LAMBDA*Phi = 0
BOUNDARIES
  REGION 1 'box'
  START (-1,-1)
    VALUE(Phi)=0   LINE TO (1,-1)
    NATURAL(Phi)=0 LINE TO (1,1)
    VALUE(Phi)=0   LINE TO (-1,1)
    NATURAL(Phi)=0 LINE TO CLOSE
  REGION 2 'blob' { the embedded blob }
  k = 0.2        { This value makes more interesting pictures }
  START 'ring' (R,0)
    ARC(CENTER=0,0) ANGLE=360 TO CLOSE
PLOTS
  CONTOUR(Phi)
  VECTOR(-k*grad(Phi))
  ELEVATION(Phi) FROM (0,-1) to (0,1)
  ELEVATION(Normal(-k*grad(Phi))) ON 'ring'
END

```


The solution presented by FlexPDE will have the following characteristics:

- The full set of PLOTS will be produced for each of the requested modes.
- An additional plot page will be produced listing the eigenvalues.
- The mode number and eigenvalue will be reported on each plot.
- LAMBDA is available as a defined name for use in arithmetic expressions.

The first two contours are as follows:


Modal Heat Flow Analysis

22:39:17 11/6/08
FlexPDE 6.00

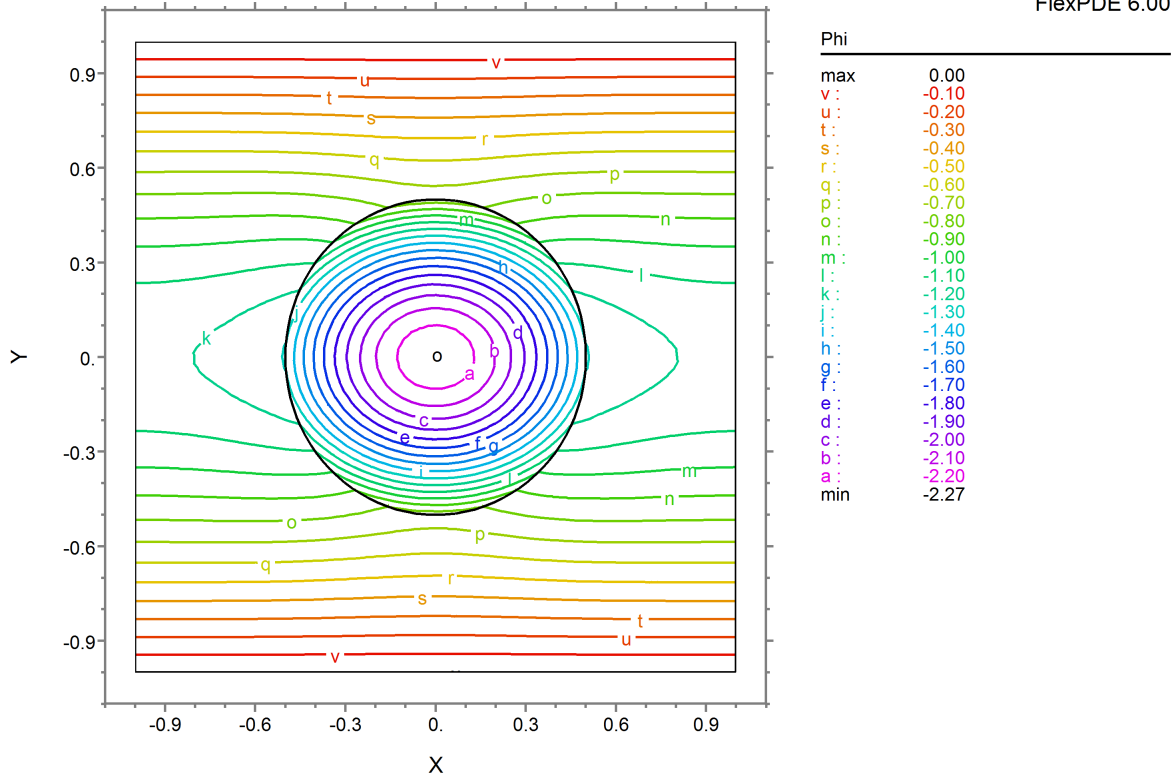

ex4: Grid#1 P2 Nodes=1201 Cells=570 RMS Err= 3.2e-4
Mode 1 Lambda= 2.0761 Integral= -3.396896

Modal Heat Flow Analysis

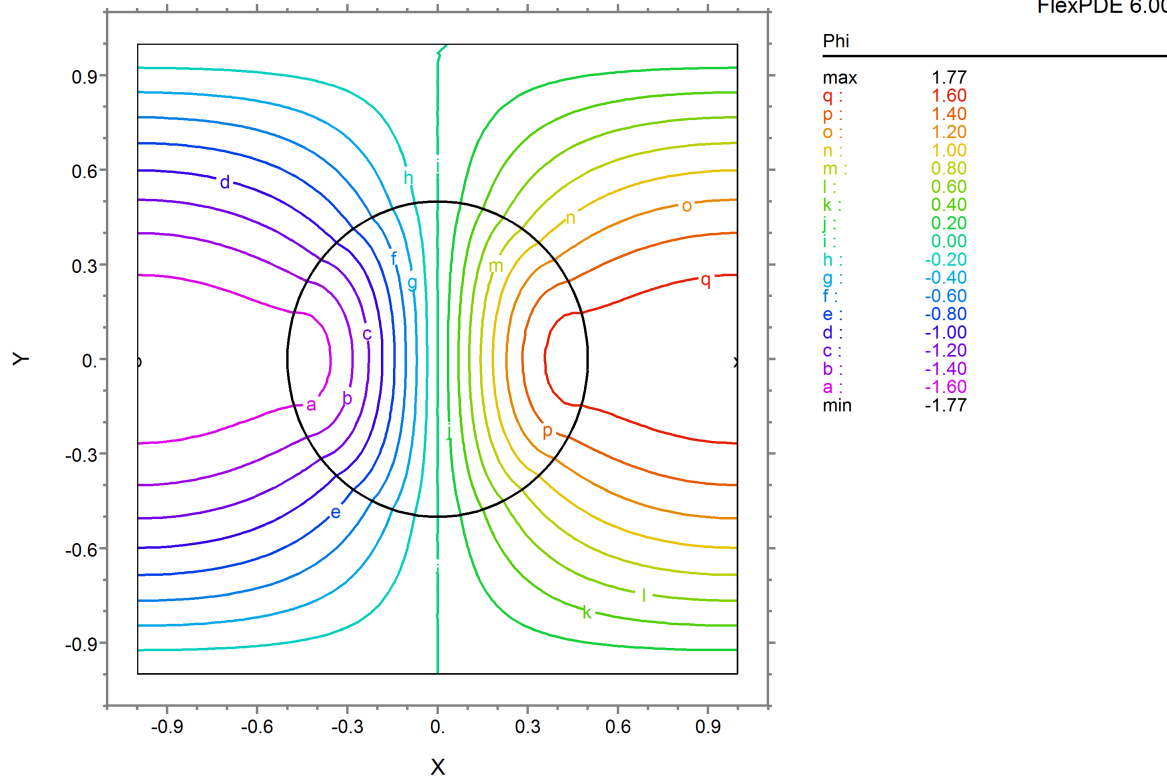22:39:17 11/6/08
FlexPDE 6.00

ex4: Grid#1 P2 Nodes=1201 Cells=570 RMS Err= 3.2e-4
Mode 2 Lambda= 3.4320 Integral= -3.761614e-5

2.3.8.1 The Eigenvalue Summary

When running an Eigenvalue problem, FlexPDE automatically produces an additional plot displaying a summary of the computed eigenvalues.

If the user specifies a SUMMARY plot, then this plot will supplant the automatic summary, allowing the user to add reports to the eigenvalue listing.

For example, we can add to our previous descriptor the plot specification:

```
SUMMARY
REPORT(lambda)
REPORT(integral(phi))
```

This produces the following report on the summary page:

Modal Heat Flow Analysis

22:15:55 5/23/05
FlexPDE 5.0.0

Eigenvalues:

Mode 1: lambda= 2.076144 integral(phi)=-3.408079
Mode 2: lambda= 3.431960 integral(phi)=-4.340801e-6
Mode 3: lambda= 5.704378 integral(phi)=-1.050399
Mode 4: lambda= 6.752271 integral(phi)= 9.194491e-4

2.4 Addressing More Difficult Problems

If heat flow on a square were all we wanted to do, then there would probably be no need for FlexPDE. The power of the FlexPDE system comes from the fact that almost any functional form may be specified for the material parameters, the equation terms, or the output functions. The geometries may be enormously complex, and the output specification is concise and powerful.

In the following sections, we will address some of the common situations that arise in real problems, and show how they may be treated in FlexPDE.

2.4.1 Nonlinear Coefficients and Equations

One common complication that arises is that either the terms of the equation or the material properties are complicated functions of the system variables. FlexPDE understands this, and has made full provision for handling such systems.


Suppose, for example, that the conductivity in the 'blob' of our example problem were in fact a strong function of the temperature. Say, for example, that $k = \exp(-5 \cdot \phi)$. The solution couldn't be simpler. Just define it the way you want it and click "run":

```
...  
REGION 2 'blob' { the embedded blob }  
    k = exp(-5*phi)  
...
```

The appearance of a nonlinear dependence will automatically activate the nonlinear solver, and all the dependency details will be handled by FlexPDE.

The modified result appears immediately:

Heat flow around an Insulating blob

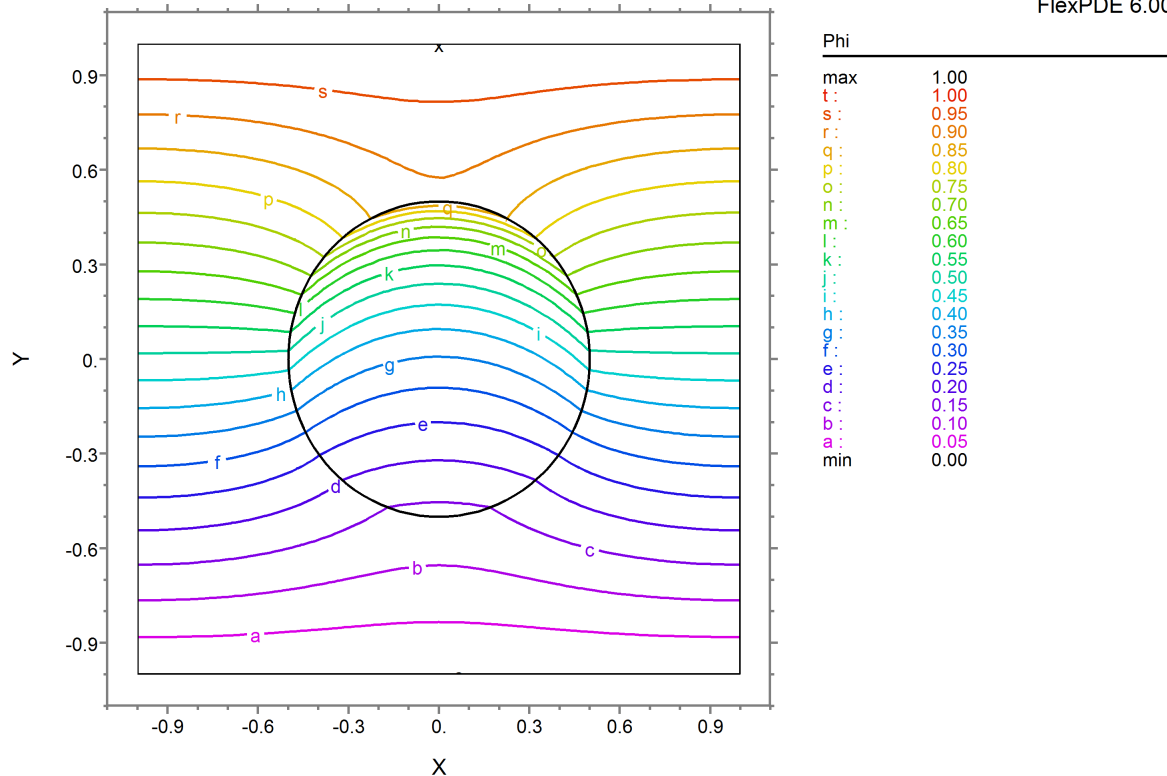22:41:08 11/6/08
FlexPDE 6.00

ex5: Grid#2 P2 Nodes=1293 Cells=616 RMS Err= 0.0015
Integral= 1.916010


Nonlinear terms in the equation are just as easy. If our system has a nonlinear sinusoidal source, for example, we may type:

EQUATIONS

$$\text{Div}(k*\text{grad}(\text{phi})) + 0.01*\text{phi}*\sin(\text{phi}) = 0$$

Click "run", and the solution appears:

Heat flow around an Insulating blob

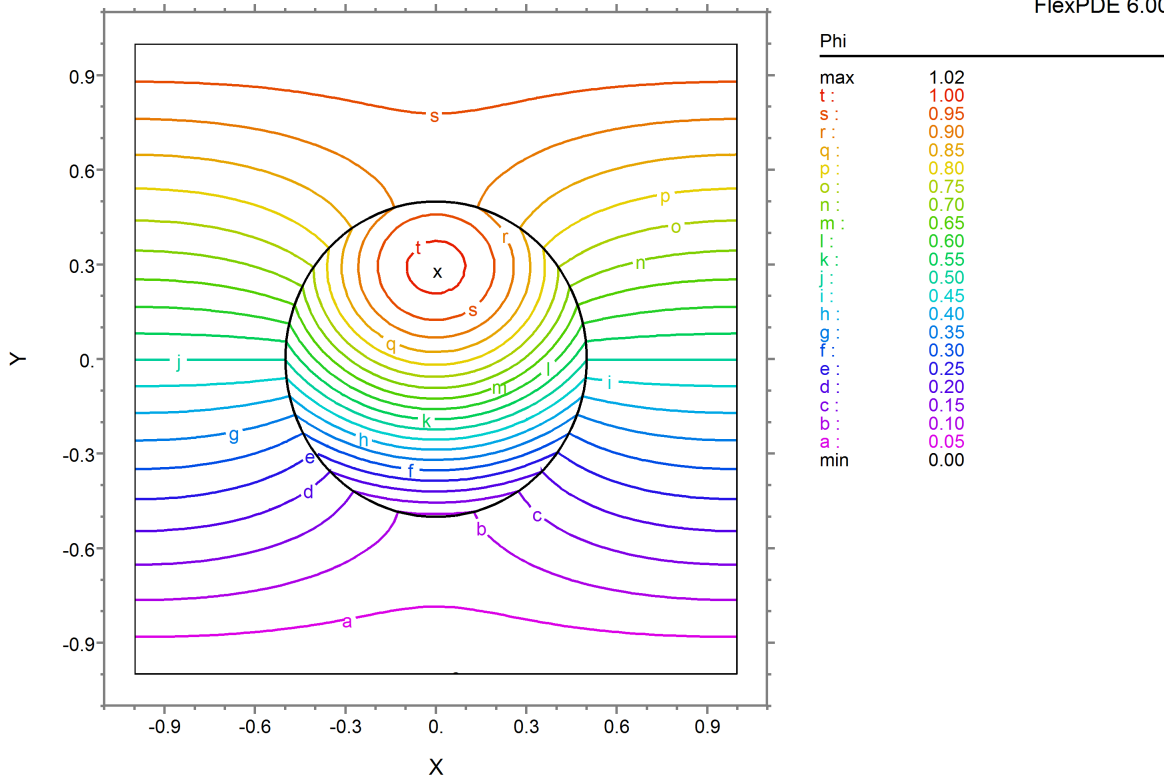22:42:09 11/6/08
FlexPDE 6.00

ex6: Grid#1 P2 Nodes=1201 Cells=570 RMS Err= 3.8e-4
Integral= 2.123946

2.4.1.1 Complications Associated with Nonlinear Problems

Actually, nonlinear problems are frequently more difficult than we have implied above, for several reasons.

- Nonlinear problems can have more than one solution.
- A nonlinear problem may not, in fact, have a solution at all.

FlexPDE uses a Newton-Raphson iteration process to solve nonlinear systems. This technique can be very sensitive to the initial estimate of the solution. If the starting conditions are too far from the actual solution, it may be impossible to find the answer, even though it might be quite simple from a different starting value.

There are several things that can be done to help a nonlinear problem find a solution:

- Provide as good an initial value as you can, using the INITIAL VALUES section of the script.
- Ensure that the boundary conditions are consistent.
- Use STAGES to progress from a linear to a nonlinear system, allowing the linear solution to provide initial conditions for the nonlinear one.

- Pose the problem as a time-dependent one, with time as an artificial relaxation dimension.
- Use SELECT CHANGELIM to limit the excursion at each step and force FlexPDE to creep toward a solution.
- Use MONITORS to display useful aspects of the solution, to help identify troublesome terms.

We will return in a [later section](#)^[152] to the question of intransigent nonlinear problems.

2.4.2 Natural Boundary Conditions

The term "natural boundary condition" usually arises in the calculus of variations, and since the finite element method is fundamentally one of minimization of an error functional, the term arises also in this context.

The term has a much more intuitive interpretation, however, and it is this which we will try to present.

Consider a **Laplace equation**,

$$\nabla \bullet \nabla u = 0$$

The **Divergence Theorem** says that the integral of this equation over all space is equal merely to the integral over the bounding surface of the normal component of the flux,

$$\iint \text{div}(\text{grad}(u))dA = \oint n \bullet \text{grad}(u)dl$$

(we have presented the equation in two dimensions, but it is valid in three dimensions as well).

The surface value of $n \bullet \text{grad}(u)$ is in fact the "natural boundary condition" for the Laplace (and Poisson) equation. It is the way in which the system *inside* interacts with the system *outside*. It is the (negative of the) flux of the quantity u that crosses the system boundary.

The **Divergence Theorem** is a particular manifestation of the more general process of **Integration by Parts**. You will remember the basic rule,

$$\int_a^b u dv = uv \Big|_a^b - \int_a^b v du$$

The term uv is evaluated at the ends of the integration interval and gives rise to surface terms. Applied to the integration of a divergence, integration by parts produces the Divergence Theorem.

FlexPDE applies integration by parts to all terms of the partial differential equations that contain second-order derivatives of the system variables. In the Laplace equation, of course, this means the only term that appears.

In order for a solution of the Laplace equation (for example) to be achieved, one must specify at all points of the boundary either the value of the variable (in this case, u) or the value of $n \bullet \text{grad}(u)$.

In the notation of FlexPDE,

VALUE(u)=u1 supplies the former, and

NATURAL(u)=F supplies the latter.

In other words,

The NATURAL boundary condition statement in FlexPDE supplies the value of the surface flux, as that flux is defined by the integration of the second-order terms of the PDE by parts. The default boundary condition for FlexPDE is NATURAL(VARIABLE)=0.

Note: On an internal boundary the NATURAL defines the difference in flux between the two adjacent regions, producing a source or sink at that boundary.

Consistent with our discussion of nonlinear equations, the value given for the surface flux may be a nonlinear value.

The radiation loss from a hot body, for example, is proportional to the fourth power of temperature, and the statement

$$\mathbf{NATURAL}(u) = -k \cdot u^4$$

is a perfectly legal boundary condition for the Laplace equation in FlexPDE.

2.4.2.1 Some Typical Cases

Since **integration by parts** is a fundamental mathematical operation, it will come as no surprise that its application can lead to many of the fundamental rules of physics, such as Ampere's Law.

For this reason, the Natural boundary condition is frequently a statement of very fundamental conservation laws in many applications.

But it is not always obvious at first what its meaning might be in equations which are more elaborate than the Laplace equation.

So let us first list some basic terms and their associated natural boundary condition contributions (we present these rules for two-dimensional geometry, but the three-dimensional extensions are readily seen).

- Applied to the term $\partial f(u) / \partial x$, integration by parts yields

$$\iint \frac{\partial f(u)}{\partial x} dx dy = \oint f(u) dy = \oint f(u) \alpha dl$$

Here α is the x-direction cosine of the surface normal and dl is the differential path length. Since FlexPDE applies integration by parts only to second order terms, this rule is applied only if the function $f(u)$ contains further derivatives of u . Similar rules apply to derivatives with respect to other coordinates.

- Applied to the term $\partial^2 f(u) / \partial x^2$, integration by parts yields

$$\iint \frac{\partial^2 f(u)}{\partial x^2} dx dy = \oint \frac{\partial f(u)}{\partial x} dy = \oint \frac{\partial f(u)}{\partial x} \alpha dl$$

Since this term is second order, it will always result in a contribution to the natural boundary condition.

- Applied to the term $\nabla \cdot \vec{F}(u)$, integration by parts yields the Divergence Theorem

$$\iint \nabla \cdot \vec{F}(u) dx dy = \oint \vec{F}(u) \cdot \hat{n} dl$$

Here \hat{n} is the outward surface normal unit vector.

As with the x-derivative case, integration by parts will not be applied unless the vector \vec{F} itself contains further derivatives of u .

- Applied to the term $\nabla \times \vec{F}(u)$, integration by parts yields the Curl Theorem

$$\iint \nabla \times \vec{F}(u) dx dy = \oint \hat{n} \times \vec{F}(u) dl$$

Using these formulas, we can examine what the natural boundary condition means in several common cases:

The Heat Equation

$$\text{Div}(-k * \text{grad}(\text{Temp})) + \text{Source} = 0$$

$$\text{Natural}(\text{Temp}) = \text{normal}(-k * \text{grad}(\text{Temp})) \{ \text{outward surface-normal flux} \}$$

(Notice that we have written the PDE in terms of heat flux with the negative sign imbedded in the equation. If the sign is left out, the sign of the Natural is reversed as well.)

One-dimensional heat equation

$$dx(-k * dx(\text{Temp})) + \text{Source} = 0$$

$$\text{Natural}(\text{Temp}) = \text{outward surface-normal component of flux} = (-k * dx(\text{temp}) * nx),$$

where nx is the x-direction cosine of the surface normal.

Similar forms apply for other coordinates.

Magnetic Field Equation

$$\text{curl}(\text{curl}(A)/\mu) = J$$

$$\text{Natural}(A) = \text{tangential component of } H = \text{tangential}(\text{curl}(A)/\mu)$$

Convection Equation

$$dx(u) - dy(u) = 0$$

Natural(u) is undefined, because there are no second-order terms.

See the example "[Samples | Applications | Fluids | Hyperbolic.pde](#)"⁴⁰⁹.

2.4.2.2 An Example of a Flux Boundary Condition

Let us return again to our heat flow test problem and investigate the effect of the Natural boundary condition. As originally posed, we specified $\text{Natural}(\Phi)=0$ on both sidewalls. This corresponds to zero flux at the boundary. Alternatively, a convective cooling loss at the boundary would correspond to a flux

$$\text{Flux} = -K \cdot \text{grad}(\Phi) = \Phi - \Phi_0$$

where Φ_0 is a reference cooling temperature. With convectively cooled sides, our boundary specification looks like this (assuming $\Phi_0=0$):


```

REGION 1 'box'
START (-1,-1)
VALUE(Phi)=0           LINE TO (1,-1)
NATURAL(Phi)=Phi     LINE TO (1,1)
VALUE(Phi)=1           LINE TO (-1,1)
NATURAL(Phi)=Phi     LINE TO CLOSE
    
```

The result of this modification is that the isotherms curve upward:

Heat flow around an Insulating blob

22:43:18 11/6/08
FlexPDE 6.00

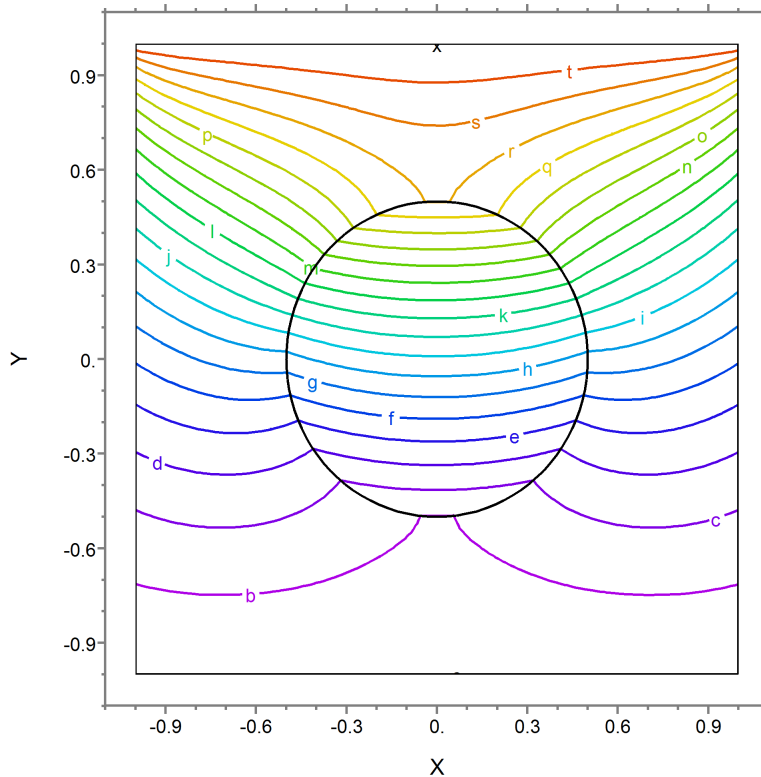

Phi	
max	1.00
u :	1.00
t :	0.95
s :	0.90
r :	0.85
q :	0.80
p :	0.75
o :	0.70
n :	0.65
m :	0.60
l :	0.55
k :	0.50
j :	0.45
i :	0.40
h :	0.35
g :	0.30
f :	0.25
e :	0.20
d :	0.15
c :	0.10
b :	0.05
a :	0.00
min	0.00

ex7: Grid#2 P2 Nodes=1221 Cells=578 RMS Err= 0.0011
Integral= 1.590394

2.4.3 Discontinuous Variables

The default behavior of FlexPDE is to consider all variables to be continuous across material interfaces. This arises naturally from the finite element model, which populates the interface with nodes that are shared by the material on both sides.

FlexPDE supports discontinuities in variables at material interfaces by use of the words CONTACT and JUMP in the script language.

CONTACT(V) is a special form of NATURAL boundary condition which also causes the affected variable to be stored in duplicate nodes at the interface, capable of representing a double value.

JUMP(v) means the instantaneous change in the value of variable "v" when moving outward across an interface from inside a given material. At an interface between materials '1' and '2', JUMP(V) means (V2-V1) in material '1', and (V1-V2) in material '2'.

The expected use of JUMP is in a CONTACT Boundary Condition statement on an interior boundary. The combination of CONTACT and JUMP causes a line or surface source to be generated proportional to the difference between the two values.

JUMP may also be used in other boundary condition statements, but it is assumed that the argument of the JUMP is a variable for which a CONTACT boundary condition has been specified. See the example "Samples | Usage | Discontinuous_Variables | Contact_Resistance_Heating.pde" for an example of this kind of use.

The interpretation of the JUMP operator follows the model of contact resistance, as explained in the next section.

2.4.3.1 Contact Resistance

The problem of contact resistance between two conductors is a typical one requiring discontinuity of the modeled variable.

In this problem, a very thin resistive layer causes a jump in the temperature or voltage on the two sides of an interface. The magnitude of the jump is proportional to the heat flux or electric current flowing across the resistive film. In microscopic analysis, of course, there is a physical extent to the resistive material. But its dimensions are such as to make true modelling of the thickness inconvenient in a finite element simulation.

In the contact resistance case, the heat flux across a resistive interface between materials '1' and '2' as seen from side '1' is given by

$$F1 = -K1*dn(T) = -(T2-T1)/R$$

where F1 is the value of the outward heat flux, K1 is the heat conductivity, dn(T) is the outward normal derivative of T, R is the resistance of the interface film, and T1 and T2 are the two values of the temperature at the interface.

As seen from material '2',

$$F2 = -K2*dn(T) = -(T1-T2)/R = -F1$$

Here the normal has reversed sign, so that the outflow from '2' is the negative of the outflow from '1', imposing energy conservation.

The Natural Boundary Condition for the heat equation

$$\text{div}(-K*\text{grad}(T)) = H$$

is given by the divergence theorem as

$$\text{Natural}(T) = -K*dn(T),$$

representing the outward heat flux.

This flux can be related to a discontinuous variable by use of the CONTACT boundary condition in place of the NATURAL.

The FlexPDE expression JUMP(T) is defined as (T2-T1) in material '1' and (T1-T2) in material '2'.

The representation of the contact resistance boundary condition is therefore

$$\text{CONTACT}(T) = -\text{JUMP}(T)/R$$

This statement means the same thing in both of the materials sharing the interface. [Notice that the sign applied to the JUMP reflects the sign of the divergence term.]

We can modify our previous example problem to demonstrate this, by adding a heat source to drive the jump, and cooling the sidewalls. The restated script is:

```

TITLE 'Contact Resistance on a heated blob'
VARIABLES
  Phi           { the temperature }
DEFINITIONS
  K = 1         { default conductivity }
  R = 0.5       { blob radius }
  H = 0         { internal heat source }
  Res = 0.5   { contact resistance }
EQUATIONS
  Div(-k*grad(phi)) = H

BOUNDARIES
  REGION 1 'box'
    START(-1,-1)
      VALUE(Phi)=0 { cold outer walls }
    LINE TO (1,-1) TO (1,1) TO (-1,1) TO CLOSE
  REGION 2 'blob' { the embedded blob }
    H = 1         { heat generation in the blob }
    START 'ring' (R,0)
      CONTACT(phi) = -JUMP(phi)/Res
    ARC(CENTER=0,0) ANGLE=360 TO CLOSE

PLOTS
  CONTOUR(Phi)
  SURFACE(Phi)

```

```


VECTOR(-k*grad(Phi))
ELEVATION(Phi) FROM (0,-1) to (0,1)
ELEVATION(Normal(-k*grad(Phi))) ON 'ring'
END

```

The surface plot generated by running this problem shows the discontinuity in temperature:

Contact Resistance on a heated blob

22:44:17 11/6/08
FlexPDE 6.00

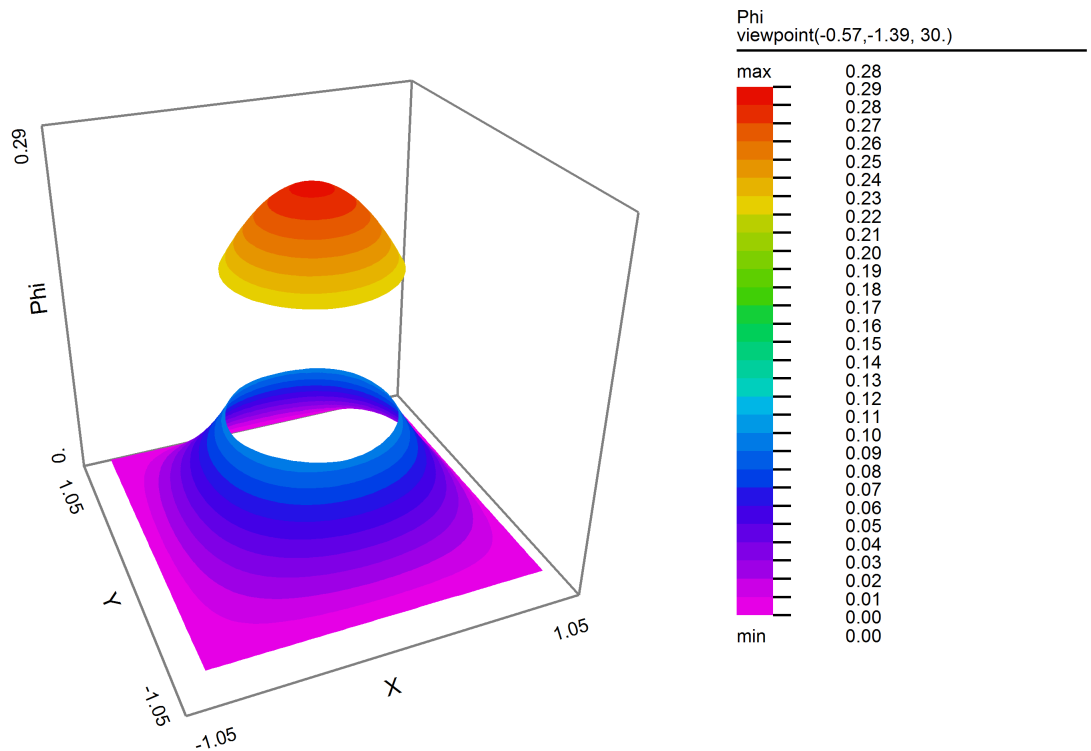

ex8: Grid#1 P2 Nodes=1249 Cells=570 RMS Err= 2.1e-4
Integral= 0.304967

2.4.3.2 Decoupling

Using the Contact Resistance model, one can effectively decouple the values of a given variable in two adjacent regions. In the previous example, if we replace the jump boundary condition with the statement

$$\mathbf{CONTACT(phi) = 0 * JUMP(phi)}$$

the contact resistance is infinite, and no flux can pass between the regions.

Note: The JUMP statement is recognized as a special form. Even though the apparent value of the right hand side here is zero, it is not removed by the arithmetic expression simplifier.

2.4.3.3 Using JUMP in problems with many variables

An expression $JUMP(V)$ may appear in any boundary condition statement on a boundary for which the argument variable V has been given a CONTACT boundary condition.

In an electrical resistance case, for example, the voltage undergoes a jump across a contact resistance, and the current through this contact is a source of heat for a heatflow equation. The following example, though not strictly realizable physically, diagrams the technique. Notice that the $JUMP$ of Φ appears as a source term in the Natural boundary condition for $Temp$. Φ , having appeared in a CONTACT boundary condition definition, is stored as a double-valued quantity, whose $JUMP$ is available to the boundary condition for $Temp$. $Temp$, which does not appear in a CONTACT boundary condition statement, is a single-valued variable at the interface.


```

TITLE 'Contact Resistance as a heat source'
VARIABLES
  Phi      { the voltage }
  Temp    { the temperature }
DEFINITIONS
  Kd = 1    { dielectric constant }
  Kt = 1    { thermal conductivity }
  R = 0.5   { blob radius }
  Q = 0     { space charge density }
  Res = 0.5 { contact resistance }
EQUATIONS
  Phi: Div(-kd*grad(phi)) = Q
  Temp: Div(-kt*grad(temp) = 0
BOUNDARIES
  REGION 1 'box'
    START (-1,-1)
    VALUE(Phi)=0 { grounded outer walls }
    VALUE(Temp)=0 { cold outer walls }
    LINE TO (1,-1) TO (1,1) TO (-1,1) TO CLOSE
  REGION 2 'blob' { the embedded blob }
    Q = 1 { space charge in the blob }
    START 'ring' (R,0)
    CONTACT(phi) = -JUMP(phi)/Res
    { the heat source is the voltage difference times the current }
    NATURAL(temp) = -JUMP(Phi)^2/Res
    ARC(CENTER=0,0) ANGLE=360 TO CLOSE
PLOTS
  CONTOUR(Phi) SURFACE(Phi)
  CONTOUR(temp) SURFACE(temp)
END

```

The temperature shows the effect of the surface source:

Contact Resistance as a heat source

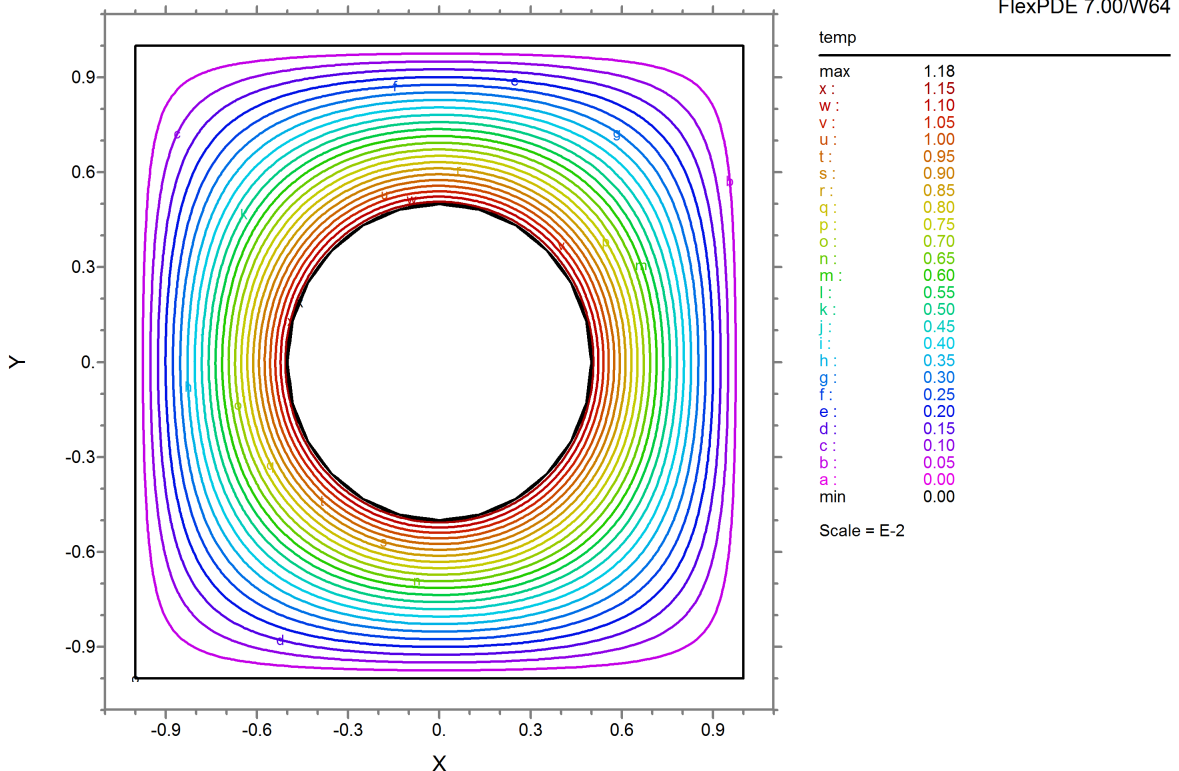

ex9: Grid#1 P3 Nodes=332 Cells=554 RMS Err= 1.e-4
Integral= 0.022169

2.5 Using FlexPDE in One-Dimensional Problems

FlexPDE treats problems in one space dimension as a degenerate case of two dimensional problems.

The construction of a problem descriptor follows the principles laid out in previous sections, with the following specializations:

- The COORDINATES specification must be CARTESIAN1, CYLINDER1 or SPHERE1
- Coordinate positions are given by one dimensional points, as in
START(0) LINE TO (5)
- The boundary path is in fact the domain, so the boundary must not CLOSE on itself
- Since the boundary path is the domain, boundary conditions are not specified along the path. Instead we use the existing syntax of POINT VALUE and POINT LOAD to specify boundary conditions at the end points of the domain:

START(0) POINT VALUE(u)=0 LINE TO (5) POINT LOAD(u)=1

- Only ELEVATION and HISTORY are meaningful plots in one dimension.

Our basic example problem does not have a one-dimensional analog, but we can adapt it to an insulating spherical shell between two spherical reservoirs as follows:

```

TITLE 'Heat flow through an Insulating shell'
COORDINATES
  Sphere1
VARIABLES
  Phi          { the temperature }
DEFINITIONS
  K = 1        { default conductivity }
  R1 = 1       { the inner reservoir }
  Ra = 2       { the insulator inner radius }
  Rb = 3       { the insulator outer radius }
  R2 = 4       { the outer reservoir }
EQUATIONS
  Div(-k*grad(phi)) = 0
BOUNDARIES
  REGION 1          { the total domain }
  START (R1) POINT VALUE(Phi)=0
  LINE TO (R2) POINT VALUE(Phi)=1
  { note: no 'Close!' }
  REGION 2 'blob' { the embedded layer }
  k = 0.001
  START (Ra) LINE TO (Rb)
PLOTS
  ELEVATION(Phi) FROM (R1) to (R2)
END

```

2.6 Using FlexPDE in Three-Dimensional Problems

First, a caveat:

Three-dimensional computations are not simple. We have tried to make FlexPDE as easy as possible to use, but the setup and interpretation of 3D problems relies heavily on the concepts explained in 2D applications of FlexPDE. Please do not try to jump in here without reading the preceding 2D discussion.

Extrusion:

FlexPDE constructs a three-dimensional domain by extruding a two-dimensional domain into a third dimension. This third dimension can be divided into layers, possibly with differing material properties and boundary conditions in each layer. The interface surfaces which separate the layers need not be planar, but there are some restrictions placed on the shapes that can be defined in this way.


The finite element model constructed by FlexPDE in three-dimensional domains is fully general. The domain definition process is not.

2.6.1 The Concept of Extrusion

The fundamental idea of extrusion is quite simple; a square extruded into a third dimension becomes a cube; a circle becomes a cylinder. Given spherical layer surfaces, the circle can also become a sphere.


Note: It is important to consider carefully the characteristics of any given problem, to determine the orientation most amenable to extrusion.

What happens if we extrude our simple 2D heat flow problem into a third dimension? Setting the extrusion distance to half the plate spacing, we get a cylinder imbedded in a brick, as we see in the following figure:

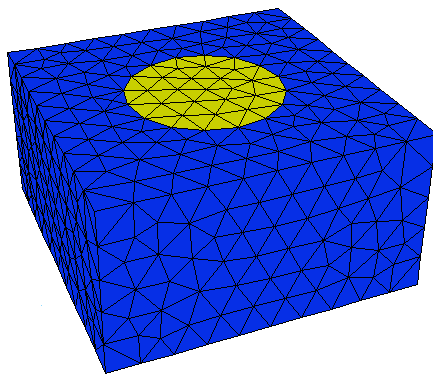

A cross-section at any value of Z returns the original 2D figure.

A cross-section cut at $Y=0$ shows the extruded structure:

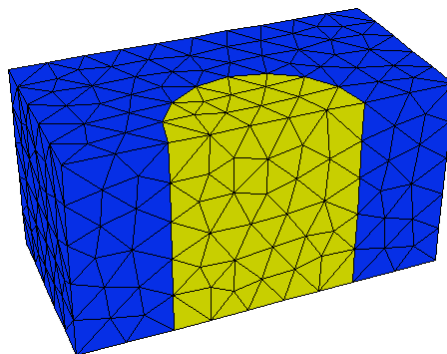

2.6.2 Extrusion Notation in FlexPDE

Performing the extrusion above requires three basic changes in the 2D script:

- The COORDINATES section must specify CARTESIAN3.
 - A new EXTRUSION section must be added to specify the layering of the extrusion.
 - PLOTS and MONITORS must be modified to specify any cut planes or surfaces on which the display is to be computed.
-

There are two forms for the EXTRUSION section, the elaborate form and the shorthand form. In both cases, the layers of the model are built up in order from small to large Z.

In the elaborate form, the dividing SURFACES and the intervening LAYERS are each named explicitly, with algebraic formulas given for each dividing surface.

Note: With this usage, we have overloaded the word SURFACE. As a plot command, it can mean a form of graphic output in which the data are presented as a three-dimensional surface; or, in this new case, it can mean a dividing surface between extrusion layers. The distinction between the two uses should be clear from the context.

In the simple case of our extruded cylinder in a square, it looks like this:

```
EXTRUSION
SURFACE 'Bottom' z=0
  LAYER 'Everything'
SURFACE 'Top'      z=1
```

The bottom and top surfaces are named, and given simple planar shapes.


The layer between these two surfaces comprises everything in the domain, so we can name it 'Everything'.

In the shorthand form, we merely state the Z-formulas:

```
EXTRUSION      z = 0, 1
```

In this case, the layers and surfaces must later be referred to by number. The first surface, $z=0$, is identified as surface 1. The second surface, $z=1$, as surface 2.

Notice that there is no distinction, as far as the layer definition is concerned, between the parts of the layer which are in the cylinder and the parts of the layer which are outside the cylinder. This distinction is made by combining the LAYER concept with the REGION concept of the 2D base plane representation. In a vertical cross-section we can label the parts as follows:

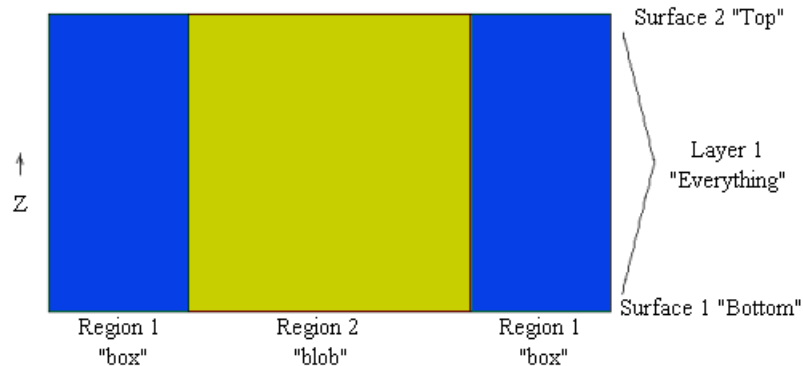

Notice that the cylinder can be uniquely identified as the intersection of the 'blob' region of the base plane with the 'Everything' layer of the extrusion.

2.6.3 Layering

Now suppose that we wish to model a canister rather than a full length cylinder. This requires that we break up the material stack above region 2 into three parts, the canister and the continuation of the box material above and below it.


We do this by specifying three layers (and four interface surfaces):


```
EXTRUSION
SURFACE "Bottom" z=-1/2
LAYER "Underneath"
SURFACE "Can Bottom" z=-1/4
LAYER "Can"
SURFACE "Can Top" z=1/4
LAYER "Above"
SURFACE "Top" z=1/2
```

We have now divided the 3D figure into six logical compartments: three layers above each of two base regions.

Each of these compartments can be assigned unique material properties, and if necessary, unique boundary conditions.

The cross section now looks like this:

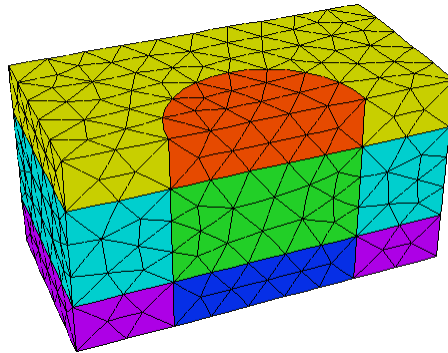

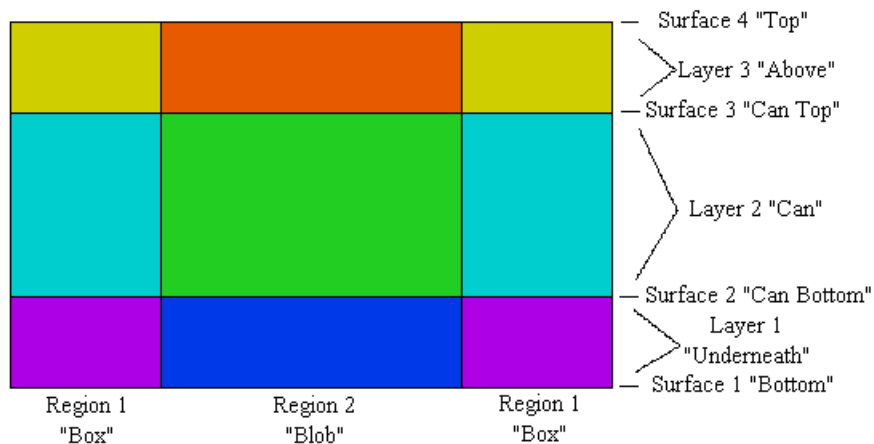

It would seem that we have nine compartments, but recall that region 1 completely surrounds the cylinder, so the left and right parts of region 1 above are joined above and below the plane of the paper. This results in six 3D volumes, denoted by the six colors in the figure.

We stress at this point that it is neither necessary nor correct to try to specify each compartment as a separate entity. You do not need a separate layer and region specification for each material compartment, and repetition of identical regions in the base plane or layers in the extrusion will cause confusion.

The compartment structure is fully specified by the two coordinates REGION and LAYER, and any compartment is identified by the intersection of the REGION in the base plane with the LAYER in the extrusion.

2.6.4 Setting Material Properties by Region and Layer


In our 2D problem, we specified the conductivity of the blob inside the REGION definition for the blob, and that continues to be the technique in 3D.

The difference now is that we must also specify the LAYER to which the definition applies. We do this with a LAYER qualification clause:

```
REGION 2 'blob' { the embedded blob }
  LAYER 'Can' K = 0.001
  START 'ring' (R,0)
  ARC(CENTER=0,0) ANGLE=360
```

Without the LAYER qualification clause, the definition would apply to all layers lying above region 2 of the base plane. Here, the presence of the parameter definition inside a REGION and qualified by a LAYER selects a specific 3D compartment to which the specification applies.

In the following diagram, we have labeled each of the six distinct compartments with a (region,layer) coordinate.

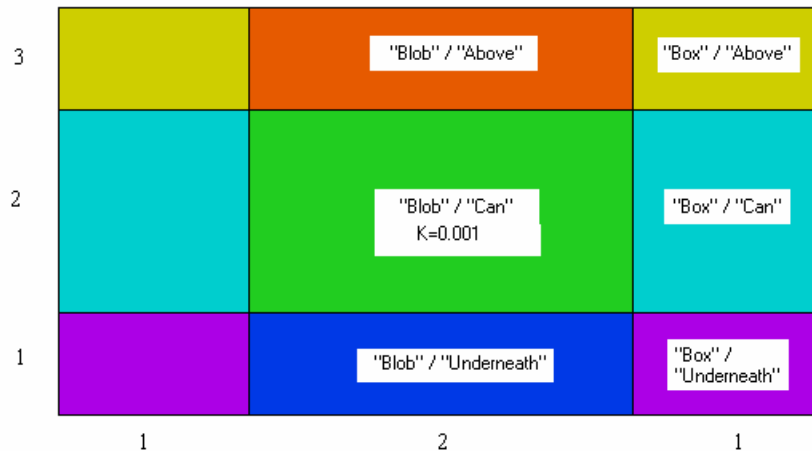

The comprehensive logical structure of parameter redefinitions in the BOUNDARIES section with the location of parameter redefinition specifications in this grid can be described for the general case as follows:

BOUNDARIES

```

REGION 1
  params(1,all) { parameter redefinitions for all layers of region 1 }
  LAYER 1
    params(1,1){ parameter redefinitions restricted to layer 1 of region 1 }
  LAYER 2
    params(1,2){ parameter redefinitions restricted to layer 2 of region 1 }
  LAYER 3
    params(1,3){ parameter redefinitions restricted to layer 3 of region 1 }
  START(,) .... TO CLOSE { trace the perimeter }

REGION 2
  params(2,all) { parameter redefinitions for all layers of region 2 }
  LAYER 1
    params(2,1) { parameter redefinitions restricted to layer 1 of region 2 }
  LAYER 2
    params(2,2) { parameter redefinitions restricted to layer 2 of region 2 }
  LAYER 3
    params(2,3) { parameter redefinitions restricted to layer 3 of region 2 }
  START(,) .... TO CLOSE { trace the perimeter }

{ ... and so forth for all regions }


```

2.6.5 More Complex Extrusions


The specification of three-dimensional geometries as extrusions in FlexPDE is based on the decomposition of the object into two parts:

- The projection of the object onto the base X-Y plane.
- The division of the extrusion of this projection into layers in the Z dimension.

Let us take as a model a sandwich formed by a layer of dielectric material with two rectangular conductive patches, top and bottom, with differing dimensions. We wish to model the dielectric, the conductive patches and the surrounding air.

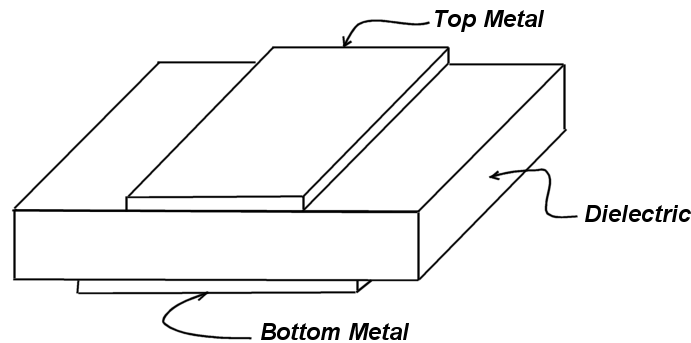

First, we form the projection of this figure onto the X-Y plane, showing all relevant interfaces:

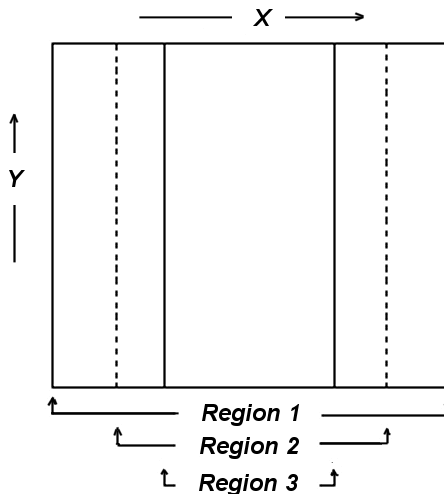


The geometry is specified to FlexPDE primarily in terms of this projection. A preliminary description of the 2D base figure is then:

```

BOUNDARIES
REGION 1    {this is the outer boundary of the system}
START(0,0)
LINE TO (5,0) TO (5,5) TO (0,5) TO CLOSE
REGION 2    {this region overrides region 1 and describes the larger plate}
START(1,0)
LINE TO (4,0) TO (4,5) TO (1,5) TO CLOSE
REGION 3    {this region overrides region 1 & 2 and describes the smaller plate}
START(2,0)
LINE TO (3,0) TO (3,5) TO (5,3) TO CLOSE
  
```

Note that any part of the projection which will have a different stack of material properties above it must be represented by a region. All parts of the projection which will have the same stack of material properties may be included in a single region, even though they may be disjoint in the projection.

Next we view the X-Z cross-section of the sandwich:

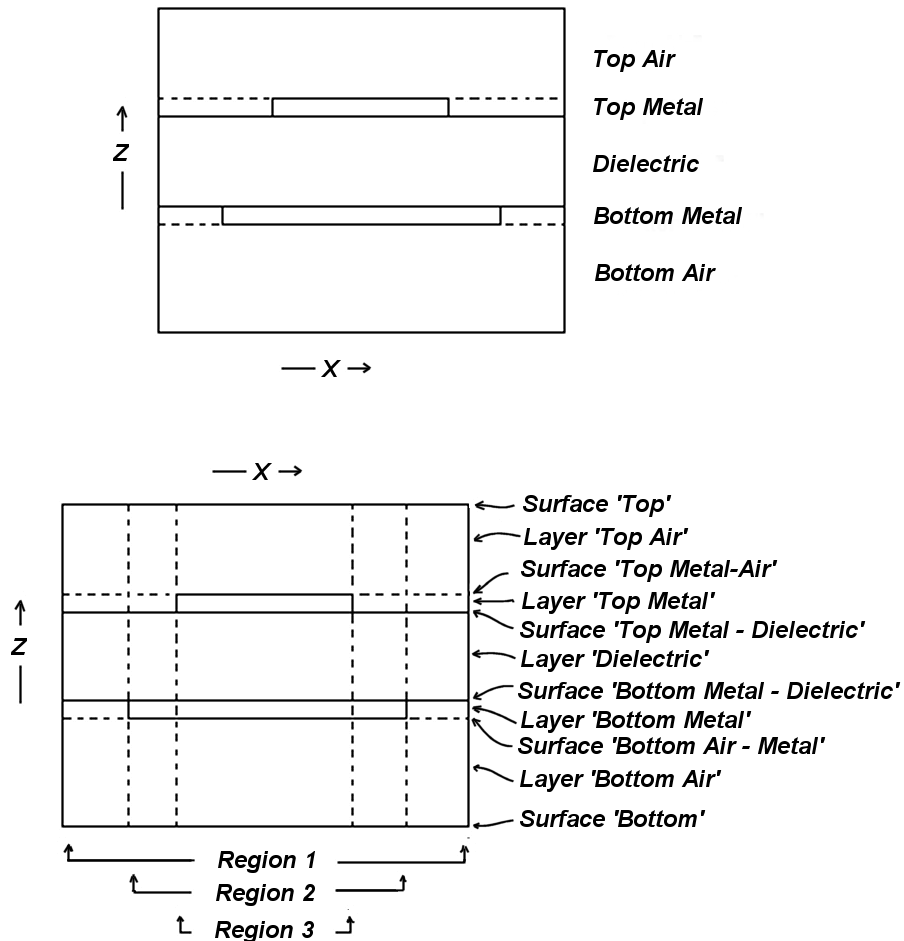

The layer structure is specified bottom-up to FlexPDE in the EXTRUSION statement:

```

EXTRUSION
SURFACE "Bottom" Z=0
LAYER "Bottom Air"
SURFACE "Bottom Air - Metal" Z=0.9
LAYER "Bottom Metal"
SURFACE "Bottom Metal - Dielectric" Z=1
LAYER "dielectric"
SURFACE "Top Metal - Dielectric" Z=2
LAYER "Top Metal"
SURFACE "Top Metal - Air" Z=2.1
LAYER "Top Air"

```

SURFACE "top" Z=3

The LAYER statements are optional, as are the names of the surfaces. If surfaces and layers are not named, then they must subsequently be referred to by numbers, with surface numbers running in this case from 1 to 6 and layer numbers from 1 to 5. SURFACE 1 is Z=0, and LAYER 1 is between SURFACE 1 and SURFACE 2.

Note: a shorthand form to this specification is:

EXTRUSION Z=(0, 0.9, 1, 2, 2.1, 3)

In this form layers and surfaces must subsequently be referred to by number.

Assume that we have the following DEFINITIONS and EQUATIONS section:

DEFINITIONS

K = Kair {default the dielectric coefficient to the value for air}
 Kdiel = 999 {replace 999 with problem value}
 Kmetal = 999 {replace 999 with problem value}

EQUATIONS

DIV(K*GRAD(V))

We now modify the BOUNDARIES section to include layering information in the various regions:

BOUNDARIES

REGION 1 {this is the outer boundary of the system}
LAYER "Dielectric" K = Kdiel {all other layers default to Kair}
 START(0,0)
 LINE TO (5,0) TO (5,5) TO (0,5) TO CLOSE
 REGION 2 {this region overrides region 1 and describes the larger plate}
LAYER "Bottom Metal" K = Kmetal
LAYER "Dielectric" K = Kdiel
 START(1,0)
 LINE TO (4,0) TO (4,5) TO (1,5) TO CLOSE
 REGION 3 {this region overrides region 1 & 2 and describes the smaller plate}
LAYER "Bottom Metal" K = Kmetal
LAYER "Dielectric" K = Kdiel
LAYER "Top Metal" Kmetal
 START(2,0)
 LINE TO (3,0) TO (3,5) TO (5,3) TO CLOSE

If layers are not named, then layer numbers must be used in place of the names above. The LAYER specifiers act as group headers, and all definitions following a LAYER specification refer to that layer, until the group is broken by SURFACE, LAYER or START. Definitions which apply to all layers of the region must appear before any LAYER specification.

The specification of boundary conditions proceeds in a similar way. As in the description of 2D problems in FlexPDE, the default boundary condition is always NATURAL(variable)=0. In the X-Y projection of our problem, which forms the basis of our 3D description, we have described the bounding lines of the regions. A boundary condition attached to any of these bounding lines will apply to all layers

of the vertical surface formed by extruding the line. Boundary conditions along this surface may be specialized to a layer in the same way as the material properties are specialized to a layer. Assume that we wish to apply a potential of V_0 to one end of the lower plate and V_1 to the opposite end of the upper plate. We will modify the descriptor in the following way:

```
BOUNDARIES
REGION 1    { this is the outer boundary of the system }
  LAYER "Dielectric" K = Kdiel    { all other layers default to Kair }
  START(0,0)
  LINE TO (5,0) TO (5,5) TO (0,5) TO CLOSE
REGION 2    { this region overrides region 1, and describes the larger plate }
  LAYER "Bottom Metal" K = Kmetal
  LAYER "Dielectric" K = Kdiel
  START(1,0)
  LAYER "Bottom Metal" VALUE(V)=V0
  LINE TO (4,0)
  LAYER "Bottom Metal" NATURAL(V)=0
  LINE TO (4,5) TO (1,5) TO CLOSE
REGION 3    { this region overrides regions 1&2, and describes the smaller
plate}
  LAYER "Bottom Metal" K = Kmetal
  LAYER "Dielectric" K = Kdiel
  LAYER "Top Metal" K = Kmetal
  START(2,0)
  LINE TO (3,0) TO (3,5)
  LAYER "Top Metal" VALUE(V)=V1
  LINE TO (2,5)
  LAYER "Top Metal" NATURAL(V)=0
  LINE TO CLOSE
```

The final requirement for boundary condition specification is the attachment of boundary conditions to the X-Y end faces of the extruded figure. This is done by the SURFACE modifier. Suppose we wish to force the bottom surface to $V=0$ and the top to $V=1$. We would modify the descriptor as follows:

```
BOUNDARIES
SURFACE "Bottom" VALUE(V)=0
SURFACE "Top" VALUE(V)=1
REGION 1    { this is the outer boundary of the system }
  LAYER "Dielectric" K = Kdiel    { all other layers default to Kair }
  START(0,0)
  LINE TO (5,0) TO (5,5) TO (0,5) TO CLOSE
REGION 2    { this region overrides region 1, and describes the larger plate }
  LAYER "Bottom Metal" K = Kmetal
  LAYER "Dielectric" K = Kdiel
  START(1,0)
  LAYER "Bottom Metal" VALUE(V)=V0
  LINE TO (4,0)
  LAYER "Bottom Metal" NATURAL(V)=0
  LINE TO (4,5) TO (1,5) TO CLOSE
REGION 3    { this region overrides regions 1&2, and describes the smaller plate}
  LAYER "Bottom Metal" K = Kmetal
  LAYER "Dielectric" K = Kdiel
```

```

LAYER "Top Metal" K = Kmetal
START(2,0)
  LINE TO (3,0) TO (3,5)
LAYER "Top Metal" VALUE(V)=V1
  LINE TO (2,5)
LAYER "Top Metal" NATURAL(V)=0
  LINE TO CLOSE

```

Observe that since the SURFACE statements lie outside any REGION specification, they apply to all regions of the surface. To specialize the SURFACE statement to a specific region, it should be included within the REGION definition.

In this example, we have used named surfaces and layers. The same effect can be achieved by omitting the layer names and specifying layers and surfaces by number:

```

BOUNDARIES
SURFACE 1 VALUE(V)=0
SURFACE 6 VALUE(V)=1
REGION 1    { this is the outer boundary of the system }
  LAYER 3 K = Kdiel { all other layers default to Kair }
  START(0,0)
  LINE TO (5,0) TO (5,5) TO (0,5) TO CLOSE
REGION 2    { this region overrides region 1, and describes the larger plate }
  LAYER 2 K = Kmetal
  LAYER 3 K = Kdiel
  START(1,0)
  LAYER 2 VALUE(V)=V0
  LINE TO (4,0)
  LAYER 2 NATURAL(V)=0
  LINE TO (4,5) TO (1,5) TO CLOSE
REGION 3    { this region overrides regions 1&2, and describes the smaller plate}
  LAYER 2 K = Kmetal
  LAYER 3 K = Kdiel
  LAYER 4 K = Kmetal
  START(2,0)
  LINE TO (3,0) TO (3,5)
  LAYER 4 VALUE(V)=V1
  LINE TO (2,5)
  LAYER 4 NATURAL(V)=0
  LINE TO CLOSE

```

Remember that in our terminology a REGION refers to an area in the projected base plane, while a LAYER refers to a section of the Z-extrusion. A particular 3D chunk of the figure is uniquely identified by the intersection of a REGION and a LAYER.

A completed form of the descriptor outlined here may be found in the sample problem "[Samples | Usage | 3D Domains | 3D Extrusion spec.pde](#)"^[484]. A slightly more complex and interesting variation may be found in "[Samples | Applications | Electricity | 3D Capacitor.pde](#)"^[379].



2.6.6 Void Compartments

The reserved word VOID is treated syntactically the same as a parameter redefinition. If this word appears in any of the LAYER-qualified positions above, then that (region,layer) compartment will be excluded from the domain.

```

REGION 2    'blob' { the embedded blob }
  LAYER 'Can' VOID
  START 'ring' (R,0)
  ARC(CENTER=0,0) ANGLE=360

```

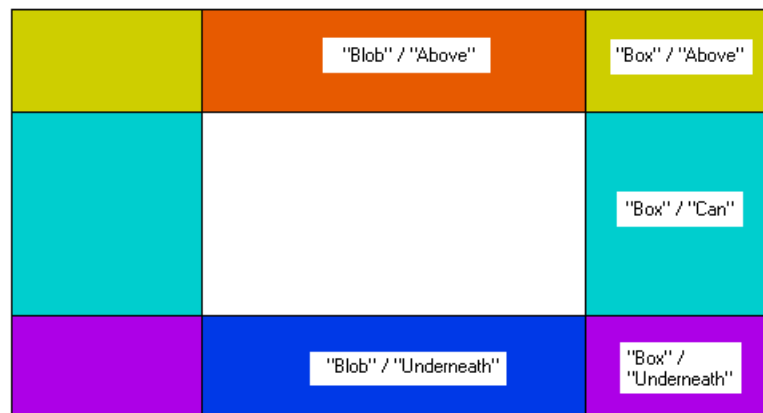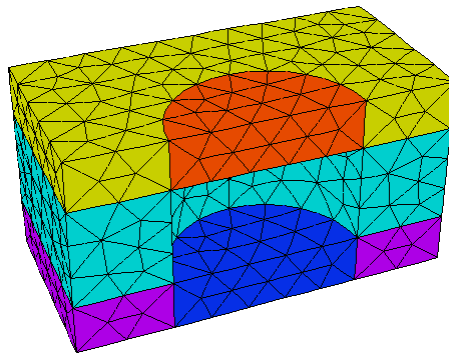

The example problem "[Samples | Usage | 3D_Domains | 3D_Void.pde](#)^[513]" demonstrates this usage.

2.6.7 Limited Regions



In what we have discussed so far, the region structure specified in the 2D base plane has been propagated unchanged throughout the extrusion dimension. FlexPDE uses the specifier LIMITED REGION to restrict the defined region to a specified set of layers and/or surfaces.

Instead of propagating throughout the extrusion dimension, a LIMITED REGION exists only in the layers and surfaces explicitly referenced in the declarations within the region. Mention of a layer causes the LIMITED REGION to exist in the specified layer and in its bounding surfaces. Mention of a surface causes the LIMITED REGION to exist in the specified surface.

In our ongoing example problem, we can specify:

```
LIMITED REGION 2      'blob' { the embedded blob }
  LAYER 'Can' K = 0.001
  START 'ring' (R,0)
  ARC(CENTER=0,0) ANGLE=360 TO CLOSE
```

In this form, the canister is not propagated through the "Above" and "Underneath" layers:

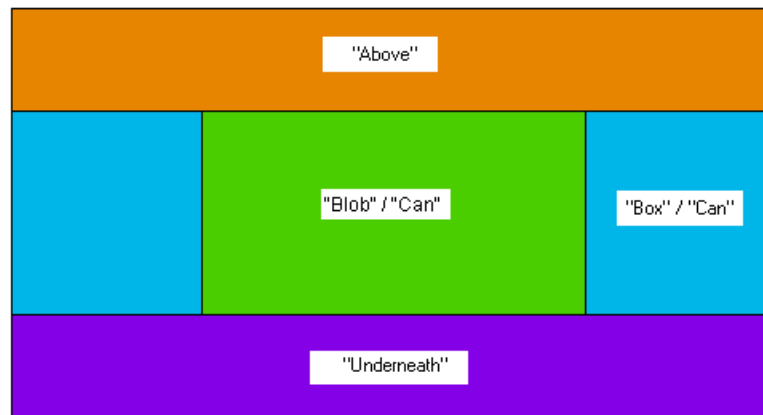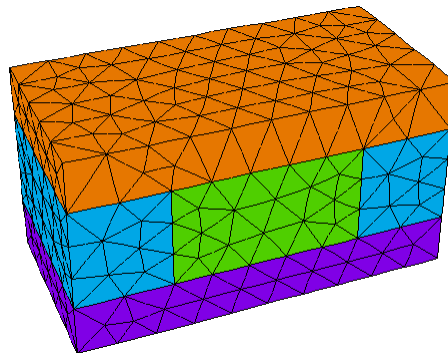

2.6.8 Specifying Plots on Cut Planes

In two-dimensional problems, the CONTOUR, SURFACE, VECTOR, GRID output forms display data values on the computation plane.

In three dimensions, the same displays are available on any cut plane through the 3D figure. The specification of this cut plane is made by simply appending the equation of a plane to the plot command, qualified by 'ON':

PLOTS

CONTOUR(Phi) **ON x=0**

Note: More uses of the ON clause, including plots on extrusion surfaces, will be discussed later ¹²⁰

We can also request plots of the computation grid (and by implication the domain structure) with the **GRID** command:

GRID(x,z) **ON y=0**

This command will draw a picture of the intersection of the plot plane with the tetrahedral mesh structure currently being used by FlexPDE. The plot will be painted with colors representing the distinct material properties present in the cross-section. 3D compartments with identical properties will appear in the same color. The arguments of the GRID plot are the values to be displayed as the abscissa and ordinate positions. Deformed grids can be displayed merely by modifying the arguments.

2.6.9 The Complete 3D Canister

With all the described modifications installed, the full script for the 3D canister problem is as follows:

```
TITLE 'Heat flow around an Insulating Canister'
COORDINATES
  Cartesian3
VARIABLES
  Phi           { the temperature }
DEFINITIONS
  K = 1         { default conductivity }
  R = 0.5       { blob radius }
EQUATIONS
  Div(-k*grad(phi)) = 0
EXTRUSION
  SURFACE 'Bottom' z=-1/2
  LAYER 'underneath'
  SURFACE 'Can Bottom' z=-1/4
  LAYER 'Can'
  SURFACE 'Can Top' z=1/4
  LAYER 'above'
  SURFACE 'Top' z=1/2
BOUNDARIES
  REGION 1 'box'
  START(-1,-1)
  VALUE(Phi)=0 LINE TO (1,-1)
  NATURAL(Phi)=0 LINE TO (1,1)
  VALUE(Phi)=1 LINE TO (-1,1)
  NATURAL(Phi)=0 LINE TO CLOSE
  LIMITED REGION 2 'blob' { the embedded blob }
  LAYER 2 k = 0.001 { the canister only }
  START 'ring' (R,0)
```




```
ARC(CENTER=0,0) ANGLE=360 TO CLOSE
PLOTS
  GRID(y,z) ON x=0
  CONTOUR(Phi) ON x=0
  VECTOR(-k*grad(Phi)) ON x=0
  ELEVATION(Phi) FROM (0,-1,0) to (0,1,0) { note 3D coordinates }
END
```

Since we have specified no boundary conditions on the top and bottom extrusion surfaces, they default to zero flux. This is the standard default, for reasons explained in an earlier section.

The first three of the requested PLOTS are:

Heat flow around an Insulating Canister

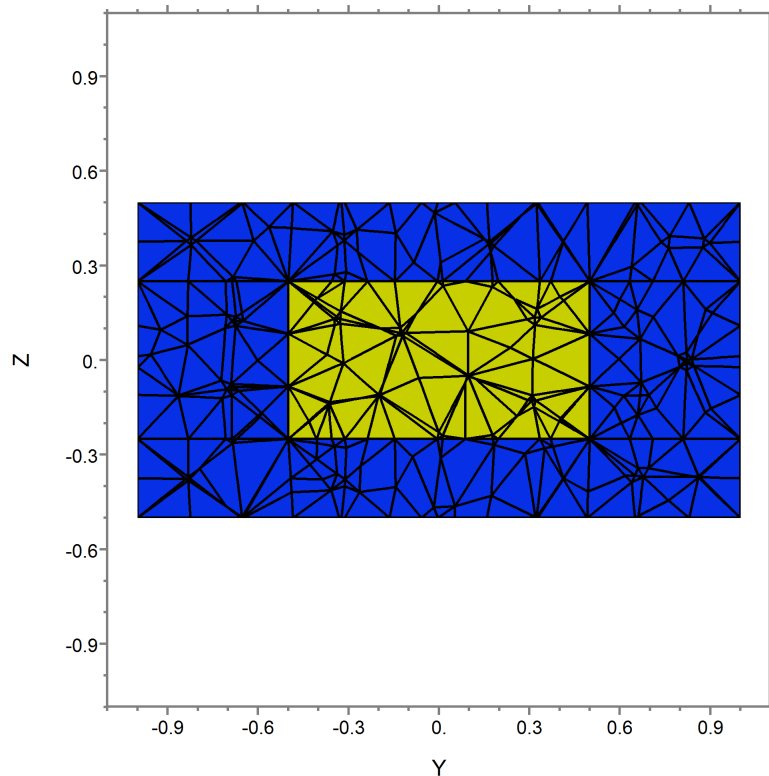


22:48:58 11/6/08
FlexPDE 6.00

y,z
on x=0


3ex3: Grid#2 P2 Nodes=9855 Cells=6462 RMS Err= 0.0015

Heat flow around an Insulating Canister

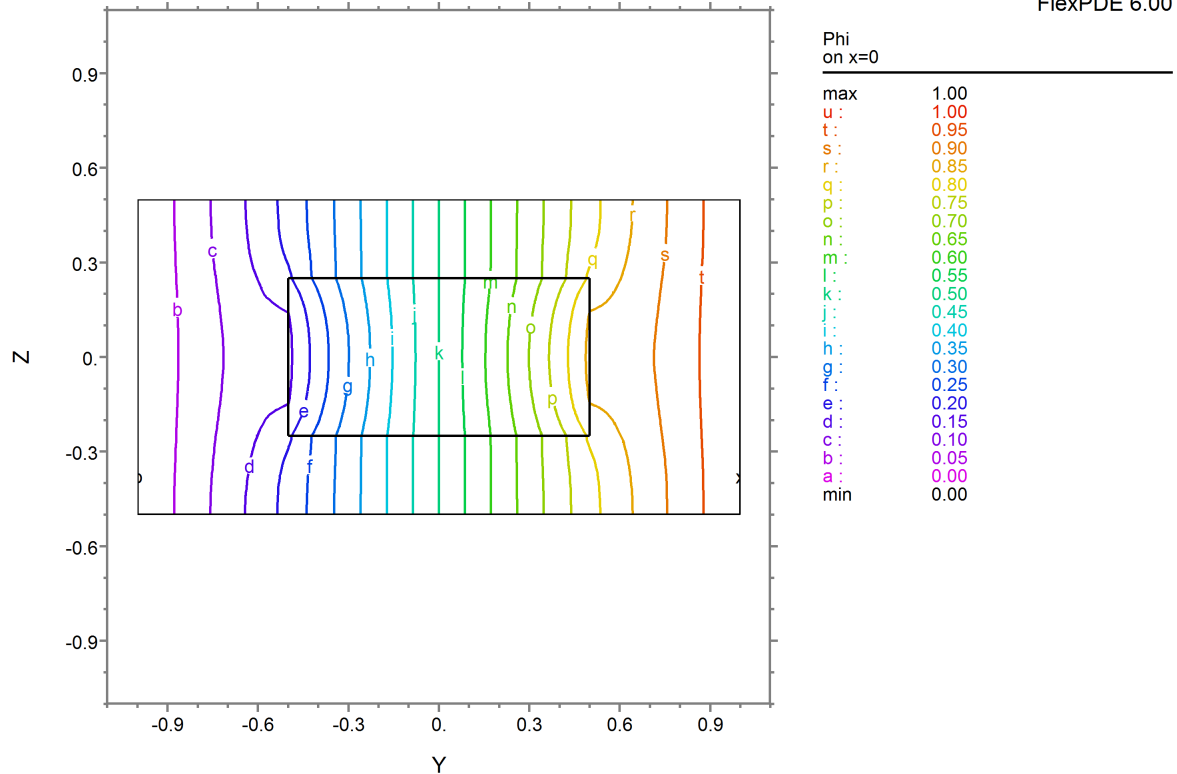22:47:39 11/6/08
FlexPDE 6.00

3ex2: Grid#2 P2 Nodes=9281 Cells=6012 RMS Err= 0.0015
Integral= 0.999997

Heat flow around an Insulating Canister

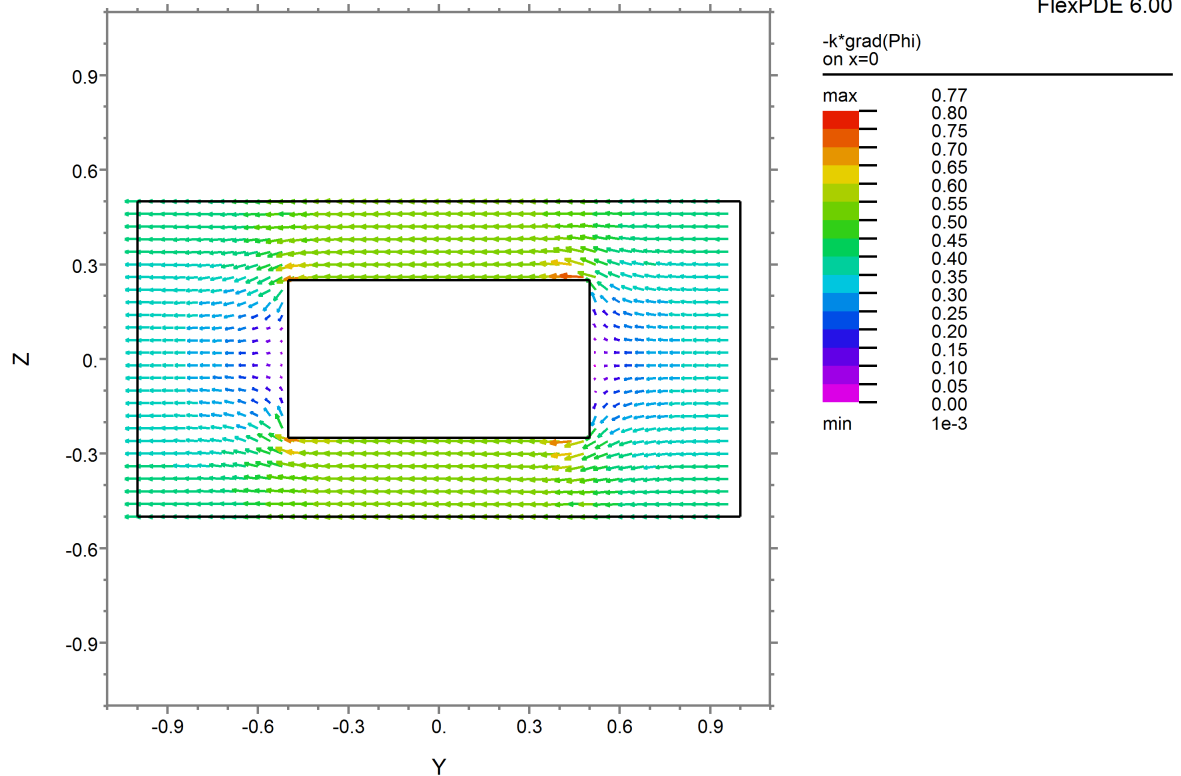


3ex2: Grid#2 P2 Nodes=9281 Cells=6012 RMS Err= 0.0015

2.6.10 Setting Boundary Conditions in 3D

The specification of boundary conditions in 3D problems is an extension of the techniques used in 2D.

- Boundary condition specifications that in 2D applied to a bounding curve are applied in 3D to the extruded sidewalls generated by that curve.
- The qualifier LAYER number or LAYER "name" may be applied to such a sidewall boundary condition to restrict its application to a specific layer of the sidewall.
- Boundary conditions for extrusion surfaces are constructed as if they were parameter redefinitions over a REGION or over the entire 2D domain. In these cases, the qualifier SURFACE number or SURFACE "name" must precede the boundary condition definition.

In the following figure, we have labeled the various surfaces which can be assigned distinct boundary conditions. Layer interface surfaces have been labeled with an "s", while sidewall surfaces have been labeled with "w". We have shown only a single sidewall intersection in our cross-sectional picture, but in fact each segment of the bounding trace in the base plane can specify a distinct "w" type wall boundary condition.

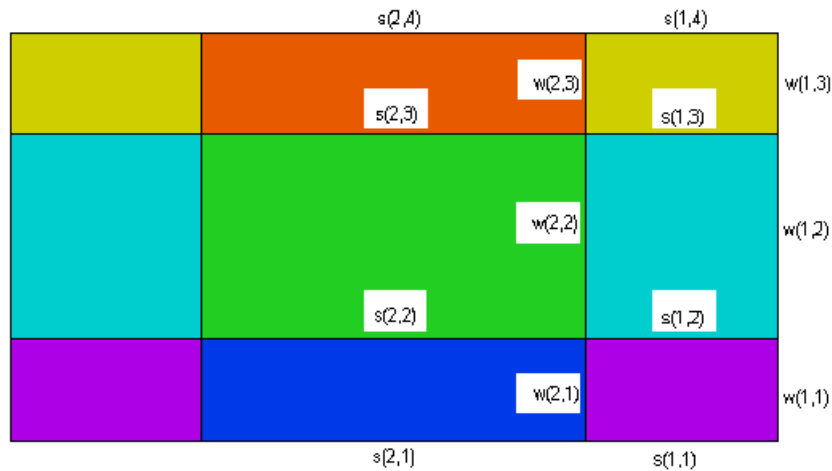

The comprehensive logical structure of the **BOUNDARIES** section with the locations of the boundary condition specifications in 3D can be diagrammed as follows:

```

BOUNDARIES
SURFACE 1
  s(all, 1) { BC's on surface 1 over full domain }
SURFACE 2
  s(all, 2) { BC's on surface 2 over full domain }
{...other surfaces }
REGION 1
  SURFACE 1
    s(1,1) { BC's on surface 1, restricted to region 1 }
  SURFACE 2
    s(1,2) { BC's on surface 2, restricted to region 1 }
  ...
  START(,) { -- begin the perimeter of region m }
  w(1,..) { BC's on following segments of sidewall of region 1 on all layers }
  LAYER 1
    w(1,1) { BC's on following segments of sidewall of region 1, restricted to layer 1 }
  }
  LAYER 2
    w(1,2) { BC's on following segments of sidewall of region 1, restricted to layer 2 }
  }
  ...
  LINE TO ....
  { segments of the base plane boundary with above BC's }
  LAYER 1
    w(1,1) { new BC's on following segments of sidewall of region 1, restricted to layer 1 }
  }
  ...
  LINE TO ....
  { continue the perimeter of region 1 with modified boundary conditions }
  TO CLOSE
REGION 2

```

```

SURFACE 1
  s(2,1) { BC's on surface 1, restricted to region 2 }
SURFACE 2
  s(2,2) { BC's on surface 2, restricted to region 2 }
...
START(,)  { -- begin the perimeter of region m }
w(2,..) { BC's on following segments of sidewall of region 2 on all layers }
LAYER 1
  w(2,1){ BC's on following segments of sidewall of region 2, restricted to layer
  1 }
LAYER 2
  w(2,2){ BC's on following segments of sidewall of region 2, restricted to layer
  2 }
...
LINE TO ....
{ segments of the base plane boundary with above BC's }
  LAYER 1
    w(2,1) { new BC's on following segments of sidewall of region 2, restricted
    to layer 1 }
...
LINE TO ...
{ continue the perimeter of region 2 with modified boundary conditions }
TO CLOSE

```

Remember that, as in 2D, REGIONS appearing later in the script will overlay and cover up portions of earlier regions in the base plane. So the real extent of REGION 1 is that part of the base plane within the perimeter of REGION 1 which is not contained in any later REGION.

For an example of how this works, suppose we want to apply a fixed temperature "Tcan" to the surface of the canister of our previous example. The canister portion of the domain has three surfaces, the bottom, the top, and the sidewall.

The layer dividing SURFACES that define the bottom and top of the canister are named 'Can Bottom' and 'Can Top'. The part we want to assign is that part of the surfaces which lies above region 2 of the base plane. We therefore put a boundary condition statement inside of the region 2 definition, together with a SURFACE qualifier.

The sidewall of the canister is the extrusion of the bounding line of REGION 2, restricted to that part contained in the layer named 'Can'. So we add a boundary condition to the bounding curve of REGION 2, with a LAYER qualifier.

The modified BOUNDARIES section then looks like this:

```

BOUNDARIES
  REGION 1 'box'
    START(-1,-1)
      VALUE(Phi)=0 LINE TO (1,-1)
      NATURAL(Phi)=0 LINE TO (1,1)
      VALUE(Phi)=1 LINE TO (-1,1)
      NATURAL(Phi)=0 LINE TO CLOSE
  REGION 2 'blob' { the embedded blob }
    SURFACE 'Can Bottom' VALUE(Phi)=Tcan

```



```

SURFACE 'Can Top' VALUE(Phi)=Tcan
{ parameter redefinition in the 'Can' layer only: }
LAYER 2 k = 0.001
START 'ring' (R,0)
  { boundary condition in the 'Can' layer only: }
  LAYER 'Can' VALUE(Phi)=Tcan
  ARC(CENTER=0,0) ANGLE=360 TO CLOSE

```

2.6.11 Shaped Layer Interfaces

We have stated that the layer interfaces need not be planar. But FlexPDE makes some assumptions about the layer interfaces, which places some restrictions on the possible figures.

- Figures must maintain an extruded shape, with sidewalls and layer interfaces (the sidewalls cannot grow or shrink)
- Layer interface surfaces must be continuous across region boundaries. If a surface has a vertical jump, it must be divided into layers, with a region interface at the jump boundary and a layer spanning the jump. (Not this:  but this: )
- Layer interface surfaces may merge, but may not invert. Use a MAX or MIN function in the surface definition to block inversion.

Using these rules, we can convert the canister of our example into a sphere by placing spherical caps on the cylinder.

The equation of a spherical end cap is

$$Z = Z_{\text{center}} + \sqrt{R^2 - x^2 - y^2}$$

Or,

$$Z = Z_{\text{top}} - R + \sqrt{R^2 - x^2 - y^2}$$

- To avoid grazing contact of this new sphere with the top and bottom of our former box, we will extend the extrusion from -1 to 1 .
- To avoid arithmetic errors, we will prevent negative arguments of the sqrt.

Our modified script now looks like this:

```

TITLE 'Heat flow around an Insulating Sphere'
COORDINATES
  Cartesian3
VARIABLES
  Phi          { the temperature }
DEFINITIONS
  K = 1        { default conductivity }
  R = 0.5      { sphere radius }
  { shape of hemispherical cap: }
  Zsphere = sqrt(max(R^2-x^2-y^2,0))
EQUATIONS
  Div(-k*grad(phi)) = 0
EXTRUSION
  SURFACE 'Bottom' z=-1
  LAYER 'underneath'
  SURFACE 'Sphere Bottom' z = -max(Zsphere,0)


```

```

LAYER 'Can'
SURFACE 'Sphere Top' z = max(Zsphere,0)
LAYER 'above'
SURFACE 'Top'      z=1
BOUNDARIES
REGION 1 'box'
  START(-1,-1)
    VALUE(Phi)=0 LINE TO (1,-1)
    NATURAL(Phi)=0 LINE TO (1,1)
    VALUE(Phi)=1 LINE TO (-1,1)
    NATURAL(Phi)=0 LINE TO CLOSE
LIMITED REGION 2 'blob' { the embedded blob }
  LAYER 2 K = 0.001
  START 'ring' (RSphere,0)
    ARC(CENTER=0,0) ANGLE=360
    TO CLOSE
PLOTS
  GRID(y,z) on x=0
  CONTOUR(Phi) on x=0
  VECTOR(-k*grad(Phi)) on x=0
  ELEVATION(Phi) FROM (0,-1,0) to (0,1,0)
END


```

Cut-away and cross-section images of the **LAYER** \times **REGION** compartment structure of this layout looks like this:

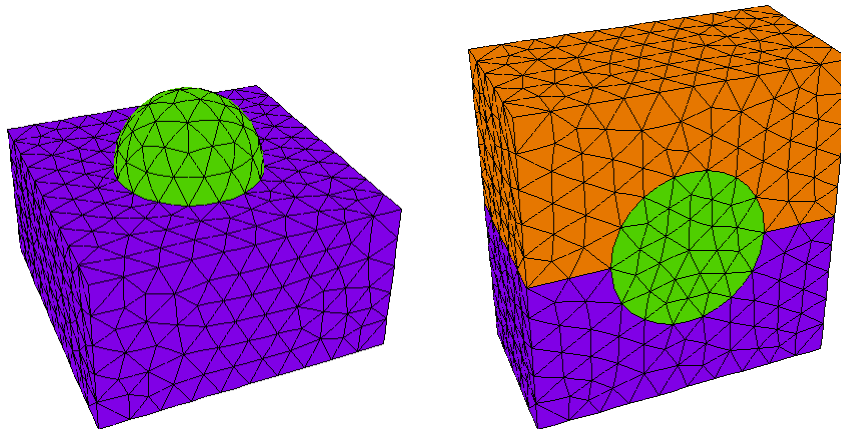

The contour plot looks like this:

Heat flow around an Insulating Sphere

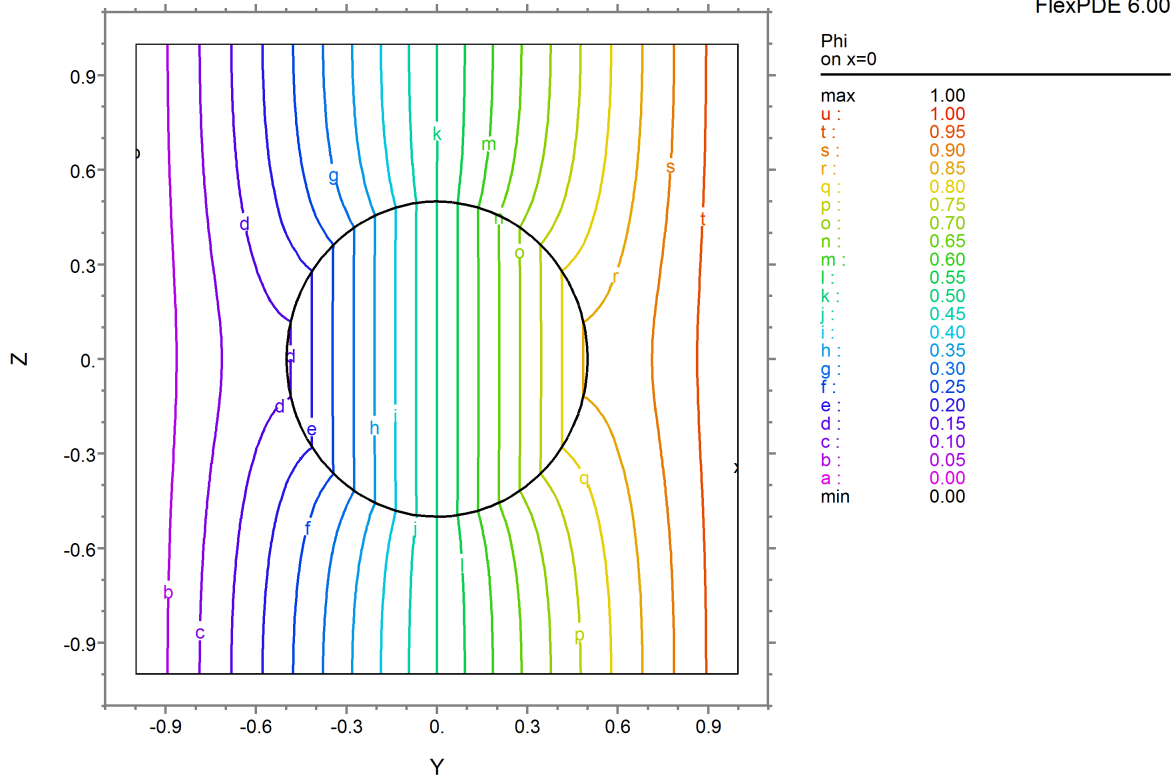22:52:06 11/6/08
FlexPDE 6.00

3ex4: Grid#1 P2 Nodes=12132 Cells=7893 RMS Err= 9.2e-4
Integral= 1.999999

Notice that because of the symmetry of the 3D figure, this plot looks like a rotation of the 2D contour plot in "Putting It All Together".

2.6.12 Surface-Generating Functions

FlexPDE includes three surface-generation functions (PLANE, CYLINDER and SPHERE) to simplify the construction of 3D domains (See [Surface Functions](#)²³⁹ in the Problem Descriptor Reference)

With the SPHERE command, for example, we could modify the Zsphere definition above as

```
{ shape of hemispherical cap: }  
Zsphere = SPHERE( (0,0,0), R)
```

We can also build a duct with cylindrical top and bottom surfaces using the following script fragments:

DEFINITIONS

```
R0 = 1           { cylinder radius }  
Len = 3         { cylinder length }  
theta = 45     { axis direction in degrees }  
c = cos(theta degrees) { direction cosines of the axis direction }
```



```

s = sin(theta degrees)
x0 = -(len/2)*c           { beginning point of the cylinder axis }
y0 = -(len/2)*s
zoff = 10                 { a z-direction offset for the entire figure }

```

{ The cylinder function constructs the top surface of a cylinder with axis along $z=0.5$. The positive and negative values of this surface will be separated by a distance of one unit at the diameter. }

```
zs = CYLINDER((x0,y0,0.5), (x0+Len*c,y0+Len*s, 0.5), R0)
```

EXTRUSION

```

SURFACE z = zoff-zs      { the bottom half-surface }
SURFACE z = zoff+zs     { the top half-surface }

```

BOUNDARIES


REGION 1

```

START (x0,y0)
LINE TO (x0+R0*c,y0-R0*s)
TO (x0+Len*c+R0*c,y0+Len*s-R0*s)
TO (x0+Len*c-R0*c,y0+Len*s+R0*s)
TO (x0-R0*c,y0+R0*s)
TO CLOSE

```

The constructed figure looks like this:

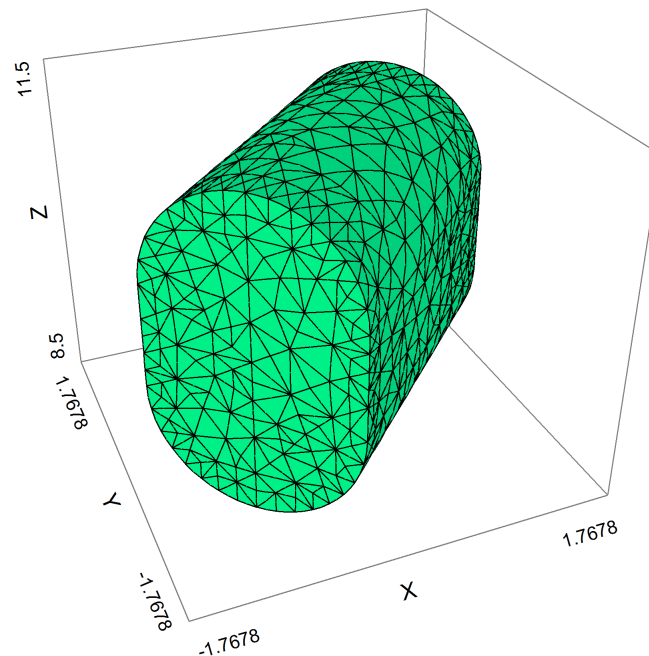

See the example problem "Samples | Usage | 3D_Domains | 3D_Cylspec.pde" for the complete cylinder script.

2.6.13 Integrals in Three Dimensions

In three-dimensional problems, volume integrals may be computed over volume compartments selected by region and layer.

- **Result = VOL_INTEGRAL(<integrand>)**
Computes the integral of the integrand over the entire domain.
- **Result = VOL_INTEGRAL(<integrand>, <region name>)**
Computes the integral of the integrand over all layers of the specified region.
- **Result = VOL_INTEGRAL(<integrand>, <layer name>)**
Computes the integral of the integrand over all regions of the specified layer.
- **Result = VOL_INTEGRAL(<integrand>, <region name>, <layer name>)**
Computes the integral of the integrand over the compartment specified by the region and layer names.
- **Result = VOL_INTEGRAL(<integrand>, <region number>, <layer number>)**
Computes the integral of the integrand over the compartment specified by the region and layer numbers.

Surface integrals may be computed over selected surfaces. From the classification of various qualifying names, FlexPDE tries to infer what surfaces are implied in a surface integral statement. In the case of non-planar surfaces, integrals are weighted by the actual surface area.

- **Result = SURF_INTEGRAL(<integrand>)**
Computes the integral of the integrand over the outer bounding surface of the total domain.
- **Result = SURF_INTEGRAL(<integrand>, <surface name> {, <layer_name>})**
Computes the integral of the integrand over all regions of the named extrusion surface. If the optional <layer_name> appears, it will dictate the layer in which the computation is performed.
- **Result = SURF_INTEGRAL(<integrand>, <surface name>, <region name> {, <layer_name>})**
Computes the integral of the integrand over the named extrusion surface, restricted to the named region. If the optional <layer_name> appears, it will dictate the layer in which the computation is performed.
- **Result = SURF_INTEGRAL(<integrand>, <region name>, <layer name>)**
Computes the integral of the integrand over all surfaces of the compartment specified by the region and layer names. Evaluation will be made inside the named compartment.
- **Result = SURF_INTEGRAL(<integrand>, <boundary name> {, <region_name>})**
Computes the integral of the integrand over all layers of the sidewall generated by the extrusion of the named base-plane curve. If the optional <region name> argument appears, it controls on

which side of the surface the integral is evaluated. Portions of the surface that do not adjoin the named layer will not be computed.

- **Result = SURF_INTEGRAL(<integrand>, <boundary name>, <layer name> {, <region_name> })**

Computes the integral of the integrand over the sidewall generated by the extrusion of the named base-plane curve, restricted to the named layer. If the optional <region name> argument appears, it controls on which side of the surface the integral is evaluated. Portions of the surface that do not adjoin the named layer will not be computed.

Note: The example problem "[Samples | Usage | 3D_Integrals.pde](#)^[602]" demonstrates several forms of integral in a three-dimensional problem.

Let us modify our Canister problem to contain a heat source, and compare the volume integral of the source with the surface integral of the flux, as checks on the accuracy of the solution:

```

TITLE 'Heat flow from an Insulating Canister'
COORDINATES
  Cartesian3
VARIABLES
  Phi           { the temperature }
DEFINITIONS
  K = 1         { default conductivity }
  R = 0.5       { blob radius }
  S = 0
EQUATIONS
  Div(-k*grad(phi)) = S
EXTRUSION
  SURFACE 'Bottom' z=-1/2
    LAYER 'underneath'
  SURFACE 'Can Bottom' z=-1/4
    LAYER 'Can'
  SURFACE 'Can Top' z=1/4
    LAYER 'above'
  SURFACE 'Top' z=1/2
BOUNDARIES
  REGION 1 'box'
    START(-1,-1)
      VALUE(Phi)=0 LINE TO (1,-1)
      NATURAL(Phi)=0 LINE TO (1,1)
      VALUE(Phi)=1 LINE TO (-1,1)
      NATURAL(Phi)=0 LINE TO CLOSE
  REGION 2 'blob' { option: could be LIMITED }
    LAYER 2 k = 0.001 { the canister only }
    S = 1 { still the canister }
    START 'ring' (R,0)
      ARC(CENTER=0,0) ANGLE=360 TO CLOSE
PLOTS
  GRID(y,z) on x=0
  CONTOUR(Phi) on x=0

```

```
VECTOR(-k*grad(Phi)) on x=0
ELEVATION(Phi) FROM (0,-1,0) to (0,1,0)
```

SUMMARY

```
REPORT(Vol_Integral(S,'blob','can')) AS 'Source Integral'
REPORT(Surf_Integral(NORMAL(-k*grad(Phi)),'blob','can'))
```

```
AS 'Can Heat Loss'
```

```
REPORT(Surf_Integral(NORMAL(-k*grad(Phi))))
```

```
AS 'Box Heat Loss'
```


```
REPORT(Vol_Integral(S,'blob','can')-Surf_Integral(NORMAL(-k*grad(Phi))))
```

```
AS 'Energy Error'
```

```
END
```

The contour plot is as follows:

Heat flow from an Insulating Canister

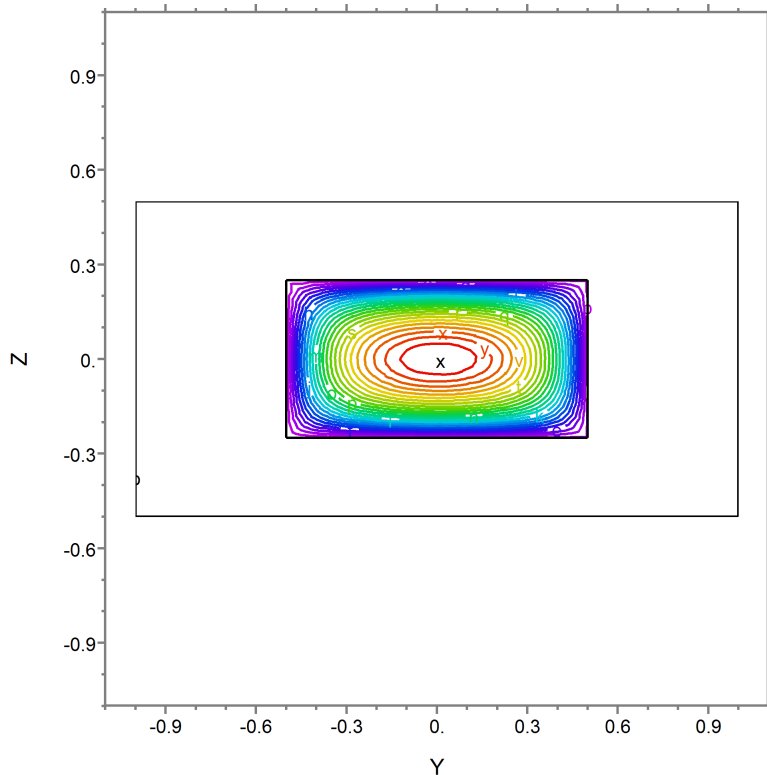

21:51:39 11/6/08
FlexPDE 6.00

Phi
on x=0

max	26.0
z :	25.0
y :	24.0
x :	23.0
w :	22.0
v :	21.0
u :	20.0
t :	19.0
s :	18.0
r :	17.0
q :	16.0
p :	15.0
o :	14.0
n :	13.0
m :	12.0
l :	11.0
k :	10.0
j :	9.00
i :	8.00
h :	7.00
g :	6.00
f :	5.00
e :	4.00
d :	3.00
c :	2.00
b :	1.00
a :	0.00
min	0.00

3ex5: Grid#3 P2 Nodes=20159 Cells=14020 RMS Err= 0.0016
Integral= 7.395459

The summary page shows the integral reports:

SUMMARY

Source Integral= 0.392690
 Can Heat Loss= 0.387963
 Box Heat Loss= 0.394317
 Energy Error= -1.626284e-3

Note: The "Integral" reported at the bottom of the contour plot is the default Area_Integral(Phi) reported by the plot processor.

2.6.14 More Advanced Plot Controls

We have discussed the specification of plots on cut planes in 3D. You can, if you want, apply restrictions to the range of such plots, much like the restrictions of integrals.

You can also specify plots on extrusion SURFACES (layer interface surfaces), even though these surfaces may not be planar.

The basic control mechanism for plots is the ON <thing> statement.

For example, the statement

```
CONTOUR(Phi) ON 'Sphere Top' ON 'Blob'
```

requests a contour plot of the potential Phi on the extrusion surface named 'Sphere Top', restricted to the region 'Blob'.

```
CONTOUR(NORMAL(-K*GRAD(Phi))) ON 'Sphere Top' ON 'Blob' ON 'Can'
```

requests a contour plot of the normal component of the heat flux on the top part of the sphere, with evaluation to be made within layer 'Can', i.e., inside the sphere.


- In general, the qualifier ON <name> will request a localization of the plot, depending on the type of object named by <name>.
- The qualifier ON REGION <number> selects a region by number, rather than by name.
- The qualifier ON SURFACE <number> selects a layer interface surface by number, rather than by name.
- The qualifier ON LAYER <number> selects a layer by number, rather than by name.

As an example, let us request a plot of the heat flux on the top of the sphere, as shown above. We will add this command to the PLOTS section, and also request an integral over the same surface, as a cross check. The plot generator will automatically compute the integral over the plot grid. This computation should give the same result as the SURF_INTEGRAL, which uses a quadrature on the computation mesh.

```
CONTOUR(NORMAL(-K*GRAD(Phi))) ON 'Sphere Top' ON 'Blob' ON 'Can'
REPORT(SURF_INTEGRAL(NORMAL(-K*GRAD(Phi)), 'Sphere Top', 'Blob', 'Can'))
AS 'Surface Flux'
```

The result looks like this:

Heat flow around an Insulating Sphere

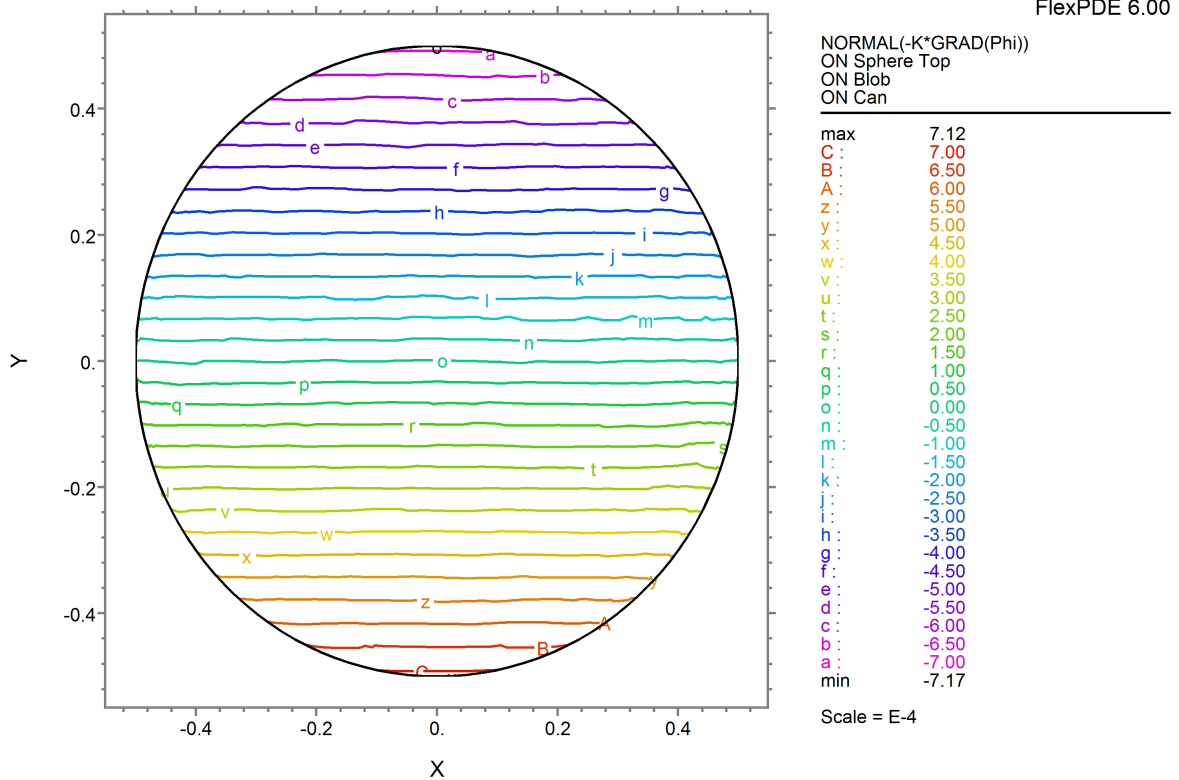

3ex4: Grid#1 P2 Nodes=12132 Cells=7893 RMS Err= 9.2e-4
Surface Flux= -5.216031e-8 Surf_Integral= -6.490344e-5

Since in this case the integral is a cancellation of values as large as $7e-4$, the reported "Surface Flux" value of $-5.2e-8$ is well within the default error target of $ERRLIM=0.002$. The automatically generated plot grid integral, "Surf_Integral", shows greater error at $-6.49e-5$, due to poorer resolution of integrating the area-weighted function in the plot plane.

2.6.15 3D Mesh Generation

FlexPDE version 4.0 introduced an entirely new mesh generator for 3D problems. With support for LIMITED REGIONS, it offers users much more flexibility in the creation of 3D domains. It is also a much more complex computation, and is sometimes in need of some user assistance to successfully create a mesh for complex 3D problems.

The greatest challenge faced by the 3D mesh generator is the transition across wide ranges of feature sizes. Any help the user can give in easing this transition will be amply rewarded in a decreased incidence of mesh generation failure. We at PDE Solutions are also engaged in improving the intelligence of the mesh generator to also assist in reaching this goal.

DOMAIN REVIEW

The first facility that users should be aware of is the "Domain" item on the main menu bar. Selecting this item instead of "Run" will give the user a step-by-step review of the mesh generation process. This review reflects the order of operations performed by the mesh generator.

- The first sequence of displays shows the domain boundaries in the surfaces and layers of the extrusion. The first plot shows the domain boundaries present in the bottom surface; the next shows the boundaries which extend through the first layer; then the boundaries present in the second extrusion surface; and so on through entire domain, and ending with the top surface. You should examine each of these displays to determine that the structure is as you intended. Errors at this point can create serious trouble later.
- After the individual surfaces and layers are displayed, a composite 3D display is presented of the total domain, as represented by boundaries. This plot can be rotated to examine all aspects of the domain.
- The next sequence of displays shows the triangular surface meshes created for the extrusion surfaces. These meshes are created and displayed in 3D space, and can be rotated to be sure there are no anomalies in the construction. Following initial surface mesh creation, the meshes are refined to create sufficient resolution of surface curvature. They are then analyzed for proximity, and coarser meshes are refined due to influence from nearby dense meshes.
- The next sequence of displays shows the creation of the tetrahedral 3D meshes for each of the regions and layers of the domain. Before a block is filled, the bounding surface is shown; after filling, the filled block is displayed (it looks the same). The sequence presents first the region blocks for layer 1, followed by a unified mesh of layer 1. This pattern is repeated through the layers of the domain, until finally a unified 3D mesh is displayed. At this point, the mesh is composed of linear (straight-sided) tetrahedra.
- Once the domain is filled with linear tetrahedra, the additional nodes needed for quadratic or cubic interpolation. Cells are also bent at this point to conform to curved boundaries. This curving can create troubles in thin curved shells. The 3D mesh generator is not yet smart enough to compute shell thickness and curvature and automatically adapt the size. You may have to do it manually with the MESH_SPACING command. $\text{Sqrt}(\text{Radius} \times \text{thickness})$ is a good rule of thumb.
- This completes the mesh generation process, and solution should proceed promptly.

DEALING WITH FAILURE

The most common cause of mesh generation failure is the inability to make the transition from very small to very large feature sizes without tangling. If the mesh generation fails, the user has several options, all involving some kind of manual mesh density control.

- The simplest way of dealing with mesh generation failure is simply to increase the NGRID selector. This causes the entire mesh to be more dense, and also more regular. In some cases, it may create a mesh which is simply too large for effective computing with the available computer resources.

- A second approach is to use the MESH_SPACING control to increase the overall density in a troublesome region, layer or surface. Remember that MESH_SPACING can be specified as arbitrary functions of spatial coordinate, allowing dense meshes in specific locales.
- The ASPECT control can be used to increase the cell sizes in thin components, thereby reducing the range of sizes that must be dealt with in surrounding media. Increasing ASPECT can create elongated cells in surrounding media, so you may need to balance its use by explicitly controlling MESH_SPACING in these regions.
- You can localize the problem areas by building your domain one layer at a time. Build the first layer and examine the regional meshes for compliance with your expectations. Then add the next layer. You might at this point want to hide the first layer, so you can deal with the second layer as an independent item.

2.7 Complex Variables

In previous versions of FlexPDE, it has been possible to treat complex variables and equations by declaring each component as a VARIABLE and writing a real PDE for each complex component.

In version 6 and later, FlexPDE understands complex variables and makes provision for treating them conveniently.

The process starts by declaring a variable to be COMPLEX, and naming its components:

```
VARIABLES
  C = COMPLEX(Cr,Ci)
```

Subsequently, the complex variable **C** can be referenced by name, or its components can be accessed independently by their names.

In the EQUATIONS section, each complex variable can be given an equation, which will be interpreted as dealing with complex quantities. The complex equation will be processed by FlexPDE and reduced to two real component equations, by taking the real and imaginary parts of the resulting complex equation.

For example, the time-harmonic representation of the heat equation can be presented as

```
EQUATIONS
  C: DIV(k*GRAD(C)) - COMPLEX(0,1)*C = 0
```

Alternatively, the individual components can be given real equations:

```
EQUATIONS
  Cr: DIV(k*GRAD(Cr)) + Ci = 0
  Ci: DIV(k*GRAD(Ci)) - Cr = 0
```

In a similar way, boundary conditions may be assigned either to the complex equation or to each component equation individually:

`VALUE(C) = COMPLEX(1,0)` assigns 1 to the real part and 0 to the imaginary part of C
or

`VALUE(Cr) = 0` `NATURAL(Ci) = 0`

Any parameter definition in the **DEFINITIONS** section may be declared **COMPLEX** as well:

DEFINITIONS

`complexname = COMPLEX(realpart, imaginarypart)`

FlexPDE recognizes several fundamental [complex operators](#)¹⁸³:

<code>REAL (complex)</code>	Extracts the real part of the complex number.
<code>IMAG (complex)</code>	Extracts the imaginary part of the complex number.
<code>CARG (complex)</code>	Computes the Argument (or angular component) of the complex number, implemented as <code>CARG(complex(x,y)) = Atan2(y,x)</code> .
<code>CONJ (complex)</code>	Returns the complex conjugate of the complex number.
<code>CEXP (complex)</code>	Computes the complex exponential of the complex number, given by <code>CEXP(complex(x,y)) = exp(x+iy) = exp(x)*(cos(y)+i*sin(y))</code> .

COMPLEX quantities can be the arguments of PLOT commands, as well. Occurrence of a complex quantity in a PLOT statement will be interpreted as if the real and imaginary parts had been entered separately in the **PLOT** command.

`ELEVATION(C) FROM A TO B`

will produce a plot with two traces, the real and imaginary parts of C.

2.7.1 The Time-Sinusoidal Heat

Suppose we wish to discover the time-dependent behavior of our example [Cartesian blob](#)⁶⁰ due to the application of a time-sinusoidal applied temperature.

The time-dependent heat equation is $\text{Div}(K*\text{Grad}(\text{Phi})) = C_p*dt(\text{Phi})$

If we assume that the boundary values and solutions can be represented as

$$\text{Phi}(x,y,t) = \text{Aphi}(x,y)*\exp(i*\omega*t)$$

Substituting in the heat equation and dividing out the exponential term, we are left with a complex equation

$$\text{Div}(K*\text{Grad}(\text{Aphi})) - \text{Complex}(0,1)*\omega*C_p*\text{Aphi} = 0$$

The time-varying temperature Phi can be recovered from the complex Aphi simply by multiplying by the appropriate time exponential and taking the real part of the result.

Assuming for simplicity that $\omega=1$ and $C_p=1$, the modified script becomes:

`TITLE 'Heat flow around an Insulating blob'`

```


VARIABLES
  APhi = Complex(APhir,APhii) { the complex temperature amplitude }
DEFINITIONS
  K = 1          { default conductivity }
  R = 0.5        { blob radius }
EQUATIONS
  APhi: Div(-k*grad(APhi)) - Complex(0,1)*APhi = 0
BOUNDARIES
  REGION 1 'box'
    START(-1,-1)
      VALUE(APhi)=Complex(0,0)  LINE TO (1,-1)
      NATURAL(APhi)=Complex(0,0)  LINE TO (1,1)
      VALUE(APhi)=Complex(1,0)  LINE TO (-1,1)
      NATURAL(APhi)=Complex(0,0)  LINE TO CLOSE
  REGION 2 'blob'      { the embedded blob }
    k = 0.01 { change K for prettier pictures }
    START 'ring' (R,0)
      ARC(CENTER=0,0) ANGLE=360 TO CLOSE
PLOTS
  CONTOUR(APhir) CONTOUR(APhii)
  VECTOR(-k*grad(APhir))
  ELEVATION(APhi) FROM (0,-1) to (0,1)
  ELEVATION(Normal(-k*grad(APhir))) ON 'ring'
END

```

Running this script produces the following results for the real and imaginary components:


Time Sinusoidal Heat flow around an Insulating blob

22:36:39 11/7/08
FlexPDE 6.00

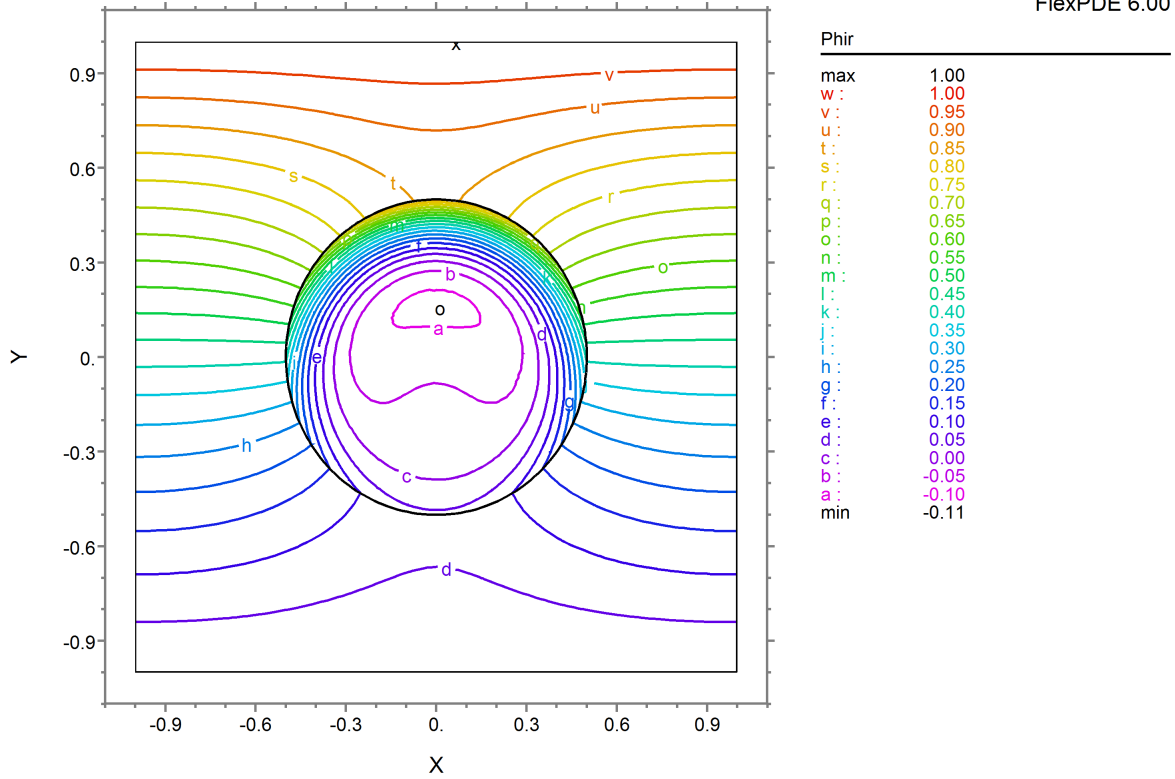

ex10: Grid#4 P2 Nodes=4821 Cells=2378 RMS Err= 6.8e-5
k= 1.000000 INTEGRAL(Phir, 'blob')= 0.068905 Integral= 1.533706


Time Sinusoidal Heat flow around an Insulating blob

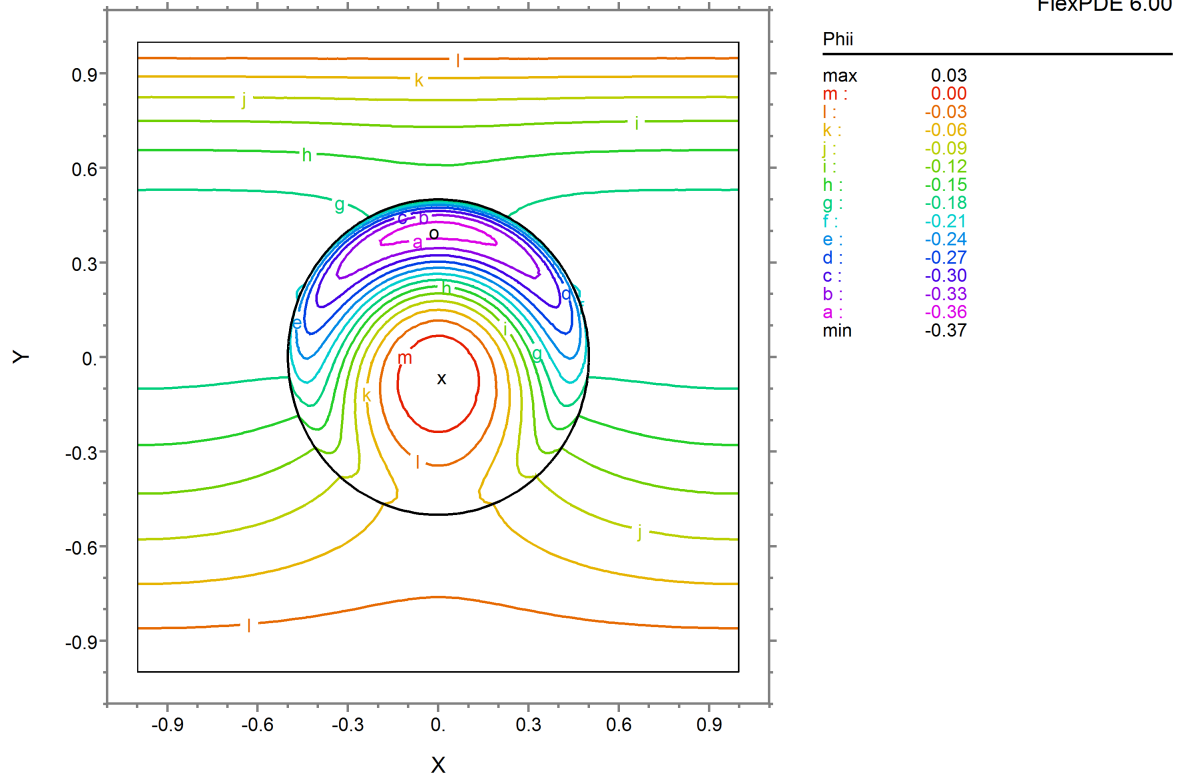22:36:39 11/7/08
FlexPDE 6.00

ex10: Grid#4 P2 Nodes=4821 Cells=2378 RMS Err= 6.8e-5
 k= 1.000000 INTEGRAL(Phi, 'blob')= -0.115794 Integral= -0.473407

The ELEVATION trace through the center shows:

Time Sinusoidal Heat flow around an Insulating blob

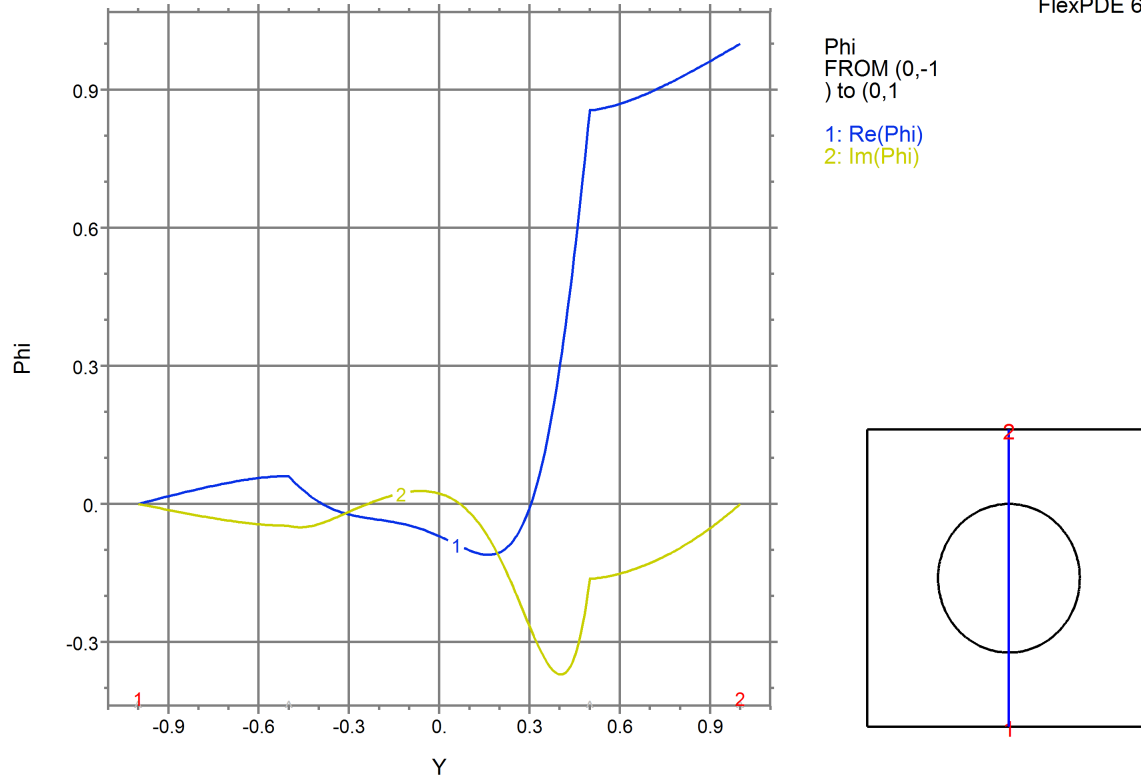12:46:02 11/8/08
FlexPDE 6.00

ex10: Grid#4 P2 Nodes=4821 Cells=2378 RMS Err= 6.8e-5
Integral(a)= 0.506903 Integral(b)= -0.158257

2.7.2 Interpreting Time-Sinusoidal Results

Knowledge of the real and imaginary parts of the complex amplitude function is not very informative. What we really want to know is what the time behavior of the temperature is. We can investigate this with the help of some other facilities of FlexPDE 6.

We can examine distributions of the reconstructed temperature at selected times using a REPEAT statement

PLOTS

```
REPEAT tx=0 BY pi/2 TO 2*pi
  SURFACE(Phir*cos(tx)+Phii*sin(tx)) as "Phi at t="+$[4]tx
ENDREPEAT
```

We can also reconstruct the time history at selected positions using [ARRAYS](#)^[215]. The ARRAY facility allows us to declare arbitrary arrays of values, manipulate them and plot them.

We will declare an array of time points at which we wish to evaluate the temperature, and compute the sin and cos factors at those times. We also define an ARRAY-valued function to return the time history at a point:

DEFINITIONS

```

ts = ARRAY (0 BY pi/20 TO 2*pi)   { An array of 40 times }
fr = cos(ts)   fi = sin(ts)       { the arrays of trigonometric factors }
poft(px, py) = EVAL(phir,px,py)*fr + EVAL(phii,px,py)*fi

```

PLOTS

```


ELEVATION(poft(0,0), poft(0,0.2), poft(0,0.4), poft(0,0.5)) VS ts
AS "Histories"

```

Two of the plots produced by the addition of these script lines are:


Time Sinusoidal Heat flow around an Insulating blob

12:46:02 11/8/08
FlexPDE 6.00

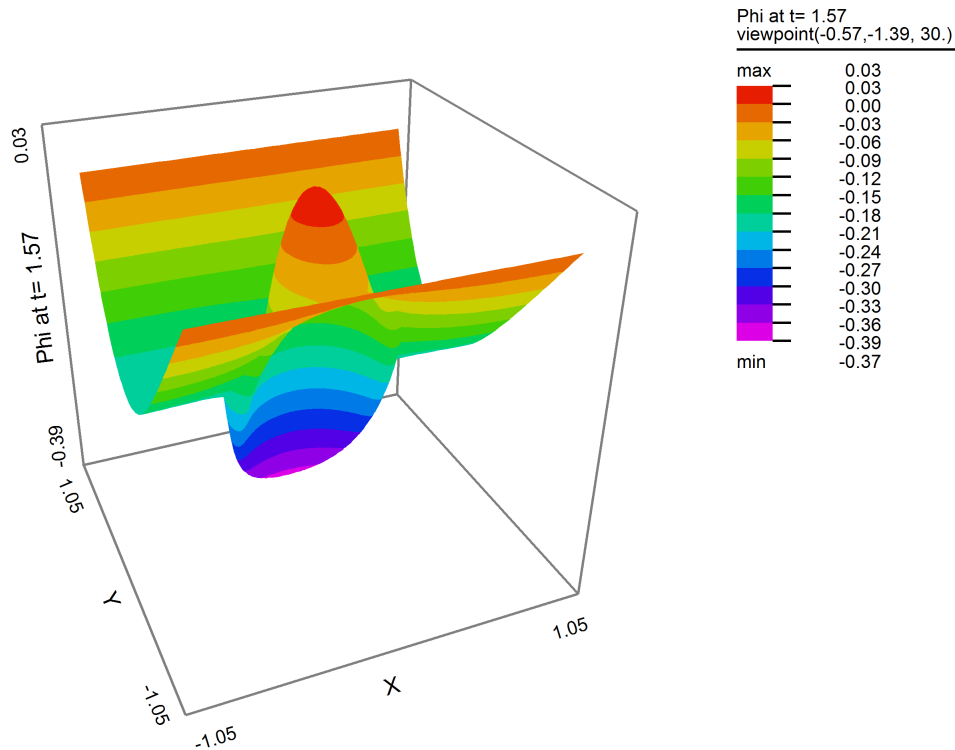

ex10: Grid#4 P2 Nodes=4821 Cells=2378 RMS Err= 6.8e-5
Integral= -0.473407

Time Sinusoidal Heat flow around an Insulating blob

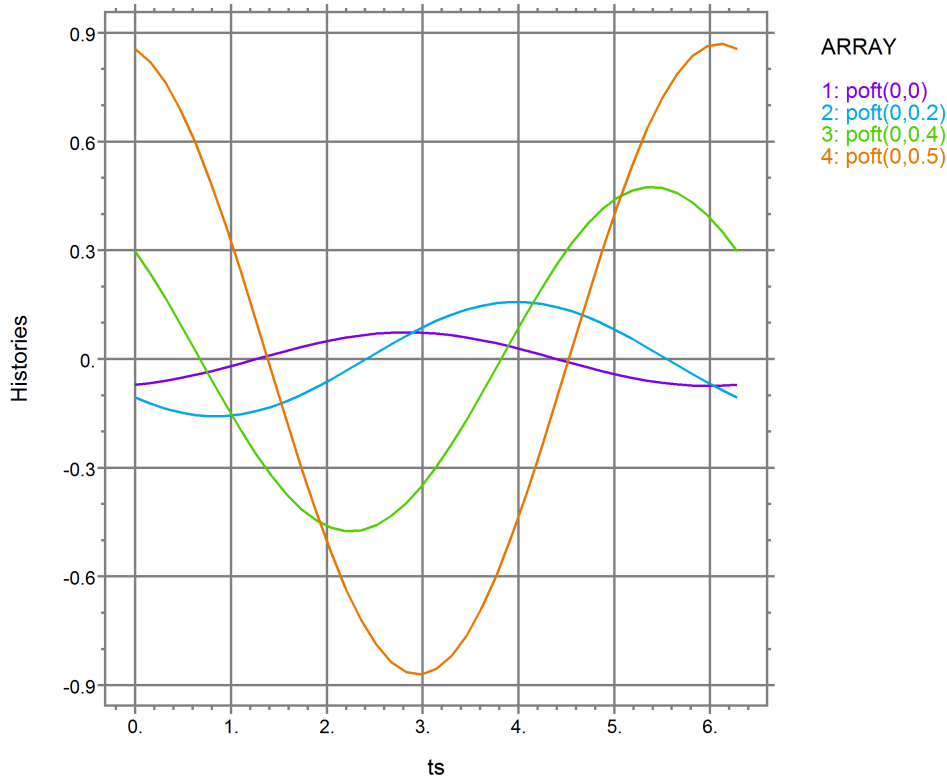12:46:02 11/8/08
FlexPDE 6.00

ex10: Grid#4 P2 Nodes=4821 Cells=2378 RMS Err= 6.8e-5
 Integral(a)= 2.775558e-17 Integral(b)= 1.144917e-16 Integral(c)= -6.938894e-17 Integral(d)= -1.110223e-16

2.8 Vector Variables

FlexPDE supports the definition of VECTOR variables. Each VECTOR variable is assumed to have a component in each of the three spatial coordinates implied by the [COORDINATES](#)^[207] section in the script, regardless of the number of dimensions represented in the computation domain.

For example, you can construct a one-dimensional spherical model of three vector directions. Values will be assumed to vary only in the radial direction, but they can have components in the polar and azimuthal directions, as well.

The use of VECTOR variables begins by declaring a variable to be a [VECTOR](#)^[212], and naming its components:

```
VARIABLES
  V = VECTOR(Vx,Vy,Vz)
```

The component directions are associated by position with the directions implicit in the selected COORDINATES. In YCYLINDER (R,Z,Phi) coordinates, the vector components will be (Vr,Vz,Vphi).

Components may be omitted from the right, in which case the missing components will be assumed to have zero value.

A component may be explicitly declared to have zero value, by writing a 0 in its component position, as in

$$V = \text{VECTOR}(0,0,V\text{phi})$$

This will construct a one-variable model, in which the variable is the azimuthal vector component.

Subsequently, the vector variable V can be referenced by name, or its components can be accessed independently by their names.

In the EQUATIONS section, each vector variable can be given an equation, which will be interpreted as dealing with vector quantities. The vector equation will be processed by FlexPDE and reduced to as many real component equations as are named in the declaration, by taking the corresponding parts of the resulting vector equation.

For example, the three dimensional cartesian representation of the Navier-Stokes equations can be presented as

EQUATIONS

$$V: \text{dens} * \text{DOT}(V, \text{GRAD}(V)) + \text{GRAD}(p) - \text{visc} * \text{DIV}(\text{GRAD}(V)) = 0$$

Alternatively, the individual components can be given real equations:

EQUATIONS

$$Vx: \text{dens} * (Vx * \text{DX}(Vx) + Vy * \text{DY}(Vx) + Vz * \text{DZ}(Vx)) + \text{DX}(p) - \text{visc} * \text{DIV}(\text{GRAD}(Vx)) = 0$$

$$Vy: \text{dens} * (Vx * \text{DX}(Vy) + Vy * \text{DY}(Vy) + Vz * \text{DZ}(Vy)) + \text{DY}(p) - \text{visc} * \text{DIV}(\text{GRAD}(Vy)) = 0$$

$$Vz: \text{dens} * (Vx * \text{DX}(Vz) + Vy * \text{DY}(Vz) + Vz * \text{DZ}(Vz)) + \text{DZ}(p) - \text{visc} * \text{DIV}(\text{GRAD}(Vz)) = 0$$

In a similar way, boundary conditions may be assigned either to the complex equation or to each component equation individually:

$$\text{VALUE}(V) = \text{VECTOR}(1,0,0)$$

or

$$\text{VALUE}(Vx) = 0 \quad \text{NATURAL}(Vy) = 0$$

Any parameter definition in the DEFINITIONS section may be declared VECTOR as well:

DEFINITIONS

$$\text{vectorname} = \text{VECTOR}(x\text{part}, y\text{part}, z\text{part})$$

VECTOR quantities can be the arguments of PLOT commands, as well. Occurrence of a vector quantity in a PLOT statement will be interpreted as if the component parts had been entered separately in the PLOT command.

$$\text{ELEVATION}(V) \text{ FROM } A \text{ TO } B$$

will produce a plot with as many traces as are active in the COORDINATES definition.

Examples:

[Samples | Usage | Vector_Variables | Vector_Variables.pde](#) 690

2.8.1 Curvilinear Coordinates

An aspect of vector variables in curvilinear coordinates that is sometimes overlooked is that the derivative of a vector is not necessarily the same as the vector of derivatives of the components. This is because in differentiating a vector, the unit vectors in the coordinate space must also be differentiated.

In cylindrical (R,Phi,Z) coordinates, for example, the radial component of the Laplacian of a vector V is

$$\text{DEL2}(V_r) - V_r/R^2 - 2*DPHI(V_{\phi})/R^2$$

The extra $1/R^2$ terms have arisen from the differentiation of the unit vectors.

FlexPDE performs the correct expansion of the differential operators in all supported coordinate systems.

2.8.2 Magnetic Vector Potential

Our [Cylindrical torus problem](#) ^[71] can easily be converted to a model of a current-carrying torus inside a box.

The geometry is unchanged, but we now solve for the magnetic vector potential A. We will also move the location slightly outward in radius to avoid the singularity at $R=0$.

Maxwell's equation for the magnetic field can be expressed in terms of the magnetic vector potential as

$$\text{Curl}(\text{Curl}(A)/\mu) = J$$

Here J is the vector current density and mu is the magnetic permeability.

The script becomes

```
TITLE 'Magnetic Field around a Current-Carrying Torus'
COORDINATES YCYLINDER { implicitly R,Z,Phi }
VARIABLES
  A = VECTOR(0,0,Aphi)
DEFINITIONS
  J = VECTOR(0,0,0) { default current density }
  mu = 1
  Rad = 0.5 { blob radius (renamed)}
EQUATIONS
  A: CURL(CURL(A)/mu) = J
BOUNDARIES
  REGION 1 'box'
    START(1,-1)
    VALUE(A)=VECTOR(0,0,0)
    LINE TO (3,-1) TO (3,1) TO (1,1) TO CLOSE
  REGION 2 'blob' { the torus }
    J = VECTOR(0,0,1) { current in the torus }
    START 'ring' (2,Rad)
    ARC(CENTER=2,0) ANGLE=360 TO CLOSE
PLOTS
```

```


CONTOUR(Aphi) as "Vector Potential"
VECTOR(CURL(A)) as "Magnetic Induction"
ELEVATION(Aphi) ON 'ring'
END

```

The resulting plots are:

Magnetic Vector Potential around a Current-Carrying Rod


21:30:36 11/8/08
FlexPDE 6.00

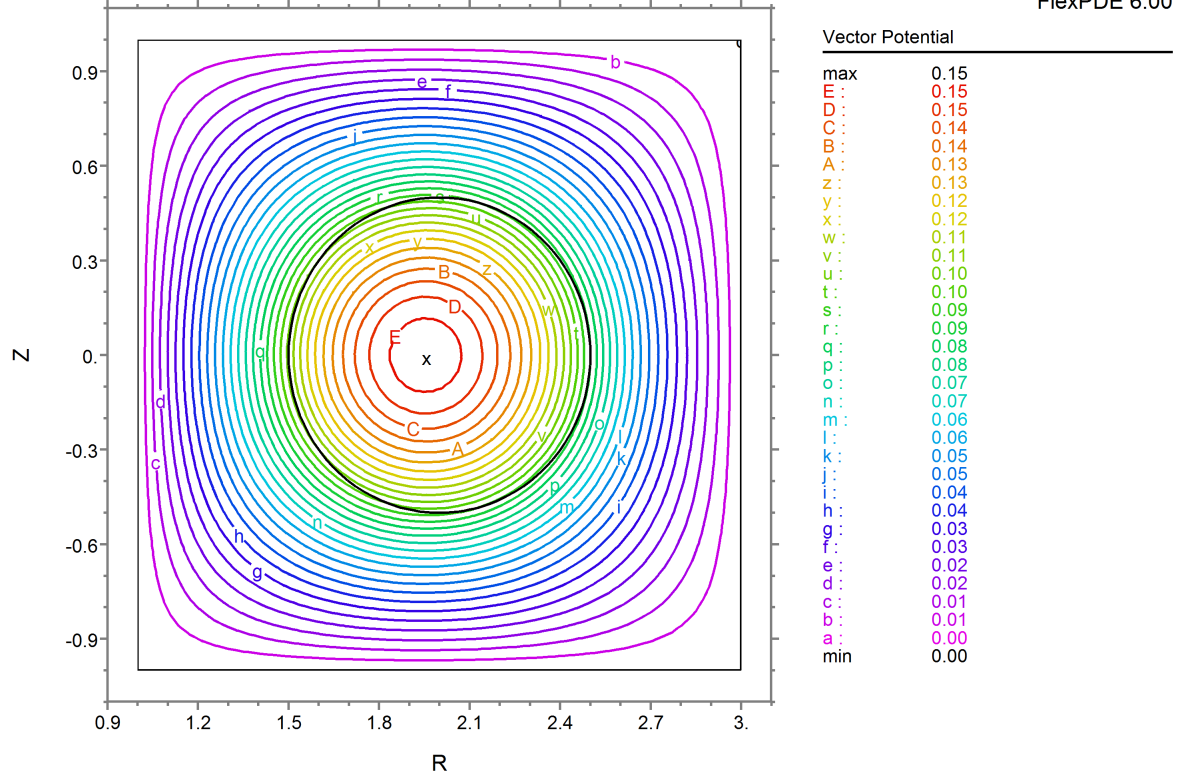

ex11: Grid#3 P2 Nodes=2982 Cells=1449 RMS Err= 5.8e-5
Vol_Integral= 2.478625



Magnetic Vector Potential around a Current-Carrying Rod

21:30:36 11/8/08
FlexPDE 6.00

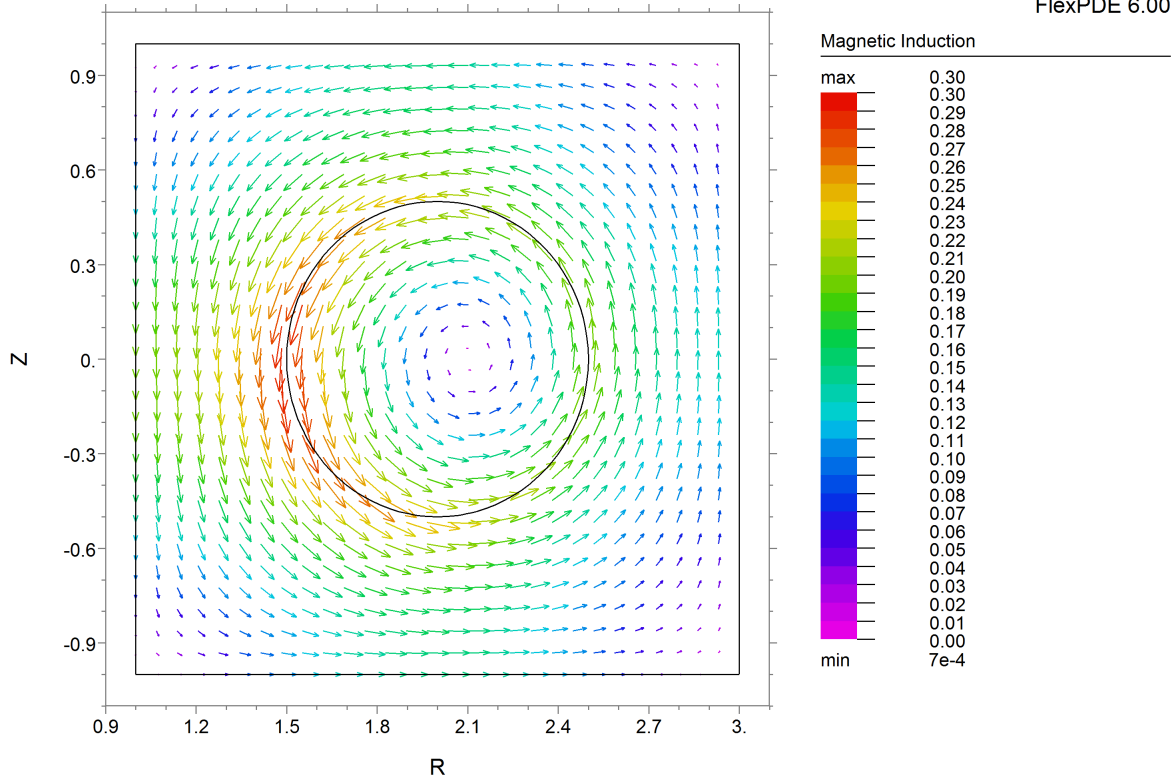

ex11: Grid#3 P2 Nodes=2982 Cells=1449 RMS Err= 5.8e-5

Magnetic Vector Potential around a Current-Carrying Rod

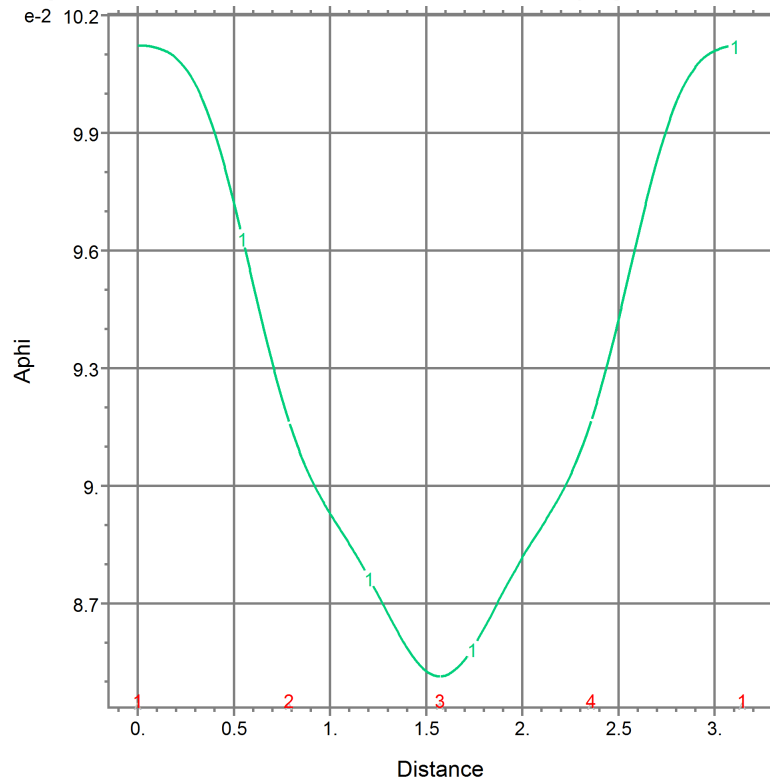22:01:20 11/8/08
FlexPDE 6.00Aphi
ON ring
1: Aphiex11: Grid#3 P2 Nodes=2982 Cells=1449 RMS Err= 5.8e-5
Surf_Integral= 3.630098

2.9 Variables Inactive in Some Regions

FlexPDE supports the ability to restrict some variables and equations to act only in specified REGIONS. This feature is controlled by declaring variables to be **INACTIVE** in some regions.

VARIABLES

var1, var2 {,...}

BOUNDARIES

REGION 1

INACTIVE(var1, var2 {,...})

In solving the EQUATIONS for these variables, it will be as if the **INACTIVE** regions had not been included in the domain definition. Boundaries between regions in which the variables are active and those in which they are inactive will be treated as exterior boundaries for these variables. Boundary conditions may be placed on these boundaries as if they were the exterior boundary of the system.

2.9.1 A Chemical Beaker

As an example of Regionally Inactive Variables, let us use the [Cartesian Blob](#) ^[60] test problem, and modify it to represent a chemical beaker immersed in a cooling bath.


Inside the beaker we will place chemicals A and B that react to produce heat. Temperature will be allowed to diffuse throughout the beaker and into the cooling bath, but the chemical reactions will be confined to the beaker. The cooling bath itself is insulated on the outer wall, so no heat escapes the system. The modified script is as follows:

```

TITLE "A Chemical Beaker"
VARIABLES
  Phi(0.1)                { the temperature }
  A(0.1), B(0.1)         { the chemical components }
DEFINITIONS
  Kphi = 1                { default thermal conductivity }
  Ka = 0.01    Kb = 0.001 { chemical diffusivities }
  H = 1                { Heat of reaction }
  Kr = 1+exp(3*Phi)     { temperature dependent reaction rate }
  Cp = 1                { heat capacity of mixture }
  R = 0.5                { blob radius }
  A0 = 1    B0 = 2      { initial quantities of chemicals }
INITIAL VALUES
  A = A0
  B = B0
EQUATIONS
  Phi:  Div(kphi*grad(phi)) + H*kr*A*B = Cp*dt(phi)
  A:    Div(ka*grad(A)) - kr*A*B = dt(A)
  B:    Div(kb*grad(B)) - kr*A*B = dt(B)
BOUNDARIES
  REGION 1 'box'
    INACTIVE(A,B)          { inactivate chemicals in the outer region }
    START(-1,-1)
    NATURAL(Phi)=0
    LINE TO (1,-1) TO (1,1) TO (-1,1) TO CLOSE
  REGION 2 'blob'        { the embedded blob }
    kphi = 0.02
    START 'ring' (R,0)
    ARC(CENTER=0,0) ANGLE=360 TO CLOSE
TIME 0 TO 40
PLOTS
  FOR t=0.1, 0.2, 0.3, 0.5, 1, 2, 5, 10, 20, ENDTIME
    SURFACE(Phi)
    SURFACE(A)
    HISTORY(Phi) AT (0,0) (0,0.4) (0,0.49) (0,0.6)
    REPORT integral(Phi)/integral(1) AS "Average Phi"
    REPORT integral(B,'blob')/integral(1,'blob') as "Residual B"
END

```


A Chemical Beaker

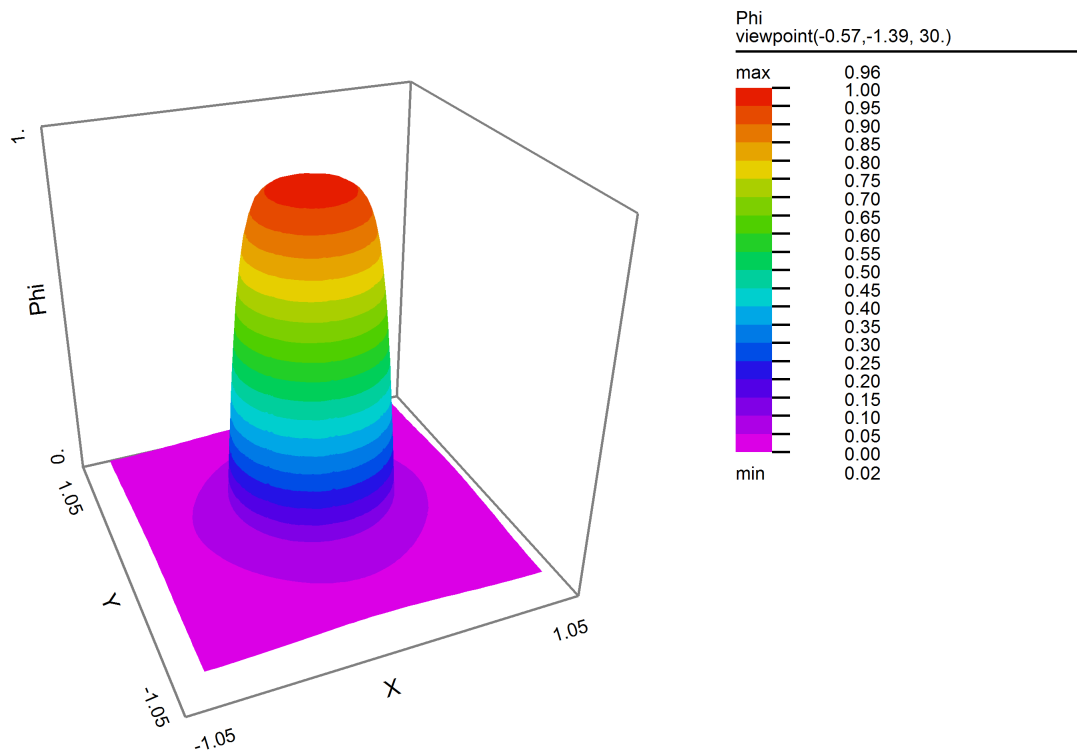15:08:22 11/20/08
FlexPDE 6.00

ex12: Cycle=46 Time= 0.3000 dt= 0.0267 P2 Nodes=2297 Cells=1118 RMS Err= 4.5e-4
Integral= 0.704216

This plot of temperature shows diffusion beyond the boundaries of the beaker.


A Chemical Beaker

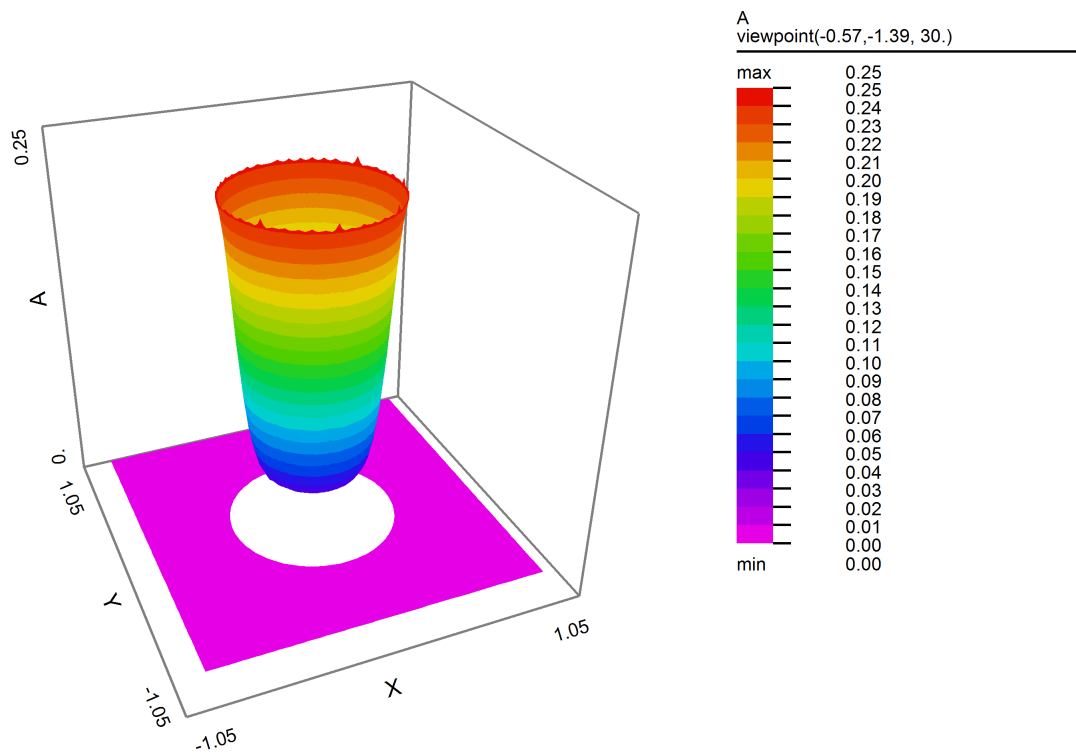15:08:22 11/20/08
FlexPDE 6.00

ex12: Cycle=46 Time= 0.3000 dt= 0.0267 P2 Nodes=2297 Cells=1118 RMS Err= 4.5e-4
Integral= 0.079722

This plot of concentration A shows depression in the center where higher temperature increases the reaction rate. No chemical diffuses beyond the beaker boundary.

A Chemical Beaker

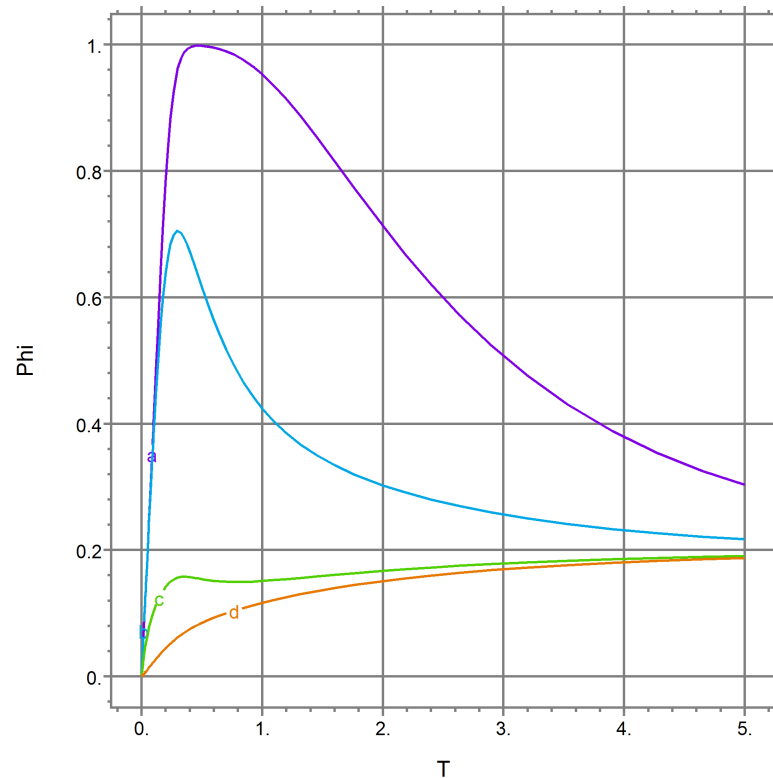15:08:22 11/20/08
FlexPDE 6.00

HISTORY

1: Phi

ex12: Cycle=78 Time= 5.0000 dt= 0.3743 P2 Nodes=1561 Cells=750 RMS Err= 1.2e-4
Average Phi= 0.196348 Residual B= 0.999968

This plot of temperature history shows an average value of 0.196348. This agrees favorably with the energy conservation value of $H \cdot \pi \cdot \text{Rad}^2 / (C_p \cdot \text{Box}^2) = 0.196350$. The residual quantity of B is correct at 1.0.

2.10 Variables Explicit in Some Regions

FlexPDE supports the ability to explicitly state the values of some variables in specified REGIONS. This feature is controlled by declaring variables to be EXPLICIT and supplying the expected value or expression. In solving the EQUATIONS for these variables, the value of expression will be used.

```
VARIABLES
  var1, var2 {,...}
BOUNDARIES
  REGION 1
  EXPLICIT(var1)=expression
```

Values of a variable may also be made EXPLICIT along a bounding path :

```
VARIABLES
  var1, var2 {,...}
BOUNDARIES
```



```

REGION 1
START(...)
EXPLICIT(var1)=expression

```

This is most useful in moving mesh models as applied to the surrogate coordinate variables.

Examples:

[Samples | Usage | Moving Mesh | Sliptube Explicit Reconnect.pde](#)⁶⁴⁶

2.11 Moving Meshes

FlexPDE supports methods for moving the domain boundaries and computation mesh during the course of a problem run.

The mechanisms for specifying this capability are simple extensions of the existing script language. There are three parts to the definition of a moving mesh:

- Declare a surrogate variable for each coordinate you wish to move:

```

VARIABLES
Xm = MOVE(x)

```

- Write equations for the surrogate variables:

```

EQUATIONS
dt(xm) = umesh

```

- Write boundary conditions for the surrogate variables:

```

BOUNDARIES
START (0,0) VELOCITY(xm) = umesh

```

The specification of ordinary equations is unaffected by the motion of the boundaries or mesh. EQUATIONS are assumed to be presented in Eulerian (Laboratory) form. FlexPDE symbolically applies motion correction terms to the equations. The result of this approach is an Arbitrary Lagrange/Eulerian (ALE) model, in which user has the choice of mesh velocities:

- Locking the mesh velocity to a fluid velocity results in a Lagrangian model. (FlexPDE has no mechanism for reconnecting twisted meshes, so this model is discouraged in cases of violent motion).
- Specifying a mesh velocity different from the fluid velocity preserves mesh integrity while still allowing deformation of the bounding surfaces or following bulk motion of a fluid.
- If no mesh motion is specified, the result is an Eulerian model, which has been the default in previous versions of FlexPDE.

EULERIAN and LAGRANGIAN EQUATIONS

The EQUATIONS section is assumed to present equations in the Eulerian (Laboratory) frame.

The EQUATIONS section can optionally be labeled LAGRANGIAN EQUATIONS, in which case FlexPDE will apply no motion corrections to the equations. The user must then provide equations that are appropriate to the moving nodes.

For clarity, the section label EULERIAN EQUATIONS can be used to specify that the equations are appropriate to the laboratory reference frame. This is the default interpretation.

2.11.1 Mesh Balancing

A convenient method for distributing the computation mesh smoothly within a moving domain boundary is simply to diffuse the coordinates or the mesh velocities.

For example, suppose we change our basic example problem to model a sphere of oscillating size $R_m = 0.5 + 0.25 \cdot \cos(t)$.

Diffusing Mesh Coordinates

We define surrogate coordinates for X and Y:

VARIABLES

```
Phi
Xm = MOVE(x)
Ym = MOVE(y)
```

For the EQUATIONS of the mesh coordinates, we will use simple diffusion equations to distribute the positions smoothly in the interior, expecting the actual motions to be driven by boundary conditions:

$$\begin{aligned}\text{Div}(\text{Grad}(X_m)) &= 0 \\ \text{Div}(\text{Grad}(Y_m)) &= 0\end{aligned}$$

We can apply the boundary velocities directly to the mesh coordinates on the blob surface using the time derivative of R and geometric rules:

$$\begin{aligned}\text{VELOCITY}(X_m) &= -0.25 \cdot \sin(t) \cdot x/r \\ \text{VELOCITY}(Y_m) &= -0.25 \cdot \sin(t) \cdot y/r\end{aligned}$$

Diffusing Mesh Velocities

Alternatively, we can define mesh velocity variables as well as the surrogate coordinates for X and Y:

VARIABLES

```
Phi
Xm = MOVE(x)
Ym = MOVE(y)
Um
Vm
```

The EQUATIONS for the mesh coordinates are simply the velocity relations:

$$\begin{aligned} dt(X_m) &= U_m \\ dt(Y_m) &= V_m \end{aligned}$$

For the mesh velocities we will use a diffusion equation to distribute the velocities smoothly in the interior:

$$\begin{aligned} \text{div}(\text{grad}(U_m)) &= 0 \\ \text{div}(\text{grad}(V_m)) &= 0 \end{aligned}$$

The boundary conditions for mesh velocity on the blob are as above:

$$\begin{aligned} \text{VALUE}(U_m) &= -0.25 \cdot \sin(t) \cdot x/r \\ \text{VALUE}(V_m) &= -0.25 \cdot \sin(t) \cdot y/r \end{aligned}$$

Since the finite element equations applied at the boundary nodes are averages over the cells, we must also apply the hard equivalence of velocity to the mesh coordinates on the blob boundary

$$\begin{aligned} \text{VELOCITY}(X_m) &= U_m \\ \text{VELOCITY}(Y_m) &= V_m \end{aligned}$$

2.11.2 The Pulsating Blob

Using the position balancing form from the preceding paragraph, the modified script for our example problem becomes:


```
TITLE 'Heat flow around an Insulating blob'
VARIABLES
  Phi           { the temperature }
  Xm = MOVE(x)   { surrogate X }
  Ym = MOVE(y)   { surrogate Y }
DEFINITIONS
  K = 1         { default conductivity }
  R0 = 0.75    { initial blob radius }
EQUATIONS
  Phi:  Div(-k*grad(phi)) = 0
  Xm:  div(grad(Xm)) = 0
  Ym:  div(grad(Ym)) = 0
BOUNDARIES
  REGION 1 'box'
    START(-1,-1)
    VALUE(Phi)=0 VELOCITY(Xm)=0 VELOCITY(Ym)=0
    LINE TO (1,-1)
    NATURAL(Phi)=0   LINE TO (1,1)
    VALUE(Phi)=1   LINE TO (-1,1)
    NATURAL(Phi)=0   LINE TO CLOSE
  REGION 2 'blob' { the embedded blob }
    k = 0.001
    START 'ring' (R,0)
    VELOCITY(Xm) = -0.25*sin(t)*x/r
    VELOCITY(Ym) = -0.25*sin(t)*y/r
```

```

        ARC(CENTER=0,0) ANGLE=360 TO CLOSE
TIME 0 TO 2*pi
PLOTS
  FOR T = pi/2 BY pi/2 TO 2*pi
    GRID(x,y)
    CONTOUR(Phi)
    VECTOR(-k*grad(Phi))
    ELEVATION(Phi) FROM (0,-1) to (0,1)
    ELEVATION(Normal(-k*grad(Phi))) ON 'ring'
  END

```

The extremes of motion of this problem are shown below. See Help system or online documentation for an animation.

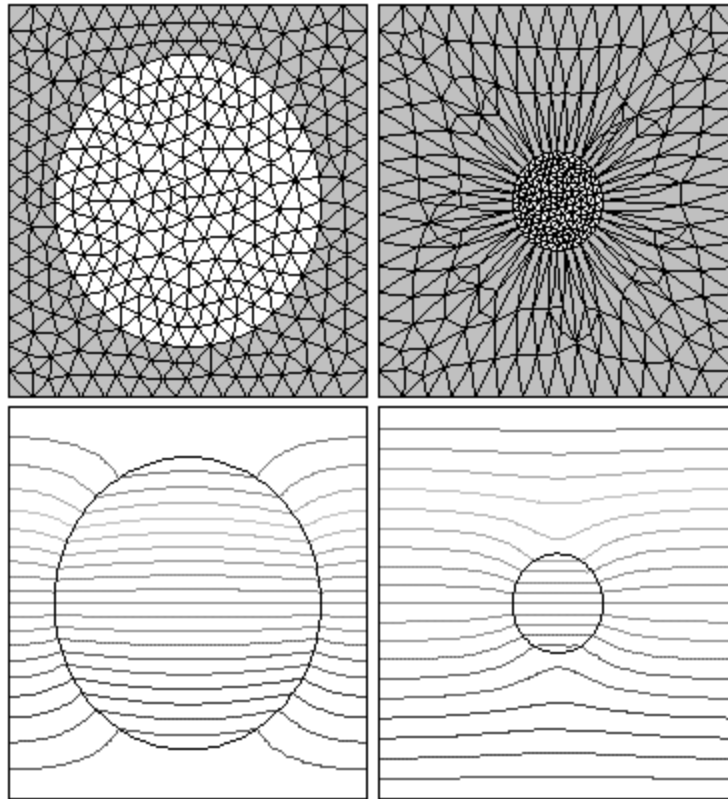

The position and velocity forms of this problem can be seen in the following examples:

[Samples | Usage | Moving_Mesh | 2D_Blob_Position.pde](#) ⁶³¹

[Samples | Usage | Moving_Mesh | 2D_Blob_Velocity.pde](#) ⁶³²

Three-dimensional forms of the problem can be seen in the following examples:

[Samples | Usage | Moving_Mesh | 3D_Blob_Position.pde](#) ⁶³⁹

[Samples | Usage | Moving_Mesh | 3D_Blob_Velocity.pde](#) ⁶⁴⁰

2.11.3 Mesh Reconnection

FlexPDE can automatically reconnect a moving mesh when the mesh becomes distorted or nonuniform. The reconnection option is turned on using the selector RECONNECT :

```
SELECT
  RECONNECT(ON)    { turn on all reconnect operations }
```

There are three primary reconnection operations : PURGE (purging a node), SPLIT (splitting a nodal link by inserting a node), and SWAP (swapping a link between nodes) which can be controlled independently. E.g :

```
SELECT
  RECONNECT(purge,swap)  { turn on only the purge and swap operations }
```

These can be controlled globally in the SELECT section as well as regionally in the BOUNDARIES section.

```
REGION 1
  RECONNECT(OFF)    { turn off all reconnect operations in this region }
```

```
REGION 2
  RECONNECT(split)  { turn on only the split operation in this region }
```

Examples:

[Samples | Usage | Moving Mesh | 2D_Bubble_Reconnect.pde](#) ⁶³³

[Samples | Usage | Moving Mesh | 3D_Bubble_Reconnect.pde](#) ⁶⁴²

[Samples | Usage | Moving Mesh | 3D_Intrusion_Reconnect.pde](#) ⁶⁴³

[Samples | Usage | Moving Mesh | Gaussian_Valve_Reconnect.pde](#) ⁶⁴⁵

[Samples | Usage | Moving Mesh | Sliptube_Explicit_Reconnect.pde](#) ⁶⁴⁶

2.12 Controlling Mesh Density

There are several mechanisms available for controlling the cell density in the mesh created by FlexPDE.

Implicit Density

The cell density of the created mesh will follow the spacing of points in the bounding segments. A very small segment in the boundary will cause a region of small cells in the vicinity of the segment.

Maximum Density

The global command

```
SELECT NGRID = <number>
```

controls the maximum cell size. The mesh will be generated with approximately **NGRID** cells in the largest dimension, and corresponding size in the smaller dimension, subject to smaller size requirements from other criteria.

Explicit Density Control

Cell density in the initial mesh may be controlled with the parameters [MESH_SPACING](#)^[228] and [MESH_DENSITY](#)^[228]. [MESH_SPACING](#) controls the maximum cell dimension, while [MESH_DENSITY](#) is its inverse, controlling the minimum number of cells per unit distance. The mesh generator examines many competing effects controlling cell size, and accepts the smallest of these effects as the size of a cell. The [MESH_SPACING](#) and [MESH_DENSITY](#) controls therefore have effect only if they are the smallest of the competing influences, and a large spacing request is effectively ignored.

The [MESH_SPACING](#) and [MESH_DENSITY](#) controls can be used with the syntax of either defined parameters or boundary conditions.


Used as defined parameters, these controls may appear in the DEFINITIONS section or may be redefined in subsequent regional redefinition sections. In this use, the controls specify the volume or area mesh density over a region or over the entire domain.

For controlling the cell density along boundary segments, the controls [MESH_SPACING](#) and [MESH_DENSITY](#) may be used with the syntax of boundary conditions, and may appear wherever a boundary condition statement may appear. In this usage, the controls specify the cell spacing on the boundary curve or surface.

The value assigned to [MESH_SPACING](#) or [MESH_DENSITY](#) controls may be functions of spatial coordinate. In the example of the chapter "[Generating a Mesh](#)"^[56], we could write:

```
REGION 2 'blob'           { the embedded 'blob' }
  MESH_DENSITY = 50*EXP(-50*(x^2+y^2))
  START(1/2,0)
  ARC(CENTER=0,0) ANGLE=360
```

This results in the following initial mesh:

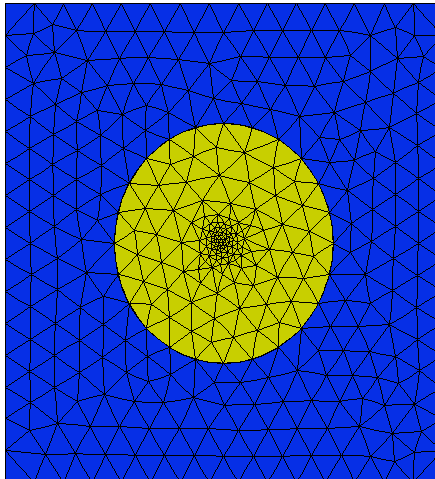

See also the example problems

["Samples | Usage | Mesh_Control | Mesh_Spacing.pde"](#)^[608]

["Samples | Usage | Mesh_Control | Mesh_Density.pde"](#)^[608]

Adaptive Mesh Refinement

Once the initial mesh is constructed, FlexPDE will continue to estimate the solution error, and will refine the mesh as necessary to meet the target accuracy. In time dependent problems, an adaptive refinement process will also be applied to the initial values of the variables, to refine the mesh where the variables undergo rapid change. Whereas cells created by this adaptive refinement process can later be re-merged, cells created by the initial explicit density controls are permanent, and cannot be un-refined.

Note: The adaptive refinement process relies on evaluation of the various sources and derivatives at discrete points within the existing mesh. Sources or other effects which are of extremely small extent, such as thin bands or point-like functions, may not be discernible in this discrete model. Any effects of small extent should be brought to the attention of the griddier by explicitly placing gridding features at these locations. Use [REGIONS](#) or [FEATURES](#)^[249] wherever something interesting is known to take place in the problem.

See also the [FRONT](#)^[258] and [RESOLVE](#)^[259] statements for additional controls.

2.13 Post-processing with FlexPDE

FlexPDE can be used to import both data and mesh structure from a previous run's [TRANSFER](#)^[227] and perform post-processing without gridding or solving any equations.

This is easily accomplished in a step-wise process:

- Make a copy of the script that generated the exported data. This will ensure that you have the same domain structure in your post-processing script as you did in the exporting script.
- Remove the [VARIABLES](#)^[209] and [EQUATIONS](#)^[232] sections. This is how FlexPDE will know not to try and solve any equations.
- Remove any boundary conditions stated in the [BOUNDARIES](#)^[241] section. Since the variables have been removed, any boundary condition statements will generate a parse error.
- Add the [TRANSFERMESH](#)^[227] statement in the [DEFINITIONS](#)^[214] section. This will read in the exported mesh and data.
- Add any new [PLOTS](#)^[261] that you desire. Now you can easily add plots that were not requested in the initial run, without having to rerun the original script. This is especially useful when you have a computation that takes a lot of time.

Note: The domain structure must exactly match that of the exporting problem.

Examples:

["Samples | Usage | Import-Export | Post_Processing.pde"](#)⁵⁹⁴

["Samples | Usage | Import-Export | 3D_Post_Processing.pde"](#)⁵⁸⁸

2.14 Exporting Data to Other Applications

FlexPDE supports several mechanisms for exporting data to other applications or visualization software.

The EXPORT Qualifier

The simplest method is to append the modifier "EXPORT" (or "PRINT") to a plot command. In this case, the plot data will be written to a text file in a predefined format suitable for importing to another FlexPDE problem using the TABLE input function. For ELEVATIONS or HISTORIES, the output will consist of a list of the times or X-, Y- or Z- coordinates of the data followed by a list of the data values (see the description of the TABLE input function). For 2D plots, a regular rectangular grid will be constructed, and the data written in TABLE input format.

The FORMAT String

The format of the text file created by the EXPORT modifier may be controlled by the inclusion of the modifier FORMAT "string".

If this modifier appears together with the EXPORT or PRINT modifier, then the file will contain one text line for each data point in the grid. The contents of the line will be exactly that specified by the **string**.

- All characters except "#" will be copied literally into the output line.
- "#" will be interpreted as an escape character, and various options will be selected by the character following the "#":
- #x, #y, #z and #t will print the value of the spatial coordinates or time of the data point;
- #1 through #9 will print the value of the corresponding element of the plot function list;
- #b will write a tab character;
- #r will cause the remainder of the format string to be repeated for each plot function in the plot list;
- #i inside a repeated string will print the value of the current element of the plot function list.

In all cases of FORMATTED export, a header will be written containing descriptive information about the origin of the file. This header will be delimited by "{" and "}". In 2D grids, table points which are outside the problem domain will also be bracketed by "{" and "}" and marked as "exterior". If these commenting forms are unacceptable to the importing application, then the data files must be manually edited before import.

TABLE Output

The [TABLE](#)^[223] plot command may also be used to generate tabular export. This command is identical to a CONTOUR command with an EXPORT qualifier, except that no graphical output is generated. The FORMAT "string" qualifier may also be used with TABLE output.

Transferring Data to another FlexPDE problem

FlexPDE supports the capability of direct transfer of data defined on the Finite Element mesh. The TRANSFER output function writes the current mesh structure and the requested data values to an ASCII text file. Another FlexPDE problem can read this file with the **TRANSFER** input function. The transferred data will be interpolated on the output mesh with the Finite Element basis of the creating problem. The TRANSFER input mesh need not be the same as the computation mesh, as long as it spans the necessary area.

The data format of the TRANSFER file is similar to the TECPLOT file described below. The TRANSFER file, however, maintains the quadratic or cubic basis of the computation, while the **TECPLOT** format is converted to linear basis. Since this is an ASCII text file, it can also be used for data transfer to user-written applications. The format of the TRANSFER file is described in the Problem Descriptor Reference chapter "[Transfer File Format](#)"^[278]

Output to Visualization Software

FlexPDE can export solution data to third-party visualization software. Data export is requested by what is syntactically a PLOT command, with the type of plot (such as CONTOUR) replaced by the format selector. Two formats are currently supported, CDF and TECPLOT.

CDF

CDF(arg1 [,arg2,...]) selects output in netCDF version 3 format. CDF stands for "common data format", and is supported by several software products including SlicerDicer (www.visualogic.com). Information about CDF, including a list of software packages supporting it, can be viewed at the website www.unidata.ucar.edu/packages/netcdf.

CDF data are constrained to be on a regular rectangular mesh, but in the case of irregular domains, parts of the rectangle can be absent. This regularity implies some loss of definition of material interfaces, so consider using a ZOOMed domain to resolve small features.

The CDF "plot" statement can be qualified by ZOOM or "ON SURFACE" modifiers, and its density can be controlled by the POINTS modifier. For global control of the grid size, use the statement "SELECT CDFGRID=n", which sets all dimensions to n. The default gridsize is 50.

Any number of arguments can be given, and all will be exported in the same file. The output file is by default "<problem>_<sequence>.cdf", but specific filenames can be selected with the FILE modifier.

TECPLOT

TECPLOT(arg1 [,arg2,...]) selects output in TecPlot format. TecPlot is a visualization package which supports finite element data format, and so preserves the material interfaces as defined in FlexPDE. No ZOOM or POINTS control can be imposed. The full computation mesh is exported, grouped by material number. TecPlot can selectively enable or disable these groups. Any number of arguments can be given, and all will be exported in the same file. The output file is by default "<problem>_<sequence>.dat", but specific filenames can be selected with the FILE modifier.

Information about TecPlot can be viewed at www.amtec.com .

VTK

VTK(arg1 [,arg2,...]) selects output in Visual Tool Kit format. VTK is a freely available library of visualization software, which is beginning to be used as the basis of many visualization packages. The file format can also be read by some visualization packages that are not based on VTK, such as VisIt (www.llnl.gov/visit). The format preserves the mesh structure of the finite element method, and so preserves the material interfaces as defined in FlexPDE. No ZOOM or POINTS control can be imposed. The full computation mesh is exported. Particular characteristics of the visualization system are outside the control of FlexPE. Any number of arguments can be given, and all will be exported in the same file. The output file is by default "<problem>_<sequence>.vtk", but specific filenames can be selected with the FILE modifier.

The VTK format supports quadratic finite element basis directly, but not cubic. To export from cubic-basis computations, use VTKLIN.

VTKLIN(arg1 [,arg2,...]) produces a VTK format file in which the native cells of the FlexPDE computation have been converted to a set of linear-basis finite element cells.

Information about VTK can be viewed at public.kitware.com/VTK/.

Examples:

[Samples](#) | [Usage](#) | [Import-Export](#) | [Export.pde](#)⁵⁹⁰

[Samples](#) | [Usage](#) | [Import-Export](#) | [Export_Format.pde](#)⁵⁹¹

[Samples](#) | [Usage](#) | [Import-Export](#) | [Export_History.pde](#)⁵⁹¹

[Samples](#) | [Usage](#) | [Import-Export](#) | [Transfer_Export.pde](#)⁵⁹⁹

[Samples](#) | [Usage](#) | [Import-Export](#) | [Transfer_Import.pde](#)⁵⁹⁹

[Samples](#) | [Usage](#) | [Import-Export](#) | [Table.pde](#)⁵⁹⁶

Note:

Reference to products from other suppliers does not constitute an endorsement by PDE Solutions Inc.

2.15 Importing Data from Other Applications

The [TABLE](#)^[222] facility can be used to import data from other applications or from manually created data lists.

Suppose that in our [example problem](#)^[60] we wish to define a thermal conductivity that varies with temperature (called "Phi" in the example script). We could simply define a temperature-dependent function for the conductivity. But if the dependency is derived from observation, there may be no simple analytic relationship. In this case, we can use a TABLE to describe the dependency.

A table file describing conductivity vs temperature might look like this:

```
{ Conductivity vs temperature }
Phi 6
1 2 10 22 67 101
Data
0.01 0.02 0.05 0.11 0.26 3.8
```

Supposing that we have named this file "conductivity.tbl", our script will simply include the following definition:

```
K = TABLE("conductivity.tbl")
```

Notice that within the table file, the name Phi is declared as the table coordinate. When FlexPDE reads the table file, this name is compared to the names of defined quantities in the script, and the connection is made between the data in the table and the value of "Phi" at any point in the computation where a value of "K" is required.

If the table file had defined the table coordinate as, say, "Temp", we could still use the table in our example by over-riding the table file definition with a new dependency coordinate:

```
K = TABLE("conductivity.tbl", Phi)
```

This statement would cause FlexPDE to ignore the name given in the file itself and associate the table coordinate with the local script value "Phi".

Other forms of TABLE command are available. See the Problem Descriptor Reference chapter ["Table Import Definitions"](#)^[222] for more information.

2.16 Using ARRAYS and MATRICES

FlexPDE includes expanded capabilities for using ARRAYS and MATRICES.

[ARRAYS](#)^[215] and [MATRICES](#)^[217] differ from other objects in FlexPDE, such as VARIABLES or VECTORS, in that no assumptions are made about associations between the ARRAY or MATRIX and the geometry or

mesh structure of the PDE model. ARRAYS and MATRICES are simply lists of numbers which can be defined, manipulated and accessed independently of any domain definition or coordinate geometry. Typically, an ARRAY is created and filled with data using one of the available declaration statements, e.g.,

```
A = array(1,2,3,4,5,6,7,8,9,10)
B = array for x(0 by 0.1 to 10) : sin(x)+1.1
```

New ARRAYS can be created by performing arithmetic operations on existing arrays:

```
C = exp(A)      { each element of C is the exponential of the corresponding element of
A }
D = C+A        { each element of D is the sum of the corresponding elements of C and A }
E = 100*B      { each element of E is 100 times the corresponding element of B }
```

Elements can be accessed individually by indexing operations:

```
E[12] = B[3]+9
```

ARRAYS can be used in PLOT statements:

```
ELEVATION (D) VS A
```

Similarly, MATRICES can be created and filled with data using one of the available declaration statements, e.g.,

```
M = MATRIX((1,2,3),(4,5,6),(7,8,9))
N = MATRIX FOR x(0 BY 0.1 TO 10)
      FOR y(0 BY 0.1 TO 10) : sin(x)*sin(y)+1.1
```

New ARRAYS or MATRICES can be created by performing *element-by-element* arithmetic operations on existing ARRAYS and MATRICES:

```
P = 1/M      { each element of matrix P is the reciprocal of the corresponding element of
M }
Q = P+M
```

The special operators ****** and **//** are defined for specifying conventional matrix-array arithmetic:

```
R = N**B     { R is an ARRAY representing the conventional matrix-array multiplication of B
by N }
S = B//N     { S is the solution of the equation N**S=B (i.e., S is the result of multiplying B
by the inverse of N) }
```

Elements of MATRICES can be accessed individually by indexing operations:

```
U = N[3,9]
```

ARRAYS and MATRICES may also be used to define domain boundaries. See "[Boundary Paths](#)"²⁴⁴ in the Problem Descriptor Reference.

All operations on ARRAYS and MATRICES are checked for compatible sizes, and incompatibilities will be reported as errors.

Note: You must remember that the FlexPDE script is not a procedural program. Objects in the script describe the dependencies of quantities, and are not "current state" records of values that can be explicitly modified by subsequent redefinition or looping.

Examples:

See the example folder "[Samples | Usage | Arrays+Matrices](#)"⁵³⁴

2.17 Solving Nonlinear Problems

FlexPDE automatically recognizes when a problem is nonlinear and modifies its strategy accordingly. The solution method used by FlexPDE is a modified Newton-Raphson iteration procedure. This is a "descent" method, which tries to fall down the gradient of an energy functional until minimum energy is achieved (i.e. the gradient of the functional goes to zero). If the functional is nearly quadratic, as it is in simple diffusion problems, then the method converges quadratically (the relative error is squared on each iteration). The default strategy implemented in FlexPDE is frequently sufficient to determine a solution without user intervention. But in cases of strong nonlinearities, it may be necessary for the user to help guide FlexPDE to a valid solution. There are several techniques that can be used to help the solution process.

Time-Dependent Problems

In nonlinear time-dependent problems, the default behavior is to take a single Newton step at each timestep, on the assumption that any nonlinearities will be sensed by the timestep controller, and that timestep adjustments will guarantee an accurate evolution of the system from the given initial conditions. In this mode, the derivatives of the solution with respect to the variables is computed once at the beginning of the timestep, and are not updated.

Steady-State Problems

In the case of nonlinear steady-state problems, the situation is somewhat more complicated. We are not guaranteed that the system will have a unique solution, and even if it does, we are not guaranteed that FlexPDE will be able to find it.

- **Start with a Good Initial Value**

Providing an initial value which is near the correct solution will aid enormously in finding a solution. Be particularly careful that the initial value matches the boundary conditions. If it does not, serious excursions may be excited in the trial solution, leading to solution difficulties.

- **Use STAGES to Gradually Activate the Nonlinear Terms**

You can use the staging facility of FlexPDE to gradually increase the strength of the nonlinear terms. Start with a linear or nearly linear system, and allow FlexPDE to find a solution which is consistent with the boundary conditions. Then use this solution as a starting point for a more strongly nonlinear system. By judicious use of staging, you can creep up on a solution to very nasty problems.

- **Use artificial diffusion to stabilize solutions**

Gibbs phenomena are observed in signal processing when a discontinuous signal is reconstructed from its Fourier components. The characteristic of this phenomenon is ringing, with overshoots and undershoots in the recovered signal. Similar phenomena can be observed in finite element models when a sharp transition is modeled with an insufficient density of mesh cells. In signal processing, the signal can be smoothed by use of a "window function". This is essentially a low-pass filter that removes the high frequency components of the signal. In partial differential equations, the diffusion operator $\text{Div}(\text{grad}(u))$ is a low-pass filter that can be used to smooth oscillations in the solution. See the Technical Note "[Smoothing Operators in PDEs](#)"^[356] for technical discussion of this operator. In brief, you can use a term $\text{eps} * \text{Div}(\text{Grad}(u))$ in a PDE to smooth oscillations of spatial extent D by setting $\text{eps} = D^2 / \pi^2$ in steady state or $\text{eps} = 2 * D * c / \pi$ in time dependence (where c is the signal propagation velocity). The term should also be scaled as necessary to provide dimensional consistency with the rest of the terms of the equation. Use of such a term merely limits the spatial frequency components of the solution to those which can be adequately resolved by the finite element mesh.

- **Use CHANGELIM to Control Modifications**

The selector [CHANGELIM](#)^[199] limits the amount by which any nodal value in a problem may be modified on each Newton-Raphson step. As in a one-dimensional Newton iteration, if the trial solution is near a local maximum of the functional, then shooting down the gradient will try to step an enormous distance to the next trial solution. FlexPDE applies a backtracking algorithm to try to find the step size of optimal residual reductions, but it also limits the size of each nodal change to be less than CHANGELIM times the average value of the variable. The default value for CHANGELIM is 0.5, but if the initial value (or any intermediate trial solution) is sufficiently far from the true solution, this value may allow wild excursions from which FlexPDE is unable to recover. Try cutting CHANGELIM to 0.1, or in severe cases even 0.01, to force FlexPDE to creep toward a valid solution. In combination with a reasonable initial value, even CHANGELIM=0.01 can converge in a surprisingly short time. Since CHANGELIM multiplies the RMS average value, not each local value, its effect disappears when a solution is reached, and quadratic final convergence is still achieved.

- **Watch Out for Negative Values**

FlexPDE uses piecewise polynomials to approximate the solution. In cases of rapid variation of the solution over a single cell, you will almost certainly see severe under-shoot in early stages. If you are assuming that the value of your variable will remain positive, don't. If your equations lose validity in the presence of negative values, perhaps you should recast the equations in terms of the logarithm of the variable. In this case, even though the logarithm may go negative, the implied value of your actual variable will remain positive.

- **Recast the Problem in a Time-Dependent Form**

Any steady-state problem can be viewed as the infinite-time limit of a time-dependent problem. Rewrite your PDE's to have a time derivative term which will push the value in the direction of decreasing deviation from solution of the steady-state PDE. (A good model to follow is the time-dependent diffusion equation $\text{DIV}(K * \text{GRAD}(U)) = \text{DT}(U)$. A negative value of the divergence indicates a local maximum in the solution, and results in driving the value downward.) In this case,

"time" is a fictitious variable analogous to the "iteration count" in the steady-state N-R iteration, but the time-dependent formulation allows the timestep controller to guide the evolution of the solution.

2.18 Using Multiple Processors

FlexPDE version 6 and later uses multi-threaded computation to support modern multi-core and multi-processor hardware configurations. Only shared-memory multi-processors are supported, not clusters.

Each opened problem runs in its own computation thread, and can use up to twenty-four additional computation threads. A single main thread controls the graphic interface and screen display.

Matrix construction, residual calculations, linear system solvers and plot mesh generation are all multi-threaded. Computation mesh generation and plot display functions are not, although graphics load is shared between the problem thread and the main graphics thread.

Individual Problem Control

Each individual script can declare the number of worker threads to be used in the computation:

SELECT THREADS = <number>

requests that <number> worker threads be used, in addition to the main graphics thread and the individual problem thread.

Setting the Default

The default number of worker threads can be changed in the [General Settings](#)^[28] tab of the [Preferences Window](#)^[28].

Command-Line Control

If you run FlexPDE from a command line and include the switch -T<number>, the default thread count will be set to <number>. For example, the command line

flexpde8 -T4 problem

will set the default to 4 threads and load the script file "problem.pde". The selected thread count will be written to the .ini file on conclusion of the flexpde session and become the default next time FlexPDE is run.

Speed Effects of Multiple Processors

There are many factors that will influence the timing of a multi-thread run.

- The dominant factor is the memory bandwidth. If the memory cannot keep up with the processor speed, then more threads will run slower due to the overhead of constructing and synchronizing threads and merging data.
- The size of the problem will also affect the speedup, because with a larger problem a smaller proportion of data can be held in cache memory. The memory bandwidth limitation will therefore be greater with a larger problem.

The following chart shows our experience with speeds in versions 5 and 6. These tests were run on a 4-core AMD Phenom with 667 MHz 128-bit memory. Notice that the Black_Oil problem is significantly faster in version 6, even though it is taking many more timesteps. This timestep count indicates that the timestep control in V6 is more pessimistic than V5. The speedup with V6 1 thread is partly due to the fact that graphic redraws are run in a separate thread in V6 but not in V5.

Notice that in this machine, the memory saturates at 3 threads, so that the fourth thread produces no significant speed improvement (and in fact may be slower).

Version	Threads	Black_Oil.pde		3D_FlowBox.pde
		CPU time	timesteps	CPU time
5	1	14:37	534	8:15
5	2	12:17	540	6:09
6	1	10:21	688	8:06
6	2	6:58	684	4:14
6	3	6:16	696	3:30
6	4	7:13	703	3:22

2.19 Running FlexPDE from the Command Line

When FlexPDE is run from a command line or as a subtask from another application, there are some command-line switches that can be used to control its behavior:

- R Run the file which is named on the command line. Do not enter edit mode.
- V View the file which is named on the command line. Do not enter edit mode.
- X Exit FlexPDE when the problem completes.
- M Run in "minimized" mode (reduced to an icon).
- Q Run "quietly". Combines -R -X -M.
- S Run "silently". -Q with all error reports suppressed. Also, no icon should appear in the system taskbar.
- T Set the default thread count. Append the number : -T6 will use six threads.

- L License FlexPDE. For Internet Key, append A for activate, R for release, then serial number : -LA668668886. For local or network dongle, append D or N followed by dongle ID : -LD2-2428250.
- I Report the computer specific ID for FlexPDE.
- NC Turn off consolidation of output.
- NM Turn off automatic import of previous mesh.
- NI Turn off loading and saving of preferences from .ini file.

For example, the command line

flexpde8 -R problem

will load and run the script file "problem.pde".

Command Line Parameters

Simple parameters can be set from the command line using -param name = value.

For example, the command line

flexpde8 -param k=1 problem

will load and run the script file "problem.pde" with the parameter definition of k=1 (overriding any definition of k in the script).

Note : On the Mac, the actual executable code is located inside of an application "bundle", which is simply a directory hierarchy that is hidden from the user in graphics mode. The complete path to the executable would be "FlexPDE8.app/Contents/MacOS/flexpde8". See the Apple developer website for more information about application bundles.

2.20 Running FlexPDE Without A Graphical Interface

Starting in version 6.30, there is a FlexPDE executable that does not use any graphical interface. This is necessary for users to run FlexPDE on systems that do not provide interactive graphics. The executable is suffixed with 'n' (for "no graphics") to distinguish it from the graphical version.

The graphics-less FlexPDE must be run from a command line. For example, the command line

flexpde8n problem

will load and run the script file "problem.pde".

The run can be interrupted by typing 'Q'. The user is then prompted whether to interrupt or not. Type 'Y' to complete the interrupt.

2.21 Importing DXF Files

FlexPDE supports the import of DXF files, allowing you to use AutoCAD to prepare your FlexPDE problem descriptor files.

To prepare the problem in AutoCAD, use the following rules:

- On layer 0, enter as text the entire body of the problem description, *excluding* the BOUNDARIES section.
- Use one layer for each region of the problem. Draw on each layer the boundaries pertaining to that region. Enter as text on each layer the necessary regional definitions for that region. For boundaries that are shared between regions, be sure that the points are recognizably the same (within $1e-6 \cdot \text{domain size}$). Snap-to-grid is advised.
- Enter as text the necessary boundary conditions. Place the text so that the insertion point is near the boundary to which the boundary condition applies.
- Export the drawing as a DXF file in R14 format.

To run the problem in FlexPDE, do the following:

- Select the "Import->DXF 2D" item from the "File" menu.
- Select the DXF file to import and click "open".
- Enter a minimum merge distance. This is the distance at which two points will be considered the same, and merged.
- FlexPDE will read the DXF file and translate it into a corresponding .PDE file. This file will be displayed in the FlexPDE editor and also written to disk as a .PDE file for later use.
- Examine the translated file for errors, then proceed as for a standard .PDE file.

You may choose to modify the translated .PDE file, or to continue to update the .DXF file, whichever is most convenient for your needs.

Examples:

See the sample problem "Samples | Usage | Import-Export | AcadSample.dxf" and its associated drawing file AcadSample.dwg.

2.22 Importing OBJ Files

FlexPDE supports the import of 3D bounding surface meshes in the OBJ file format, allowing you to use a CAD program like Rhino to prepare your 3D model. The [EXTRUSION](#)^[238] section will be absent and the [BOUNDARIES](#)^[241] section will contain the one statement to import the OBJ file :

BOUNDARIES

IMPORT OBJ 'filename'

To prepare the OBJ mesh, use the following rules :

- Build a closed mesh of your object and name it. FlexPDE must have a closed mesh - no open meshes. Do not use spaces in the name.
- Extract any mesh faces to which you would like to apply a boundary condition. Group and name them. Groups intended to have different boundary conditions must have different names. Do not use spaces in the name.
- Export the mesh in OBJ format without vertex normals, without mesh texture coordinates, and without materials. Also be sure to export object names as OBJ names, and group names as OBJ groups.

To have FlexPDE automatically generate a basic starting script file to import the OBJ mesh, do the following :

- Select the "Import->OBJ 3D" item from the "File" menu. Browse to the desired OBJ file and click "Open". (Alternatively, you may use the "Open" menu item and switch the file filter to "OBJ"). This will create a basic script file with the appropriate sections for the import process. This step is optional and may be skipped once you have familiarity with the script grammar for importing OBJ files.
- Add the sections [VARIABLES](#)^[209], [EQUATIONS](#)^[232], and [PLOTS](#)^[261].
- Modify the [MATERIALS](#)^[229] and [BOUNDARY CONDITIONS](#)^[230] sections as needed.

Note : FlexPDE will use flat-sided tetrahedra when creating computation meshes from imported OBJ surface meshes. It will not curve the sides as in self constructed surface meshes.

Material Properties and Boundary Conditions

Since there are no [REGIONS](#)^[245] or [boundary paths](#)^[241] stated in the script when you import an OBJ mesh file, we have provided two new sections for defining material property sets and boundary condition sets. They are the [MATERIALS](#)^[229] and [BOUNDARY CONDITIONS](#)^[230] sections.

In a normal script these definitions can be used in the normal flow with USE MATERIAL "name" and USE BC "name". In order to use them in your OBJ import you have to label and group some items in the OBJ file (usually before exporting from the CAD program, although it can be reopened and patched up by hand if needed).

In order to apply material parameters to a given object, simply select the complete bounding mesh of that object and name it. That name will be used to apply a parameter set definition. If you name the object "box" then a MATERIAL named "box" must be present in the FlexPDE script.

In order to apply a BC to a set of mesh cells (like the side of a box) you will need to extract those cells from the closed mesh, group them, and name the group. The group name will be used to apply a BC set

definition. If you name the group "right side" then a BOUNDARY CONDITION named "right side" must be present in the FlexPDE script.

OBJ Construction Tips

Try and get a uniform mesh created in the CAD program. It is easy to get a mesh with large long skinny cells very close to other small cells. FlexPDE does a pre-process pass where it will split cells in order to make them more uniform, but it is better to try and get uniformity from the CAD mesh generator first.

FlexPDE will accept triangular and square cells from the OBJ mesh, but it is better to make them triangular in the CAD program before exporting the OBJ file. FlexPDE will divide a square cell into four cells, whereas in the CAD program you can divide them into two. The reason for FlexPDE dividing into four is related to matching up common cell faces and their normals on faces shared between objects.

The normals of the cells will need to be directed outward. This is the default for most CAD programs when creating a mesh from closed objects. If you make an object from pieces, you will need to make sure the normals point outward.

Creating Void Volumes

Create two objects one inside the other. Invert the normals of the inside object. Name them as the same object.

Examples:

[Samples | Usage | CAD_Import | cube_OBJimport.pde](#)^[539] - the most basic usage of the OBJ import.

[Samples | Usage | CAD_Import | cube2_OBJimport.pde](#)^[540] - two objects with a shared face.

[Samples | Usage | CAD_Import | helix_OBJimport.pde](#)^[543] - a stress model of a coil.

[Samples | Usage | CAD_Import | boxinbox_OBJimport.pde](#)^[538] - void volume.

[Samples | Usage | CAD_Import | horn_OBJimport.pde](#)^[545] - random crazy shape.

See all the other examples in the "Samples | Usage | CAD_Import" directory.

Please see the supplementary YouTube videos on OBJ mesh construction and import :

www.youtube.com/playlist?list=PLfkFm0BfPLmw_hxfw7KSBCt-xqaxyaYB0

2.23 Getting Help

We're here to help.

Of course, we would rather answer questions about how to use FlexPDE than about how to do the mathematical formulation of your problem.


FlexPDE is applicable to a wide range of problems, and we cannot be experts in all of them.

If you have what appears to be a malfunction of FlexPDE, or if it is doing something you don't understand or seems wrong,

- Send us an Email describing the problem.
- Attach a descriptor file that demonstrates the difficulty, and explain clearly what you think is wrong.
- The more concise you can make your question, the more promptly we will be able to answer.
- **Tell us what version of FlexPDE you are using;** your problem may have been solved in a later release.

Send your enquiry to support@pdesolutions.com and we will answer as soon as we can, usually within a day or two.

Part



**Problem
Descriptor
Reference**

3 Problem Descriptor Reference

This section presents a detailed description of the components of FlexPDE problem descriptors. No attempt is made here to give tutorial explanations of the use of these components. See Part I [Getting Started](#)^[2] for user interface information and Part II [User Guide](#)^[46] for tutorial guidance in the use of FlexPDE.

3.1 Introduction

FlexPDE is a script-driven system. It reads a description of the equations, domain, auxiliary definitions and graphical output requests from a text file referred to as a "problem descriptor" or "script".

The problem descriptor file can be created either with the editor facility in FlexPDE, or with any other ASCII text editor. A word processor can be used only if there is an optional "pure text" output, in which formatting codes have been stripped from the file.

Problem descriptors use an easy to learn natural language originally developed by Robert G. Nelson for use in the PDS2 system at Lawrence Livermore National Lab and later in the PDEase2 system from Macsyma, Inc. The language is also described in Dr. Gunnar Backstrom's book, "Simple Fields of Physics by Finite Element Analysis".

As FlexPDE has evolved, a number of extensions have been added to extend its processing capabilities. The language as currently implemented in FlexPDE is described in this document.

While similar in some ways to a computer programming language, FlexPDE scripting language is more natural, and is oriented to the description of PDE systems. Most intermediate level college students, engineers, and scientists who have had at least an introductory course in partial differential equations can quickly master the language well enough to prepare simple problem descriptor files and begin solving problems of their own devising.

The FlexPDE problem descriptor language can be viewed as a shorthand language for creating Finite Element models. The statements of the descriptor provide the information necessary for FlexPDE to assemble a numerical process to solve the problem.

It is important to understand that the language of FlexPDE problem descriptors is not a *procedural* one. The user describes how the various components of the system relate to one another. He does *not* describe a sequence of steps to be followed in forming the solution, as would be done in a procedural programming language such as C or FORTRAN. Based on the relations between problem elements, FlexPDE decides on the sequence of steps needed in finding the solution.

FlexPDE makes various assumptions about the elements of the problem descriptor.

For example, if a variable is named in the VARIABLES section, it is assumed that:

- the variable is a scalar or vector field which takes on values over the domain of the problem,

- it will be approximated by a finite element interpolation between the nodes of a computation mesh,
- the values of the variable are continuous over the domain, and
- a partial differential equation will be defined describing the behavior of the variable.

If a definition appears in the DEFINITIONS section, it is assumed that the named quantity

- is ancillary to the PDE system,
- may be discontinuous over the domain,
- does not (necessarily) obey any PDE.

In the chapters that follow, we describe in detail the rules for constructing problem descriptors.

3.1.1 Preparing a Descriptor File

Problem descriptor files for use with FlexPDE are most easily prepared and edited using FlexPDE's built-in editor, which uses syntax highlighting to enhance the readability of the user's script. Recognized grammatical keywords are displayed in red, comments in green, and text strings in blue.

To begin a new descriptor file, simply click "File | New Script" from the FlexPDE main menu bar.

To edit an existing descriptor, click "File | Open Script" instead.


A convenient way to create a new descriptor is to start with a copy of an existing descriptor for a similar problem and to modify it to suit the new problem conditions.

FlexPDE's built-in editor is similar to the Windows Notepad editor and produces a pure ASCII text file without any imbedded formatting characters. Descriptor files can also be prepared using any ASCII text editor or any editor capable of exporting a pure ASCII text file. Descriptor files prepared with word processors that embed formatting characters in the text will cause FlexPDE to report parsing errors.

3.1.2 File Names and Extensions

A problem descriptor file can have any name which is consistent with the host operating system. Even though permitted by some operating systems, names with imbedded blank characters should be avoided. It is best to choose a name that is descriptive of the problem.

Problem descriptor files must have the extension '.pde'. When saving a file using the built-in editor, FlexPDE will automatically add the extension '.pde'. When using a separate or off-line editor, be sure to give the file a '.pde' extension instead of the default extension.

Windows operating systems by default hide the file name extension. FlexPDE script files can still be recognized by the  icon. Alternatively, Windows can be configured to display file extensions.

See also ["FlexPDE Working Files"](#).⁴

3.1.3 Problem Descriptor Structure

Problem descriptors organize a problem by breaking it into sections of related items.

Each section is headed by a proper name followed by one or more statements which define the problem.

The permitted section names are:

TITLE	- defines the problem title
SELECT	- sets various options and controls
COORDINATES	- defines the coordinate system
VARIABLES	- names the problem variables
DEFINITIONS	- defines ancillary quantities and parameters
MATERIALS	- defines sets of parameters that can be applied by name
BOUNDARY CONDITIONS	- defines sets of boundary conditions that can be applied by name
INITIAL VALUES	- sets initial values of variables
EQUATIONS	- defines the partial differential equation system
CONSTRAINTS	- defines optional integral constraints
EXTRUSION	- extends the domain to three dimensions
BOUNDARIES	- describes the 2D or projected 3D domain
RESOLVE	- optionally supplements mesh refinement control
FRONT	- optionally supplements mesh refinement control for advancing fronts
TIME	- defines the time domain
MONITORS	- selects interim graphic display
PLOTS	- selects final graphic display
HISTORIES	- selects time-summary displays
END	- identifies the end of the descriptor

The number of sections used in a particular problem descriptor can vary, subject only to the requirement that all files must contain a BOUNDARIES section and an END section.

While some flexibility exists in the placement of these sections, it is suggested that the user adhere to the ordering described above.

DEFINITIONS and SELECT can appear more than once.

Because descriptors are dynamically processed from top to bottom, they cannot contain forward references. Definitions may refer to variables and other defined names, provided these variables and names have been defined in a preceding section or previously in the same section.

For detailed description of these sections, see ["The Sections of a Descriptor"](#)^[196].

3.1.4 Problem Descriptor Format

While not strictly required, we suggest use of the following indentation pattern for all problem descriptors:

```
section 1
  statement
section 2
  statement 1
  statement 2
  *
  *
section 3
  statement 1
  statement 2
  *
  *
```

This format is easy for both the person preparing the file and for others to read and understand.

3.1.5 Case Sensitivity

With the exception of quoted character strings, which are reproduced exactly as they appear in a problem descriptor, words, characters and other text items used in problem descriptors are NOT case sensitive.

Upper case letters and lower case letters are equivalent.

The text items `variables`, `VARIABLES`, `Variables` and mixed case text like `VaRiAbles` are all equivalent.

Judicious use of capitalization can improve the readability of the script.

3.1.6 "Include" Files

FlexPDE supports the C-language mechanism of including external files in the problem descriptor. The statement

```
#INCLUDE "filename"
```

will cause the named file to be included bodily in the descriptor in place of the `#INCLUDE "filename"` statement.

If the file does not reside in the same folder as the descriptor, the full path to the file must be given.

An include statement can be placed anywhere in the descriptor, but for readability it should be placed on its own line.

This facility can be used to insert common definition groups in several descriptors.

Note: Although FlexPDE is not case sensitive, the operating system which is being asked for the included file may be case sensitive. The quoted file name must conform to the usage of the operating system.

3.1.7 A Simple Example

As a preview example to give the flavor of a FlexPDE descriptor file, we will construct a model of heatflow on a square domain.

The heatflow equation is

$$\text{div}(K*\text{grad}(\text{Temp})) + \text{Source} = 0$$

If K is constant and Source = 4*K, the heat equation will be satisfied by the function

$$\text{Temp} = \text{Const} - x^2 - y^2 .$$

We define a square region of material of conductivity K = 1, with a uniform heat source of 4 heat units per unit area.

We further specify the boundary value

$$\text{Temp} = 1 - x^2 - y^2$$

Since we know the analytic solution, we can compare the accuracy of the FlexPDE solution.

The text of the descriptor is as follows:

```
{ *****
SIMPLE.PDE
  This sample demonstrates the simplest application of FlexPDE to
  heatflow problems.
  *****
}

TITLE "Simple Heatflow"

VARIABLES
  temp          { Identify "Temp" as the system variable }
```

DEFINITIONS

```

k = 1           { declare and define the conductivity }
source = 4      { declare and define the source }
texact = 1-x^2-y^2 { exact solution for reference }

```

INITIAL VALUES

```

temp = 0      { unimportant in linear steady-state problems,
               but necessary for time-dependent or nonlinear
               systems }

```

EQUATIONS { define the heatflow equation :}

```

div(k*grad(temp)) + source = 0

```

BOUNDARIES { define the problem domain: }

```

REGION 1      { ... only one region }
START(-1,-1) { specify the starting point }
               { specify Dirichlet boundary at exact solution: }
VALUE(temp)=texact
LINE TO (1,-1) { walk the boundary }
TO (1,1)
TO (-1,1)
TO CLOSE      { bring boundary back to starting point }

```

MONITORS

```

CONTOUR(temp) { show the Temperature during solution }

```

PLOTS { write these plots to disk at completion: }

```

CONTOUR(temp) { show the solution }
SURFACE(temp) { show a surface plot as well }
               { display the solution error :}
CONTOUR(temp-texact) AS "Error"
               { show a vector flow plot: }
VECTOR(-dx(temp),-dy(temp)) AS "Heat Flow"

```

```

END           { end of descriptor file }

```

3.2 The Elements of a Descriptor

The problem descriptors or 'scripts' which describe the characteristics of a problem to FlexPDE are made up of a number of basic elements, such as names and symbols, reserved words, numeric constants, etc. These elements are described in the sections that follow.

3.2.1 Comments

Problem descriptors can be annotated by adding comments.

Multi-line comments can be placed anywhere in the file. Multi-line comments are formed by enclosing the desired comments in either curly brackets { and } or the paired symbols /* and */. Comments can be

nested, but comments that begin with a curly bracket must end with a curly bracket and comments that begin with '/*' must end with '*/'.

Example:

```
{ this is a comment
so is this.
}
```

End-of-line comments are introduced by the exclamation mark !. End-of-line comments extend from the ! to the end of the line on which they occur. Placing the line comment symbol ! at the beginning of a line effectively removes the whole line from the active portion of the problem descriptor, in a manner similar to 'rem' at the beginning of a line in a DOS batch file or '//' in C++.

Example:

```
! this is a comment
this is not
```

Comments can be used liberally during script development to temporarily remove lines from a problem descriptor. This aids in localizing errors or focusing on specific aspects of a problem.

3.2.2 Reserved Words and Symbols

FlexPDE assigns specific meanings and uses to a number of predefined 'reserved' words and symbols in descriptors.

Except when they are included as part of a comment or a literal string, these words may only be used for their assigned purpose.

The following parser keywords are highlighted by the FlexPDE editor:

ACUMESH	ALIAS	ALIGN_MESH
AND	ANGLE	ANTIPERIODIC
ARC	ARRAY	AS
ASK_USER	AT	
BATCH	BC	BEVEL
BLOCK	BOUNDARIES	BOUNDARY
BY	BYLAYER	BYSURFACE
CDF	CELL_SIZE	CENTER
CLOSE	COMPLEX	CONDITIONS
CONST	CONSTRAINTS	CONTACT
CONTOUR	COORDINATES	CRITICAL
CYLINDER		
DEBUG	DEFINITIONS	DEGREES
DELAY	DELTAT	DIR
DIRECTION	DISTANCE	

ELEVATION	ELSE	END
ENDLABEL	ENDREPEAT	EQUATION
EQUATIONS	EULERIAN	EVAL
EXCLUDE	EXPORT	EXTRUSION
FEATURE	FILE	FILLET
FINALLY	FINISH	FIXED
FOR	FORMAT	FRAME
FREEZE	FROM	FRONT
GLOBAL	GLOBALMAX	GLOBALMAX_X
GLOBALMAX_Y	GLOBALMAX_Z	GLOBALMIN
GLOBALMIN_X	GLOBALMIN_Y	GLOBALMIN_Z
GRID		
HALT	HISTORIES	HISTORY
IF	INACTIVE	INITIAL
JUMP		
LABEL	LAGRANGIAN	LAMBDA
LAYER	LAYERED	LAYERS
LEVELS	LIMIT	LIMITED
LINE	LIST	LOAD
LOOKUP		
MAP	MATERIALS	MATRIX
MAXIMIZE	MERGE	MESH_DENSITY
MESH_SPACING	MINIMIZE	MODE
MODE_SUMMARY	MONITORS	MOVE
NATURAL	NEUMANN	NOBC
NODE		NOT
OBJ	OFF	ON
ONLY	OR	
PERIODIC	PLANE	PLOTS
POINT	POINT_LOAD	POINT_NATURAL
POINT_VALUE	POINT_VELOCITY	POINTS
PRINT	PRINTONLY	
RADIANS	RADIUS	RANGE
REFINEOBJ	REGION	REGIONS
REPEAT	REPORT	RESOLVE
ROTATE		
SCALAR	SELECT	SIZEOF
SMOOTH	SPHERE	SPLINE
SPLINETABLE	SPLINETABLEDEF	STAGE
STAGED	START	SUM
SUMMARY	SURFACE	

TABLE	TABLEDEF	TABULATE
TECPLOT	TENSOR	THEN
TIME	TITLE	TO
TRANSFER	TRANSFER6	TRANSFERMESH
TRANSFERMESHTIME		
UNORMAL	USE	
VAL	VALUE	VALUES
VARIABLES	VECTOR	VELOCITY
VERSUS	VIEWANGLE	VIEWPOINT
VOID	VOLJ	VS
VTK	VTKLIN	
WINDOW		
ZOOM		

The following names of built-in functions and identifiers are not recognized by the FlexPDE editor's syntax highlighter, but may be used only for their assigned purpose:

ABS	AINTEGRAL	ARCCOS
ARCSIN	ARCTAN	AREA_INTEGRAL
ATAN2	ATAN2V6	
BESSI	BESSJ	BESSK
BESSY	BINTEGRAL	
CARG	CEXP	CLOG
CONJ	COS	COSH
CROSS	CURL	
DEL2	DIFF	DIV
DOT		
ENDTIME	ERF	ERFC
EXPINT	EXP	
FEATURE_INDUCTION	FIT	
GAMMAF	GLOBALMAX	GLOBALMAX_X
GLOBALMAX_Y	GLOBALMAX_Z	GLOBALMIN
GLOBALMIN_X	GLOBALMIN_Y	GLOBALMIN_Z
GRAD		
IMAG	INTEGRAL	INTEGRATE
JACOBIAN		
LINE_INTEGRAL	LN	LOG10
LUMP		

MAGNITUDE MOD	MAX	MIN
NORMAL		
PARTS	PASSIVE	PI
RAMP	RANDOM	REAL
SAVE SINH SQRT	SIGN SINTEGRAL SURF_INTEGRAL	SIN SPACE_ERROR SWAGE
TAN TIME_ERROR TIME_MIN TIMEMIN	TANGENTIAL TIME_INTEGRAL TIMEMAX TIMEMIN_T	TANH TIME_MAX TIMEMAX_T TINTEGRAL
UPULSE USTEP	UPWIND	URAMP
VINTEGRAL	VOL_INTEGRAL	
XBOUNDARY XYCOMP YCOMP YZCOMP ZXCOMP	XCOMP XZCOMP YXCOMP ZBOUNDARY ZYCOMP	XXCOMP YBOUNDARY YYCOMP ZCOMP ZZCOMP

3.2.3 Separators

White Space

Spaces, tabs, and new lines, frequently referred to as "white space", are treated as separators and may be used freely in problem descriptors to increase readability. Multiple white spaces are treated by FlexPDE as a single white space.

Commas

Commas are used to separate items in a list, and should be used only where explicitly required by the descriptor syntax.

Semicolons

Semicolons are not significant in the FlexPDE grammar. They are treated as equivalent to commas.

3.2.4 Literal Strings

Literal strings are used in problem descriptors to provide optional user defined labels, which will appear on softcopy and hardcopy outputs.

The label that results from a literal string is reproduced on the output exactly (including case) as entered in the corresponding literal string.

Literal strings are formed by enclosing the desired label in either single or double quote marks . Literal strings that begin with a double quote mark must end in a double quote mark, and literal strings that begin with a single quote mark must end in a single quote mark.

A literal string may consist of any combination of alphanumeric characters, separators, reserved words, and/or symbols including quote marks, provided only that strings that begin with a double quote mark may contain only single quote marks and strings that begin with a single quote mark may contain only double quote marks.

Example:

TITLE "This is a literal 'string' used as a problem title"

3.2.5 Numeric Constants

Integers

Integers must be of the form XXXXXX where X is any decimal digit from 0 to 9. Integer constants can contain up to 9 digits.

Decimal Numbers

Decimal numbers must be of the form XXXXX.XXX where X is any decimal digit from 0 to 9 and '.' is the decimal separator. Decimal numbers must not include commas ','. Using the European convention of a comma ',' as a decimal separator will result in an error. Commas are reserved as item separators.

Decimal numbers may include zero to nine digits to the left of the decimal separator and up to a total of 308 digits total. FlexPDE considers only the first fifteen digits as significant.

Engineering Notation Numbers

Engineering notation numbers must be of the form XXXXXEsYYY where X is any digit from 0 to 9 or the decimal separator '.', Y is any digit from 0 to 9, E is the exponent separator, and s is an optional sign operator. Engineering notation numbers must not include commas ','. Using the European convention of a comma ',' as a decimal separator will result in an error. Commas are reserved as item separators. The number to the left of the exponent separator is treated as a decimal number and the number to the right of the exponent separator is treated as an integer and may not contain a decimal separator or more than 3 digits. The range of permitted engineering notation numbers is 1e-307 to 1e308.

3.2.6 Built-in Functions

Functions and Arguments

All function references must include at least one argument. Arguments can be either numerical constants or expressions that evaluate to numerical values. The following functions are supported in problem descriptors:

3.2.6.1 Analytic Functions

The following analytic functions are supported by FlexPDE:

<u>Function</u>	<u>Comments</u>
ABS(x)	Absolute value
ARCCOS(x)	Inverse cosine (returns radians)
ARCSIN(x)	Inverse sine (returns radians)
ARCTAN(x)	Inverse tangent (returns radians)
ATAN2(y,x)	Arctan(y/x) with numerically safe implementation*
ATAN2V6(y,x)	Arctan(y/x) with numerically safe implementation*
BESSI(order,x)	Modified Bessel function I for real x
BESSJ(order,x)	Bessel Function J
BESSK(order,x)	Modified Bessel function K for real x
BESSY(order,x)	Bessel Function Y
COS(x)	Cosine of x (angle in radians)**
COSH(x)	Hyperbolic cosine of x (angle in radians)**
COTH(x)	Hyperbolic cotangent of x (angle in radians)**
CSCH(x)	Hyperbolic cosecant of x (angle in radians)**
ERF(x)	Error Function
ERFC(x)	Complementary Error Function
EXP(x)	Exponential function
EXPINT(x)	Exponential Integral $Ei(x)$ for real $x > 0$ ***
EXPINT(n,x)	Exponential Integral $En(x)$ for $n \geq 0$, real $x > 0$ ***
GAMMAF(x)	Gamma function for real $x > 0$
GAMMAF(a,x)	Incomplete gamma function for real $a > 0$, $x > 0$
LOG10(x)	Base-10 logarithm
LN(x)	Natural logarithm
SECH(x)	Hyperbolic secant of x (angle in radians)**
SIN(x)	Sine of x (angle in radians)**
SINH(x)	Hyperbolic sine of x (angle in radians)**
SQRT(x)	Square Root
TAN(x)	Tangent of x (angle in radians)**
TANH(x)	Hyperbolic tangent

* Note that in version 7 the definition has changed to use the standard range of $-\pi$ to π . *ATAN2V6* is provided for compatibility with old behavior.

** If working with degrees, use *TORADIANS(x)* to convert arguments from degrees to radians.

*** as defined in Abramowitz & Stegun, "Handbook of Mathematical Functions".

Examples:

[Samples | Usage | Functions | Standard_Functions.pde](#)^[578]

3.2.6.2 Non-Analytic Functions

The following non-analytic functions are supported in FlexPDE:

CEILING(expression, maximum, delta)

Alternative to the MIN function that has a continuous derivative.

Returns the minimum value of expression and maximum with a transition of width delta.

See [Samples | Usage | Functions | Floor_Ceiling.pde](#)^[572]

EDGE_DISTANCE(boundary_name)

Returns the distance traveled by traversing named boundary path boundary_name.

See [Samples | Usage | Misc | Edge_Distance.pde](#)^[614]

FLOOR(expression, minimum, delta)

Alternative to the MAX function that has a continuous derivative.

Returns the maximum value of expression and minimum with a transition of width delta.

See [Samples | Usage | Functions | Floor_Ceiling.pde](#)^[572]

GLOBALMAX(arg)

GLOBALMAX(arg, region_name)

GLOBALMAX(arg, region_name, layer_name)

With one argument GLOBALMAX is equal to the largest value of the argument over the problem domain. The search can be restricted to a specific region and layer using the second two arguments.

GLOBALMAX is tabulated, and is re-evaluated only when components of the argument change.

See [Samples | Usage | Functions | Globalmax.pde](#)^[576] and [Samples | Usage | Functions | Globalmax_3D.pde](#)^[577]

GLOBALMAX_X(arg)

GLOBALMAX_Y(arg)

GLOBALMAX_Z(arg)

Returns the specified coordinate of the associated GLOBALMAX. Global searches are tabulated by argument expression, and repeated calls to GLOBALMAX and its related coordinates do not cause repeated evaluation.

GLOBALMIN(arg)
GLOBALMIN(arg, region_name)
GLOBALMIN(arg, region_name, layer_name)

With one argument GLOBALMIN is equal to the smallest value of the argument over the problem domain. The search can be restricted to a specific region and layer using the second two arguments. GLOBALMIN is tabulated, and is re-evaluated only when components of the argument change.

GLOBALMIN_X(arg)
GLOBALMIN_Y(arg)
GLOBALMIN_Z(arg)

Returns the specified coordinate of the associated GLOBALMIN. Global searches are tabulated by argument expression, and repeated calls to GLOBALMIN and its related coordinates do not cause repeated evaluation.

MAX(arg1,arg2)

The maximum function requires two arguments. MAX is evaluated on a point by point basis and is equal to the larger of the two arguments at each point.

MIN(arg1,arg2)

The minimum function requires two arguments. MIN is evaluated on a point by point basis and is equal to the lessor of the two arguments at each point.

MOD(arg1,arg2)

The modulo function requires two arguments. MOD is evaluated on a point by point basis and is equal to the remainder of (arg1/arg2) at each point. This is a direct implementation of the C function `fmod(arg1,arg2)` : "Computes the floating-point remainder of the division operation $\text{arg1}/\text{arg2}$. The floating-point remainder of the division operation $\text{arg1}/\text{arg2}$ calculated by this function is exactly the value $\text{arg1} - n*\text{arg2}$, where n is $\text{arg1}/\text{arg2}$ with its fractional part truncated. The returned value has the same sign as arg1 and is less or equal to arg2 in magnitude."

RANDOM(arg)

The random function requires one argument. The result is a pseudo-random number uniformly distributed in (0,arg). The only reasonable application of the RANDOM function is in initial values. Use in other contexts will probably result in convergence failure.

ROUND(arg)

The round function requires one argument. The result is an integer following standard rounding behavior : e.g. 1.49 rounds down to 1, 1.5 rounds up to 2.

SIGN(arg)

The sign function requires one argument. SIGN is equal to 1 if the argument is positive and -1 if the argument is negative.

SPACE_ERROR()
SPACE_ERROR(variable)

The space error function returns the average spatial error over all variables. If a variable name is given, it returns the spatial error for the named variable only. The return is a field value.

TIME_ERROR()
TIME_ERROR(variable)

The time error function returns the average time error over all variables. If a variable name is given, it returns the time error for the named variable only. The return is a scalar value.

TIMEMAX(arg)

The time maximum function requires one argument. TIMEMAX is equal to the largest value of the argument over the time span of the problem. TIMEMAX is tabulated, and is re-evaluated only when components of the argument change.

TIMEMAX_T(arg)

Returns the time at which the associated TIMEMAX of the argument occurs. Time searches are tabulated by argument expression, and repeated calls to TIMEMAX and its related times do not cause repeated evaluation.

TIMEMIN(arg)

The time minimum function requires one argument. TIMEMIN is equal to the smallest value of the argument over the time span of the problem. TIMEMIN is tabulated, and is re-evaluated only when components of the argument change.

TIMEMIN_T(arg)

Returns the time at which the associated TIMEMIN of the argument occurs. Time searches are tabulated by argument expression, and repeated calls to TIMEMIN and its related times do not cause repeated evaluation.

3.2.6.3 Unit Functions

The following unit-valued functions are supported in FlexPDE:

USTEP(arg)

The unit step function requires one argument. USTEP is 1 where the argument is positive and 0 where the argument is negative. For example, USTEP($x-x_0$) is a step function at $x=x_0$.

UPULSE(arg1,arg2)

The unit pulse function requires two arguments. UPULSE is 1 where arg1 is positive and arg2 is negative and 0 everywhere else. UPULSE($t-t_0$, $t-t_1$) is a pulse from t_0 to t_1 if $t_1 > t_0$. [Note: because instantaneous switches cause serious trouble in time dependent problems, the UPULSE function automatically ramps the rise and fall over 1% of the total pulse width.]

URAMP(arg1,arg2)

The unit ramp function requires two arguments. URAMP is like UPULSE, except it builds a ramp instead of a rectangle. URAMP is 1 where arg1 and arg2 are both positive, linearly interpolated between 0 and 1 when arg1 is positive and arg2 is negative, and 0 everywhere else.

Examples:

[Samples | Usage | Unit Functions.pde](#)^[582]

3.2.6.4 String Functions

FlexPDE provides support for dynamically constructing text strings.

\$number (i.e. <dollar> number)

This function returns a text string representing the integer value of **number**. **number** may be a literal value, a name or a parenthesized expression. If **number** has integral value, the string will have integer format. Otherwise, the string will be formatted as a real number with a default length of 6 characters.

\$(width)number

This form acts as the form above, except that the string size will be width.

These functions may be used in conjunction with the concatenation [operator "+"](#)^[190] to build boundary or region names or plot labels. For example

```
REPEAT i=1 to 4
  START "LOOP"+$i (x,y)
  { path_info ... }
ENDREPEAT
```

This is equivalent to

```
START "LOOP1" (x,y) <path_info> ...
START "LOOP2" (x,y) <path_info> ...
START "LOOP3" (x,y) <path_info> ...
START "LOOP4" (x,y) <path_info> ...
```

Example:

See ["Samples | Usage | Misc | Repeat.pde"](#)^[621]

3.2.6.5 The FIT Function

The following two forms may be used to compute a finite-element interpolation of an arbitrary argument:

result = FIT(expression)

computes a Finite Element fit of the given expression using the current computational mesh and basis. Nodal values are computed to return the correct integral over each mesh cell.

result = FIT(expression, weight)

as with FIT(expression), but with a smoothing diffusion with coefficient equal to **weight** (try 0.1 or 1.0, and modify to suit).

weight may be an arbitrary expression, involving spatial coordinates, time, or variables of the computation. In this way it can be used to selectively smooth portions of the mesh. The value of **weight** has a well-defined meaning: it is the spatial wavelength over which variations are damped: spatial variations with wavelength much smaller than **weight** will be smoothed, while spatial variations with wavelength much greater than **weight** will be relatively unmodified.

Note: FIT() builds a continuous representation of the data across the entire domain, and cannot preserve discontinuities in the fitted data. In some cases, multiplying the data by an appropriate material parameter can result in a continuous function appropriate for fitting. An exception to this rule is in the case of CONTACT boundaries, where the mesh nodes are duplicated, and discontinuities can be preserved in FIT functions.

FIT() may be used to smooth noisy data, to block ill-behaved functions from differentiation in the derivative computation for Newton's method, or to avoid expensive re-computation of complex functions.

See also the [SAVE^{\[180\]}](#) function, in which nodal values are directly computed.

Example:

[Samples | Usage | fit+weight.pde^{\[615\]}](#)

3.2.6.6 The LUMP Function

The LUMP function creates a field on the finite element mesh, and saves a single value of the argument expression in each cell of the finite element mesh. The value stored for each cell is the average value of the argument expression over the cell, and is treated as a constant over the cell.

The LUMP function may be used to block ill-behaved functions from differentiation in the derivative computation for Newton's method, or to avoid expensive re-computation of complex functions.

The normal use for LUMP is in the DEFINITIONS section, as in

name = LUMP (expression)

Note: This definition of LUMP(F) is NOT the same as the "lumped parameters" frequently referred to in finite element literature.

Example:

[Samples | Usage | Lump.pde](#)^[616]

3.2.6.7 The RAMP Function

The RAMP function is a modification of the [URAMP](#)^[176] function, intended to make the usage more nearly like an [IF..THEN](#)^[194] statement.

It has been introduced to provide an alternative to discontinuous functions like [USTEP](#)^[176] and the discontinuous [IF..THEN](#)^[194] construct.

Discontinuous switching can cause serious difficulties, especially in time dependent problems, and is strongly discouraged. FlexPDE is an adaptive system. Its procedures are based on the assumption that by making timesteps and/or cell sizes smaller, a scale can be found at which the behavior of the solution is representable by polynomials. Discontinuities do not satisfy this assumption. A discontinuity is a discontinuity, no matter how close you look. Instantaneous turn-on or turn-off introduces high-frequency spatial or temporal components into the solution, including those which are far beyond the physical limits of real systems to respond. This makes the computation slow and possibly physically meaningless.

The RAMP function generates a smooth transition from one value to another, with the transition taking place as "expression" changes by an amount "width". It can be thought of as a "fuzzy IF", and has a usage very similar to an IF.. THEN, but without the harsh switching characteristics.

The form is:

value = RAMP(expression, left_value, right_value, width)

This expression is logically equivalent to

value = IF expression < 0 THEN left_value ELSE right_value

except that the transition will be linear over width. If the left and right values are functions, then you may not get a straight line as the ramp. The result will be a linear combination of the two functions.

See the [SWAGE](#)^[181] function for a similar function with both smooth value and derivative.

Example:

see "[Samples | Usage | Swage_test.pde](#)"^[581] for a picture of the SWAGE and RAMP transitions and their derivatives.

3.2.6.8 The SAVE Function

The SAVE function creates a field on the finite element mesh, and saves the values of the argument expression at the nodal points for subsequent interpolation. SAVE builds a continuous representation of the data within each material region, and can preserve discontinuities in the saved data.

The SAVE function may be used to block ill-behaved functions from differentiation in the derivative computation for Newton's method, or to avoid expensive re-computation of complex functions.

The normal use for SAVE is in the DEFINITIONS section, as in

name = SAVE (expression)

Note: SAVE() builds a continuous representation of the data across the entire domain, and cannot preserve discontinuities in the fitted data. In some cases, multiplying the data by an appropriate material parameter can result in a continuous function appropriate for saving. An exception to this rule is in the case of CONTACT boundaries, where the mesh nodes are duplicated, and discontinuities can be preserved in SAVE functions.

Example:

["Samples | Usage | Save.pde"](#)^[622]

See the FIT()^[178] function for a similar function with integral conservation and variable smoothing capabilities.

3.2.6.9 The SUM Function

The SUM function produces the sum of repetitive terms. The form is:

value = SUM(name, initial, final, expression)

The expression argument is evaluated and summed for name = initial, initial+1, initial+2,...final.

For example, the statement:

```
source = SUM(i,1,10,exp(-i))
```

forms the sum of the exponentials $\exp(-1)+\exp(-2)+\dots+\exp(-10)$.

The SUM function may be used with data ARRAYs, as in

DEFINITIONS

```
A = ARRAY(1,2,3,4,5,6,7,8,9,10)
```

source = SUM(i,1,10,A[i])

Example:

[Samples | Usage | Sum.pde](#)^[580]

3.2.6.10 The SWAGE Function

The SWAGE function has been introduced to provide an alternative to discontinuous functions like [USTEP](#)^[176] and the discontinuous [IF..THEN](#)^[194] construct. Discontinuous switching can cause serious difficulties, especially in time dependent problems, and is strongly discouraged.

FlexPDE is an adaptive system. Its procedures are based on the assumption that by making timesteps and/or cell sizes smaller, a scale can be found at which the behavior of the solution is representable by polynomials. Discontinuities do not satisfy this assumption. A discontinuity is a discontinuity, no matter how close you look. Instantaneous turn-on or turn-off introduces high frequency spatial or temporal components into the solution, including those which are far beyond the physical limits of real systems to respond. This makes the computation slow and possibly physically meaningless.

The SWAGE function generates a smooth transition from one value to another. The slope at the center of the transition is the same as a [RAMP](#)^[179] of the given width, but the curve extends to five times the given width on each side, reaching the end values exactly. It also has smooth derivatives, except for a one percent jump at the cutoff points. It can be thought of as a "fuzzy IF", and has a usage very similar to an IF.. THEN, but without the harsh switching characteristics.

The form is:

value = SWAGE(expression, left_value, right_value, width)

This expression is logically equivalent to

value = IF expression < 0 THEN left_value ELSE right_value

except that the transition will be smeared over width.

See the [RAMP](#)^[179] function for a similar function which is smooth in value, but not in derivative.

Example:

see "[Samples | Usage | Swage_test.pde](#)"^[581] for a picture of the SWAGE and RAMP transitions and their derivatives.

Wiktionary:

swage 1.(noun) A tool, variously shaped or grooved on the end or face, used by blacksmiths and other workers in metals, for shaping their work. 2.(verb)To bend or shape using a swage.

3.2.6.11 The VAL and EVAL functions

There are two ways to evaluate an arbitrary expression at selected coordinates, VAL and EVAL.

value = VAL(expression, x, y)
value = VAL(expression, x, y, z)

The value of expression is computed at the specified coordinates. *The coordinates must be constants.* The value is computed and stored at each phase of the solution process, allowing efficient reference in many computations.

FlexPDE maintains a "scoreboard" of dependencies and re-evaluates the expression whenever the dependency changes. If the expression depends on a variable, it will also create an implicit coupling between the expression and its point of use, causing the value to be solved simultaneously during the solution phase.

Expression can include derivative terms, but the VAL itself cannot be differentiated.

value = EVAL(expression, x, y)
value = EVAL(expression, x, y, z)

The value of expression is computed at the specified coordinates. *The coordinates may be dynamically variable.* The value is recomputed at each reference, possibly leading to increased run time.

This form does NOT allow FlexPDE to compute implicit couplings between computation nodes referencing and evaluating the value.

Derivative operators applied to EVAL will be passed through and applied to expression.

Note: The value returned from these functions must be scalar.

3.2.6.12 Boundary Search Functions

The functions XBOUNDARY, YBOUNDARY and ZBOUNDARY allow the user to search for the position of a system boundary from an evaluation point:

XBOUNDARY("boundary name")
XBOUNDARY("boundary name", ycoord)
XBOUNDARY("boundary name", ycoord, zcoord)

YBOUNDARY("boundary name")
YBOUNDARY("boundary name", xcoord)
YBOUNDARY("boundary name", xcoord, zcoord)

ZBOUNDARY("surface name")
ZBOUNDARY("surface name", xcoord, ycoord)

In each case, the function returns the X,Y or Z coordinate of the named boundary/surface at the (Y,Z), (X,Z) or (X,Y) coordinates of the current evaluation.

The form in which no evaluation point is supplied should only be used in places where the point can be supplied by context. E.g. plots or equations.

3.2.7 Operators

3.2.7.1 Arithmetic Operators

The following customary symbols can be use in arithmetic expressions:

<u>Operator</u>	<u>Action</u>
-	Unary negate, Forms the negative of a single operand
+	Binary add, Forms the sum of two operands
-	Binary subtract, Forms the difference of two operands
*	Binary multiply, Forms the product of two operands
/	Binary divide, Divides the first operand by the second
^	Binary power, Raises the first operand to the power of the second

These operators can be applied to scalars, arrays or matrices. When used with arrays or matrices, the operations are applied element-by-element.

Special operators are defined to designate conventional matrix and array operations.

<u>Operator</u>	<u>Action</u>
**	Binary MATRIX multiply. Forms the product of two matrices or the product of a MATRIX and an ARRAY. Applied to tensors, the result is the same as the DOT operator.
//	Matrix "division". $A1 = A2 // M$ produces the ARRAY A1 satisfying the equation $A2 = M**A1$.

3.2.7.2 Complex Operators

The following operators perform various transformations on complex quantities.

REAL (complex)

Extracts the real part of the complex number.

IMAG (complex)

Extracts the imaginary part of the complex number.

CABS (complex)

Computes the magnitude of the complex number, given by

$CABS(\text{complex}(x,y)) = \sqrt{x^2 + y^2}$.

CARG (complex)

Computes the Argument (or angular component) of the complex number, implemented as
 $CARG(\text{complex}(x,y)) = \text{Atan2}(y,x)$.

CEXP (complex)

Computes the complex exponential of the complex number, given by
 $CEXP(\text{complex}(x,y)) = \exp(x + iy) = \exp(x) * (\cos(y) + i * \sin(y))$.

CLOG (complex)

Computes the natural logarithm of the complex number, given by
 $CLOG(\text{complex}(x,y)) = \ln(x + iy) = \ln(\sqrt{x^2 + y^2}) + i * \arctan(y/x)$.

CONJ (complex)

Returns the complex conjugate of the complex number.

CSQRT (complex)

Computes the complex square root of the complex number, given by
 $CSQRT(\text{complex}(x,y)) = \text{complex}(\sqrt{(r + x)/2}, \text{sign}(y) * \sqrt{(r - x)/2})$
 where $r = CABS(x,y)$.

3.2.7.3 Differential Operators

Differential operator names are constructed from the coordinate names for the problem, either as defined by the user, or as default names.

First derivative operators are of the form "D<name>", where <name> is the name of the coordinate.
 Second-derivative operators are of the form "D<name1><name2>".

In the default 2D Cartesian case, the defined operators are "DX", "DY", "DXX", "DXY", and "DYY".

All differential operators are expanded internally into the proper forms for the active coordinate system of the problem.

D<n> (arg)

First order partial derivative of arg with respect to coordinate <n>, eg. DX(arg).

D<n><m> (arg)

Second order partial derivative of arg with respect to coordinates <n> and <m>, eg. DXY(arg).

DIV (vector_arg)

Divergence of vector argument. Produces a scalar result.

DIV (argx, argy {, argz })

Divergence of the vector whose components are argx and argy (and possibly argz in 3D). This is the same as $\text{DIV}(\text{vector}(\text{argx}, \text{argy}, \text{argz}))$, and is provided for convenience.

DIV (tensor_arg)

Divergence of tensor argument. Produces a vector result. In curvilinear geometry, $\text{DIV}(\text{GRAD}(\text{vector}))$ is NOT the same as the Laplacian of the components of the vector, because differentiation of the unit vectors introduces additional terms. FlexPDE handles these expansions correctly in all supported geometries.

GRAD (scalar_arg)

Gradient of scalar argument. Produces a vector result.

GRAD (vector_arg)

Gradient of vector argument. This operation produces a **tensor** result. In curvilinear geometry, this creates additional terms due to the differentiation of the unit vectors. It is NOT equivalent to the gradient of the vector components except in Cartesian geometry. FlexPDE handles these expansions correctly in all supported geometries.

CURL (vector_arg)

Returns the vector result of applying the curl operator to vector_arg.

CURL (scalar_arg)

Curl of a scalar_arg (2D only). Assumes arg to be the magnitude of a vector normal to the computation plane, and returns a vector result in the computation plane.

CURL (argx, argy {, argz })

Curl of a vector whose components in the computation plane are argx and argy (and possibly argz in 3D). This is the same as $\text{CURL}(\text{vector}(\text{argx}, \text{argy}, \text{argz}))$, and is provided for convenience.

DEL2 (scalar_arg)

Laplacian of scalar_arg. Equivalent to $\text{DIV}(\text{GRAD}(\text{scalar_arg}))$.

DEL2 (vector_arg)

Laplacian of vector_arg. Equivalent to $\text{DIV}(\text{GRAD}(\text{vector_arg}))$.

3.2.7.4 Integral Operators

Integrals may be formed over volumes, surfaces or lines. The specific interpretation of the integral operators depends on the coordinate system of the current problem. Integral operators can treat only scalar functions as arguments. You cannot integrate a vector field.

Examples

[Samples | Applications | Heatflow | Heat_Boundary.pde](#) ⁴²⁸

[Samples | Usage | 3d_Domains | 3D_Integrals.pde](#) ⁶⁰²

[Samples | Usage | Constraints | Boundary_Constraint.pde](#) ⁵⁵⁰

[Samples | Usage | Constraints | 3D_Constraint.pde](#) ⁵⁴⁷

[Samples | Usage | Constraints | 3D_Surf_Constraint.pde](#) ⁵⁴⁹

[Samples | Usage | Tintegral.pde](#) ⁶⁰⁴

3.2.7.4.1 Time Integrals

The operators TINTEGRAL and TIME_INTEGRAL are synonymous, and perform explicit time integration of arbitrary *scalar* values from the problem start time to the current time:

TINTEGRAL (integrand)
TIME_INTEGRAL (integrand)

Note: This operator cannot be used to create implicit linkage between variables. Use a GLOBAL VARIABLE instead.

3.2.7.4.2 Line Integrals

The operators BINTEGRAL and LINE_INTEGRAL are synonymous, and perform line integrations of scalar integrands.

The integral is always taken with respect to distance along the declared line or curve path (positive in the path direction).

The basic form of the LINE_INTEGRAL operator is:

BINTEGRAL (integrand, named_boundary)
LINE_INTEGRAL (integrand, named_boundary)

The boundary specification may be omitted, in which case the entire outer boundary is implied.

2D Line Integrals

In 2D Cartesian geometry, LINE_INTEGRAL is the same as SURF_INTEGRAL.

In 2D cylindrical geometry, SURF_INTEGRAL will contain the $2\pi r$ weighting, while LINE_INTEGRAL will not.

2D Line integrals may be further qualified by specifying the region in which the evaluation is to be made:

LINE_INTEGRAL (integrand, named_boundary, named_region)

named_region must be one of the regions bounded by the selected boundary.

3D Line Integrals

3D Line integrals may be computed only on extrusion surfaces of the 3D domain.

LINE_INTEGRAL (integrand, named_boundary, surface_number)
LINE_INTEGRAL (integrand, named_boundary, named_surface)

The named_boundary must exist in the named_surface (ie, it must not have been excluded by LIMITED REGION commands).

3.2.7.4.3 2D Surface Integrals

The synonymous prototype forms of surface integral functions in 2D are:

SINTEGRAL (integrand, named_boundary)
SURF_INTEGRAL (integrand, named_boundary)

Here named_boundary may be specified *by name*, or it can be omitted, in which case the entire outer boundary of the domain is implied.

In two-dimensional Cartesian problems, the surface element is formed by extending the two-dimensional line element a single unit in the *Z*-direction, so that the surface element is $dl * 1$. In this case, the surface integral is the same as the line integral.

In two-dimensional cylindrical problems, the surface element is formed as $2 * \pi * r * dl$, so the surface integral is NOT the same as the line integral.

The region in which the evaluation is made can be controlled by providing a third argument, as in

SURF_INTEGRAL (integrand, named_boundary, named_region)

named_region must be one of the regions bounded by the selected surface.

3.2.7.4.4 3D Surface Integrals

In three-dimensional problems, there are several forms for the surface integral:

1. Integrals over extrusion surfaces are selected by surface name or number and qualifying region name or number:

SINTEGRAL (integrand, surface, region)
SURF_INTEGRAL (integrand, surface, region)

If region is omitted, the integral is taken over all regions of the specified surface.
If both surface and region are omitted, the integral is taken over the entire outer surface of the domain.

Integrals of this type may be further qualified by selecting the layer in which the evaluation is to be made:

SURF_INTEGRAL (integrand, surface, region, layer)

layer must be one of the layers bounded by the selected surface.

2. Integrals over "sidewall" surfaces are selected by boundary name and qualifying layer name:

SINTEGRAL (integrand, named_boundary, named_layer)
SURF_INTEGRAL (integrand, named_boundary, named_layer)

If layer is omitted, the integral is taken over all layers of the specified surface.

Integrals of this type may be further qualified by selecting the region in which the evaluation is to be made:

SURF_INTEGRAL(integrand, named_boundary, named_layer, named_region)

named_region must be one of the regions bounded by the selected surface.

3. Integrals over entire bounding surfaces of selected subregions are selected by region name and layer name, as with volume integrals:

SINTEGRAL (integrand, named_region, named_layer)
SURF_INTEGRAL (integrand, named_region, named_layer)

If named_layer is omitted, the integral is taken over all layers of the specified surface.

3.2.7.4.5 2D Volume Integrals

The synonymous prototype forms of volume integral functions in 2D are:

INTEGRAL (integrand, region)
VOL_INTEGRAL (integrand, region)

Here region can be specified by number or name, or it can be omitted, in which case the entire domain is implied.

In two-dimensional Cartesian problems, the volume element is formed by extending the two-dimensional cell a single unit in the Z -direction, so that the volume integral is the same as the area integral in the coordinate plane.

In two-dimensional cylindrical problems, the volume element is formed as $2\pi r dr dz$, so that the volume integral is NOT the same as the area integral in the coordinate plane. For the special case of 2D cylindrical geometry, the additional operator

AREA_INTEGRAL (integrand, region)

computes the area integral of the integrand over the indicated region (or the entire domain) without the $2\pi r$ weighting.

3.2.7.4.6 3D Volume Integrals

The synonymous prototype forms of volume integral functions in 3D are:

INTEGRAL (integrand, region, layer)
VOL_INTEGRAL (integrand, region, layer)

Here layer can be specified by number or name, or it can be omitted, in which case the entire layer stack is implied.

region can also be specified by number or name, or it can be omitted, in which case the entire projection plane is implied.

If region is omitted, then layer must be specified *by name* or omitted. If both region and layer are omitted, the entire domain is implied.

For example,

INTEGRAL(integrand, region, layer) means the integral over the subregion contained in the selected region and layer.

INTEGRAL(integrand, named_layer) means the integral over all regions of the named layer.

INTEGRAL(integrand, region) means the integral over all layers of the selected region.

INTEGRAL(integrand) means the integral over the entire domain.

3.2.7.5 Relational Operators

The following operators may be used in constructing conditional expressions:

Relational Operators

<u>Operator</u>	<u>Definition</u>
-----------------	-------------------

=	Equal to
<	Less than
>	Greater than
<=	Less than or equal to
>=	Greater than or equal to
<>	Not equal to

Relational Combinations

<u>Operator</u>	<u>Definition</u>
AND	Both conditions true
OR	Either condition true
NOT	(Unary) reverses condition

Assignment Operator

In addition to its use as an equal operator, problem descriptors use the '=' symbol to assign (associate) values functions and expressions with defined names.

3.2.7.6 String Operators

The following operators can be used in expressions that construct string constants:

<u>Operator</u>	<u>Action</u>
+	Binary add, Forms the concatenation of two text-string operands

When used in the DEFINITIONS section, The strings to be concatenated must be parenthesized as a group.

Example:

```
DEFINITIONS
str1 = "The beginning "
str2 = " the end"
str3 = (str1 + "and" + str2)
```

The above would produce str3 as "The beginning and the end".

See also ["String Functions"](#)^[177]

3.2.7.7 Vector Operators

The following operators perform various transformations on vector quantities.

Vector quantities are assumed to have one component in each of the three coordinate directions implied by the COORDINATES selection, whether the selected model geometry is one, two or three dimensional.

For example, a Vector can have a Z-component in a two-dimensional X,Y geometry. The restricted geometry simply means that there is no computable variation of the solution in the missing directions. In the explicit construction of Vectors, the third component may be omitted, in which case it is assigned a value of zero.

CROSS (vector1, vector2)

Forms the cross product of two vectors and returns the resulting vector. In 2D geometries, the CROSS product of two vectors lying in the computation plane returns a vector with a nonzero component only in the direction normal to the problem plane. Where appropriate, FlexPDE will interpret this vector as a scalar, suitable for arithmetic combination with other scalars.

DOT (vector1, vector2)

Forms the dot product of two vectors and returns a scalar value equal to the magnitude of the vector dot product.

MAGNITUDE (vector)

Returns a scalar equal to the magnitude of a vector argument.

MAGNITUDE (argx, argy {, argz })*

Returns a scalar equal to the magnitude of a vector whose components are argx and argy (and possibly argz).

NORMAL (vector)

NORMAL (argx, argy {, argz })*

Returns a scalar equal to the component of a vector argument normal to a boundary. This operator may be used only in boundary condition definitions or in boundary plots or integrals, where the reference surface is clear from the context of the statement. (See also UNORMAL below).

TANGENTIAL(vector)

TANGENTIAL (argx, argy {, argz })*

Returns a scalar equal to the component of a vector argument tangential to a boundary. This operator may be used only in boundary condition definitions or in boundary plots or integrals, where the reference surface is clear from the context of the statement.

VECTOR (argx {, argy {, argz } })*

Constructs a vector whose components are the scalar arguments. Omitted arguments are assumed zero.

Vector Component Operators

In a standard cartesian coordinate system, the operators XCOMP, YCOMP, and ZCOMP provide access to the components of a vector :

XCOMP (vector)**<coord1>COMP (vector)**

Returns a scalar whose value is the *first* component of the vector argument.

YCOMP (vector)**<coord2>COMP (vector)**

Returns a scalar whose value is the *second* component of the vector argument.

ZCOMP (vector)**<coord3>COMP (vector)**

Returns a scalar whose value is the *third* component of the vector argument.

Beginning in version 7, in non-cartesian coordinate systems and cartesian systems where the coordinates have been renamed (aliased), the coordinate name will be used instead of X, Y, or Z. E.g. in the CYLINDER1 coordinate system, the first component would be accessed with RCOMP; in a CARTESIAN2 coordinate system with coordinates aliased to "A" and "B", the first and second components would be accessed using ACOMP and BCOMP.

In an attempt to support backward compatibility, the XCOMP, YCOMP, and ZCOMP operators are defined as the first, second, and third components whenever possible. If the coordinate system defines X, Y, or Z, the coordinate defined order takes precedence.

The Special Function UNORMAL

UNORMAL is a built-in function which returns the unit-normal vector at the location of evaluation. It's use is valid only in expressions computed on a system boundary. UNORMAL takes no arguments, as it's arguments are implicitly the coordinates at the point of evaluation.

** Note: arguments in brackets {} are optional.*

3.2.7.8 Tensor Operators

FlexPDE supports limited use of TENSOR quantities, to parallel the results of GRAD(vector).

A TENSOR is a vector of vectors, potentially 3 x 3 components.

TENSOR((T11, T12, T13) , (T21, T22, T23) , (T31, T32, T33))

This operator returns a TENSOR object with the indicated components. Each of the T_{ij} may be any scalar expression.

DOT(vector, tensor)

This operator returns a VECTOR with components ($(V1*T11+V2*T21+V3*T31)$, $(V1*T12+V2*T22+V3*T32)$, $(V1*T13+V2*T23+V3*T33)$).

DOT(tensor, vector)

This operator returns a VECTOR with components ($(T11*V1+T12*V2+T13*V3)$, $(T21*V1+T22*V2+T23*V3)$, $(T31*V1+T32*V2+T33*V3)$).

DOT(tensor, tensor)

This operator returns a TENSOR representing the matrix product of the tensors. The operator ** can be used to produce the same result (i.e. tensor**tensor).

DIV(tensor)

This operator returns a VECTOR value whose components depend on the metric coefficients of the selected problem geometry. In Cartesian geometry, the result is a VECTOR made up of the divergences of the tensor columns.

TRANSPOSE(tensor)

This operator returns a TENSOR which is the transpose of the argument tensor.

vector * vector

produces a tensor of all combinations of component products.

XXCOMP (tensor)**XYCOMP (tensor)****XZCOMP (tensor)****YXCOMP (tensor)****YYCOMP (tensor)****YZCOMP (tensor)****ZXCOMP (tensor)****ZYCOMP (tensor)****ZZCOMP (tensor)**

These operators returns a scalar whose value is the indicated component of the tensor argument (X indicates the first coordinate component, Y the second and Z the third, regardless of the actual assigned names of the coordinates).

3.2.8 Predefined Elements

The problem descriptor language predefines the following elements :

PI 3.14159265358979

For Cartesian coordinates in which 'R' is not specified as a coordinate name or a defined name, the problem descriptor language predefines the following elements:

R	$R = \sqrt{x^2 + y^2}$	radius vector length in 2D
	$R = \sqrt{x^2 + y^2 + z^2}$	radius vector length in 3D
THETA	$THETA = \arctan(y/x)$	azimuthal angle in 2D or 3D

Note: If "R" or "Theta" appear on the left side of a definition before any use in an expression, then the new definition will become the meaning of the name, and the predefined meaning will be hidden.

In all problems,

CELL_SIZE an internally declared value representing the size of the current evaluation cell.

CURRENT_DIRECTOR a string representation of the command-line current working directory. (Established at execution time - will not change if command line changes directory.)

In staged problems where "STAGES = integer" is declared in the SELECT section,

STAGE an internally declared index which increments from 1 to integer.

In modal analysis (eigenvalue and eigenfunction) problems where "MODES = integer" is declared in the SELECT section,

LAMBDA an internally declared name which represents the various eigenvalues.

In time-dependent problems, the current timestep interval is available:

DELTAT an internally declared name which returns the size of the current timestep.

3.2.9 Expressions

Value Expressions

Problem descriptors are composed predominantly of arithmetic expressions made of one or more operators, variables, defined values and pairs of parentheses that evaluate to numerical values. In evaluating value expressions, FlexPDE follows the algebraic rules of precedence in which unary operators are evaluated first, followed by binary operators in the following order:

- power
- multiplication and division
- addition and subtraction
- relational operators (<, <=, =, >, >=, >)
- relational combinations (AND, OR)

When included in expressions, subexpressions enclosed in pairs of parentheses are evaluated first, without regard to the precedence of any operators which precede or follow them. Parentheses may be nested to any level, with inner subexpressions being evaluated first and proceeding outward. Parentheses must always be used in pairs.

Examples:

```
a = b*(c+d)
div(k*grad(u))
```

Conditional-Value Expressions

Problem descriptors can contain conditional expressions of the form

```
IF condition THEN subexpression ELSE subexpression .
```

This form selects one of the two alternative values as the value of the expression. It is used in expressions like

```
y = IF a THEN b ELSE c
```

analogous to the expression "y = a ? b : c" in the C programming language.

It is *not* the procedural alternative construct

```
IF a THEN y=b ELSE y=c { Wrong ! }
```

familiar in procedural programming languages.

The THEN or ELSE subexpressions may contain nested IF...THEN...ELSE expressions. Each ELSE will bind to the nearest previous IF.

Conditional expressions used in material parameters can cause numerical trouble in the solution of a PDE system, because they imply an instantaneous change in the result value. This instantaneous change violates assumptions of continuity upon which the solver algorithms are based.

See [URAMP](#)^[176], [RAMP](#)^[179] and [SWAGE](#)^[181] for switching functions that transition smoothly between alternative values.

3.2.10 Repeated Text

The REPEAT..ENDREPEAT construct allows the repetition of sections of input text.

The syntax looks like a FOR loop in procedural languages, but we emphasize that in FlexPDE this feature constitutes a *textual* repetition, not a procedural repetition.

The form of a repeat clause is

```
REPEAT name = initial TO final
REPEAT name = initial BY delta TO final
```

These statements specify that the following lines of descriptor text should be repeated a number of times. The given name is defined as if it had appeared in the DEFINITIONS section, and is given the value specified by initial.

The repeated section of text is terminated by the statement

ENDREPEAT

At this point, the value of name is incremented by delta (or by one, if no delta is given). If the new value is not greater than final, the repeated text is scanned again with the new value in place of name. If delta is negative, the value of name is decremented and the termination test is modified accordingly.

The REPEAT statement can appear in the following locations:

- in BATCH file lists
- in VARIABLE lists
- in EXTRUSION lists
- in INITIAL VALUE lists
- anywhere the REGION, START or LINE keywords are legal.
- around any plot command or group of plot commands.
- around any DEFINITION or group of DEFINITIONS.
- around any REPORT command or group of REPORT commands.
- around AT points in a HISTORY list

Use of ARRAYS and the \$integer string function can extend the power of the REPEAT loop.

Examples:

```
REPEAT xc=1/4 by 1/4 to 7/4
  REPEAT yc=1/4 by 1/4 to 7/4
    START (xc+rad,yc) ARC (CENTER=xc,yc) ANGLE=360 CLOSE
  ENDREPEAT
ENDREPEAT
```

This double loop constructs a 7 x 7 array of circles, all part of the same REGION.

See the sample problems:

[Samples | Usage | Repeat.pde](#)^{62†}

Note: REPEAT..ENDREPEAT replaces the older FOR..ENDFOR facility used in earlier versions of FlexPDE. The older facility is no longer supported, and will produce parsing errors.

3.3 The Sections of a Descriptor

The SECTIONS of a descriptor were outlined in the [introduction](#)¹⁶⁴. In the following pages we present a detailed description of the function and content of each section.

3.3.1 Title

The optional TITLE section can contain one literal string.

When a TITLE is used, the literal string it contains is used as a title label for all MONITORS and PLOTS.

If TITLE is not specified, the plots will not have a title label.

Example:

```
TITLE "this is my first model"
```

3.3.2 Select

The SELECT section, which is optional, is used when it is necessary to override some of the default selectors internal to the program.

Selectors are used to control the flow of the process used to solve a problem.

The SELECT section may contain one or more selectors and their associated values. The default selectors have been chosen to optimize how FlexPDE handles the widest range of problems.

The SELECT section should be used only when the default behavior of FlexPDE is somehow inadequate.

Unlike the other elements used in program descriptors, the proper names used for the selectors are not part of the standard language, are not reserved words, and are not meaningful in other descriptor sections.

The selectors implemented in FlexPDE are specific to a version of FlexPDE, and may not correspond to those available in previous versions of FlexPDE or in other applications using the FlexPDE descriptor language.

3.3.2.1 Mesh Generation Controls

The following controls can be used in the SELECT section to modify the behavior of the mesh generator.

- Logical selectors can be turned on by selector = ON, or merely mentioning the selector
- Logical selectors can be turned off by selector = OFF.
- Numeric selectors are set by selector = number.
- Some selectors can be [STAGED](#)^[221].

ASPECT type: Numeric default: 2.0

Maximum cell aspect ratio for mesh generation in 2D problems and 3D surface meshes. Cells may be stretched to this limit of edge-size ratio.

AUTOMESH type: Logical default: On (settable in [Preferences](#)^[28] panel).

If ON, previously generated mesh will be loaded if possible.

AUTOTRANSFER type: Logical default: On (settable in [Preferences](#)^[28] panel).

If ON, automatically saves a [TRANSFER](#)^[276] output file with all primary variables.

CELL_LIMIT type: Numeric default: See below

Specifies the maximum cell count. (Note that in version 7 this selector has replaced the NODELIMIT selector of previous versions.) If mesh refinement tries to create more cells than the limit, the cell-merge threshold will be raised to try to balance errors across a mesh of the specified size. This control cannot

be used to reduce the size of the initial mesh construction, which is dictated by [NGRID](#)^[198], user density controls, and domain boundary feature sizes. This selector can be STAGED. Default values are shown below, although these limits will likely not be reachable within the resources of most computers :

	1D	2D	3D
Professional	1,000,000	10,000,000	50,000,000
Lite	100	400	1200

CHECK_DUP_REGIONS type: Logical default: On

If ON, defined regions will be tested to see if they are identical and an error diagnostic presented if there are any duplicates. Duplication of regions will cause the first definition to be ignored and an erroneous model may be generated.

If OFF, regions will not be tested for duplication.

CURVEGRID type: Logical default: On

If ON, cells will be bent to follow curved boundaries, and a 3D mesh will be refined to resolve surface curvature.

If OFF, neither of these modifications will be attempted, and the computation will proceed with straight-sided triangles or flat-sided tetrahedra. (It may be necessary to turn this option OFF when surfaces are defined by [TABLES](#)^[222], because the curvature is infinite at table breaks.)

FEATURE_INDUCTION type: Numeric default: 2

In the initial domain layout, FlexPDE attempts to discover cell sizes necessary to resolve domain elements, iterating to propagate the influence of small features. In complex domains this can become expensive. If feature sizes are relatively uniform, or if the user controls the cell size manually, the iteration can be bypassed by setting FEATURE_INDUCTION to 0.

GRIDARC type: Numeric default: 30 degrees

Arcs will be gridded with no cell exceeding this angle. Other factors may cause the sizes to be smaller.

GRIDLIMIT type: Numeric default: 8

Maximum number of regrid before a warning is issued. Batch runs stop at this limit.

INITGRIDLIMIT type: Numeric default: 5

Maximum number of regridding passes in the initial refinement to define initial values. INITGRIDLIMIT=0 suppresses initial refinement.

MERGEDIST type: Numeric default: Automatic

In the initial domain layout, points closer than MERGEDIST will be coalesced into a single point. This helps overcome the effects of roundoff and input number precision in generation of domains. A default merge distance is computed during initial layout. MERGEDIST will over-ride this default value. Individual values for X, Y and Z coordinates can be set with [XMERGEDIST](#)^[198], [YMERGEDIST](#)^[198] and [ZMERGEDIST](#)^[198] respectively. (These controls should be used only in unusual cases, when the default value performs incorrectly.)

NGRID type: Numeric default: See below

Specifies the number of mesh rows in each dimension. Use this control to set the maximum cell size in open areas. This is a convenient way to control the overall mesh density in a problem. Default values are shown below:

	1D	2D	3D
Professional	100	20	12
Student/Lite	25	10	5

REGRID type: Logical default: On

By default, FlexPDE implements adaptive mesh refinement. This selector can be used to turn it off and proceed with a fixed mesh. This selector can be [STAGED](#)^[227].

SMOOTHINIT type: Logical default: On

Implements a mild initial-value smoothing for time dependent problems, to help ameliorate discontinuous initial conditions.

STAGEGRID type: Logical default: Off

Forces regeneration of mesh with each stage of a staged problem. FlexPDE attempts to detect stage dependencies in the domain and regenerate the mesh, but this selector may be used to override the automatic detection.

XMERGEDIST type: Numeric default: Automatic

See [MERGEDIST](#)^[198].

YMERGEDIST type: Numeric default: Automatic

See [MERGEDIST](#)^[198].

ZMERGEDIST type: Numeric default: Automatic

See [MERGEDIST](#)^[198].

Note: See the "[Mesh Control Parameters](#)^[228]" section in this manual and the "[Controlling Mesh Density](#)^[144]" section in the User Guide for more discussion of mesh control.

3.3.2.2 Solution Controls

The following controls can be used in the SELECT section to modify the solution methods of FlexPDE.

- Logical selectors can be turned on by selector = ON, or merely mentioning the selector.
- Logical selectors can be turned off by selector = OFF.
- Numeric selectors are set by selector = number.

PRIMARY SOLUTION CONTROLS

AUTOSTAGE type: Logical default: On

In STAGED problems, this selector causes all stages to be run consecutively without pause. Turning this selector OFF causes FlexPDE to pause at the end of each stage, so that results can be examined before proceeding.

CHANGELIM type: Numeric default: 2.0(steady state), 0.5(time dependent)

Steady state: Specifies the maximum change in any variable allowed on any Newton iteration step (measured relative to the variable norm). In severely nonlinear problems, it may be necessary to force a slow progress (small CHANGELIM) toward the solution in order to avoid pathological behavior of the nonlinear functions.

Time dependent: Specifies the maximum change in one timestep of any variable derived from a steady-state equation. Changes larger than CHANGELIM will cause the timestep to be cut.

CHECK_TABLES type: Logical default: On

Check table references for access out of the defined range. Issue an error diagnostic if accessed out of the defined range. See also [TABLE](#)^[223].

CUBIC type: Logical default: On

Use cubic Finite Element basis (same as [ORDER=3](#)^[202]). The default selection can be changed in the [General Settings](#)^[28] tab of the [Preferences Window](#)^[28].

DELAY type: Numeric default: 0

In [STAGED](#)^[22] problems using [AUTOSTAGE](#)^[199], this selector causes each stage to pause for this many seconds before proceeding to the next stage. This allows for casual examination of the results at each stage without needing to click the continue button. In [BATCH](#)^[287] scripts, this selector causes each problem to pause before running the next problem.

DIRECT type: Logical default: Off

This selects use of a direct matrix solver instead of the default iterative solver. There is an internal limit to the size of the matrix that FlexPDE will allow using this method. The limit is based on the number of unknowns in the model. The direct solver requires a large amount of memory and problems larger than this can cause the system to go to virtual memory which is extremely slow. The default limit can be dictated by the selector [DIRECTLIMIT](#)^[207].

DIRECTLIMIT type: Numeric default: 20,000

Sets the internal limit to the size of the matrix that FlexPDE will allow when using the [DIRECT](#)^[207] matrix solver.

ERRLIM type: Numeric default: 0.002

This is the primary accuracy control. Both the spatial error control [XERRLIM](#)^[203] the temporal error control [TERRLIM](#)^[203] are set to this value unless over-ridden by explicit declaration. This selector can be [STAGED](#)^[22].

[Note: ERRLIM is an *estimate* of the relative error in the dependent variables. The solution is not guaranteed to lie within this error. It may be necessary to adjust ERRLIM or manually force greater mesh density to achieve the desired solution accuracy.]

FIRSTPARTS type: Logical default: Off

By default, FlexPDE integrates all second-order terms by parts, creating the surface terms represented by the Natural boundary condition. This selector causes first-order terms to be integrated by parts as well. Use of this option may require adding terms to Natural boundary condition statements.

FIXDT type: Logical default: Off

Disables the automatic timestep control. The timestep is fixed at the value given in the [TIME](#)^[260] section. (In most cases, this is not advisable, as it is difficult to choose a single timestep value that is both accurate and efficient over the entire time range of a problem. Consider modifying the [ERRLIM](#)^[200] control instead.)

ITERATE type: Numeric default: 4000

Primary conjugate gradient iteration limit. This count may be enlarged automatically for large systems. Iteration may terminate before this count if convergence criteria are met.

LINUPDATE type: Numeric default: 5

In linear steady-state problems, FlexPDE repeats the linear system solution until the computed residuals are below tolerance, up to a maximum of LINUPDATE passes.

MODES type: Numeric default: 0

Selects the Eigenvalue solver and specifies the desired number of modes. For computational reasons, FlexPDE will solve the system for more modes than specified (see [SUBSPACE](#)^[203]), but only the requested number will be reported.

NEWTON type: Numeric default: 40 (steady_state)
default: 1 (time-dependent)

Sets the maximum Newton iteration limit. [PREFER_SPEED](#)^[202] and [PREFER_STABILITY](#)^[202] will override this number.

NONLINEAR type: Logical default: Automatic

Selects the nonlinear (Newton-Raphson) solver, even if the automatic detection process does not require it.

NONSYMMETRIC type: Logical default: Automatic

Selects the nonsymmetric Lanczos conjugate gradient solver, even if the automatic detection process does not require it.

NOTIFY_DONE type: Logical default: Off

Requests that FlexPDE emit a beep and a "DONE" message at completion of the run.

NRMINSTEP type: Numeric default: 0.009

Sets the minimum fraction of the computed stepsize which will be applied during Newton-Raphson backtracking. This number only comes into play in difficult nonlinear systems. Usually the computed step is unmodified.

NRSLOPE type: Numeric default: 0.1

Sets the minimum acceptable residual improvement in Newton-Raphson backtracking of steady-state solutions.

OPTERRLIM type: Numeric default: 0.001*ERRLIM

This is the accuracy control for the optimizer. See [MAXIMIZE](#)^[258] and [MINIMIZE](#)^[259].

[Note: OPTERRLIM is an *estimate* of the relative error in the optimizer parameter. The solution is not guaranteed to lie within this error. It may be necessary to adjust OPTERRLIM to achieve the desired solution accuracy.]

ORDER type: Numeric default: 3

Selects the order of finite element interpolation (1, 2 or 3). The selectors QUADRATIC and CUBIC are equivalent to ORDER=2 and ORDER=3, respectively. This selector can be [STAGED](#)^[221]. The default selection can be changed in the [General Settings](#)^[28] tab of the [Preferences Window](#)^[28].

OVERSHOOT type: Numeric default: 0.0001

Sub-iteration convergence control. Conjugate-Gradient solutions will iterate to a tolerance of OVERSHOOT*[ERRLIM](#)^[201]. (Some solution methods may apply additional multipliers.)

PRECONDITION type: Logical default: On

Use matrix preconditioning in conjugate-gradient solutions. The default preconditioner is the diagonal-block inverse matrix.

PREFER_SPEED type: Logical default: On

This selector chooses parameters for nonlinear time-dependent problems that result in greatest solution speed for well-behaved problems. Equivalent to [NEWTON=1](#)^[201], [REMATRIX=Off](#)^[203].

PREFER_STABILITY type: Logical default: Off

This selector chooses parameters for nonlinear time-dependent problems that result in greatest solution stability in ill-behaved problems. Equivalent to [NEWTON=3](#)^[201], [REMATRIX=On](#)^[203].

QUADRATIC type: Logical default: Off

Selects use of quadratic Finite Element basis. Equivalent to [ORDER=2](#)^[202].

RANDOM_SEED type: Numeric default: random

Specifies the seed for random number generation. May be used to create repeatable solution of problems using random numbers.

REINITIALIZE type: Logical default: Off

Causes each Stage of a [STAGED](#)^[221] problem to be reinitialized with the [INITIAL VALUES](#)^[231] specifications, instead of preserving the results of the previous stage.

REMATRIX type: Logical default: Off

Forces a re-calculation of the Jacobian matrix for each step of the Newton-Raphson iteration in nonlinear problems. The matrix is also recomputed whenever the solution changes appreciably, or when the residual is large. This selector is set by [PREFER_STABILITY](#)^[202] and cleared by [PREFER_SPEED](#)^[202].

STAGES type: Numeric default: 1

Parameter-studies may be run automatically by selecting a number of stages. Unless the geometric domain parameters change with stage, the mesh and solution of one stage are used as a starting point for the next. The [STAGED](#)^[227] qualifier on a parameter definition sets the number of stages, so you need not use STAGES unless you want to override the automatic count.

SUBSPACE type: Numeric default: MIN(2*modes,modes+8)

If [MODES](#)^[207] has been set to select an eigenvalue problem, this selector sets the dimension of the subspace used to calculate eigenvalues. Normally, it is not necessary to use this selector, as the default is usually sufficient.

TERRLIM type: Numeric default: 0.002

This is the primary temporal accuracy control. In time dependent problems, the timestep will be cut if the estimated relative error in time integration exceeds this value. The timestep will be increased if the estimated temporal error is smaller than this value. TERRLIM is automatically set by the [ERRLIM](#)^[200] control. This selector can be [STAGED](#)^[227].

Note: TERRLIM is an estimate of the relative error in the dependent variables. The solution is not guaranteed to lie within this error. It may be necessary to adjust TERRLIM to achieve the desired solution accuracy.

THREADS type: Numeric default: 1

Selects the number of worker threads to use during the computation. This control is useful in increasing computation speed on computers with multiple shared-memory processors. FlexPDE does not support clusters. The maximum number of threads for a script is 24, but increasing the thread count doesn't always increase computation speed. See "[Using Multiple Processors](#)"^[154] for more information. The default selection can be changed in the [General Settings](#)^[28] tab of the [Preferences Window](#)^[28].

UPFACTOR type: Numeric default: 1

Multiplier on upwind diffusion terms. Larger values can sometimes stabilize a marginal hyperbolic system.

UPWIND type: Logical default: On

In the presence of convection terms, this adds a diffusion term along the flow direction to stabilize the computation.

XERRLIM type: Numeric default: 0.002

This is the primary spatial accuracy control. Any cell in which the estimated relative spatial error in the dependent variables exceeds this value will be split (unless [CELL_LIMIT](#)^[197] is exceeded). XERRLIM is set automatically by the [ERRLIM](#)^[200] selector. This selector can be [STAGED](#)^[227].

Note: XERRLIM is an estimate of the relative error in the dependent variables. The solution is not guaranteed to lie within this error. It may be necessary to adjust XERRLIM or manually force greater mesh density to achieve the desired solution accuracy.

CONJUGATE GRADIENT METHOD CONTROLS

LANCZOS type: Logical

default: On for nonsymmetric systems

Use the Lanczos/Orthomin Conjugate-Gradient iteration method of Jea and Young for nonsymmetric

system matrices. This method essentially solves the extended system
$$\begin{pmatrix} 0 & A \\ A^t & 0 \end{pmatrix} \begin{pmatrix} x \\ x^t \end{pmatrix} = \begin{pmatrix} r \\ r^t \end{pmatrix}$$
 instead

of $Ax = r$.

ORTHOMIN type: Logical

default: On for symmetric systems

Use Orthomin Conjugate-Gradient iteration method of Jea and Young for symmetric system matrices.

VANDENBERG type: Logical

default: Off

Use Vandenberg Conjugate-Gradient iteration (useful if hyperbolic systems fail to converge). This method essentially solves $(AtA)x = (At)b$ instead of $Ax=b$. This squares the condition number and slows convergence, but it makes all the eigenvalues positive when the standard CG methods fail.

CONJUGATE GRADIENT PRECONDITIONING METHOD CONTROLS

ICCG type: Logical

default: On for symmetric systems

Use an Incomplete Choleski factorization as a preconditioner in symmetric problems. This method usually converges much more quickly. If ICCG=OFF or the factorization fails, then a block-inverse preconditioner will be used. ICCG=ON is equivalent to ILUPRECON below.

ILUPRECON type: Logical

default: On for symmetric systems

Use an incomplete LU factorization as a preconditioner. With symmetric systems this is an incomplete Choleski factorization, equivalent to ICCG above. If the factorization fails, a block-inverse preconditioner will be used.

BIPRECON type: Logical

default: On for nonsymmetric systems

Use the inverse of each diagonal block as a preconditioner.

DIPRECON type: Logical

default: On for single-variable systems

Use the inverse of each diagonal element as a preconditioner.

3.3.2.3 Global Graphics Controls

The following controls can be used in the SELECT section to modify the behavior of the graphics subsystem.

- Logical selectors can be turned on by selector = ON, or merely mentioning the selector.
- Logical selectors can be turned off by selector = OFF.
- Numeric selectors are set by selector = number.

In the usual case, these selectors can be over-ridden by specific controls in individual plot commands (see [Graphic Display Modifiers](#)^[264]).

ALIAS (coord) type: string default: Coordinate name
Defines an alternate label for the plot axes. Example: ALIAS(x)="distance".

AUTOHIST type: Logical default: On
Causes history plots to be updated when any other plot is drawn.

BLACK type: Logical default: Off
Draw all graphic output in black only. Use GRAY to select grayscale output.

BOLD type: Logical default: Off
Draw all graphic plot labels in bold font.

CDFGRID type: Numeric default: 51
Specifies the default size of CDF output grid (ie, 51x51).

CONTOURGRID type: Numeric default: 101
Resolution specification for contour plots, in terms of the number of plot points along the longest plot dimension. The actual plot grid will follow the computation mesh, with subdivision if the cell size is greater than that implied by the CONTOURGRID control.

CONTOURS type: Numeric default: 15
Target number of contour levels. Contours are selected to give "nice" numbers, and the number of contours may not be exactly as specified here.

ELEVATIONGRID type: Numeric default: 401
Elevation plot grid size used by From..To elevation plots. The actual plot grid will follow the computation mesh, with subdivision if the cell size is greater than that implied by the EVATIONGRID control. Elevations on boundaries ignore this number and use the actual mesh points.

FEATUREPLOT type: Logical default: Off
If this selector is ON, FEATURE boundaries will be plotted in gray.

FONT type: Numeric default: 2
Font=1 selects sans-serif font. Font=2 selects serif font.

GRAY type: Logical default: Off
Draws all plots with a gray scale instead of the default color palette.

- HARDMONITOR** type: Logical default: Off
Causes MONITORS to be written to the PLOTS output file.
- ITALIC** type: Logical default: Off
Draw all graphic plot labels in italic font.
- LOGLIMIT** type: Numeric default: 15
The range of data in logarithmic plots is limited to LOGLIMIT decades below the maximum data value. This is a global control which may be overridden by the local LOG(number) qualifier on the plot command.
- NOMINMAX** type: Logical default: Off
Deletes "o" and "x" marks at min and max values on all contour plots.
- NOTAGS** type: Logical default: Off
Suppresses level identifying tags on all contour and elevation plots.
- NOTIPS** type: Logical default: Off
Plot arrows in vector plots without arrowheads. Useful for bi-directional stress plots.
- PAINTED** type: Logical default: Off
Draw color-filled contour plots. Plots can be painted individually by selecting PAINT in the plot modifiers.
- PAINTGRID** type: Logical default: On
Draw color-filled grid plots. Colors represent distinct materials, as defined by parameter matching.
- PAINTMATERIALS** type: Logical default: On
Synonymous with PAINTGRID, included for symmetry with individual PLOT modifiers.
- PAINTREGIONS** type: Logical default: Off
Sets PAINTGRID, but selects a different coloring scheme. Colors represent logical regions in 2D, or logical (region x layer) compartments in 3D, instead of distinct material parameters.
- PENWIDTH** type: Numeric default: 0
Sets the on-screen pen width for all plots. Value is an integer (0,1,2,3,...) which specifies the width of the drawn lines, in thousandths of the plot width (0 means thin).
- PLOTINTEGRATE** type: Logical default: On
Integrate all spatial plots. Default is volume and surface integrals, using $2\pi r$ weighting in cylindrical geometry. Histories are not automatically integrated, and must be explicitly integrated.
- PRINTMERGE** type: Logical default: Off
Send all stages or plot times of each EXPORT statement to a single file. By default, EXPORTS create a separate file for each time or stage. Individual EXPORTS can be controlled by the plot modifier MERGE.
-

SERIF	type: Logical	default: Off
Draw all graphic plot labels in serif font.		
SANSERIF	type: Logical	default: On
Draw all graphic plot labels in sanserif font.		
SPECTRAL_COLORS	type: Logical	default: Off
Sets the order of colors used in labeling plots. ON puts red at the bottom (lowest spectral color). OFF puts red at the top (hot). This selector is the reverse of THERMAL_COLORS.		
SURFACEGRID	type: Numeric	default: 101
Selects the minimum resolution for Surface plots, in terms of the number of plot points along the longest plot dimension. The actual plot grid will follow the computation mesh, with subdivision if the cell size is greater than that implied by the SURFACEGRID control.		
TEXTSIZE	type: Numeric	default: 35
Controls size of text on plot output. Value is number of <i>lines per page</i> , so larger numbers mean smaller text.		
THERMAL_COLORS	type: Logical	default: On
Sets the order of colors used in labeling plots. ON puts red at the top (hot). OFF puts red at the bottom (lowest spectral color). This selector is the reverse of SPECTRAL_COLORS.		
VECTORGRID	type: Numeric	default: 71
Sets resolution of Vector plots. Arrows are placed on a regular grid with the selected number of points along the longest plot dimension.		
VIEWPOINT (x, y, angle)		default: negative X&Y, 30
Defines default viewpoint for SURFACE plots and 3D GRID plots. Angle is in degrees. (In 3D cut plane plots, this specifies a position in the cut plane coordinates)		

3.3.3 Coordinates

The optional COORDINATES section defines the coordinate geometry of the problem.

Each geometry selection has an implied three-dimensional coordinate structure. In 2D and 1D geometries, the solution if the PDE system is assumed to have no variation in one or two of the coordinate directions. The finite element mesh is therefore constructed in the remaining space, and derivatives in the absent coordinates are assumed to be zero.

In 3D geometry the X & Y coordinates are the projection plane in which a figure is constructed, and the Z coordinate is the direction of extrusion.

The first coordinate in the order of listing is used as the horizontal axis in graphical output, while the second is used as the vertical axis.

The basic form of the COORDINATES section is:

COORDINATES geometry

where geometry may be any of the following:

<u>Name</u>	<u>Coordinate system</u>	<u>Modeled Coordinates</u>
CARTESIAN1	Cartesian (X,Y,Z)	X
CYLINDER1	Cylindrical (R,Phi,Z)	R
SPHERE1	Spherical (R,Theta,Phi)	R
CARTESIAN2	Cartesian (X,Y,Z)	X,Y
XCYLINDER	Cylindrical (Z,R,Phi)	Z,R
YCYLINDER	Cylindrical (R,Z,Phi)	R,Z
CARTESIAN3	Cartesian (X,Y,Z)	X,Y,Z

If no COORDINATES section is specified, a CARTESIAN2 coordinate system is assumed.

Renaming Coordinates

A second form of the COORDINATES section allows renaming (aliasing) of the coordinates:

COORDINATES geometry ('Xname' [, 'Yname' [, 'Zname']])

In this case, the 'Xname' argument renames the coordinate lying along the horizontal plot axis, and 'Yname' renames the coordinate lying along the vertical plot axis. 'Zname' renames the extrusion coordinate. Names may be quoted strings or unquoted names, and should not contain spaces or special characters like brackets or parentheses. Renaming coordinates does not change the fundamental nature of the coordinate system. In cylindrical geometries, for example, the radial coordinate will continue to be the radial coordinate, even if you name it "Z".

In time-dependent problems, the time coordinate may be renamed using TIME ('Tname') in the COORDINATES section :

COORDINATES geometry TIME ('Tname')

This may be used in conjunction with the renaming of spatial coordinates.

Differential Operators

Renaming coordinates causes a redefinition of the differential operators. DX becomes D<Xname>, etc.

The DIV, GRAD, and CURL operators are expanded correctly for the designated geometry. Use of these operators in the EQUATIONS section can considerably simplify problem specification.

Other Geometries

Since FlexPDE accepts arbitrary mathematical forms for equations, it is always possible to construct equations appropriate to an arbitrary geometry.

For example, using the CARTESIAN2 coordinate system and renaming coordinates, one can write the heat equation for cylindrical geometry as

```
COORDINATES cartesian2("R","Z")
VARIABLES u
...
EQUATIONS
u: dr(k*r*dr(u)) + r*dz(k*dz(u)) + r*source = 0
```

This equation derives from expanding the DIV and GRAD operators in cylindrical coordinates and multiplying by the volume weighting factor "r", and is the same as the equation that FlexPDE itself will construct in XCYLINDER geometry.

Coordinate Transformations

The function definition facility of FlexPDE can be used to simplify the transformation of arbitrary coordinates to Cartesian (X,Y,Z) coordinates.

The example problem "[Samples | Usage | polar_coordinates.pde](#)"⁶¹⁹ uses this facility to pose equations in polar coordinates:

```
DEFINITIONS
dr(f) = (x/r)*dx(f) + (y/r)*dy(f)      { functional definition of polar derivatives... }
dphi(f) = (-y)*dx(f) + x*dy(f)        {... in cartesian coordinates }

EQUATIONS
{ equation expressed in polar coordinates }
{ (and Multiplied by r^2 to clear the r=0 singularity) }
U: r*dr(r*dr(u)) + dphi(dphi(u)) + r*r*s = 0
```

Graphic output using this procedure is always mapped to the fundamental Cartesian coordinate system.

3.3.4 Variables

The VARIABLES section is used to define and assign names to all the primary dependent variables used in a problem descriptor. The form of this section is

```
VARIABLES    variable_name_1 , variable_name_2 ,...
```

All names appearing in the VARIABLES section will be represented by a finite element approximation over the problem mesh. Each variable is assumed to define a continuous field over the problem domain.

It is further assumed that each variable will be accompanied by a partial differential equation listed in the EQUATIONS section.

Each variable_name may be followed by various qualifiers, which will be described in subsequent sections. These qualifiers allow you to control mesh motion, declare complex and vector variables, declare arrays of variables, and control some of the ways FlexPDE treats the variable.

In assigning names to the dependent variables, the following rules apply:

- Variable names must begin with an alphabetic character. They may not begin with a number or symbol.
- Variable names may be a single character other than the single character "t", which is reserved for the time variable.
- Variable names may be of any length and any combination of characters, numbers and/or symbols other than reserved words.
- Variable names may not contain any separators. Compound names can be formed with the '_' symbol (e.g. temperature_celsius).
- Variable names may not contain the character '-' which is reserved for the minus sign.

Example:

```
VARIABLES  
  U,V
```

3.3.4.1 The THRESHOLD Clause

An optional THRESHOLD clause may be associated with a variable name.

The THRESHOLD value determines the *minimum* range of values of the variable for which FlexPDE must try to maintain the requested ERRIM accuracy. In other words, THRESHOLD defines the level of variation at which the user begins to lose interest in the details of the solution.

Error estimates are scaled to the *greater* of the THRESHOLD value or the observed range of the variable, so the THRESHOLD value becomes meaningless once the observed variation of a variable in the problem domain exceeds the stated THRESHOLD. If you make the THRESHOLD too large, the accuracy of the solution will be degraded. If you make it too small, you will waste a lot of time computing precision you don't need. So if you provide a THRESHOLD, make it a modest fraction of the expected range (max minus min) of the variable.

The THRESHOLD clause has two alternative forms:

```
variable_name ( THRESHOLD = number )  
variable_name ( number )
```

Note: In most cases, the use of THRESHOLD is meaningful only in time-dependent or nonlinear steady-state problems with uniform initial values, or that ultimately reach a solution of uniform value.

3.3.4.2 The ORDER Clause

An optional ORDER clause may be associated with a variable name.

The ORDER value determines the [interpolation order](#)^[202] for a given variable. It may be used in conjunction with THRESHOLD.

The ORDER clause has the form:

variable_name (ORDER = number)

3.3.4.3 Complex Variables

You may declare that a VARIABLE name represents a complex quantity. The format of a complex declaration is:

variable_name = COMPLEX (real_name , imaginary_name)

This declaration tells FlexPDE that variable_name represents a complex quantity, and assigns the real_name and imaginary_name to the real and imaginary parts of variable_name. You may subsequently assign EQUATIONS and boundary conditions either to the variable_name, or to its components individually. Similarly, you can perform arithmetic operations or request graphical output of either the variable_name itself, or its components individually.

Example:

```
VARIABLES
  U,V
  C = COMPLEX(Cr,Ci)
```

3.3.4.4 Moving Meshes

FlexPDE can be configured to move the finite element mesh in time-dependent problems.

In order to do this, you must assign a VARIABLE as a surrogate for each coordinate you wish to modify. This specification uses the form

variable_name = MOVE (coordinate_name)

This declaration assigns variable_name as a surrogate variable for the coordinate_name. You may subsequently assign EQUATIONS and boundary conditions to the surrogate variable in the normal way, and these equations and boundary conditions will be imposed on the values of the selected mesh coordinate at the computation nodes.

Example:

```
VARIABLES
  U,V
  Xm = MOVE(X)
```

See [Moving Meshes](#)²³⁶ later in this document and the Moving Meshes chapter in the [User Guide](#)¹⁴⁰.

3.3.4.5 Variable Arrays

You may declare that a VARIABLE name represents an array of variables. The format of a variable array declaration is:

```
variable_name = ARRAY [ number ]
```

This declaration tells FlexPDE that variable_name represents an array of variable quantities, each one a scalar field on the problem domain. FlexPDE creates internal names for the elements of the array by subscripting variable_name with "_" and the element number (e.g. U_7). You can access the components either by this internal name or by an indexed reference variable_name[index].

You may subsequently assign EQUATIONS and boundary conditions either to the individual components, or in a REPEAT loop by indexed reference. Similarly, you can perform arithmetic operations or request graphical output of either the indexed array name, or by the individual component names.

Example:

```
VARIABLES
  A = ARRAY[10]      { declares ten variables A_1 through A_10 }
                    { also accessible as A[1] through A[10] }
```

See example problems:

[Samples | Usage | Variable Arrays | array_variables.pde](#)⁶⁸⁴

3.3.4.6 Vector Variables

You may declare that a VARIABLE name represents a vector quantity. The format of a vector declaration is:

```
variable_name = VECTOR ( component1 )
variable_name = VECTOR ( component1 , component2 )
variable_name = VECTOR ( component1 , component2 , component3 )
```

This declaration tells FlexPDE that variable_name represents a vector quantity, and assigns the component names to the geometric components of variable_name. You may subsequently assign EQUATIONS and boundary conditions either to the variable_name, or to its components individually. Similarly, you can perform arithmetic operations or request graphical output of either the variable_name itself, or its components individually.

The three component names correspond to the coordinate directions as implied in the COORDINATES section of the problem descriptor. You can declare any or all of the three component directions, even if the model domain treats only one or two.

Any of the component names can be replaced by "0" to indicate that this component of the vector is not to be modeled by FlexPDE, but is to be assumed zero. Similarly, omitted names cause the corresponding vector components to be assumed zero.

Example:

In XCYLINDER geometry, which has coordinates (Z,R,Phi), you can tell FlexPDE to model only the Phi component of a vector quantity as follows:

```
VARIABLES
  A = Vector(0,0,Aphi)
```

See example problems:

[Samples | Usage | Variable Types | Vector Variables.pde](#)^[690]

[Samples | Applications | Fluids | 3d_Flowbox.pde](#)^[392]

[Samples | Applications | Fluids | Swirl.pde](#)^[416]

[Samples | Applications | Magnetism | 3D_Vector_Magnetron.pde](#)^[439]

3.3.5 Global Variables

The **GLOBAL VARIABLES** section is used to define auxiliary or summary values which are intricately linked to the field variables.

Each GLOBAL VARIABLE takes on a single value over the entire domain, as opposed to the nodal finite element field representing a VARIABLE.

GLOBAL VARIABLES differ from simple DEFINITIONS in that DEFINITIONS are algebraically substituted in place of their references, while GLOBAL VARIABLES represent stored values which are assigned a row and column in the master coupling matrix and are solved simultaneously with the finite element equations.

The GLOBAL VARIABLES section must follow immediately after the VARIABLES section.

Rules for declaring GLOBAL VARIABLES are the same as for VARIABLES, and a GLOBAL VARIABLE may have a THRESHOLD, and may be declared to be COMPLEX, VECTOR or ARRAY, as with VARIABLES.

Each GLOBAL VARIABLE will be associated with an entry in the EQUATIONS section, with rules identical to those for VARIABLES.

GLOBAL VARIABLES do not have boundary conditions. They may be either steady-state or time-dependent, and may be defined in terms of integrals over the domain, or by point values of other functions.

Examples:

[Samples | Applications | Control | Control_Steady.pde](#)^[377]

[Samples](#) | [Applications](#) | [Control](#) | [Control_Transient.pde](#) 

Note: In previous versions of FlexPDE, Global Variables were referred to as SCALAR VARIABLES. This usage is still allowed for compatibility, but the newer terminology is preferred.

3.3.6 Definitions

The **DEFINITIONS** section is used to declare and assign names to special numerical constants, coefficients, and functions used in a problem descriptor.

In assigning names to the definitions, the following rules apply:

- Must begin with an alphabetic character. May *not* begin with a number or symbol.
- May be a single character other than the single character `t`, which is reserved for the time variable.
- May be of any length and any combination of characters, numbers, and symbols other than reserved words, coordinate names or variable names.
- May *not* contain any separators. Compound names can be formed with the `'_'` symbol (e.g. `temperature_celsius`).
- May *not* contain the `'-'` which is reserved for the minus sign.

Normally, when a definition is declared it is assigned a value by following it with the assignment operator `'='` and either a value or an expression. Definitions are dynamic elements and when a value is assigned, it will be the initial value only and will be updated, if necessary, by the problem solution.

Example:

```
Viscosity = 3.02e-4*exp(-5*Temp)
```

Definitions are expanded inline in the partial differential equations of the **EQUATIONS** section. They are not represented by a finite element approximation over the mesh, but are calculated as needed at various times and locations.

Redefining Regional Parameters

Names defined in the **DEFINITIONS** section may be given overriding definitions in some or all of the **REGIONS** of the **BOUNDARIES** section. In this case, the quantity may take on different region-specific

values. Quantities which are completely specified in subsequent REGIONS may be stated in the DEFINITIONS section without a value.

Note: See the User Guide section "[Setting Material Properties by Region](#)"^[98] for examples of redefined regional parameters.

Defining Constant Values

Normally, DEFINITIONS are stored as the defining formulas, and are recomputed as needed. In rare cases (as with RANDOM elements), this is inappropriate. The qualifier CONST() can be used to force the storage of numeric values instead of defining formulas. Values will be computed when the script is parsed, and will not be recomputed.

name = CONST (expression)

Note: Scripts with [staged geometry](#)^[227] will reparse the script file and regenerate any CONST values.

3.3.6.1 ARRAY Definitions

Names may be defined as representing arrays or lists of values. ARRAY definition can take several forms:

name = ARRAY (value_1 , value_2 ... value_n)

defines name to be an n-element array of values value_1 ... value_n.

name = ARRAY (initial BY step TO final)

defines name to be an array of values initial, initial + step, initial + 2*step, and so forth up to final.

name = ARRAY [number]

defines name to be an array of number elements. Values are as yet undefined, and must be supplied later in the script.

name = ARRAY [number] (value_1 , value_2 ... value_number)

defines name to be an array of number elements, whose values are value_1, value_2, etc.

name = ARRAY FOR param (initial BY step TO final) : expression

defines name to be an array of values generated by evaluating expression with param set to initial, initial + step, initial + 2*step, and so forth up to param = final.

name = ARRAY FOR param (P1 , P2 { , P3 ... }) : expression

defines name to be an array of values generated by evaluating expression with param set to P1, P2, and so forth up to the end of the listed parameters.

The values assigned to ARRAY elements must evaluate to scalar numbers. They may contain coordinate or variable dependencies, but must not be VECTOR, COMPLEX or TENSOR quantities.

Examples:

```

u = array[11]
v = array(0,1,2,3,4,5,6,7,8,9,10)
w = array(0 by 0.1 to 10)
alpha =array for x(0 by 0.1 to 10) : sin(x)+1.

```

Referencing ARRAY values

Within the body of the descriptor, ARRAY values may be referenced by the form

name [index]

The value of the selected ARRAY element is computed and used as though it were entered literally in the text.

ARRAY elements that have not been previously assigned may be given values individually by conventional assignment syntax:

name [index] = expression

Arithmetic Operations on ARRAYS

Arithmetic operations may be performed on ARRAYS as with scalar values. Names defined as the result of ARRAY arithmetic will be implicitly defined as ARRAYS. Arithmetic operations and functions on ARRAYS are applied element-by-element.

ARRAYS may also be operated on by [MATRICES](#)^[217] (q.v.)

Example:

```

beta = sin(w)+1.1      { beta is an ARRAY with the same data as alpha }
gamma = sin(v)+0.1    { gamma is an ARRAY with the dimension of v }

```

The SIZEOF operator

The operator SIZEOF may be used to retrieve the allocated size of an ARRAY.

Example:

```

n = SIZEOF(v)          { returns 11, the allocated size of the example array "v" above }

```

ARRAYS of Constant Values

Normally, ARRAYS are stored as the defining formulas for the elements, and are recomputed as needed. In rare cases (as with RANDOM elements), this is inappropriate. The qualifier CONST can be prepended to the ARRAY definition to force the storage of numeric values instead of defining formulas. Elements will be computed when the script is parsed, and will not be recomputed. For example:

name = CONST ARRAY (value_1 , value_2 ... value_n)

Note: Scripts with [staged geometry](#)^[221] will reparse the script file and regenerate any [CONST](#)^[214] values.

See Also: ["Using ARRAYS and MATRICES"](#)^[150]

3.3.6.2 MATRIX Definitions

Names may be defined as representing matrices or tables of values. MATRIX definition can take several forms:

**name = MATRIX ((value_11 , value_12 ... value_1m) ,
... (value_n1 , value_n2 ... value_nm))**

defines name to be a matrix of values with n rows and m columns.

name = MATRIX [rows , columns]

defines name to be an matrix of elements with the stated dimensions. Values are as yet undefined, and must be supplied later in the script.

**name = MATRIX [n , m] ((value_11 , value_12 ... value_1m) ,
... (value_n1 , value_n2 ... value_nm))**

defines name to be an array of number elements, whose values are as listed.

**name = MATRIX FOR param1 (initial1 BY step1 TO final1)
FOR param2 (initial2 BY step2 TO final2) : expression**

defines name to be a matrix of values generated by evaluating expression with param1 and param2 set to the indicated range of values. param2 is cycled to create columns, and param1 is cycled to create rows.

**name = MATRIX FOR param1 (P11 , P12 { , P13 ... })
FOR param2 (P21 , P22 { , P23 ... }) : expression**

defines name to be a matrix of values generated by evaluating expression with param1 and param2 set to the indicated range of values. param2 is cycled to create columns, and param1 is cycled to create rows.

The values assigned to MATRIX elements must evaluate to scalar numbers. They may contain coordinate or variable dependencies, but must not be VECTOR, COMPLEX or TENSOR quantities.

Examples:

m1 = **matrix**((1,2,3),(4,5,6),(7,8,9))

m2 = **matrix for** x(0.1 by 0.1 to 5*pi/2) { a 79x79 diagonal matrix of amplitude 10 }
 for y(0.1 by 0.1 to 5*pi/2) : **if**(x=y) **then** 10 **else** 0

m3 = **matrix for** x(0.1 by 0.1 to 5*pi/2) { a 79x79 matrix of sin products }
 for y(0.1 by 0.1 to 5*pi/2) : sin(x)*sin(y) +1

Referencing MATRIX values

Within the body of the descriptor, MATRIX values may be referenced by the form

name [row_index , column_index]

The value of the selected MATRIX element is computed and used as though it were entered literally in the text.

MATRIX elements that have not been previously assigned may be given values individually by conventional assignment syntax:

name [row_index , column_index] = expression

Arithmetic Operations on MATRICES

Arithmetic operations may be performed on MATRICES. Names defined as the result of MATRIX arithmetic will be implicitly defined as MATRICES or ARRAYS, as appropriate to the operation.

- Standard arithmetic operations and functions on MATRICES are applied element-by-element.
- The special operator ** is defined for conventional matrix multiplication

Examples:

N = M1 * M2 { N is a MATRIX, each element of which is the product of corresponding elements in M1 and M2 }

S = sin(M) { S is a MATRIX, each element of which is the sine of the corresponding element of M }

N = M1 ** M2 { N is a MATRIX, each element of which is the dot product of corresponding row in M1 and column in M2 (ie, conventional matrix multiplication) }

Arithmetic Operations of MATRICES on ARRAYS

Arithmetic operations may be performed by MATRICES on ARRAYS. Names defined as the result of these operations will be implicitly defined as ARRAYS, as appropriate to the operation. The MATRIX and ARRAY appearing in such operations must agree in dimensions or the operation will be rejected.

- The special operator ****** is defined for conventional (matrix x vector) multiplication, in which each element of the result vector is the dot product of the corresponding matrix row with the argument vector.
- The special operator **//** is defined for (vector / matrix) division. This operation is defined as multiplication of the vector by the inverse of the argument matrix.

Examples:

$V2 = M ** V1$ { V2 is an ARRAY, each element of which is the dot product of the corresponding row of M with the ARRAY V1 }

$V2 = V1 // M$ { V2 is an ARRAY that satisfies the equation $M**V2 = V1$ }

The TRANSPOSE operator

The operator TRANSPOSE may be used to retrieve the transpose of a MATRIX.

The SIZEOF operator

The operator SIZEOF may be used to retrieve the allocated size of a MATRIX.

Example:

$n = \text{SIZEOF}(v)$ { returns 11, the allocates size of the example array "v" above }

MATRICES of Constant Values

Normally, MATRICES are stored as the defining formulas for the elements, and are recomputed as needed. In rare cases (as with RANDOM elements), this is inappropriate. The qualifier CONST can be prepended to the MATRIX definition to force the storage of numeric values instead of defining formulas. Elements will be computed when the script is parsed, and will not be recomputed. For example:

**name = CONST MATRIX ((value_11 , value_12 ... value_1m) ,
... (value_n1 , value_n2 ... value_nm))**

See Also: ["Using ARRAYS and MATRICES"](#)¹⁵⁰

3.3.6.3 COMPLEX Definitions

You may declare that a DEFINITION name represents a complex quantity. The format of a complex declaration is:

name = COMPLEX (real_name , imaginary_name)

This declaration tells FlexPDE that name represents a complex quantity, and assigns the real_name and imaginary_name to the real and imaginary parts of name. You can perform arithmetic operations or request graphical output of either the name itself, or its components individually.

Example:

DEFINITIONS

Cr = 5

Ci = 7

C = COMPLEX(Cr,Ci)

3.3.6.4 Function Definitions

Definitions can be made to depend on one to three explicit arguments, much as with a Function definition in a procedural language. The syntax of the parameterized definition is

name (argname) = expression

name (argname1 , argname2) = expression

name (argname1 , argname2 , argname3 , ...) = expression

The maximum number of arguments is 10, and the construct is only meaningful if expression contains references to the argnames. Names defined in this way can later be used by supplying actual values for the arguments. As with other definitions in FlexPDE, these actual parameters may be any valid expression with coordinate or variable dependences. The argnames used in the definition are local to the definition and are undefined outside the scope of the defining expression.

Note that it is never necessary to pass known definitions, such as coordinate names, variable names, or other parameters as arguments to a parameterized definition, because they are always globally known and are evaluated in the proper context. Use the parameterized definition facility when you want to pass values that are not globally known.

Note: This construct is implemented by textual expansion of the definitions in place of the function reference. It is not a run-time call, as in a procedural language.

Example:

DEFINITIONS

sq(arg) = arg*arg

...

EQUATIONS

div(a*grad(u)) + sq(u+1)*dx(u) +4 = 0;

In this case, the equation will expand to

$$\text{div}(a*\text{grad}(u)) + (u+1)*(u+1)*dx(u) + 4 = 0.$$

See also ["Samples | Usage | Function_Definition.pde"](#)^[574]

3.3.6.5 STAGED Definitions

FlexPDE can perform automated parameter studies through use of the STAGE facility. In this mode, FlexPDE will run the problem a number of times, with differing parameters in each run. Each STAGE begins with the solution and mesh of the previous STAGE as initial conditions.

[HISTORY](#)^[274] plots can be used to show the variation of scalar values as the STAGES proceed.

Note: *The STAGE facility can only be used on steady-state problems. It cannot be used with time dependent problems.*

The STAGES Selector

In the SELECT section, the statement

STAGES = number

specifies that the problem will be run number times. A parameter named STAGE is defined, which takes on the sequence count of the staged run. Other definitions may use this value to vary parameter values, as for example:

Voltage = 100*stage

STAGED Definitions

A parameter definition may also take the form:

param = STAGED (value_1, value_2, ... value_n)

In this case, the parameter param takes on value_1 in stage 1, value_2 in stage 2, etc. If STAGED parameters are defined, the STAGES selector is optional. If the STAGES selector is not defined, the length of the STAGED list will be used as the number of stages. If the STAGES selector is defined, it overrides the length of the STAGED list. Commas are optional.

See the example ["Samples | Usage | Stages.pde"](#)^[626].

STAGED Definitions by incrementation

Any **value** in the **STAGED** form above may be replaced by the incrementation form

value_i BY increment TO value_j

STAGED Geometry

If the geometric domain definition contains references to staged quantities, then the solution and mesh will not be retained, but the mesh will be regenerated for the new geometry. History plots can still be displayed for staged geometries.

See the example "[Samples | Usage | Staged_Geometry.pde](#)"^[626].

FlexPDE attempts to detect stage dependence in the geometrical domain definition and automatically regenerate the mesh. If for any reason these dependencies are undetected, the global selector STAGEGRID can be used to force grid staging.

Note: Scripts with staged geometry will reparse the script file and regenerate any [CONST](#)^[214] values.

3.3.6.6 POINT Definitions

A name may be associated with a coordinate point by the construct

point_name = POINT(a,b)

Here a and b must be computable constants at the time the definition is made. They may not depend on variables or coordinates. They may depend on stage number.

The name of the point can subsequently appear in any context in which the literal point (a,b) could appear.

Individual coordinates of a named point can be extracted using [vector component operators](#)^[190].

Movable Points

The qualifier MOVABLE can be used with named points that are used in boundary definitions in moving-mesh problems. These points become locked to the mesh, and will move as the mesh moves.

Such points can be used in "AT" selectors for histories to track values at points that move with the mesh.

Examples:

[Samples | Usage | Moving_Mesh | 2D_Movepoint.pde](#)^[635]

3.3.6.7 TABLE Import Definitions

FlexPDE supports the import of tabular data in several script commands. In each case, the model assumes that a text file contains data defining one or more functions of one, two or three coordinates. The coordinates may be associated with any quantity known to FlexPDE, such as a spatial coordinate, a variable, or any defined quantity. At each point of evaluation, whether of a plot or a quadrature computation of coupling matrix, or any other context, the values of the declared coordinates of the table are computed and used as lookup parameters to interpolate data from the table.

This feature is useful for modeling systems where experimental data is available and for interfacing with other software programs.

The names of quantities to be used as table coordinates may be declared inside the table file, or they may be imposed by the TABLE input statement itself.

Table coordinates must be in monotonic increasing order.

TABLE data are defined on a rectangular grid, and interpolated with linear, bilinear or trilinear interpolation. Modifiers can be prepended to table definitions to create spline interpolation or histogram interpretation, or to smooth the imported data.

Table import files are ASCII text files, and can be generated with any ASCII text editor, by user programs designed to generate tables, or by FlexPDE itself, using the EXPORT plot modifier or the TABLE output statement (see [MONITORS and PLOTS](#)^[267]).

See [TABLE File Format](#)^[225] for a definition of the table file format.

See [Importing Data from other applications](#)^[150] for a discussion of TABLE usage.

3.3.6.7.1 The TABLE Input function

A single imported data function may be declared by one of the forms:

```
name = TABLE ( 'filename' )  
name = TABLE ( 'filename', coord1 [,coord2... ] )
```

Both forms import a data table from the named file and associate the data with the defined **name**.

In the first form, the coordinates of the table must be named in the file.

In the second form, the coordinates are named explicitly in the command.

In either case, the declared coordinates must be names known to FlexPDE at the time of reading the file.

The format of the TABLE file describes a function of one, two or three coordinates.

The TABLE statement must appear in a parameter definition (in the DEFINITIONS section or as a regional parameter definition in a REGION clause), and the table data are associated with the given name. *Note: FlexPDE version 6 and later do not allow TABLE to be used directly in arithmetic expressions.*

When the parameter name is used in subsequent computations, the current values of the table coordinates will be used to interpolate the value. For instance, if the table coordinates are the spatial coordinates X and Y, then during computations or plotting, the named parameter will take on a spatial distribution corresponding to the table data spread over the problem domain.

In version 7.11 and later, FlexPDE will issue an error diagnostic if table data is accessed outside of the defined range. This was added as a warning to the user since extrapolated data may not be trustworthy. This table bounds check can be turned off using the selector [CHECK TABLES](#)^[200].

Examples:

- [Samples | Usage | Import-Export | Table.pde](#)⁵⁹⁶
- [Samples | Usage | Import-Export | Blocktable.pde](#)⁵⁸⁹
- [Samples | Usage | Import-Export | Smoothtable.pde](#)⁵⁹⁵
- [Samples | Usage | Import-Export | Splinetable.pde](#)⁵⁹⁵

3.3.6.7.2 The TABLEDEF input statement

The TABLEDEF input statement is similar to the [TABLE](#)²²³ input function, but can be used to directly define one or several parameters from a multi-valued table file.

The format is

TABLEDEF('filename' , name1 { , name2 , ... })

Whereas in the TABLE statement the additional arguments are coordinate reassignments, in the TABLEDEF statement the additional arguments are the names to be defined and associated with the table data. The TABLEDEF statement is not able to redefine the names of the table coordinates, and the names in the table file must be those of values known to FlexPDE at the time of reading the table.

The TABLEDEF statement is syntactically parallel to the TRANSFER statement.

TABLEDEF may optionally be preceded by [TABLE modifiers](#)²²⁴.

3.3.6.7.3 TABLE Modifiers

The default interpolation for table data is linear (or bilinear or trilinear) within the table cells. Alternative treatments of the data can be specified by prefixes attached to the TABLE statement.

<u>Modifier</u>	<u>Effect</u>
SPLINE	A cubic spline is fit to the table data (one- and two-dimensional tables only)
BLOCK	Data points are assumed to denote the beginning of a histogram level. The data value at a given point will apply uniformly to the coordinate interval ending at the next coordinate point. A ramped transition will be applied to the interpolation, transitioning from one level to the next in 1/10 of the combined table cell widths.
BLOCK(fraction)	Data are interpreted as with BLOCK, but fraction is used as the transition width factor in place of the default 1/10.
SMOOTH(wavelength)	A diffusive smoothing is applied to the TABLE data, in such a way that the integral of the data is preserved, but sharp transitions are blurred. This can

result in more efficient solution times if the data are used as sources or parameters in time-dependent problems.

Fourier components with spatial wavelengths less than wavelength will be damped. (See [Technical Note: Smoothing Operators in PDE's](#)^[356]).

Examples:

Data = SMOOTH(0.1) TABLE("input_file")

Data = SPLINE TABLE("input_file")

3.3.6.7.4 TABLE File format

Data files for use in TABLE or TABLEDEF input must have the following form:

```
{ comments }
name_coord1  datacount1
  value1_coord1  value2_coord1  value3_coord1 ...
name_coord2  datacount2
  value1_coord2  value2_coord2  value3_coord1 ...
name_coord3  datacount3
  value1_coord3  value2_coord3  value3_coord3 ...
data { comments }
data111  data211  data311 ...
data121  data221  data321 ...
data131  data231  data331 ...
...      ...      ...
...      ...      ...
data112  data 212  data312 ...
data122  data 222  data322 ...
data132  data 232  data 332 ...
...      ...      ...
...      ...      ...
```

where

name_coordN is the coordinate name in the N direction. Names must match defined names in the importing script unless table coordinate redefinition is used.

valueN_coordM is the Nth value of the Mth coordinate. These must be in monotonic increasing order.

datacountN is the number of data points in the N direction.

DataJKL is the data at coordinate point (J,K,L)

... ellipses indicate extended data lists, which may be continued over multiple lines.

Note that in presenting data, coord1 is cycled first, then coord1, then coord3.

Coordinate lists and data lists are free-format, and may be arbitrarily spaced, indented or divided into lines.

Example:

```
{ this is an example table. }
x 6
  -0.01 2 4 6 8 10.01
y 6
  -0.01 2 4 6 8 10.01
data
  1.1    2.1    3.1    4.1    5.1    6.1
  1.2    2.2    3.2    4.2    5.2    6.2
  1.3    2.3    3.3    4.3    5.3    6.3
  1.4    2.4    3.4    4.4    5.4    6.4
  1.5    2.5    3.5    4.5    5.5    6.5
  1.6    2.6    3.6    4.6    5.6    6.6
```

3.3.6.8 TABULATE definitions

The TABULATE statement can be used to generate a TABLE internally from arithmetic expressions. The result is a TABLE identical to one produced externally and read by the TABLE or TABLEDEF statements.

This facility can be used to tabulate parameters that are very expensive to compute, resulting in an improvement in the efficiency of the system solution.

The TABULATE statement has a syntax identical to that of ARRAY and MATRIX definition, with the addition of a possible third table dimension.

name = TABULATE FOR param1 (first1 BY step1 TO final1) : expression

**name = TABULATE FOR param1 (first1 BY step1 TO final1)
FOR param2 (first2 BY step2 TO final2) : expression**

**name = TABULATE FOR param1 (first1 BY step1 TO final1)
FOR param2 (first2 BY step2 TO final2)
FOR param3 (first3 BY step3 TO final3) : expression**

These statements define name to be a TABLE of values generated by evaluating expression at all combinations of the specified parameters. param1, param2 and param3 must be names already defined in the script, and they become the coordinate values of the table.

As with MATRICES and ARRAYS, table points can be stated explicitly

name = TABULATE FOR param1 (p11 , p12 { , p13 ...}) : expression

The two forms of coordinate definition can be mixed at will, as in

name = TABULATE FOR param1 (p1 , p2 , p3 BY step TO final , pN) : expression

The expression can also be an explicit list of values :

```
name = TABULATE FOR param1 (first1 BY step1 TO final1 ) : LIST (value1,
value2, ...)
```

Interpretation of the resulting table can be modified as with the TABLE statement, by prefixing the TABULATE clause by the modifiers SPLINE, BLOCK or SMOOTH.

Examples:

[Samples](#) | [Usage](#) | [Misc](#) | [Tabulate.pde](#)^[627]

3.3.6.9 TRANSFER Import Definitions

FlexPDE supports a TRANSFER facility for exchanging data between FlexPDE problem runs. The format is unique to FlexPDE, and is not supported by other software products. The file format for version 7 is different from that of previous versions, but files written by version 6 can also be read by version 7. See [TRANSFER file format](#)^[278] and [TRANSFER6 file format](#)^[283] for descriptions of the file formats.

A TRANSFER file contains data defined on the same unstructured triangle or tetrahedral mesh as used in the creating FlexPDE computation, and maintains the full information content of the original computation. It also contains a description of the problem domain definition of the creating run.

Note: Unlike FlexPDE Version 6, Version 7 TRANSFER import restores the state of HISTORY plots (if the file was written by Version 7).

The TRANSFER input statement has three forms :

```
TRANSFER ( 'filename' , name1 { , name2 , ... } )
TRANSFERMESH ( 'filename' , name1 { ,name2,.. } )
TRANSFERMESHTIME ( 'filename' , name1 { ,name2,.. } )
```

The file specified in the transfer input function must have been written by FlexPDE using the TRANSFER output function. The names listed in the input function will become defined as if they had appeared in a "name=" definition statement. The names will be positionally correlated with the data fields in the referenced output file.

With the TRANSFER form, the mesh structure of the imported file is stored independently from the computation mesh, and is not influenced by refinement or merging of the computation mesh.

The TRANSFERMESH input statement not only imports data definitions stored on disk, but also **IMPOSES THE FINITE ELEMENT MESH STRUCTURE** of the imported file onto the current problem, bypassing the normal mesh generation process. In order for this imposition to work, the importing descriptor file must have **EXACTLY** the same domain definition structure as the exporting file. Be sure to use a copy of the exporting domain definition in your importing descriptor. You may change the boundary conditions, but not the boundary positions and ordering.

The TRANSFERMESHTIME statement acts precisely as the TRANSFERMESH statement, except that the problem time is imported from the transfer file as well as the mesh. This statement can be used to resume a time-dependent problem from the state recorded in the transfer file. In version 7 the TRANSFERMESHTIME statement is deprecated and has been replaced by the RESTART statement.

Restart :

The RESTART input statement has the form :

RESTART ('filename')

The file specified in the transfer input function must have been written by FlexPDE using the RESTART output function or the automatic .

Examples:

[Samples | Usage | Import-Export | Transfer_Export.pde](#) ⁵⁹⁹

[Samples | Usage | Import-Export | Transfer_Import.pde](#) ⁵⁹⁹

[Samples | Usage | Import-Export | Mesh_Export.pde](#) ⁵⁹²

[Samples | Usage | Import-Export | Mesh_Import.pde](#) ⁵⁹³

[Samples | Usage | Stop+Restart | Restart_Export.pde](#) ⁶⁸¹

[Samples | Usage | Stop+Restart | Restart_Import.pde](#) ⁶⁸²

3.3.6.10 The PASSIVE Modifier

Definitions may be specified as **PASSIVE**, in which case they will be blocked from differentiation with respect to system variables in the formation of the global Jacobian matrix. In strongly nonlinear systems, this sometimes prevents pathological behavior, at the expense of slower convergence.

Example:

Viscosity = Passive(3.02*exp(-5*Temp))

The derivative of Viscosity with respect to Temp will be forced to zero, instead of the true value (-5)*3.02*exp(-5*Temp).

3.3.6.11 Mesh Control Parameters

FlexPDE uses an adaptive initial mesh generation procedure. Cell sizes are generated to conform with local boundary feature sizes, and cell sizes will grow gradually from locales of small cell size to locales of large cell size. Cells sides always match everywhere, and there is never a mismatch between adjacent cells.

It is possible, however, to override the default cell size logic by use of the controls MESH_SPACING and MESH_DENSITY. These parameters have special meaning in controlling the initial mesh layout. They may appear in the context of a parameter definition or redefinition (ie, in the DEFINITIONS section or in a REGION), or in the context of a boundary condition. There may be more than one control active in any locale, and the control (default or explicit) resulting in the smallest mesh cells will dominate.

MESH_SPACING dictates the desired spacing between mesh nodes.

MESH_DENSITY is the reciprocal of MESH_SPACING, and dictates the desired number of mesh nodes per unit distance.

Appearing in the DEFINITIONS section, these parameters specify a global default mesh density function in the volume of the domain.

Appearing in a REGION, these parameters specify a mesh density function in the volume of the current region (in 3D they may be qualified by LAYER or SURFACE).

Appearing in the context of a boundary condition (ie, inside a *path*) they dictate the mesh density along the curve or sidewall surface currently being defined. In 3D they may be qualified by LAYER or SURFACE to restrict the application of the density function.

MESH_SPACING and MESH_DENSITY specifications may be any function of spatial coordinates (but not of VARIABLES).

Examples:

```
MESH_DENSITY = exp(-(x^2+y^2+z^2))
```

This will create a Gaussian density distribution around (0,0,0), with spacing ultimately overridden by the size limit implied by NGRID.

See the User Guide section "[Controlling Mesh Density](#)"¹⁴⁴ for more information.

See also

["Samples | Usage | Mesh Control | Mesh Density.pde"](#)⁶⁰⁸

["Samples | Usage | Mesh Control | Mesh Spacing.pde"](#)⁶⁰⁸

["Samples | Usage | Mesh Control | Boundary Density.pde"](#)⁶⁰⁵

["Samples | Usage | Mesh Control | Boundary Spacing.pde"](#)⁶⁰⁶

3.3.7 Materials

The **MATERIALS** section is used to create sets of DEFINITIONS that can be applied to a REGION by the USE MATERIAL statement.

Example:

```
MATERIALS
"wood" :
  a=1
  b=2
```

```
c=3
"plastic" :
a=10
b=20
c=30
```

BOUNDARIES

REGION 1

```
USE MATERIAL "wood"
... ! a is 1 in this region
```

REGION 2

```
USE MATERIAL "plastic"
... ! a is 10 in this region
```

Examples:

[Samples | Usage | Misc | Material Sets.pde](#)^[617]

3.3.8 Boundary Conditions

The **BOUNDARY CONDITIONS** section is used to create sets of boundary conditions that can be applied to a boundary path by the USE BC statement.

Example:

BOUNDARY CONDITIONS

```
"outside" :
VALUE(u)=1
NATURAL(v)=0
"inside" :
NATURAL(u)=100
VALUE(v)=10
```

BOUNDARIES

REGION 1

```
START(...)
USE BC "outside"
... ! value of u is 1 on this path
```

REGION 2

```
START(...)
USE BC "inside"
... ! natural of u is 100 on this path
```

Examples:

[Samples | Usage | Misc | BC_Sets.pde](#)^[617]

3.3.9 Initial Values

The **INITIAL VALUES** section is used to initialize the dependent variables.

When not specifically initialized, the dependent variables are initialized to zero.

For steady state problems the INITIAL VALUES section is optional.

For time dependent problems, the INITIAL VALUES section should include a value assignment statement for each dependent variable.

Initial value statements are formed by following the dependent variable name with the assignment operator '=' and either a constant, function, expression or previously defined definition.

Example:

```
INITIAL VALUES
U = 1.0-x
```

Setting Initial Values from an imported table:

For syntactic reasons, initial values cannot be set directly from [TABLE](#)^[222] or [TRANSFER](#)^[227].

An intermediate name must be defined by the TABLE or TRANSFER command, and then assigned to the initial value:

```
DEFINITIONS
TRANSFER("initial_U.xfr",U0)
INITIAL VALUES
U = U0
```

Setting Initial time derivatives:

In some problems, especially moving mesh problems, it is important to specify initial time derivatives that are not zero.

This can be done by specifying DT(variable) = expression

Example:

```
INITIAL VALUES
DT(U) = V0
```

See script examples :

[Samples | Usage | Moving_Mesh | 1d_stretch_x.pde](#)^[630]
[Samples | Usage | Moving_Mesh | 2d_stretch_x.pde](#)^[637]
[Samples | Usage | Moving_Mesh | 2d_stretch_xy.pde](#)^[638]

3.3.10 Equations

The **EQUATIONS** section is used to list the partial differential equations that define the dependent variables of the problem.

There must be one equation for each dependent variable listed in the VARIABLES and GLOBAL VARIABLES sections.

Each equation must be prefixed by `variable_name`: in order to associate the equation with a variable and with boundary condition declarations. (If there is only a single equation, the prefix may be omitted.)

Equations are entered into a problem descriptor in much the same way as they are written on paper. In their simplest form they can be written using the DIV (divergence), GRAD (gradient), CURL and DEL2(Laplacian) operators. FlexPDE will correctly expand these operators in the coordinate system specified in the COORDINATES section.

When it is necessary to enter partial differential terms, differential operators of the form `D<name>` or `D<name1><name2>` may be used. Here `<name>` represents a coordinate name, such as X, Y or Z (or other names chosen by the user in the COORDINATES section).

In the default 2D Cartesian geometry, the operators DX, DY, DXX, DXY, DYX and DYY are defined.

Similarly, in the default cylindrical geometries (XCYLINDER and YCYLINDER), the operators DR, DZ, DRR, DRZ, DZR and DZZ are defined.

In 3D Cartesian geometry, the operators DZ, DZZ, DXZ, and DYZ are also defined.

Example:

EQUATIONS

u: $\text{div}(k*\text{grad}(u)) + u*\text{dx}(u) = 0$

Complex and Vector Variables

Equations can be written using COMPLEX or VECTOR variables. In each case, FlexPDE will expand the stated equation into the appropriate number of scalar equations for computing the components of the COMPLEX or VECTOR variable.

Example:

VARIABLES

U = COMPLEX(Ur,Ui)

EQUATIONS

U: $\text{DIV}(k*\text{GRAD}(U)) + \text{COMPLEX}(-U_i, U_r) = 0$

Third Order and Higher Order Derivatives

Equation definitions may contain spatial derivatives of only first or second order. Problems such as the biharmonic equation which require the use of higher order derivatives must be rewritten using an intermediate variable and equation so that each equation contains only first or second order derivatives.

3.3.10.1 Association between Equations, Variables and Boundary Conditions

In problems with a single variable, there is no ambiguity about the assignment of boundary conditions to the equations.

In problems with more than one variable, FlexPDE requires that equations be explicitly associated with variables by tagging each equation with a variable name. This process also allows optimal ordering of the equations in the coupling matrix.

Example:

U: $\text{div}(k*\text{grad}(u))+u*\text{dx}(u)=0$ { associates this equation with the variable U }

Boundary conditions are defined in the [BOUNDARIES](#)^[24] section, and are associated with equations by use of the variable name, which selects an equation through the association tag. VALUE(U)=0, for example, will cause the nodal equations for the equation tagged U: to be replaced by the equation $u=0$ along the selected boundary .

Natural boundary conditions must be written with a sign corresponding to the sign of the generating terms when they are moved to the left side of the equal sign. *We suggest that all second-order terms should be written on the left of the equal sign, to avoid confusion regarding the sign of the applied natural boundary condition.*

3.3.10.2 Sequencing of Equations

FlexPDE has the ability to sequence sets of equations.

The sets are defined using the THEN and FINALLY sections following the EQUATIONS section.

```
EQUATIONS
  <set A>
THEN
  <set B>
{ THEN
  <set C> ... }
{ FINALLY
  <set D> }
```

Any number of THEN equation sets may be designated and these sets along with the main EQUATIONS section will be run sequentially and repetitively (including regrid) until the solution meets the normal error criteria. Once the EQUATIONS and THEN sets are finished, the last set defined in the FINALLY section will be solved.

Each set of equations is solved for the variables defined by the equations of that set, with the other variables held constant at their current values. Solutions of the EQUATIONS set will be held constant during the solution of the first THEN set, etc.

Each VARIABLE may be defined only once in the complete list of equations.

In time-dependent problems, the full set of equations is solved once during each timestep. The FINALLY clause is ignored in time-dependent problems.

Note: This facility finds its greatest utility in steady-state problems and time-dependent problems with one-way coupling. In time-dependent problems with two-way coupling, use of sequenced equations may falsify propagation speeds, or lead to instability.

Example:

```
EQUATIONS
  u: div(grad(u)) + s = 0
THEN
  v: div(grad(v)) + u = 0
```

Examples:

[Samples | Usage | Sequenced Equations | Theneq.pde](#)^[680]
[Samples | Usage | Sequenced Equations | Theneq+time.pde](#)^[679]

Iteration of Equations

FlexPDE has the ability to iterate sets of equations until convergence.

The equation set to iterate is identified using START_ITERATION and END_ITERATION :

```
EQUATIONS
START_ITERATION
  <set A>
THEN
  <set B>
END_ITERATION
```

Example:

```
EQUATIONS
START_ITERATION
  u: div(grad(u)) = v
  r: div(grad(r)) = s
THEN
  v: div(grad(v)) = u
  s: div(grad(s)) = r
END_ITERATION
```

Examples:

[Samples | Usage | Sequenced Equations | Equation Iteration.pde](#)⁶⁷⁵

3.3.10.3 Initial Equations

New in version 7 is the ability to state an initial set of steady-state equations that will be solved as the starting point for a time-dependent set of equations.

Example:

INITIAL EQUATIONS

```
u: visc*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
v: visc*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))
```

EQUATIONS

```
u: visc*div(grad(u)) - dx(p) = dens*dt(u) + dens*(u*dx(u) + v*dy(u))
v: visc*div(grad(v)) - dy(p) = dens*dt(v) + dens*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))
c: dt(c) + u*dx(c) + v*dy(c) = div(Kc*grad(c))
```

Examples:

[Samples | Usage | Sequenced Equations | Initialeq.pde](#)⁶⁷⁷

[Samples | Applications | Fluids | Coupled Contaminant Initeq.pde](#)⁴⁰⁶

3.3.10.4 Eigenvalues and Modal Analysis

FlexPDE can solve eigenvalue problems involving an arbitrary number of equations. This type of problem is identified by the appearance of the selector `MODES=<number>` in the `SELECT` section, and by use of the reserved word `LAMBDA` in the equations section. The `MODES` selector tells FlexPDE how many modes to calculate, and `LAMBDA` in the equations stands for the eigenvalue. The eigenvalues can be real or complex, and must be linear. Nonlinear uses of `LAMBDA` are not guaranteed to converge.

The equation should then be written in the form

$$F(V) + \text{LAMBDA} * G(V) = H(X, Y)$$

Where $F(V)$ and $G(V)$ are the appropriate terms containing the dependent variable, and $H(X, Y)$ is a driving source term. The name `LAMBDA` is automatically declared by FlexPDE to mean the eigenvalue, and should not be declared in the `DEFINITIONS` section.

FlexPDE uses the method of subspace iteration (see Bathe and Wilson, "Numerical Methods in Finite Element Analysis", Prentice-Hall, 1976) to solve for a selected number of eigenvalues of lowest magnitude. In this method, the full problem is projected onto a subspace of much smaller dimension, and the eigenvalues and eigenvectors of this reduced system are found. This process is repeated until

convergence of the eigenvalues is achieved. The eigenvectors of the full system are then recovered from expansion of the eigenvectors of the reduced system. As in a power-series expansion, there is some loss of accuracy in the higher modes due to truncation error. For this reason, FlexPDE solves a subspace of dimension $\min(n+8, 2*n)$, where n is the number of requested modes.

Eigenvalue Shifting

It is possible to examine eigenmodes which do not correspond to eigenvalues of the smallest magnitude by the technique of eigenvalue shifting. Consider the two systems

$$L(u) + \lambda u = 0$$

And

$$L(u) + \lambda u + \text{shift} * u = 0.$$

These systems will have the same eigenvectors as those associated with eigenvalues of " $\lambda + \text{shift}$ " in the original system. Given the latter problem, FlexPDE will find a set of eigenvalues corresponding to the eigenvalues closest above " shift " in the spectrum of the former problem. The sum " $\lambda + \text{shift}$ " will correspond to the eigenvalue in the former system.

Examples:

[Samples | Usage | Eigenvalues | 3D_Oildrum.pde](#)⁵⁶⁰
[Samples | Usage | Eigenvalues | 3D_Plate.pde](#)⁵⁶¹
[Samples | Usage | Eigenvalues | Drumhead.pde](#)⁵⁶²
[Samples | Usage | Eigenvalues | Drumhole.pde](#)⁵⁶³
[Samples | Usage | Eigenvalues | Drumhole_Animate.pde](#)⁵⁶⁴
[Samples | Usage | Eigenvalues | Filledguide.pde](#)⁵⁶⁵
[Samples | Usage | Eigenvalues | Shiftguide.pde](#)⁵⁶⁶
[Samples | Usage | Eigenvalues | Vibar.pde](#)⁵⁶⁷
[Samples | Usage | Eigenvalues | Waveguide.pde](#)⁵⁶⁹
[Samples | Usage | Eigenvalues | Waveguide20.pde](#)⁵⁷⁰

3.3.10.5 Moving Meshes

FlexPDE can support moving computation meshes in time-dependent problems. Use of this capability requires:

- The assignment of a [surrogate variable](#)¹⁴⁰ for each coordinate to be moved
- Definition of an EQUATION of motion for each such surrogate coordinate
- Suitable Boundary Conditions on the surrogate coordinate.

In some problems, the mesh positions may be driven directly. In others, there will be a variable defining the mesh velocity. This may be the same as the fluid velocity, in which case the model is purely Lagrangian, or it may be some other better-behaved motion, in which case the model is mixed Lagrange/Eulerian (ALE).

FlexPDE 6 contains no provisions for re-connecting distorted meshes. Except in well-behaved problems, pure Lagrangian computations are therefore discouraged, as severe mesh corruption may result.

Alternative Declaration Forms

EQUATIONS are always assumed to refer to the stationary Eulerian (Laboratory) reference frame. FlexPDE automatically computes the required correction terms for mesh motion. .

Alternatively, the user can declare LAGRANGIAN EQUATIONS, and FlexPDE will not modify the user's stated equations. In this case, the equations must be written correctly for the values at the moving nodes.

The declaration EULERIAN EQUATIONS can also be used for clarity, although this is equivalent to the default EQUATIONS declaration.

Internal Mesh Redistribution

When the mesh is not tied directly to a fluid velocity, a convenient technique for maintaining mesh integrity is to diffuse either the mesh coordinates or the mesh velocities in the problem interior.

For direct coordinate diffusion, we apply the diffusion equation to the surrogate coordinates:

$$\text{DIV}(\text{GRAD}(x_{\text{surrogate}})) = 0$$

and apply the motion conditions to the coordinate boundary conditions with either VALUE or VELOCITY conditions:

$$\text{VELOCITY}(x_{\text{surrogate}}) = x_{\text{velocity}}$$

or

$$\text{VALUE}(x_{\text{surrogate}}) = \text{moving_positions}$$

If the mesh is driven by a mesh velocity variable, we apply the diffusion equation to the velocity variables:

$$\begin{aligned} \text{DIV}(\text{GRAD}(x_{\text{velocity_variable}})) &= 0 \\ \text{DT}(x_{\text{coordinate}}) &= x_{\text{velocity_variable}} \end{aligned}$$

At the boundaries, we apply the driving motions to the velocity variables and lock the surrogate coordinate variable to its associated velocity

$$\begin{aligned} \text{VALUE}(x_{\text{velocity_variable}}) &= x_{\text{velocity}} \\ \text{VELOCITY}(x_{\text{surrogate}}) &= x_{\text{velocity}} \end{aligned}$$

Note: See the User Guide section on [Moving Meshes](#)^[140] and the example problems in the "Samples | Moving_Mesh" folder.

Effect of Mesh Motion on EQUATION Specifications

EQUATIONS are always written in the Eulerian (Laboratory) reference frame, regardless of whether the mesh moves or not. FlexPDE automatically computes the required correction terms for mesh motion.

3.3.11 Constraints

The **CONSTRAINTS** section, which is optional, is used to apply integral constraints to the system. These constraints can be used to eliminate ambiguities that would otherwise occur in steady state systems, such as mechanical and chemical reaction systems, or when only derivative boundary conditions are specified.

The CONSTRAINTS section, when used, normally contains one or more statements of the form

INTEGRAL (argument) = expression

CONSTRAINTS should not be used with steady state systems which are unambiguously defined by their boundary conditions, or in time-dependent systems.

A CONSTRAINT creates a new auxiliary functional which is minimized during the solution process. If there is a conflict between the requirements of the CONSTRAINT and those of the PDE system or boundary conditions, then the final solution will be a *compromise* between these requirements, and may not strictly satisfy either one.

CONSTRAINTS can be applied to any of the [INTEGRAL operators](#)^[185].

CONSTRAINTS *cannot* be used to enforce local requirements, such as positivity, to nodal variables.

Examples:

- [Samples | Usage | Constraints | Constraint.pde](#)^[551]
- [Samples | Usage | Constraints | Boundary_Constraint.pde](#)^[550]
- [Samples | Usage | Constraints | 3D_Constraint.pde](#)^[547]
- [Samples | Usage | Constraints | 3D_Surf_Constraint.pde](#)^[549]
- [Samples | Applications | Chemistry | Reaction.pde](#)^[375]

3.3.12 Extrusion

The vertical layer structure of a three-dimensional problem is specified bottom-up to FlexPDE in the EXTRUSION Section:

```

EXTRUSION
SURFACE "Surface_name_1"      Z = expression_1
LAYER   "Layer_name_1"
SURFACE "Surface_name_2"      Z = expression_2
LAYER   "Layer_name_2"
...
SURFACE "Surface_name_n"      Z = expression_n
    
```

The specification must start with a SURFACE and end with a SURFACE.

LAYERS correspond to the space between the SURFACES.

The Layer_names and Surface_names in these specifications are optional. The LAYER specifications may be omitted if a name is not needed to refer to them.

- Surfaces need not be planar, and they may merge, but they must not cross. expression_1 is assumed to be everywhere less than or equal to expression_2, and so on. Use a MIN or MAX function when there is a possibility of crossover.
- Surface expressions can refer to regionally defined parameters, so that the surface takes on different definitions in different regions. The disjoint expressions must, however, be continuous across region interfaces. (see example "[Samples | Usage | 3d_Domains | Regional_surfaces.pde](#)"⁵¹⁷)
- If surface expressions contain conditional values (IF...THEN or MIN, MAX, etc), then the base plane domain should include FEATURES to delineate the breaks, so they can be resolved by the gridded.
- Surfaces must be everywhere continuous, including across material interfaces. Use of conditionals or regional definitions must guarantee surface continuity.
- Surface expressions can refer to tabular input data (see example "[Samples | Usage | 3D_Domains | Tabular_surfaces.pde](#)"⁵¹⁸).

See the User Guide chapter [Using FlexPDE in Three-Dimensional Problems](#)⁹⁴ for more information on 3D extrusions.

Shorthand form

Stripped of labels, the EXTRUSION specification may be written:

EXTRUSION Z = expression_1, expression_2 {, ...}

In this form layers and surfaces must subsequently be referred to by numbers, with surface numbers running from 1 to n and layer numbers from 1 to (n-1). SURFACE #1 is Z=expression_1, and LAYER #1 is between SURFACE #1 and SURFACE #2.

Built-In Surface Generators

FlexPDE defines three surface generation functions

PLANE (point1 , point2 , point3) Defines a plane surface containing the three stated points.

CYLINDER (point1 , point2 , radius) Defines the top surface of a cylinder with axis along the line from **point1** to **point2** and with the given radius (see note below). **point1** and **point2** must be at the same z coordinate. Z-Tilted cylinders are not supported.

SPHERE (point , radius)

Defines the top surface of a sphere of the given **radius** with center at the specified center **point** (see note below).

Each point specification is a parenthesized coordinate double (xn , yn) or triple (xn , yn , zn). If zn is omitted, it is assumed zero.

These functions can be used to simplify the layout of extrusion surfaces.

CYLINDER and SPHERE construct the top surface of the specified figure (see note below). To generate both the upper and lower halves of the CYLINDER and SPHERE, simply construct the figure at Z=0 and add and subtract the surface function from the desired Z coordinate of the center or axis.

Example:


DEFINITIONS

Zsphere = SPHERE((0,0,0), 10)

EXTRUSION

Zcenter-Zsphere, Zcenter+Zsphere

Note: These functions generate surfaces defined throughout X,Y space. CYLINDER and SPHERE include Z=constant skirts to extend the surface definitions. The diameters of the CYLINDER and SPHERE, as well as the extent of the CYLINDER along its axis and of the PLANE must be provided by REGION BOUNDARIES or FEATURES.

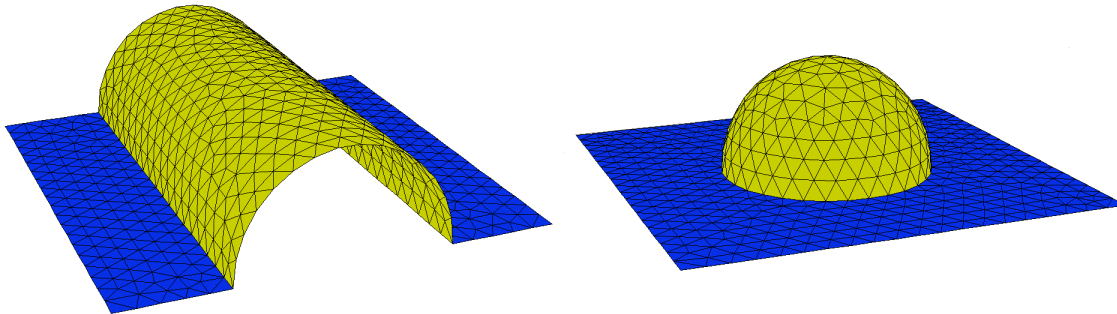

3.3.13 Rotation

The layered structure can also be extruded in an axial fashion using ROTATION in place of EXTRUSION, and PHI in place of Z.

ROTATION

SURFACE	"Surface_name_1"	phi = expression_1
LAYER	"Layer_name_1"	
SURFACE	"Surface_name_2"	phi = expression_2
LAYER	"Layer_name_2"	
...		
SURFACE	"Surface_name_n"	phi = expression_n

Example Problems:

[Samples](#) | [Usage](#) | [3D Rotations](#) | [Rotated Heat Ring.pde](#) 

3.3.14 Boundaries

The **BOUNDARIES** section is used to describe the problem domain over which the specified equation system is to be solved, and to specify boundary conditions along the outer surfaces of this domain.

Because of the history of FlexPDE, the discussion of boundaries has a strong two-dimensional orientation. Three-dimensional figures are made up by extruding a two-dimensional domain into the third dimension. One-dimensional domains are constructed by specializations of 2D techniques.

Every problem descriptor must have a BOUNDARIES section.

Problem BOUNDARIES are made up by walking the periphery of each material region on boundary paths through a 2D Cartesian space.

In this way, the physical domain is broken down into REGION, FEATURE and EXCLUDE subsections.

Every problem descriptor must have at least one REGION subsection. FEATURE and EXCLUDE subsections are optional.

For concrete examples of the constructs described here, refer to the sample problems distributed with the FlexPDE software.

3.3.14.1 Points

The fundamental unit used in building problem domains is the geometric POINT. POINTS in a FlexPDE script are expressed as a parenthesized list of coordinate values, as in the two dimensional point (2.4, 3.72).

Since two- and three- dimensional domain definitions both begin with a two-dimensional layout, the use for three-dimensional points is generally limited to ELEVATION PLOTS.

In one-dimensional systems, a POINT degenerates to a single parenthesized coordinate, such as (2.4).

3.3.14.2 Boundary Paths

A two dimensional boundary path has the general form

START(a,b) segment TO (c,d) ...

where (a,b) and (c,d) are the physical coordinates of the ends of the segment, and segment is either LINE, SPLINE or ARC.

The path continues with a connected series of segments, each of which moves the segment to a new point. The end point of one segment becomes the start point of the next segment.

A path ends whenever the next input item cannot be construed as a segment, or when it is closed by returning to the start point. The closing segment may simply end at the start point, or it can explicitly reference CLOSE, which will cause the current path to be continued to meet the starting point:

... segment TO CLOSE.

or

... segment CLOSE.

Line Segments

Line segments take the form

LINE TO (x,y)

When successive LINE segments are used, the reserved word LINE does not have to be repeated, as in the following:

LINE TO (x1,y1) TO (x2,y2) TO (x3,y3) TO ...

Spline Segments

Spline segments are syntactically similar to Line segments

SPLINE TO (x,y) TO (x2,y2) TO (x3,y3) TO ...

A cubic spline will be fit to the listed points. The first point of the spline will be either the START point or the ending point of the previous segment. The last point of the spline will be the last point stated in the chain of TO(,) points.

The fitted spline will have zero curvature at the end points, so it is a good idea to begin and end with closely spaced points to establish the proper endpoint directions.

Arc Segments

Arc segments create either circular or elliptical arcs, and take one of the following the forms:

ARC TO (x1,y1) to (x2,y2)

ARC (RADIUS = R) to (x,y)

ARC (CENTER = x1,y1) to (x2,y2)

ARC (CENTER = x1,y1) ANGLE=angle

Here angle is an angle *measured in degrees*, and follows the convention that positive angles rotate counter-clockwise and negative angles rotate clockwise. The coordinate point at the end of the arc is determined by the radius swept out by the angle. To specify the angle in radians, follow the radian value by the qualifier RADIANS.

Elliptical Segments

When the form ARC (CENTER = x1,y1) to (x2,y2) is used and the center (x1,y1) is not equidistant from the start and end points, an elliptical arc segment is generated with major and minor axes along the X and Y coordinate directions.

The orientation of the major and minor axes can be rotated with the **ROTATE** qualifier.

ARC (CENTER = x1,y1 ROTATE = 30) TO (x2,y2)

The rotation angle is defined in degrees unless followed by the qualifier RADIANS.

The end point is not rotated by this command, and must be stated correctly to intercept the rotated ellipse.

Examples:

[Samples | Usage | Misc | Rotated_Ellipse.pde](#)⁶²¹

Implicit Curve Segments

Implicit curve segments can take two forms :

CURVE (equation) BY (direction) TO (x,y)

ADAPT CURVE (expression) BY (direction) TO (x,y)

In the first form, equation defines a relation between the X and Y coordinates that lie on the curve, such as $x^2+y^2=R^2$. The boundary will follow the given equation exactly, and the start and end points must lie on the path or an error will be issued.

In the second form, expression is the left side of an equation, like x^2+y^2 . The expression will be equated to a value computed using the starting point. Then this calculated equation will be used as in the first form. The end point must lie on the computed equation or an error will be issued.

In both forms, direction will dictate which way to start tracing the path, and must be +X, -X, +Y, or -Y. The +X means move in the positive X direction, -X means move in the negative X direction, and so on.

Note : Avoid using CURVE with the start and end points at the same position, even if the expression is unambiguous.

Examples:

[Samples | Usage | Implicit Curves | Implicit Curve Boundary.pde](#)⁵⁸³

[Samples | Usage | Implicit Curves | Implicit Curve Surface.pde](#)⁵⁸⁴

[Samples | Usage | Implicit Curves | Sine_Boundary.pde](#)⁵⁸⁴

[Samples | Usage | Implicit Curves | Sine_Boundary_3D.pde](#)⁵⁸⁵

Named Paths

Names can be assigned to paths. When names are assigned to paths they take the form of a quoted string and must be placed immediately after the reserved word START:

START "pathname" (<x> , <y>)

Assigned path names are useful when boundary or line-related integrals are desired or for establishing paths over which ELEVATION plots are desired.

Names can be assigned to portions of a path by entering a new START clause, or by overlaying a portion of the boundary path by an independently declared [FEATURE](#)^[249], or by applying labels as described below.

Examples:

[Samples | Applications | Electricity | plate_capacitor.pde](#)^[385]
[Samples | Applications | Heatflow | heat_boundary.pde](#)^[428]
[Samples | Usage | Functions | vector_functions.pde](#)^[582]
[Samples | Usage | Misc | repeat.pde](#)^[621]

Labeled Paths

A name can also be applied to a segment by using LABEL and ENDLABEL. The label form does not require the use of a new START clause and can be placed directly into the normal flow of a standard boundary path declaration. This usage also allows for named segments to overlap :

```
START (0,0)
LABEL "pathA" LINE TO (0,1)
LABEL "pathB" LINE TO (1,1)
ENDLABEL "pathA"
LINE TO (1,0)
ENDLABEL "pathB"
...
```

This would place the name/label "pathA" on the segment from (0,0) to (1,1), and "pathB" from (0,1) to (1,0).

Examples:

[Samples | Applications | Electricity | fieldmap.pde](#)^[384]
[Samples | Usage | Eigenvalues | vibar.pde](#)^[567]

Paths Defined by ARRAYS and MATRICES

Paths may be defined by ARRAYS or MATRICES.

In the case of ARRAYS, two arrays of equal dimension are used to specify the coordinates in a LIST boundary:

```
LINE LIST(Ax,Ay)
SPLINE LIST(Ax,Ay)
```

Here Ax and Ay are ARRAYS listing the X- and Y- coordinates of the path.

A 2-by-N MATRIX may also be used to specify a LINE or SPLINE LIST, with the syntax:

LINE LIST(Mxy)
SPLINE LIST(Mxy)

Examples:

[Samples | Usage | Arrays+Matrices | Array_Boundary.pde](#)⁵³⁵
[Samples | Usage | Arrays+Matrices | Matrix_Boundary.pde](#)⁵³⁷

3.3.14.3 Regions

A **REGION** is a portion of a two-dimensional problem domain (or of the projection of a 3D problem domain), bounded by [boundary paths](#)²⁴¹, that encloses an area and contains a single material (but see [Regions in One Dimension](#)²⁴⁶ for exceptions).

Each material property in the REGION has a single definition, although this definition may be arbitrarily elaborate.

A REGION may consist of many disjoint areas.

Example:

```
REGION 1      { an outer box }
  START(0,0)
  LINE TO (10,0) TO (10,10) TO (0,10) TO CLOSE

REGION 2      { two embedded boxes }
  START(1,1)
  LINE TO (2,1) TO (2,2) TO (1,2) TO CLOSE
  START(5,5)
  LINE TO (6,5) TO (6,6) TO (5,6) TO CLOSE
```

Overlaying regions:

RULE:

***REGIONS DEFINED LATER OVERLAY AND OBSCURE REGIONS DEFINED EARLIER.
 AREAS COMMON TO TWO REGIONS BECOME PART OF THE LATER DEFINED REGION.***

So, in the example above, the two smaller boxes overlay the large box. The material parameters assigned to the large box pertain only to the part of the large box not overlaid by the small boxes.

It is customary to make the first region define the entire outer boundary of the problem domain, and then to overlay the parts of the domain which differ in parameters from this default region. If you overlay all parts of the outer domain with subregions, then the outer region definition becomes invisible. It may be useful to do this in some cases, since it allows a localization of boundary condition specifications. Nevertheless, one of the subregions is superfluous, because it could be the default.

3.3.14.3.1 Reassigning Regional Parameters

Names previously defined in the DEFINITIONS section can be assigned a new value within a REGION by adding one or more assignments of the form

```
name = new_expression
```

immediately following the reserved word REGION.

When definitions are reassigned new values in this manner, the new value applies only to the region in which the reassignment occurs.

Example:

```
DEFINITIONS
K = 1    { the default value }
REGION 1 { assumes default, since no override is given }
START(0,0) LINE TO (10,0) TO (10,10) TO (0,10) TO CLOSE
REGION 2
K = 2    { both sub-boxes are assigned K=2 }
START(1,1) LINE TO (2,1) TO (2,2) TO (1,2) TO CLOSE
START(5,5) LINE TO (6,5) TO (6,6) TO (5,6) TO CLOSE
REGION 3 { again assumes the default }
START(3,3) LINE TO (4,3) TO (4,4) TO (3,4) TO CLOSE
```

See also [MATERIALS](#)^[229] section.

3.3.14.3.2 Regions in One Dimension

In one-dimensional domains, the concept that a REGION bounds a finite area by closing on itself is no longer true. In one dimension, it is sufficient to define a path from the start of a material region to its finish. (Referencing CLOSE in a 1D bounding path will cause serious troubles, because the path will retrace itself.)

For example, the statements

```
REGION 1
START(0) LINE TO (5)
```

are sufficient to define a region of material extending from location 0 to location 5 in the 1D coordinate system.

In order to maintain grammatical consistency with two- and three- dimensional constructs, omitting the parentheses is *not* permitted.

Other general characteristics of REGIONS remain in force in one-dimensional domains:

Later REGIONS overlay earlier REGIONS, material properties are defined following the REGION keyword, and so forth.

3.3.14.3.3 Regions in Three Dimensions

The concept of a REGION in 3D domains retains the same character as for 2D domains.

The REGION is a partition of the 2D projection of the figure, and is extruded into the third dimension according to the EXTRUSION specification.

A material **compartment** in 3D is uniquely defined by the REGION of the projection which bounds it, and the LAYER of the extrusion in which it resides.

Extrusion of each 2D REGION therefore creates a stack of layers above it, each with possibly unique material properties.

A question then arises as to when a component that exists in a given layer of the domain must be divided into multiple regions. The rule can be stated as follows:

Rule: *When two points in the projection plane see different stacks of materials above them in the extrusion direction, then these two points must reside in different REGIONS of the domain layout.*

In the presence of [LIMITED REGIONS](#)^[248], the above rule can be interpreted to consider only the two layers adjoining a given extrusion surface. If the materials above and below the surface differ between two points, then there must be a REGION boundary separating the two points *in the subject extrusion surface*. REGION boundaries are induced in surfaces by the presence of a REGION boundary in either adjoining LAYER (subject to the [overlay rule](#)^[245]).

See the User Guide chapter [Using FlexPDE in Three-Dimensional Problems](#)^[94] for further discussion of the construction of 3D domains.

3.3.14.3.4 Regional Parameter Values in 3D

In three-dimensional problems, a redefinition of a parameter inside a REGION causes the parameter to be redefined in all layers of the layer stack above the region. To cause the parameter to be redefined only in a selected layer, use the LAYER qualifier, as in

```
LAYER number name = new_expression
LAYER "layer_name" name = new_expression
```

The LAYER qualifier acts on all subsequent parameter redefinitions, until a new LAYER qualifier or a functionally distinct clause breaks the group of redefinitions.

Example:

The following descriptor fragment shows the redefinition of a parameter K in various contexts:

```
DEFINITIONS
  K=1                { defines the default value }
```

BOUNDARIES

LAYER 1 K=2 { (valid only in 3D) defines the value in layer 1 of all regions }

REGION 1

K=3 { redefines the value in region 1 only, in all layers of a 3D domain }

LAYER 2 K=4 { (valid only in 3D) defines the value in layer 2 of region 1 only }

START(0,0) LINE TO

3.3.14.3.5 Limited Regions in 3D

In three dimensional problems, many figures do not fit readily into the extrusion model. In particular, there are frequently features that in reality exist only at very restricted positions in the extrusion dimension, and which create poor meshes when extruded throughout the domain.

FlexPDE implements the concept of **LIMITED REGIONS** to accommodate this situation.

A LIMITED REGION is defined as one that is considered to exist only in specified layers or surfaces of the domain, and is absent in all other layers and surfaces.

The LIMITED REGION will be constructed only in layers and surfaces specifically stated in the body of the REGION definition.

An example of this type of structure might be a transistor, where the junction structure of the device is present only in a very thin layer of the domain, while the substrate occupies the majority of the volume.

In earlier versions of FlexPDE, the shape of the junction structure was propagated and meshed throughout the extrusion dimension. Since version 4, the structure can be restricted, or LIMITED, to a single layer or a few layers.

For example, the following descriptor fragment defines a 3-unit cube with a 0.2-unit cubical structure in the center. The small structure is present in the layer 2 mesh only.

EXTRUSION Z=0, 1.4, 1.6, 3

BOUNDARIES

REGION 1

START(0,0) LINE TO (3,0) TO (3,3) TO (3,0) TO CLOSE

LIMITED REGION 2

LAYER 2 K=9

START(1.4,1.4)

LINE TO (1.6,1.4) TO (1.6,1.6) TO (1.4,1.6) TO CLOSE

See the User Guide section "[Limited Regions](#)"¹⁰⁵ for a graphical example of this facility.

Examples:

[Samples | Usage | 3D_Domains | 3D_Limited_Region.pde](#)⁴⁹³

3.3.14.3.6 Empty Layers in 3D

In three dimensional problems, it is sometimes necessary to define holes or excluded regions in the extruded domain. This may be done using the **VOID** qualifier. VOID has the syntax of a parameter redefinition.

For example, the following descriptor fragment defines a 3-unit cube with a 1-unit cubical hole in the center:

```

EXTRUSION Z=0,1,2,3
BOUNDARIES
  REGION 1
    START(0,0) LINE TO (3,0) TO (3,3) TO (3,0) TO CLOSE
  REGION 2
    LAYER 2 VOID
    START(1,1) LINE TO (2,1) TO (2,2) TO (1,2) TO CLOSE

```

Examples:

[Samples | Usage | 3D_Domains | 3D_Void.pde](#)^[513]

3.3.14.4 Excludes

EXCLUDE subsections are used to describe closed domains which overlay parts of one or more REGION subsections. The domain described by an exclude subsection is excluded from the system. EXCLUDE subsections must follow the REGION subsections which they overlay

EXCLUDE subsections are formed in the same manner as REGION subsections and can use all the same LINE and ARC segments.

3.3.14.5 Features

FEATURE subsections are used to describe non-closed entities which do not enclose a subdomain with definable material parameters.

FEATURE subsections are formed in the same manner as [REGION](#)^[245] subsections and can use all the same LINE and ARC segments.

FEATURE subsections do not end with the reserve word CLOSE.

A FEATURE will be explicitly represented by nodes and cell sides.

FEATURE subsections are used when a problem has internal line sources; when it is desirable to calculate integrals along an irregular path; or when explicit control of the grid is required.

In 3D problems, FEATURES should be used to delineate any sharp breaks in the slope of extrusion surfaces. Unless mesh lines lie along the surface breaks, the surface modeling will be crude.

Example:

```

REGION 1      { an outer box }

```

```

START(0,0) LINE TO (10,0) TO (10,10) TO (0,10) TO CLOSE
FEATURE      { with a diagonal gridding line }
START(0,0) LINE TO (10,10)

```

3.3.14.6 Node Points

FlexPDE supports the ability to place mesh nodes at specific points in the problem geometry. This is done with the statements

```

NODE POINT (x_value , y_value)
NODE POINT (x_value , y_value , z_value)

```

A mesh node will be placed at the specified location, and linked into the computation mesh.

NODE POINTS can be used to place [POINT VALUE](#)^[253] or [POINT LOAD](#)^[253] boundary conditions (see [Caveat](#)^[253]).

In moving mesh problems, NODE POINTS will move with the mesh; they will not be locked to the specified location unless appropriate POINT VALUE boundary conditions are used to freeze the point.

In 3D geometries, specification of only two coordinates will cause a vertical meshing line to be placed throughout the Z-coordinate range of the domain. A three-coordinate point will specify a single node. Placing NODE POINTS in coincidence with EXTRUSION surfaces will have undefined effects, and may lead to mesh generation failure.

An alternative way of forcing nodes is to run a FEATURE or REGION boundary to and through the desired point.

3.3.14.7 Ordering Regions

While not strictly enforced, it is recommended that all REGION subsections be listed before any EXCLUDE or FEATURE subsections and that all EXCLUDE subsections be listed before any FEATURE subsections.

It is further recommended that the first REGION subsection be formed by walking the outside boundary of the problem thereby enclosing the entire domain of the problem.

Rule:

REGIONS defined later are assumed to overlay any previously listed REGIONS, and any properties assigned to a REGION will override properties previously assigned to the domains they overlay.

Regions in 3D Domains

In 3D domains, the above rule is applied in each extrusion surface.

3.3.14.8 Numbering Regions

REGION, EXCLUDE and FEATURE subsections can be assigned numbers and/or names.

When numbers are assigned they should be in ascending sequential order beginning with one. It is recommended that numbers always be assigned.

When names are assigned they must take the form of a quoted string and must be placed immediately after either the reserved word REGION, EXCLUDE, or FEATURE or any number assigned to the REGION, EXCLUDE, or FEATURE. Assigned names must be unique to the REGION, EXCLUDE or FEATURE that they name.

Assigned region names are useful when region-restricted plots or volume integrals are desired.

Example:

```
REGION 2 'Thing'
  {...}
PLOTS
  contour(u) on 'Thing'
```

3.3.14.9 Fillets and Bevels

Any point in a path may be followed by one of the specifications

FILLET(radius)
BEVEL(length)

The point will be replaced by a circular arc of the specified radius, or by a bevel of the specified length. FILLETS and BEVELS should not be applied to points which are the intersection of several segments, or confusion may ensue.

Example:

```
LINE TO (1,1) FILLET(0.01)
```

Example problem:

[Samples | Usage | Misc | Fillet.pde](#)^[615]
[Samples | Usage | 3D Domains | 3D Fillet.pde](#)^[615]

3.3.14.10 Specifying Boundary Conditions

The following forms of boundary condition specification may be applied to boundary segments:

VALUE (variable) = expression
NATURAL (variable) = expression
LOAD (variable) = expression
CONTACT (variable) = expression

VELOCITY (variable) = expression
NOBC (variable)

The variable designated in the boundary condition specification identifies (by explicit association) the equation to which this boundary condition is to be applied.

Dirichlet (Value) Boundary Conditions

A **VALUE** segment boundary condition forces the solution of the equation for the associated variable to the value of expression on a continuous series of one or more boundary segments. The expression may be an explicit specification of value, involving only constants and coordinates, or it may be an implicit relation involving values and derivatives of system variables.

Generalized Flux (Natural) Boundary Conditions

NATURAL and **LOAD** segment boundary conditions are synonymous. They represent a generalized flux boundary condition derived from the divergence theorem. The expression may be an explicit specification, involving only constants and coordinates, or it may be an implicit relation involving values and derivatives of system variables. The Natural boundary condition reduces to the Neumann boundary condition in the special case of the Poisson equation. See the User Guide chapter [Natural Boundary Conditions](#)^[85] for information on the implementation of Natural boundary conditions.

Contact Resistance (Discontinuous Variable) Boundary Conditions

Interior boundaries can be defined to have a contact resistance using the **CONTACT(variable)** boundary condition. See "[Jump Boundaries](#)"^[255] in the next section.

Velocity (Time Derivative) Boundary Conditions

This boundary condition imposes a specified time derivative on a boundary value (time-dependent problems only). This condition is especially useful in specifying moving boundaries, by applying it to the surrogate coordinate variable. If you have declared a velocity variable which is applied to a coordinate, then you should lock the surrogate coordinate to the mesh velocity variable at the boundary using a **VELOCITY()** boundary condition.

Terminating the current BC

Boundary conditions, once stated, remain in effect until explicitly changed or until the end of the path. **NOBC(VARIABLE)** can be used to turn off a previously specified boundary condition on the current path. It is equivalent in effect to **NATURAL(VARIABLE)=0** (the default boundary condition), except that it will not lead to "Multiple Boundary Condition Specification" diagnostics.

Default Boundary Conditions

The default boundary condition for FlexPDE is **NATURAL(VARIABLE)=0**.

Note: The NEUMANN, DNORMAL and DTANGENTIAL boundary conditions supported in earlier versions have been deleted due to unreliable behavior. They may be restored in later versions. In most cases, derivative boundary conditions are more appropriately applied through the NATURAL boundary condition facility.

3.3.14.10.1 Syntax of Boundary Condition Statements

Segment boundary conditions are added to the problem descriptor by placing them in the BOUNDARIES section.

Segment boundary conditions must immediately precede one of the reserved words LINE or ARC and cannot precede the reserved word TO.

A top-down system is used for applying segment boundary conditions to the equations. Following the START point specification in each path definition, a segment boundary condition is set up for each variable/equation. It is recommended that a boundary condition be specified for each variable/equation.

If no other segment boundary condition is specified no error will occur and a NATURAL(VARIABLE) = 0 segment boundary condition is assumed.

Under the top-down system, as boundary segments occur, the previously specified segment boundary condition for a variable will continue to hold until a new boundary condition is specified for that variable.

If the recommendation is followed that REGION 1 be formed by walking the outside boundary of the problem, thereby enclosing the entire domain of the problem, then for most problems segment boundary conditions need only be specified for the segments in REGION 1.

3.3.14.10.2 Point Boundary Conditions

POINT VALUE boundary conditions can be added by placing

POINT VALUE (variable) = expression

following a coordinate specification. The stated value will be imposed at the coordinate point immediately preceding the specification.

POINT LOAD boundary conditions can be added by placing

POINT LOAD (variable) = expression

following a coordinate specification. The stated load will be imposed as a lumped source on the coordinate point immediately preceding the specification.

A Caveat:

The results achieved by use of these specifications are frequently disappointing.

A diffusion equation, for example, $\text{div}(\text{grad}(u))+s=0$, can support solutions of the form $u=A-Br-Cr^2$, where r is the distance from the point value and A , B and C are arbitrary constants. By the superposition principle, FlexPDE is free to add such shapes to the computed solution in the vicinity of the point value, without violating the PDE. A POINT VALUE condition usually leads to a sharp spike in the solution, pulling the value up to that specified, but otherwise leaving the solution unmodified.

The POINT LOAD is not subject to this same argument, but since it is a load without scale, it will frequently produce a dense mesh refinement around the point.

A better solution is to use a distributed load or an extended value boundary segment, ring or box.

3.3.14.10.3 Boundary conditions in 1D

The idea that a boundary condition applies along the length of a boundary segment, while meaningful in two and three dimensions, is meaningless in one dimension, since it is the value along the segment that is the object of the computation.

In one dimensional problems, therefore, it is necessary to use the Point boundary condition described in the previous section for all boundary condition specifications.

Example:

```
BOUNDARIES
REGION 1
  START(0)          POINT VALUE(u)=1
  LINE TO (5)       POINT LOAD(u)=4
```

The node at coordinate 0 will have value 1, while that at coordinate 5 will have a load of 4.

3.3.14.10.4 Boundary Conditions in 3D

In three-dimensional problems, an assignment of a segment boundary condition to a region boundary causes that boundary condition to be applied to the "side walls" of all layers of the layer stack above the region. To selectively apply a boundary condition to the "side walls" of only one layer, use the LAYER qualifier, as in

LAYER number VALUE(variable) = expression
LAYER "layer_name" VALUE(variable) = expression

The LAYER qualifier applies to all subsequent boundary condition specifications until a new LAYER qualifier is encountered, or the segment geometry (LINE or ARC) statements begin.

The boundary conditions on the extrusion surfaces themselves (the slicing surfaces) can be specified by the SURFACE qualifier preceding the boundary condition specification.

Consider a simple cube. The EXTRUSION and BOUNDARIES sections might look like this:

```
EXTRUSION z = 0,1
BOUNDARIES
SURFACE 1 VALUE(U)=0          { 1 }
REGION 1
SURFACE 2 VALUE(U)=1          { 2 }
START(0,0)
NATURAL(U)=0                  { 3 }
  LINE TO (1,0)
LAYER 1 NATURAL(U)=1          { 4 }
  LINE TO (1,1)
```

```
NATURAL(U)=0           { 5 }
  LINE TO (0,1) TO CLOSE
```

Line { 1 } specifies a fixed value of 0 for the variable U over the entire surface 1 (ie. the Z=0 plane).

Line { 2 } specifies a value of 1 for the variable U on the top surface *in* REGION 1 *only*.

Line { 3 } specifies an insulating boundary on the Y=0 side wall of the cube.

Line { 4 } specifies a flux (whose meaning will depend on the PDE) on the X=1 side wall *in* LAYER 1 *only*.

Line { 5 } returns to an insulating boundary on the Y=1 and X=0 side walls.

[Of course, in this example the restriction to region 1 or layer 1 is meaningless, because there is only one of each.]

3.3.14.10.5 Jump Boundaries

In the default case, FlexPDE assumes that all variables are continuous across internal material interfaces. This is a consequence of the positioning of mesh nodes along the interface which are shared by the cells on both sides of the interface.

FlexPDE supports the option of making variables discontinuous at material interfaces (see the "[Discontinuous Variables](#)"^[89] in the User Guide for tutorial information). This capability can be used to model such things as contact resistance, or to completely decouple the variables in adjacent regions.

The key words in employing this facility are CONTACT and JUMP. The conceptual model is that of contact resistance, where the difference in voltage V across the interface (the JUMP) is given by

$$V_2 - V_1 = R * \text{current}$$

In the general case, the role of "current" is played by the generalized flux, or [Natural boundary condition](#)^[253]. (See the User Guide for further discussion of [Natural Boundary Conditions](#)^[85].) The CONTACT boundary condition is a special form of NATURAL, which defines a flux but also specifies that FlexPDE should model a double-valued boundary.

So the method of specifying a discontinuity is

$$\text{CONTACT}(V) = (1/R) * \text{JUMP}(V)$$

CONTACT(V), like NATURAL(V), means the outward normal component of the generalized flux as seen from any cell. So from any cell, the meaning of JUMP(V) is the difference between the interior and exterior values of V at a point on the boundary. Two cells sharing a boundary will then see JUMP values and outward normal fluxes of opposite sign. "Flux" is automatically conserved, since the same numeric value is used for the flux in both cells.

Specifying a CONTACT boundary condition at an internal boundary causes duplicate mesh nodes to be generated along the boundary, and to be coupled according to the JUMP boundary condition statement.

Specifying a very small (1/R) value effectively decouples the variable across the interface.

Example Problems:

[Samples | Usage | Discontinuous Variables | Thermal Contact Resistance.pde](#)  555

[Samples | Usage | Discontinuous Variables | Contact Resistance Heating.pde](#)  553

[Samples | Usage | Discontinuous Variables | Transient Contact Resistance Heating.pde](#)  556

3.3.14.10.6 Periodic Boundaries

FlexPDE supports periodic and antiperiodic boundary conditions in one, two or three dimensions.

Periodicity in the X-Y Plane

Periodicity in a two-dimensional problem, or in the extrusion walls of a three-dimensional problem, is invoked by the PERIODIC or ANTIPERIODIC statement.

The PERIODIC statement appears in the position of a boundary condition, but the syntax is slightly different, and the requirements and implications are more extensive.

The syntax is:

PERIODIC (X_mapping, Y_mapping)
ANTIPERIODIC (X_mapping, Y_mapping)

The mapping expressions specify the arithmetic required to convert a point (X,Y) in the immediate boundary to a point (X',Y') on a remote boundary. The mapping expressions must result in each point on the immediate boundary being mapped to a point on the remote boundary. Segment endpoints must map to segment endpoints. The transformation must be invertible; do not specify constants as mapped coordinates, as this will create a singular transformation.

The periodic boundary statement terminates any boundary conditions in effect, and instead imposes equality of all variables on the two boundaries. It is still possible to state a boundary condition on the remote boundary, but in most cases this would be inappropriate.

The periodic statement affects only the next following LINE or ARC path. These paths may contain more than one segment, but the next appearing LINE or ARC statement terminates the periodic condition unless the periodic statement is repeated.

Periodicity in 1D

Periodicity in a one-dimensional problem is invoked by the POINT PERIODIC or POINT ANTIPERIODIC statement. All other aspects are similar to the description above for X-Y periodicity.

Periodicity in the Z-Dimension

Periodicity in the extruded dimension is invoked by the modifier PERIODIC or ANTIPERIODIC before the EXTRUSION statement, for example,

PERIODIC EXTRUSION Z=0,1,2

In this case, the top and bottom extrusion surfaces are assumed to be conformable, and the values are forced equal (or sign-reversed) along these surfaces.

Periodicity for different variables

Periodicity can be mapped differently for each variable using the MAP qualifier. The syntax is :

PERIODIC (X_mapping, Y_mapping) MAP(variable)={1 or -1}
ANTIPERIODIC (X_mapping, Y_mapping) MAP(variable)={1 or -1}

The PERIODIC (or ANTIPERIODIC) statement presets the behavior of all variables. Variables then mapped to 1 will be periodic. Variables mapped to -1 will be antiperiodic. For example, assuming variables A, B, C, the following would make A and C periodic, and B antiperiodic :

PERIODIC(x-2,y) MAP(a) = 1 MAP(b) = -1

The MAP can also be used to exchange variables :

MAP(a) = b MAP(b) = a

Note :

Prior to version 7, each node in the finite element mesh could have at most one periodic image. This meant that two-way or three-way periodicity at a single mesh node could not be supported. Starting in version 7 multiple periodic images at one mesh node is supported.

Example Problems:

[Samples | Usage | Periodicity | 1d_periodic.pde](#)⁶⁵⁶
[Samples | Usage | Periodicity | 3d_antiperiodic.pde](#)⁶⁵⁸
[Samples | Usage | Periodicity | 3d_periodic_exchange.pde](#)⁶⁵⁹
[Samples | Usage | Periodicity | 3d_xperiodic.pde](#)⁶⁶⁰
[Samples | Usage | Periodicity | 3d_zperiodic.pde](#)⁶⁶¹
[Samples | Usage | Periodicity | antiperiodic.pde](#)⁶⁶²
[Samples | Usage | Periodicity | azimuthal_periodic.pde](#)⁶⁶³
[Samples | Usage | Periodicity | periodic+time.pde](#)⁶⁶⁴
[Samples | Usage | Periodicity | periodic.pde](#)⁶⁶⁵
[Samples | Usage | Periodicity | periodic_contaminant.pde](#)⁶⁶⁶
[Samples | Usage | Periodicity | periodic_map.pde](#)⁶⁶⁷
[Samples | Usage | Periodicity | three-way_periodic.pde](#)⁶⁶⁸
[Samples | Usage | Periodicity | two-way_periodic.pde](#)⁶⁶⁹
[Samples | Usage | Periodicity | two-way_periodic_3d.pde](#)⁶⁷⁰

3.3.14.10.7 Complex and Vector Boundary Conditions

Boundary conditions for COMPLEX or VECTOR VARIABLES may be declared for the complex or vector variable directly, or for the individual components.

If C is a COMPLEX VARIABLE with components Cr and Ci, the following boundary condition declarations are equivalent:

VALUE(C) = Complex(a,b)
VALUE(Cr) = a VALUE(Ci) = b

If V is a VECTOR VARIABLE with components Vx and Vy, the following boundary condition declarations are equivalent:

NATURAL(V) = Vector(a,b)
NATURAL(Vx) = a NATURAL(Vy) = b

The component form allows the application of different boundary condition forms (VALUE or NATURAL) to the components, while the root variable form does not.

3.3.15 Front

The **FRONT** section is used to define additional criteria for use by the adaptive regridder. In the normal case, FlexPDE repeatedly refines the computational mesh until the estimated error in the approximation of the PDE's is less than the declared or default value of ERR_LIM. In some cases, where meaningful activity is confined to some kind of a propagating front, it may be desirable to enforce greater refinement near the front. In the FRONT section, the user may declare the parameters of such a refinement.

The FRONT section has the form:

FRONT (criterion, delta)

The stated criterion will be evaluated at each node of the mesh. Cells will be split if the values at the nodes span a range greater than $(-\delta/2, \delta/2)$ around zero.

That is, the grid will be forced to resolve the criterion to within delta as it passes through zero.

Example:

[Samples | Usage | Mesh Control | Front.pde](#)^[607]

3.3.16 Maximize

The MAXIMIZE section works the same as the [MINIMIZE](#)^[259] section but with optimization looking for a maximum rather than a minimum. Internally FlexPDE minimizes the negated objective function.

3.3.17 Minimize

The MINIMIZE section is used to optimize parameters. FlexPDE implements the Nelder-Mead "amoeba" algorithm to minimize an objective function. This is not the method of greatest speed, but it is very flexible, and allows FlexPDE to perform optimization searches in a wide range of problem environments.

MINIMIZE has the forms :

```
MINIMIZE objective VS parameter ( start_value, value_range )
[ parameter2 ...]
MINIMIZE objective VS parameter ( start_value, value_range, lower_limit,
upper_limit ) [ parameter2 ... ]
```

The method creates a simplex of parameter values, each parameter assigned a random sampling of N+1 values centered about the start value with the stated range, where N is the number of parameters. The parameter values are modified until the value of the objective is minimized within the [OPTERRLIM](#)^[202] or the range of values of each parameter is bracketed to OPTERRLIM*parameter.

In the first form, the values of the parameter are allow to shift without limits on values. The second form is used to enforce an upper and lower limit to the acceptable values for the parameter. So as the optimization is taking place, the parameter will never go beyond these limits. When multiple parameters are declared, each parameter may be either form.

Note that this feature cannot be used with the STAGED facility, since internally FlexPDE will be implementing stages in order to perform the optimization.

See also : [MAXIMIZE](#)^[258]

Examples:

[Samples | Usage | Optimization | Criticality.pde](#)^[651]
[Samples | Usage | Optimization | Criticality_Size.pde](#)^[652]
[Samples | Usage | Optimization | Power_Control.pde](#)^[653]
[Samples | Usage | Optimization | Size_Control.pde](#)^[655]

3.3.18 Resolve

The **RESOLVE** section is used to define additional criteria for use by the adaptive regridder. In the normal case, FlexPDE repeatedly refines the computational mesh until the estimated error in the approximation of the PDE's is less than the declared or default value of ERRLLIM. In some cases, this can be achieved with a much less dense mesh than is necessary to make pleasing graphical presentation of derived quantities, such as derivatives of the system variables, which are much less smooth than the variables themselves. In the RESOLVE section, the user may declare one or more additional functions whose detailed resolution is important. The section has the form:

```
RESOLVE ( spec1 ) , ( spec2 ) , ( spec3 ) {...}
```


Here, each spec may be either an expression, such as "(shear_stress)", or an expression followed by a weighting function, as in "(shear_stress, x^2)".

In the simplest form, only the expressions of interest need be presented. In this case, for each stated function, FlexPDE will

- form a Finite Element interpolation of the stated function over the computational mesh
- find the deviation of the interpolation from the exact function
- split any cell where this deviation exceeds ERRLLIM times the global RMS value of the function.

Because the finite element interpolation thus formed assumes continuous functions, application of RESOLVE to a discontinuous argument will result in dense gridding at the discontinuity. An exception to this is at [CONTACT](#)^[255] boundaries, where the finite element representation is double valued.

In the weighted form, an importance-weighting function is defined, possibly to restrict the effective domain of resolution. The splitting operation described above is modified to multiply the deviation at each point by the weight function at that point. Areas where the weight is small are therefore subjected to a less stringent accuracy requirement.

Example:

[Samples](#) | [Usage](#) | [Mesh_Control](#) | [Resolve.pde](#)^[609]

3.3.19 Time

The TIME section is used in time dependent problem descriptors to specify a time range over which the problem is to be solved. It supports the following alternative forms:

FROM time1 TO time2
FROM time1 BY increment TO time2
FROM time1 TO time2 BY increment

Where:

time1 is the beginning time
time2 is the ending time.
increment is an optional specification of the initial time step for the solution. (the default initial time step is $1e-4 * (time2 - time1)$).

All time dependent problem descriptors must include statements which define the time range. While the problem descriptor language supports alternate methods of specifying a time range, it is recommended that all time dependent problems include the TIME section to specify the total time domain of the problem.

Halting Execution

The time range specification may optionally be followed by a HALT statement:

HALT minimum

HALT = minimum

This statement will cause the computation to halt if the automatically controlled timestep drops below minimum. This facility is useful when inconsistencies in data or discontinuities in parameters cause the timestep controller to become confused.

HALT condition

Here the condition can be any relational operation, such as `globalmax(myvariable) < 204`. If the condition is met on any timestep, the computation will be halted.

Limiting the maximum timestep

The time range specification may optionally be followed by a LIMIT statement:

LIMIT maximum
LIMIT = maximum

This statement will prevent the timestep controller from increasing the computation timestep beyond the stated maximum.
maximum may be any constant arithmetic expression.

Critical Times

The time range specification may optionally be followed by a CRITICAL statement:

CRITICAL time1 {, time2, time3 ...}

This will ensure that each of the times in the list will fall at the end of some timestep interval.
Times may be separated by commas or spaces.
An #include statement can be used to read the times from a disk file.

3.3.20 Monitors and Plots

The **MONITORS** section, which is optional, is used to list the graphic displays desired at intermediate steps while a problem is being solved.

The **PLOTS** section, which is optional, is used to list the graphic displays desired on completion of a problem or stage, or at selected problem times.

PLOTS differ from MONITORS in that they are written to the permanent .PG8 record for viewing after the run is completed.

(For debugging purposes the global selector `HARDMONITOR` can be used to force MONITORS to be written to the .pg8 file.)

Plot statements and Monitor statements have the same form and function.

The basic form of a PLOT or MONITOR statement is:

display_specification (plot_data) display_modifiers

display_specification must be one of the known plot types, as described in the next section.

In some cases, multiple **plot_data** arguments may be provided.

There may be any number of **display_modifiers**, with meanings determined by the `display_specification`.

The various **display_modifiers** supported by FlexPDE are listed in the "[Graphic Display Modifiers](#)"²⁶⁴ section.

An Exhortation:

The MONITORS facility has been provided to allow users to see immediate feedback on the progress of their computation, and to display any and all data that will help diagnose failure or misunderstanding. Please use MONITORS extensively, especially in the early phases of model development! Since they do not write to the .pg8 storage file, they can be used liberally without causing disk file bloat. After the model is performing successfully, you can remove them or comment them out. Many user pleas for help received by PDE Solutions could be avoided if the user had included enough MONITORS to identify the cause of trouble.

Examples:

[Samples | Usage | Plotting | Plot_test.pde](#)⁶⁷⁴

Note: All example problems contain PLOTS and MONITORS.

3.3.20.1 Graphics Display Specifications

The MONITORS or PLOTS sections can contain one or more display specifications of the following types:

CONTOUR (arg)

- Requests a two dimensional contour map of the argument, with levels at uniform intervals of the argument.
- May be combined with FIELDMAP (as CONTOUR FIELDMAP) to generate overlaid potential contours and field lines.

CONTOUR (arg1, arg2)

- Requests a two dimensional contour map of both arg1 and arg2, each with levels at independent uniform intervals.
- A level table is displayed for both arg1 and arg2.

ELEVATION (arg1, [arg2,...]) path

- Requests a two dimensional display (some times called a line-out) which displays the value of its argument(s) vertically and the value of its path horizontally.
 - Each ELEVATION listed must have at least one argument and may have multiple arguments separated by commas.
-

- path can be either a line segment specified using the forms [FROM](#)^[271] (X1,Y1) TO (X2,Y2) or [ON](#)^[271] name, where name is a literal string selecting a path named in the [BOUNDARIES](#)^[241] section.

FIELDMAP (arg) ON namedpath

- Requests a two dimensional map of the force field lines of a potential, arg.
- The namedpath will be used as the starting boundary of the field lines.
- The number of field lines can be adjusted using the modifier [FIELDLINES](#)^[266].
- A level table is not displayed.
- May be combined with CONTOUR (as CONTOUR FIELDMAP) to generate overlaid potential contours and field lines.
- See example "[Samples | Applications | Electricity | Fieldmap.pde](#)"^[384].

GLCONTOUR (arg)

- Requests a three dimensional plot of the computation grid, with surface values of arg.
- Only the outer surface of the grid will be drawn.
- Standard [ON](#)^[271] qualifiers may be applied.
- This plot can be interactively rotated by clicking and dragging the mouse, as well as panned using the arrow keys.

GLGRID (arg1, arg2, arg3)

- Requests a three dimensional plot of the computation grid, with nodal coordinates defined by the three arguments.
- Only the outer surface of the grid will be drawn.
- This plot can be interactively rotated by clicking and dragging the mouse, as well as panned using the arrow keys.

GLSURFACE (arg)

- As regular [SURFACE](#)^[264] plot but displayed using the OpenGL graphics.
- This plot can be interactively rotated by clicking and dragging the mouse, as well as panned using the arrow keys.

GRID (arg1, arg2)

- Requests a two dimensional plot of the computation grid, with nodal coordinates defined by the two arguments.
- Grids are especially useful for displaying material deformations.
- In 3D problems, a two-argument GRID plot will show a cut-plane, and must be followed by an [ON](#)^[271] specification.
- 3D cut plane grid plots do not necessarily accurately represent the computational grid.

GRID (arg1, arg2, arg3)

- Requests a three dimensional plot of the computation grid, with nodal coordinates defined by the three arguments.
- Only the outer surface of the grid will be drawn.
- This plot can be interactively rotated by right-clicking and selecting the "Rotate" menu entry.

MODE_SUMMARY

- In eigenvalue problems, this produces a SUMMARY page for each mode (comparable to the version 5 SUMMARY).
- This has been replaced with MODE SUMMARY (no underscore).

SUMMARY

- This plot type defines a text page on which only [REPORT](#)^[273] items may appear.
- A SUMMARY page can be [EXPORT](#)^[265]ed to produce text reports of scalar values.

SUMMARY ('string')

- If a string argument is given with a SUMMARY command, it will appear as a page header on the summary page.

SURFACE (arg)

- A quasi three dimensional surface which displays its argument vertically.
- If no [VIEWPOINT](#)^[270] clause is used, the viewing azimuth defaults to 216 degrees, the distance to three times the size, and the viewing elevation to 30 degrees.
- This plot can be interactively rotated by right-clicking and selecting the "Rotate" menu entry.

VECTOR (vector)

- Requests a two dimensional display of directed arrows in which the direction and magnitude of the arrows is set by the vector argument.
- The origin of each arrow is placed at its reference point.

VECTOR (arg1, arg2)

- Requests a two dimensional display of directed arrows in which the horizontal and vertical components of the arrows are given by arg1 and arg2.
- The origin of each arrow is placed at its reference point.

For all commands, the argument(s) can be any valid expression.

3.3.20.2 Graphic Display Modifiers

The appearance of any display can be modified by adding one or more of the following clauses:

AREA_INTEGRATE

- Causes CONTOUR and SURFACE plots in cylindrical geometry to be integrated with $dr*dz$ element, rather than default $2*pi*r*dr*dz$ volume element.
- See also: [LINE_INTEGRATE](#)^[267]

AS 'string'

- Changes the label on the display from the evaluated expression to **string**.

BLACK

- Draws current plot in black color only.

CONTOURS = number

- Selects the number of contour lines for CONTOUR plots. This is a local control equivalent to the global CONTOURS control, but applying only to a single plot.

DROPOUT

- Marks EXPORT and TABLE output points which fall outside the problem domain as "external". This modifier affects only EXPORTS and TABLES with FORMAT strings (see below).

EMF**EMF (pixels)****EMF (pixels, penwidth)**

- Windows version only. Produces a Microsoft Windows Enhanced Metafile output.
- pixels is the horizontal pixel count of the reference window, which defaults to 1024 if omitted.
- penwidth is an integer (0, 1, 2 or 3) which specifies the width of drawn lines, in thousandths of the drawing width (0 means thin).
- The export file name is the problem name with plot number and sequence number appended.
- The file name cannot be altered.
- **Warning:** FlexPDE uses Windows rotated fonts to plot Y-labels and axis labels on surface plots. Microsoft Word can read and resize these pictures, but its picture editor cannot handle them, and immediately "rectifies" them to horizontal.

EPS

- Produces an Encapsulated PostScript output.
- The graphic is a 10x7.5 inch landscape-mode format with 7200x5400 resolution.

EXPORT

- Causes a disk file to be written containing the data represented by the associated MONITOR or PLOT.
 - A regular rectangular grid will be constructed, and the data will be printed in a format suitable for reading by the FlexPDE TABLE function.
 - The dimension of the grid will be determined by the plot grid density appropriate to the type of plot.
-

- The format of EXPORTED data may be controlled by the FORMAT modifier (see below).
- (This is a renaming of the older PRINT modifier)

EXPORT (n)

- Modifies the EXPORT command by specifying the dimension of the printed data grid.
- For two- or three-dimensional plots, the grid will be (n x n) or (n x n x n).

EXPORT (nx, ny)**EXPORT (nx, ny, nz)**

- Modifies the EXPORT command by specifying the dimension of the printed data grid.

FIELDLINES = n

- Overrides the default number of [FIELDMAP](#)^[263] field lines and uses n instead.

FILE 'string'

- Overrides the default naming convention for files created by the EXPORT or PRINT modifiers, and writes the file named 'string' instead.

FIXED RANGE (arg1, arg2)

- Changes the dynamically set range used for the variable axis to a minimum value of arg1 and a maximum of arg2. Data outside this range is not plotted.
- See also: [RANGE](#)^[270]

FORMAT 'string'

- This modifier replaces the default format of the EXPORT or PRINT modifiers, or of the TABLE output command. When this modifier appears, the output will consist of one line for each point in the export grid.
- The contents of this line will be completely controlled by the format string as follows:
 1. all characters except "#" will be copied literally to the output line.
 2. "#" will be interpreted as an escape character, and various options will be selected by the character following the "#":
 - a. #x, #y, #z and #t will print the value of the spatial coordinates or time of the data point;
 - b. #1 through #9 will print the value of the corresponding element of the plot function list;
 - c. #b will write a taB character;
 - d. #r will cause the remainder of the format string to be repeated for each plot function in the plot list;
 - e. #i inside a repeated string will print the value of the current element of the plot function list.
- See the example problems "export_format" and "export_history".

FRAME (X, Y, Wide, High)

- Forces the plot frame to the specified coordinates, regardless of the size of the problem domain.
 - The plot frame will be forced to a 1:1 aspect ratio using the largest of the width and height values.
-

- This allows the creation of consistently-sized plots in moving-mesh problems.
- See "Samples | Moving_Mesh | Piston.pde".
- See also: [ZOOM](#)^[270]

GRAY

- Draws current plot with a 32-level gray scale instead of the default color palette.

INTEGRATE

- Causes a report of the integral under the plotted function.
- For CONTOUR and SURFACE plots, this is a volume integral (with Cartesian element $dx*dy*1$ or cylindrical element $2*pi*r*dr*dz$).
- For ELEVATIONS, it is a surface integral (with Cartesian element $dl*1$ and cylindrical element $2*pi*r*dl$). (See also AREA_INTEGRATE, LINE_INTEGRATE).
- This integral differs from a REPORT(INTEGRAL(...)) in that this command will integrate on the plot grid, while the REPORT will integrate on the computation grid.
- This modifier can be globally imposed by use of PLOTINTEGRATE in the SELECT section.

JPEG

JPEG (pixels)

JPEG (pixels, penwidth)

- Selects automatic creation of a graphic export file in JPEG format.
- pixels is the horizontal pixel count, which defaults to 1024 if omitted.
- penwidth is an integer (0,1,2 or 3) which specifies the width of the drawn lines, in thousandths of the pixel width (0 means thin).
- The export file name is the problem name with plot number and sequence number appended.
- The file name cannot be altered.

LEVELS = I1, I2, I3.....

- Explicitly defines the contour levels for CONTOUR plots.

LINE_INTEGRATE

- Causes ELEVATIONS in cylindrical geometry to be integrated with dl element, rather than default $2*pi*r*dl$ element.
- See also: [AREA_INTEGRATE](#)^[264]

LOG

LINLOG

LOGLIN

LOGLOG

- Changes the default linear scales used to those specified by the scaling command.
- LOG is the same as LINLOG, and specifies logarithmic scaling in the data coordinate.

<lx><ly><lz>

- Changes the default linear scales used to those specified by the scaling command.
- Each of <lx>, <ly> and <lz> can be either LIN or LOG, and controls the scaling in the associated dimension.

LOG (number)**...combinations as above**

- Limits the number of decades of data displayed to number.
- This effect can also be achieved globally by the Selector LOGLIMIT.

MERGE

- Sends EXPORT output for all stages or plot times to a single output file.
- This is the default for TECPLOT output.
- This option can be set globally by SELECT PRINTMERGE.

MESH

- In SURFACE plots, causes the surface to be displayed as a hidden-line drawing of the meshed surface.
- This display is more suitable on some hardcopy devices.

NOHEADER

- Deletes the problem-identification header from EXPORT output.

NOLINES

- Suppresses mesh lines in grid plot.

NOMERGE

- Sends EXPORT output for each stage or plot time to a separate output file.
- This is the default for EXPORT output.

NOMINMAX

- Deletes "o" and "x" marks at min and max values on contour plot.

NORM

- In VECTOR plots, causes all vectors to be drawn with the same length. Only the color identifies different magnitudes.

NOTAGS

- Suppresses labelling tags on contour or elevation plot.
 - This can be applied globally with SELECT NOTAGS.
-

NOTIPS

- Plots VECTORS as line segments without heads.
- The line segment will be centered on the reference point.

ON <control>

- Selects region, surface or layer restrictions of plot domain. See "[Controlling the Plot Domain](#)^[271]".

PAINTED

- Fills areas between contour lines with color. (This is slower than conventional contour lines.)

PAINTMATERIALS**PAINTREGIONS**

- Draw color-filled grid plot.
- These local flags are equivalent to and override the corresponding global flags set in the SELECT section. They affect only the current plot.

PENWIDTH = n

- Sets the on-screen pen width for the current plot.
- n is an integer (0,1,2,3,...) which specifies the width of the drawn lines, in thousandths of the plot width (0 means thin).
- See also : [Global Graphics Controls](#)^[206].

PNG**PNG (pixels)****PNG (pixels, penwidth)**

- Selects automatic creation of a graphic export file in PNG format.
- pixels is the horizontal pixel count, which defaults to 1024 if omitted.
- penwidth is an integer (0,1,2 or 3) which specifies the width of the drawn lines, in thousandths of the pixel width (0 means thin).
- The export file name is the problem name with plot number and sequence number appended.
- The file name cannot be altered.

POINTS = n**POINTS = (nx , ny)****POINTS = (nx, ny, nz)**

- Overrides the default plot grid size and uses n instead.
- Two and three dimensional exports will use n in all dimensions.
- For two-dimensional export commands, the two-dimensional grid can be explicitly controlled.
- For three-dimensional exports, the three-dimensional grid can be explicitly controlled.

PRINT**PRINT (n)**

PRINT (nx, ny)
PRINT (nx, ny, nz)

- Equivalent to EXPORT, EXPORT(n), EXPORT(nx,ny) and EXPORT(nx,ny,nz), respectively.
- NOTE : This modifier is deprecated and [EXPORT](#)^[265] should be used instead. It has been kept only for backward compatibility.

PRINTONLY

- Suppresses graphical output. Use with PRINT or EXPORT to create text output only.

RANGE (arg1, arg2)

- Changes the dynamically set range used for the variable axis to a minimum value of arg1 and a maximum of arg2.
- If the calculated value of the variable falls outside of the range argument, the range argument is ignored and the dynamically calculated value is used.
- See also: [FIXED RANGE](#)^[265]

SVG

- Produces a Scaled Vector Graphics output.

VIEWPOINT(X, Y, angle)

- With SURFACE plots, the VIEWPOINT modifier sets the viewing azimuth and perspective distance and the viewing elevation angle.

VOL_INTEGRATE

- Causes CONTOURS and SURFACE plots in cylindrical geometry to be integrated with $2\pi r dr dz$ element.
- This is the default, and is equivalent to INTEGRATE.
- See also: [INTEGRATE](#)^[267], [AREA_INTEGRATE](#)^[264]

ZOOM (X, Y, Wide, High)

- Expands (zooms) a selected area of the display or export, with (X,Y) defining the lower left hand corner of the area and (Wide,High) defining the extent of the expanded area.
- In 3D cut planes, the X and Y coordinates refer to the horizontal and vertical dimensions in the cut plane.
- See also: [FRAME](#)^[266]

ZOOM (X, Y, Z, Xsize, Ysize, Zsize)

- Expands (zooms) a selected volume of an export, with (X,Y,Z) defining the lowest corner of the volume and (Xsize,Ysize,Zsize) defining the extent of the included volume.
-

3.3.20.3 Controlling the Plot Domain

"ON" selectors

The primary mechanism for controlling the domain over which plot data are constructed is the "ON" statement, which has many forms:

ON "name"
ON REGION "name"
ON REGIONS "name1" , "name2" { , ... }
ON REGION number
ON REGIONS number1 , number2 { , ... }
ON GRID(Xposition,Yposition)

In three-dimensional problems, the following are also meaningful:

ON LAYER "name"
ON LAYERS "name1" , "name2" { , ... }
ON LAYER number
ON LAYERS number1 , number2 { , ... }
ON SURFACE "name"
ON SURFACE number
ON equation

The first listed form selects a boundary path, region, layer or surface depending on the definition of the "name". (It is actually redundant to specify SURFACE "name", etc, since the fact that a surface is being specified should be clear from the "name" itself. Nevertheless, the forms are acceptable.)

The multiple REGIONS and LAYERS forms allow grouping REGIONS and LAYERS to select the portion of the domain over which to display the plot.

In many cases, particularly in 3D, more than one "ON" clause can be used for a single plot, since each "ON" clause adds a restriction to those already in effect. There is a direct correspondence between the "ON" clauses of a plot statement and the arguments of the various [INTEGRAL](#)^[185] operators, although some of the allowable integral selections do not have valid corresponding plot options.

In two dimensional geometries, area plots which are not otherwise restricted are assumed to be taken over the entire problem domain.

Contours, Surface Plots, Grid Plots and Vector Plots

Contours, "surfaces" (3D topographic displays), grid plots and vector plots must be taken on some kind of two dimensional data surface, so in 3D problems these plot commands are incomplete without at least one "ON" clause. This can be an extrusion-surface name, or a cut-plane equation (it cannot be a projection-plane boundary path). For example, in a 3D problem,

CONTOUR(...) ON SURFACE 2

requests a contour plot of data evaluated on the second extrusion surface.

CONTOUR(...) ON SURFACE "top"

requests a contour plot of data evaluated on the extrusion surface named "top".

CONTOUR(...) ON X=Y

requests a contour plot of data evaluated on the cut plane where $x=y$.

In addition to a basic definition of the data surface, "ON" clauses may be used to restrict the display to an arbitrary REGION or LAYER. In 2D, a REGION restriction will display only that part of the domain which is in the stated region:

CONTOUR(...) ON REGION 2

requests a contour plot of data evaluated on REGION 2.

Similarly, in 3D,

CONTOUR(...) ON SURFACE 2 ON REGION 2

requests a contour plot of data evaluated on extrusion surface 2, restricted to that part of the surface lying above REGION 2 of the baseplane projection.

CONTOUR(...) ON SURFACE 2 ON REGION 2 ON LAYER 3

requests a contour plot of data evaluated on extrusion surface 2, restricted to that part of the surface lying above REGION 2 of the baseplane projection, and with the evaluation taken in LAYER 3, which is assumed to be bounded by the selected surface.

Cut Planes in 3D

Contours, surface plots and vector plots can also be specified on cut planes by giving the general formula of the cutting plane:

CONTOUR(...) ON X = expression

requests a contour plot of data evaluated on the Y-Z plane where X is the specified value.

Cut planes need not be simple coordinate planes:

CONTOUR(...) ON X=Y

requests a contour plot of data evaluated on the plane containing the z-axis and the 45 degrees line in the XY plane.

The coordinates displayed in oblique cut planes have their origin at the point of closest approach to the origin of the domain coordinates. The axes are chosen to be aligned with the nearest domain coordinate axes.

Elevation Plots

Elevation plots can be specified by endpoints of a line:

ELEVATION(...) FROM (x1,y1) TO (x2,y2)**ELEVATION(...) FROM (x1,y1,z1) TO (x2,y2,z2)**

The plot will be displayed on the straight line connecting the specified endpoints. These endpoints might span only a small part of the problem domain, or they might exceed the domain dimensions somewhat, in which case the plot line will be truncated to the interior portion.

In 2D geometry only, an elevation plot may be specified by the name of a boundary path, as in

ELEVATION(...) ON "outer_boundary"

These boundary-path elevations can be additionally restricted as to the region in which the evaluation is to be made:

ELEVATION(...) ON "inner_boundary" ON REGION "core"

This form requests that the evaluation of the plot function be made in the region named "core", with the assumption that "core" is one of the regions adjoining the "inner_boundary" path.

Plots on Deformed Grids

In fixed-mesh problems with implied deformation, such as "Samples | Applications | Stress | Bentbar.pde", CONTOUR, SURFACE and VECTOR plots can be displayed on the deformed domain shape. The syntax combines the forms of CONTOUR and GRID plots:

CONTOUR(...) ON GRID(Xposition,Yposition)

See "[Samples | Usage | Plotting | Plot_on_grid.pde](#)"^[673] for an example.
(This feature is new in version 6.03)

Sign of Vector Components

In many cases, boundary-path elevations present normal or tangential components of vectors. For these applications, the sense of the direction is the same as the sense of the NATURAL boundary condition:

The positive normal is outward from the evaluation region.

The positive tangent is counter-clockwise with respect to the evaluation region.

Plots of the normal components of vectors on extrusion surfaces in 3D follows the same rule:

The positive normal is outward from the evaluation region.

3.3.20.4 Reports

Any display specification can be followed by one or more of the following clauses to add report quantities to the plot page:

REPORT expression
REPORT (expression)

Adds to the bottom of a display the text 'expression = value_of_expression'. Any valid expression is accepted, including integrals. Multiple REPORT clauses may be used. REPORT is especially useful for reporting boundary and area integrals and functions thereof.

REPORT (expression1, expression2, ...)

A report of multiple items. Equivalent to REPORT (expression1) REPORT (expression2).

REPORT expression AS 'string'

A labeled REPORT of the form 'string = value_of_expression'.

REPORT 'string'

REPORT ('string')

Inserts 'string' into the REPORT sequence.

3.3.20.5 The ERROR Variable

The reserved word ERROR can be used to display the current state of spatial error estimates over the mesh, as for example:

CONTOUR(ERROR)

3.3.20.6 Window Tiling

When multiple MONITORS or PLOTS are listed, FlexPDE displays each one in a separate window and automatically adjusts the window sizes to tile all the windows on the screen. Individual windows cannot be independently resized or iconized. Any plot window can be maximized by double-clicking, or by right-clicking to bring up a menu.

In steady-state and eigenvalue problems, MONITORS are displayed during solution, and are replaced by **PLOTS** on completion.

In time-dependent problems, MONITORS, PLOTS and HISTORIES are displayed at all times.

3.3.20.7 Monitors in Steady State Problems

In steady state problems the listed MONITORS are displayed after each regrid. In addition, after each Newton-Raphson iteration of a nonlinear problem or after each residual iteration of a linear problem, if sufficient time has elapsed since the last monitor display, an interim set of monitors will be displayed.

3.3.20.8 Monitors and Plots in Time Dependent Problems

In time dependent problems the display specifications must be preceded by a display-time declaration statement. The display-time declaration statement may be either of the form

FOR CYCLE = number

in which case the displays will be refreshed every number time steps, or

FOR T = time1 [timeset ...]

Where each **timeset** may be one of the following :

time2
BY delta TO time2

In this case the displays will be refreshed at times specified by the **timeset** values.

Any number of plot commands can follow a display-time declaration, and the specification will apply to all of them. It is not necessary to give a display-time specification for each plot.

Multiple display time declaration statements can be used. When multiple display time statements are used each applies to all subsequent display commands until a new time declaration is encountered or the MONITORS or PLOTS section ends.

Last Time Step

The the last time step may be referenced using the qualifier **endtime** :

FOR T = 0 BY 10 TO endtime

In the above example a plot would be generated every ten time units and at the last time step, whatever was defined in the TIME section or whatever was the last time step due to a HALT condition.

Examples:

["Samples | Applications | Heatflow | Float_Zone.pde"](#)⁴²⁷

["Samples | Applications | Chemistry | Melting.pde"](#)³⁷³

3.3.20.9 Hardcopy

A right-click on any plot window, whether tiled or maximized, will bring up a menu from which the plot may be printed or exported (or rotated, if this is meaningful for the plot).

Text listings of plotted values can be written to disk by the plot modifier EXPORT (aka PRINT) in the descriptor.

3.3.20.10 Graphics Export

Bitmaps

A right-click in any displayed plot window brings up a menu, one item of which is "Export". Clicking this item brings up a dialog for exporting bitmap forms of the displayed plot. Current options are PNG, JPEG, SVG, EPS and EMF. See the "Getting Started" section for more information.

All these formats can also be selected automatically as [graphic display modifiers](#)²⁶⁴.

Retained Graphics

All displays in the PLOTS section are written in compressed form to a disk file with the extension ".PG8".

These files may be redisplayed at a later time by use of the "View" menu item in the "File" menu. On some systems, this may be accomplished simply by double-clicking the ".PG8" file in the system file manager.

See the "Getting Started" section for more information.

3.3.20.11 Data Export

Export Files

The plot types [CDF](#), [TABLE](#), [TECPLOT](#) and [VTK](#) can be used to export data to other applications for external processing. [TRANSFER](#) and [RESTART](#) can be used to transfer data to another FlexPDE run for postprocessing.

See [Graphics Display Specifications](#) and [Exporting Data to Other Applications](#) for more information.

Examples:

[Samples | Usage | Import-Export | Export.pde](#)
[Samples | Usage | Import-Export | Transfer_Export.pde](#)
[Samples | Usage | Import-Export | Transfer_Import.pde](#)
[Samples | Usage | Import-Export | Mesh_Export.pde](#)
[Samples | Usage | Import-Export | Mesh_Import.pde](#)
[Samples | Usage | Stop+Restart | Restart_Export.pde](#)
[Samples | Usage | Stop+Restart | Restart_Import.pde](#)

3.3.20.11.1 Data Export Specifications

Requests for data export are included in the MONITORS or PLOTS sections as for graphic output. This allows the control of when the export is performed in a standard way. A data export request may be any of the following types:

CDF (arg1 [,arg2,...])

- Requests the export of the listed values in netCDF version 3 format.
- The output will be two or three dimensional, following the current coordinate system or subsequent [ON SURFACE](#) modifiers.
- The included domain can be zoomed.
- If the [FILE](#) modifier does not follow, then the output will be written to a file "<problem>_<sequence>.cdf".
- Staged, eigenvalue and time-dependent problems will stack subsequent outputs in the same file, consistent with netCDF conventions.
- CDF uses a regular rectangular grid, so interface definition may be ragged.
- Use [ZOOM](#) to show details.

RESTART ()

- This is an extension of the [TRANSFER](#)^[277] export.
- The output will be written to a file "[<problem>_restart.xfr](#)"^[4] that is appropriate for restarting a computation or postprocessing.

TABLE (arg1 [,arg2,...])

- Requests the export of the listed values in tabular ASCII format.
- The output will be two or three dimensional, following the current coordinate system or subsequent [ON](#)^[269] modifiers.
- The included domain can be zoomed.
- If the [FILE](#)^[266] modifier does not follow, then the output will be written to a file "[<problem>_<sequence>.tbl](#)".
- Staged, eigenvalue and time-dependent problems will create separate files for each stage or mode, with additional sequencing numbers in the name.
- TABLE output uses a regular rectangular grid, so interface definition may be lost.
- Use [ZOOM](#)^[270] to show details.

TECPLOT (arg1 [,arg2,...])

- Requests the export of the listed values to a file readable by the TecPlot visualization system.
- The output will be two or three dimensional, following the current coordinate system.
- The entire mesh is exported.
- If the [FILE](#)^[266] modifier does not follow, then the output will be written to a file "[<problem>_<sequence>.dat](#)".
- Staged, eigenvalue and time-dependent problems will stack subsequent outputs in the same file, consistent with TecPlot conventions.
- TecPlot uses the actual triangular or tetrahedral computation mesh (subdivided to linear basis), so material interfaces are preserved.

TRANSFER (arg1 [,arg2,...])

- Requests the export of the listed values and finite element mesh data in a file readable by FlexPDE using the [TRANSFER or TRANSFERMESH](#)^[227] input command. This method of data transfer between FlexPDE problems retains the full accuracy of the computation, without the error introduced by the rectangular mesh of the TABLE function.
- The exported domain cannot be zoomed.
- If the [FILE](#)^[266] modifier does not follow, then the output will be written to a file "[<problem>_<sequence>.xfr](#)". This export format uses the actual computation mesh, so material interfaces are preserved.
- The full computation mesh is exported.
- When used in Staged, Time dependent or Eigenvalue problems, each output file will be identified by appending a sequence number to the file name.
- TRANSFER files record the state of HISTORY plots. Problems restarted from a TRANSFER file will restore the data sequence of HISTORY plots.

- See [TRANSFER File format](#)^[278] for a description of the data format.

TRANSFER6 (arg1 [,arg2,...])

- This command is the same as the TRANSFER command, except:
- Data are exported in a format compatible with FlexPDE Version 6.
- If the [FILE](#)^[286] modifier does not follow, then the output will be written to a file "<problem>_<sequence>.dat".
- TRANSFER6 files do NOT record the state of HISTORY plots. Problems restarted from a TRANSFER file will have fragmented HISTORY plots.
- See [TRANSFER6 File format](#)^[283] for a description of the data format.

VTK (arg1 [,arg2,...])

- Requests the export of the listed values to a file in VTK (Visualization Tool Kit) format for display by visualization systems such as VisIt.
- The output will be two or three dimensional, following the current coordinate system.
- The entire mesh is exported.
- If the FILE modifier does not follow, then the output will be written to a file "<problem>_<sequence>.vtk".
- Staged, eigenvalue and time-dependent problems will produce a family of files distinguished by the sequence number.
- VTK format uses the actual triangular or tetrahedral computation mesh, so material interfaces are preserved.
- The VTK format supports quadratic finite element basis directly, but not cubic. To export from cubic-basis computations, use VTKLIN.

VTKLIN (arg1 [,arg2,...])

- Produces a VTK format file in which the native cells of the FlexPDE computation have been converted to a set of linear-basis finite element cells.
- This command may be used to export to VTK visualization tools from cubic-basis FlexPDE computations, or in cases where the visualization tool does not support quadratic basis.

3.3.20.11.2 TRANSFER File format

The format of a TRANSFER file is dictated by the TRANSFER output format, and contains the following data.

(Note that the file format for Version 7 is different than that for previous versions. The new keyword TRANSFER6 can be used to write files in the old format. The TRANSFER import facility will automatically recognize the file type and import correctly for either.)

The Header Section

- 1) A identifying section enclosed in comment brackets, { ... } and containing the following:
 - a) the exporting FlexPDE version and date
 - b) the generating problem name and run time

- c) the problem title
- d) the list of quantities reported in the file.

- 2) A file identifier "FlexPDE v800 transfer file". The version number listed here will determine which file format is to be read on import.
 - 3) DIMENSIONS: The number of geometric dimensions and their names.
 - 4) BASIS: The finite element basis identifier from 4 to 10, meaning:
 - 4 = linear triangle (3 coefficients per cell)
 - 5 = quadratic triangle (6 coefficients per cell)
 - 6 = cubic triangle (9 coefficients per cell)
 - 7 = cubic triangle (10 coefficients per cell)
 - 8 = linear tetrahedron (4 coefficients per cell)
 - 9 = quadratic tetrahedron (10 coefficients per cell)
 - 10 = cubic tetrahedron (20 coefficients per cell)
 - 5) CELLDOF: The number of degrees of freedom (coefficients per cell as above).
 - 6) XBASIS: The geometric basis (which may be different than the solution basis)
 - 7) MATERIALS: The number of material regions in the domain.
 - 8) NGRID: The selector used in generating the mesh.
 - 9) FLAGS: A specification, showing the number of flags and their values. This row may change in later versions, but will not alter the readability of the file. Currently defined flags are:
 - a) Curvegrid, which allows curved cell sides where required by boundary definitions
 - b) Curveall, which forces curved cell sides for all cells in the mesh
 - c) Grow2d, the 2D mesh growth factor
 - d) Grow3d, the 3D mesh growth factor
 - 10) MESHDOF: The total number of degrees of freedom in the mesh (number of interpolation coefficients per variable).
 - 11) TIME: Current problem time and timestep (time-dependent problems only).
 - 12) VARIABLES: The number of output quantities and their names, one per line. Global quantities also define the value.
 - 13) MESHCONTROLS: The number mesh control definitions that follow, one line each.
 - 14) JOINTS: The number of domain joints (boundary break points) and their descriptions, one per line, defining:
 - Joint number
 - Periodic image joint (or 0)
-

- Associated mesh node number
- Extrusion surface (or 0)
- Active flag
- Mesh density control indices (parenthesized)

15) EDGES: The number of domain edges and their descriptions, one per line, defining:

- Edge number
- Associated base plane edge number
- Beginning joint number
- Ending joint number
- Periodic image edge (or 0)
- Extrusion surface (or 0)
- Extrusion layer (or 0)
- Active, Feature and Contact flags
- Edge name(s) that include this edge
- Mesh density control indices (parenthesized)

16) FACES: The number of 3D domain faces (3D only) and their descriptions, including

- Face number
- Associated base plane face number
- Left adjoining Region number
- Right adjoining Region number
- Periodic image face (or 0)
- Shape selector (face extrusion, edge extrusion, CAD face or 0)
- Layer or surface number
- Active and Contact flags
- Face name
- Mesh density control indices (parenthesized)

17) REGIONS: The number of domain regions and their descriptions, including

- Region number
- Associated base plane region number
- Layer (or 0)
- Material number
- Active flag
- Region name
- Mesh density control indices (parenthesized)

The Mesh Section

Unlike previous versions, version 7 ascribes nodes only to the mesh vertices. There are no midside or midface nodes. The nodal coefficients define a linear (order=1) approximation to the described quantity. This is then supplemented by quadratic and cubic coefficients which are ascribed to Sides (2D), Legs

(3D), or Cells (cubic models). Interpolation coefficients for the entire mesh are numbered sequentially, and each may be associated with a Node, a Side, a Leg, or a Cell. Exported mesh data are then as follows.

- 1) **NODES:** The number of Nodes. Nodes are numbered sequentially as they are created by the mesh generator.
 - 2) The nodal descriptions, containing one line for each mesh node with the following format:
 - the node number
 - one, two or three spatial coordinates
 - the node type (0=interior; 1=joint; 2=edge; 3=face; 4=exterior)
 - the boundary identifier (region number, joint number, edge number or face number)
 - the coefficient index associated with this node (in future versions, there may be more than one).
 - 3) **SIDES:** The number of Sides, a referencing flag and an imaging flag. Sides are numbered sequentially as they are created by the mesh generator. In 2D a Side is the leg of a triangle. In 3D a Side is a tetrahedral face.
 - 4) The side descriptions, one line per side, listing the following:
 - the side number
 - a packed flag word (1=warped; 2=periodic; 4=contact; 16=joint; 32=edge; 48=face; 64=exterior)
 - the boundary identifier
 - the geometric bulge (2D only)
 - the reference node (if referencing)
 - the image side (if imaging)
 - the coefficient indices associated with this side (varying numbers, depending on dimension and order).
 - 5) **LEGS:** The number of Legs (3D only) and a referencing flag. Legs are numbered sequentially as they are created by the mesh generator.
 - 6) The leg descriptions, one line per side, listing the following:
 - the leg number
 - a packed flag word (1=warped; 32=edge; 48=face; 64=exterior)
 - the face identifier
 - the geometric bulge (3D only)
 - the reference node (if referencing)
 - the coefficient indices associated with this side (varying numbers, depending on dimension and order).
 - 7) **CELLS:** The number of cells. Cells are numbered sequentially as they are created by the mesh generator.
-

- 8) The cell connectivity data, one line per cell, listing the following:
- the cell number
 - a packed flag word (1=bounding; 2=warped)
 - the node numbers of the vertices (2 in 1D, 3 in 2D, 4 in 3D)
 - the side numbers of the sides (none in 1D, 3 in 2D, 4 in 3D)
 - the leg numbers (3D only)
 - the neighboring cell numbers (corresponding to listed sides)
 - the region number and material number of the containing region
 - the coefficient indices associated with this cell (varying numbers, depending on dimension and order).

The Data Section

Each distinct material type in the exported problem is represented by a separate section in the TRANSFER file. Material types are defined by matching parameter definitions. Each coefficient has one value for each of the field quantities exported (global quantities do not appear). Coefficients shared between adjoining materials will appear once in each material group. The values reported may be different, if the coefficient lies on a contact boundary.

Each data section consists of:

- 1) COEFFICIENTS: The number of coefficients in the material and the material number.
- 2) The coefficient data, containing one line for each coefficient with the following format:
 - the coefficient number.
 - one value for each of the exported quantities.

The History Section

If the exporting problem has assembled data for the creation of HISTORY plots, that data will be recorded in the TRANSFER file, so that an importing problem can present the full history. This segment of the file contains the following data:

- 1) HISTORIES: The number of Histories and the number of times recorded.
- 2) The list of times at which data have been recorded.
- 3) The History blocks, one for each History, containing the following data:
 - The History number, together with number of functions, the number of "at" points, the start time, the time window, the window start, the window end, the instance count and the axis length (if plot was "vs" a quantity other than time)
 - If the History was "Versus" some axis other than time, the list of axis values

- The evaluation expressions for the requested "at" points, one line per function.
- The history data, one block for each output function. Each block contains:
 - i. The evaluation expression for the requested output function.
 - ii. The history values for the output function.

3.3.20.11.3 TRANSFER6 File format

The format of a TRANSFER6 file is identical to the version 6 output format, and contains the following data.

The Header Section

- 1) A header containing an identifying section listing the FlexPDE version, generating problem name and run time, and plotted variable name or function equation. This header is enclosed in comment brackets, { ... }.
 - 2) A file identifier "FlexPDE transfer file", and the problem title.
 - 3) The number of geometric dimensions and their names.
 - 4) The finite element basis identifier from 4 to 10, meaning:
 - 4 = linear triangle (3 points per cell)
 - 5 = quadratic triangle (6 points per cell)
 - 6 = cubic triangle (9 points per cell)
 - 7 = cubic triangle (10 points per cell)
 - 8 = linear tetrahedron (4 points per cell)
 - 9 = quadratic tetrahedron (10 points per cell)
 - 10 = cubic tetrahedron (20 points per cell)
 - 5) The number of degrees of freedom (points per cell as above).
 - 6) Current problem time and timestep (time-dependent problems only).
 - 7) The number of output variables and their names
 - 8) The number of domain joints (boundary break points) and their descriptions, including
 - Joint number
 - Periodic image joint (or 0)
 - Associated global node number
 - Extrusion surface (or 0)
 - Active flag
 - 9) The number of domain edges and their descriptions, including
 - Edge number
-

- Associated base plane edge number
 - Beginning joint number
 - Ending joint number
 - Periodic image edge (or 0)
 - Extrusion surface (or 0)
 - Extrusion layer (or 0)
 - Active, Feature and Contact flags
 - Edge name
- 10) The number of 3D domain faces and their descriptions, including
- Face number
 - Associated base plane face number
 - Left adjoining Region number
 - Right adjoining Region number
 - Periodic image face (or 0)
 - Shape selector
 - Layer or surface number
 - Active and Contact flags
 - Face name
- 11) The number of domain regions and their descriptions, including
- Region number
 - Associated base plane region number
 - Layer (or 0)
 - Material number
 - Active flag
 - Region name




The Data Section

Each distinct material type in the exported problem is represented by a separate section in the TRANSFER file. Material types are defined by matching parameter definitions. Each data section consists of:

- 1) The number of nodes
 - 2) The nodal data, containing one line for each node with the following format:
 - two or three coordinates and as many data values as specified in (7).
 - a colon (:)
 - the global node index
 - the node type (0=interior; 1=joint; 2=edge; 3=face; 4=exterior)
 - the type qualifier (region number, joint number, edge number or face number)
 - the periodic node index
-

- 3) The number of cells.
- 4) The cell connectivity data, one line per cell, listing the following:
- the geometric basis (as in Header 4)
 - the node numbers (local to the current material block) which comprise the cell. The count of these node numbers is controlled by (Header 5).
 - a colon (:)
 - the global cell number
 - the logical region number
 - the material number

The node numbers are presented in the following order:

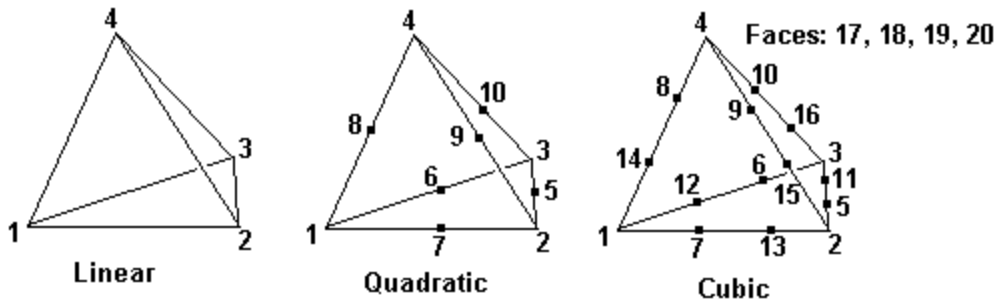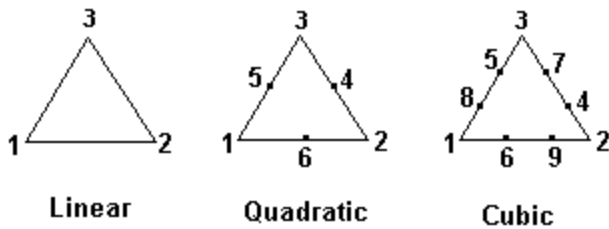

3.3.20.12 Examples

See the sample problem [Samples | Usage | Plotting | Plot_test.pde](#)^[674] for examples of PLOTS and MONITORS.

See the sample problem [Samples | Usage | Plotting | Print_test.pde](#)^[672] for examples of exporting plot data.

See the sample problem [Samples | Usage | Import-Export | Export.pde⁵⁹⁰](#) for examples of exports without display.

See the sample problem [Samples | Usage | Import-Export | Export_Format.pde⁵⁹¹](#) for examples of formatted exports without display.

See the sample problem [Samples | Usage | Import-Export | Export_History.pde⁵⁹¹](#) for examples of exports of history data.

3.3.21 Histories

The **HISTORIES** section, which is optional, specifies values for which a time history is desired. While multiple **HISTORY** statements can be listed they must all be of the form:

```
HISTORY ( arg1 [ ,arg2,... ] )
HISTORY ( arg1 [ ,arg2,... ] ) AT (X1,Y1) [ (X2,Y2)...]
```

The coordinates specify locations in the problem at which the history is to be recorded. If no coordinate is given, the arg must evaluate to a scalar.

The modifiers and reports available to PLOTS and MONITORS may also be applied to HISTORY statements.

The display of HISTORIES is controlled by the AUTOHIST select switch, which defaults to ON. With the default setting all HISTORIES are automatically refreshed and displayed with the update of any MONITORS or PLOTS.

If desired, HISTORY statements can be included directly in the MONITORS section or PLOTS section.

Histories in Staged Problems

HISTORY statements may be used in STAGED problems as well as in time-dependent problems. In this case, the default abscissa will be stage number. You can select a different value for the abscissa quantity by appending the clause

VERSUS expression

In this case, the values of the given expression in the various stages will be used as the plot axis.

Windowing History Plots

HISTORY plots by default display the total time range of the problem run. Specific time ranges can be specified in several ways. A global window specifier can be set in the SELECT section:

```
SELECT HISTORY_WINDOW = time
```

This command causes all histories to display only the most recent **time** interval of the data.

Individual HISTORY plots can be windowed by the two plot qualifier forms:

WINDOW = time selects a moving window containing the most recent **time** interval
WINDOW (time1 , selects a fixed time range, plotting the time between **time1** and
time2) **time2**

See the sample problem ["Samples | Usage | Two_Histories.pde"](#)^[629] for an example.

3.3.22 End

All problem descriptors must have an END section.

With the exception of a numeric enabling key used in special demonstration files prepared by PDE Solutions Inc., anything appearing after the reserved word end is ignored by FlexPDE and treated as a comment.

Problem notes can be conveniently placed after the reserved word END.

3.4 Batch Processing

A special form of descriptor is used to specify a group of problems to be run in batch mode.

A single "section" introduced by the word BATCH identifies a descriptor as a batch control file. Following this header, a sequence of names appears, each name enclosed in quote marks. Commas may optionally be used to separate the names. Any number of names may appear on each line of the descriptor. Each name is the name of a problem descriptor to be run. Names may include directory paths, which are assumed to originate in the directory containing the batch descriptor. The ".pde" extension is not required, and will be assumed if omitted. The list should be closed with an END statement.

Example:

```
BATCH
  { FlexPDE will accept either \ or / as a separator }
  "misc\table", "steady_state\heat_flow\slider"
  "steady_state/stress/3d_bimetal"
END
```

The entire problem list is examined immediately, and any syntax errors in the names are reported. All files named in the list are located, and missing files are reported before any processing begins.

Each problem named in the list is run to completion in sequence. As the problems run, status information is written to a log file in the directory containing the batch descriptor. This file has the same name as the batch descriptor, with the extension "_log.txt", and all problems in the list are summarized in this single

file. Graphical output from each problem is written as usual to a unique ".pg8" file in the directory with the specific descriptor. After the run is completed, this graphic output may be reviewed by restarting FlexPDE and using the [VIEW](#) ^[26] menu item.

Simple names may be listed without the quotes, but in this case embedded spaces, path separators, reserved words and numeric initials will all cause error diagnostics.

An optional [SELECT](#) ^[197] section may be placed immediately following the BATCH identifier. Most selectors set in the section will be used as the default value for all scripts run by the batch. These values will not override values set explicitly by the individual scripts.

Example:

```
BATCH
SELECT ngrid=10
...
END
```

An optional **DELAY** value may be set immediately following the BATCH identifier. This delay value specifies the number of seconds to wait prior to starting the next problem in the sequence.

Example:

```
BATCH
  DELAY = 3
...
END
```

The batch can be terminated before completion by using the "Stop Batch" item in the [Controls Menu](#) ^[10].

Part



Technical Notes

4 Technical Notes

4.1 Applications in Electromagnetics

I. Maxwell's Equations

The purpose of this note is to develop formulations for the application of FlexPDE to various problems in electromagnetics. It is not our intention to give a tutorial on electromagnetics; we assume that the reader has some familiarity with the subject, and has access to standard references.

The starting point for our discussion is, as usual, Maxwell's equations:

$$(1) \quad \nabla \times \vec{H} = \vec{J} + \frac{\partial \vec{D}}{\partial t}$$

$$(2) \quad \nabla \cdot \vec{B} = 0$$

$$(3) \quad \nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}$$

$$(4) \quad \nabla \cdot \vec{D} = \rho$$

To these we add the constitutive relations

$$(5) \quad \vec{D} = \epsilon \vec{E}$$

$$(6) \quad \vec{B} = \mu \vec{H}$$

$$(7) \quad \vec{J} = \sigma \vec{E}$$

(In isotropic materials, ϵ , μ and σ are scalars, possibly nonlinear. In more complex materials, they may be tensors. In studies involving hysteresis or permanent magnets, modifications must be made to equation (6))

From these can be derived a convenient statement of charge conservation:

$$(8) \quad \nabla \cdot \vec{J} + \frac{\partial \rho}{\partial t} = 0$$

These equations form a very general framework for the study of electromagnetic fields, and admit of numerous combinations and permutations, depending on the characteristics of the problem at hand. Much confusion arises, in fact, from the tendency of textbooks to specialize the equations too soon, in order to simplify the exposition. This approach appears to present as a generally applicable formulation one which in reality embodies many assumptions about the problem being analyzed. We will discover that some alterations or substitutions that seem esthetically pleasing will not turn out to be wise computationally.

II. Choice of variables

A constraint due directly to the Finite Element model used in FlexPDE strikes us at the very outset. FlexPDE uses a continuous piecewise polynomial representation of all model variables. That is, at each computational node in the system it is assumed that each variable takes on a unique value, and that these nodal values can be connected in space by polynomial interpolations.

Application of the Divergence Theorem and Stokes' Theorem to Maxwell's equations yield the following boundary rules at material interfaces.

- The tangential component of \vec{E} is continuous; the normal component of $\vec{D} = \epsilon\vec{E}$ is continuous (in the absence of surface charges).
- The tangential component of \vec{H} is continuous (in the absence of surface current); the normal component of $\vec{B} = \mu\vec{H}$ is continuous.

These rules are in general inconsistent with the model assumptions of FlexPDE. This means that the field components themselves cannot be chosen as the model variables unless one of the following conditions applies:

- There are no material property discontinuities in the domain,
- The discontinuous components of the field are absent in the specific configuration being modeled.

For example, if we know that in a specific configuration that all the electric fields must be tangential to the material interfaces, we can use \vec{E} as a model variable. If we know instead that all the electric fields are normal to the material interfaces, we can use \vec{D} as a model variable.

The analysis of fields in terms of the field components comprises the bulk of textbook treatments, and we will not pursue the topic further here. We will instead turn our attention to a more generally applicable modeling approach. Nevertheless, despite the seemingly restrictive nature of these prohibitions, there is a large class of problems which can be analyzed successfully by FlexPDE in terms of field components.

III. Potentials

For any twice-differentiable vector \vec{v} , the vector identity $\nabla \cdot \nabla \times \vec{v} = 0$ holds. This identity together with equation (2) implies that we can define a vector potential function \vec{A} , the magnetic vector potential, such that

$$(9) \quad \nabla \times \vec{A} = \vec{B}$$

A theorem due to Helmholtz states that a vector field can be uniquely defined only by specifying both its curl and its divergence. We must remain aware, therefore, that at this point our vector potential is incompletely determined. The arbitrariness of $\nabla \cdot \vec{A}$ is frequently exploited to simplify the equations.

In many cases, it is not necessary to explicitly specify $\nabla \cdot \vec{A}$, allowing the boundary conditions and the artifacts of the computational model to define it by default.

Substituting relation (9) into equation (3) gives $\nabla \times \left(\vec{E} + \frac{\partial \vec{A}}{\partial t} \right) = 0$. Another vector identity states that $\nabla \times \nabla \varphi = 0$ for any twice differentiable scalar φ . This allows us to define a scalar potential function V such that

$$(10) \quad \vec{E} = -\nabla V - \frac{\partial \vec{A}}{\partial t}$$

In the absence of time variation, V is seen to be the electrostatic potential.

Application of Faraday's Law to a pillbox on a material interface shows that V must be continuous across material interfaces. Application of Stokes' Theorem to \vec{A} shows that the tangential component of \vec{A} must be continuous across material interfaces. All the conventional definitions of $\nabla \cdot \vec{A}$ also have the property that the normal component of \vec{A} is continuous across material interfaces. Therefore, formulations in terms of V and \vec{A} completely satisfy the modeling assumptions of FlexPDE.

Since the two definitions (9) and (10) satisfy equations (2) and (3), we are left with Maxwell's equations (1) and (4), which in terms of \vec{A} and V are:

$$(11) \quad \nabla \times \left(\frac{\nabla \times \vec{A}}{\mu} \right) + \sigma \frac{\partial \vec{A}}{\partial t} + \varepsilon \frac{\partial^2 \vec{A}}{\partial t^2} + \sigma \nabla V + \varepsilon \frac{\partial}{\partial t} \nabla V = 0$$

$$(12) \quad \nabla \cdot (\varepsilon \nabla V) + \nabla \cdot \left(\varepsilon \frac{\partial \vec{A}}{\partial t} \right) + \rho = 0$$

At this point, it is customary in the literature to apply vector identities to convert the $\nabla \times \left(\nabla \times \frac{\vec{A}}{\mu} \right)$ into a form containing $\nabla \cdot \vec{A}$, so that a complete definition of \vec{A} can be achieved. In fact, these transformations require that μ be continuous across material interfaces. We therefore defer this operation for discussion under the appropriate specializations to follow. We should also point out that in (11) we have substituted (7) $\vec{J} = \sigma \vec{E}$, a substitution we may later wish to rescind.

IV. Boundary Conditions

FlexPDE uses the Divergence Theorem and its related Curl Theorem to reduce the order of second derivative terms, and assumes that the resulting surface integrals vanish at internal boundaries. Applied to (12), this process results in the continuity of the normal component of \vec{D} , as required by boundary rule 1). Applied to (11), this process results in the continuity of the tangential component of \vec{H} , as required by boundary rule 2).

At exterior boundaries, the Natural boundary condition specifies the value of the integrand of the surface integrals. For equation (11) this means the tangential component of \vec{H} , while for equation (12) it means the normal component of \vec{D} .

1. Symmetry planes

Following the above definition of the natural boundary condition, the specification "NATURAL(V)=0" for equation (12) means that the normal component of \vec{D} is zero. This means that field lines must be parallel to the system boundary and that potential contours must be normal to the boundary. These are the conditions of a symmetry plane.

Similarly, if we specify "NATURAL(A)=0" for equation (11), we require that the tangential component of \vec{H} be zero. This says that field lines and potential contours must be normal to the boundary, which is again the condition of a symmetry plane.

2. Perfect conductors

Since a perfect conductor cannot sustain a field, the boundary condition "VALUE(V)=constant" for equation (12) defines a perfectly conducting boundary. Note that since equation (12) contains only derivatives of V, an arbitrary constant value may be added to the solution without affecting the equation. In order for a numerical solution to succeed, there must be some point in the domain at which a value condition is prescribed, in order to make the potential solution unique.

Similarly, the specification "VALUE(A)=constant" for equation (11) forces the normal component of \vec{H} to be zero. As with V, a value should be ascribed to \vec{A} somewhere in the domain, in order to make the potential solution unique.

3. Distant Boundaries

Ampere's Law states that the integral of $\vec{H} \bullet d\vec{l}$ around a closed path is equal to the integral of $\vec{J} \bullet d\vec{S}$ over the enclosed surface, or just I, the enclosed current. Now, $\vec{H} \bullet d\vec{l}$ is the tangential component of \vec{H} , which is exactly the quantity specified in equation (11) by the Natural boundary condition. In many cases, this fact can be used to construct meaningful terminating boundary conditions for otherwise open domains.

The differential form of Ampere's Law can also be used to derive a general rule for the value of \vec{A} :

$$\vec{A}(\vec{R}) = \iiint \frac{\vec{J}(\vec{R}')}{|\vec{R} - \vec{R}'|} d^3\vec{R}'$$

(In time-varying systems, \vec{J} must refer to a current retarded in time by the propagation time from \vec{R}' to \vec{R} .)

This form has the property that $\nabla \bullet \vec{A} = 0$. We may add to this definition the gradient of an arbitrary scalar function G without affecting the resulting fields.

At points distant from any currents we may write

$$\vec{A}(\vec{R}) \rightarrow \frac{\vec{I}}{|\vec{R}|}.$$

Note that here \vec{I} is a vector which embodies the direction of the current, and that \vec{A} has the direction of \vec{I} .

V. Harmonic Analysis

Equations (11) and (12) describe a full time dependent model of the fields, which can be extremely expensive to compute. In many cases of interest, the time dependence we desire to study is the stable oscillation caused by a sinusoidal excitation. In these cases it is convenient to make the assumption that each of the field components can be expressed in the complex form

$$\vec{P} = \mathbf{P} e^{i\omega t}$$

Where \vec{P} is any of the field quantities, \mathbf{P} is an associated complex amplitude (a function of space only),

ω is the angular velocity, and i is the square root of minus 1. The observable field quantity is then the real part of \mathbf{P} , $\text{Re}(\mathbf{P})$.

With these assumptions, the time derivative terms in our equations reduce to simple forms:

$$\frac{\partial \vec{P}}{\partial t} = i\omega \vec{P}$$

$$\frac{\partial^2 \vec{P}}{\partial t^2} = -\omega^2 \vec{P}$$

Applying these assumptions to equations (11) and (12) results in the harmonic equations

$$(13) \quad \nabla \times \left(\frac{\nabla \times \vec{A}}{\mu} \right) + \omega(i\sigma - \varepsilon\omega)\vec{A} + (\sigma + i\varepsilon\omega)\nabla V = 0$$

$$(14) \quad \nabla \cdot (\varepsilon \nabla V) + i\omega \nabla \cdot (\varepsilon \vec{A}) + \rho = 0$$

These equations require solution in space only, and are thus much more economical than the full time dependent system (11), (12). We will return to these equations frequently in the sections which follow.

VI. Posing Equations for FlexPDE

We have been writing our equations in terms of vector fields, but in fact FlexPDE is not able to deal directly with vector fields; we must manually reduce the system to component equations. In a three dimensional space, equation (11) comprises three component equations while equation (12) is scalar. So we have a total of four equations in four unknowns, A_x , A_y , A_z and V .

Equations (13)-(14) are more complicated, since each component has a real and an imaginary part, for a total of eight components. Each of these eight scalar variables must be represented by a separate component equation.

We will not expand the equations into their final form just yet, because in most of the specializations addressed subsequently the resulting forms are not nearly so frightening as the full equations.

VII. Specializations

In most problems of interest, the full generality of equations (11) and (12) or their harmonic equivalents (13) and (14) are not necessary. Analysis of the needs of the problem at hand can usually lead to considerable simplification. We will consider a few cases here.

1. Electrostatics

For fields which are constant in time, equation (12) decouples from equation (11), and the electric scalar potential may be found from the single equation

$$(15) \quad \nabla \cdot (\varepsilon \nabla V) + \rho = 0$$

Since FlexPDE applies the divergence theorem over each computational cell, inclusion of ε inside the divergence is sufficient to guarantee the correct behavior of the field quantities across material interfaces. The natural boundary condition on V becomes a specification of the normal derivative of $\varepsilon \nabla V$.

2. Magnetostatics

For fields which are constant in time, equation (11) becomes

$$\nabla \times \left(\frac{\nabla \times \vec{A}}{\mu} \right) + \sigma \nabla V = 0$$

Here the term $\sigma \text{Grad}(V)$ is in fact a representation of the current density \vec{J} , which we will probably wish to specify directly as the driving current for the fields:

$$(16) \quad \nabla \times \left(\frac{\nabla \times \vec{A}}{\mu} \right) + \vec{J} = 0$$

In the geometric interpretation of \vec{A} , for which $\nabla \cdot \vec{A} = 0$, \vec{A} has components parallel to the components of \vec{J} , so if \vec{J} is restricted to a single component, we may restrict \vec{A} to only that component.

As discussed in section IV, the Natural boundary condition for \vec{A} specifies the tangential component of \vec{H} . $\text{Natural}(\vec{A})=0$ specifies a symmetry plane, and $\text{Value}(\vec{A})=0$ specifies a perfect conductor.

3. Non-magnetic Materials (constant μ)

In the common case where μ is constant, we can perform some simplification on equation (11). We can apply the vector identity

$$\nabla \times \nabla \times \vec{A} = \nabla (\nabla \cdot \vec{A}) - \nabla \cdot \nabla \vec{A}$$

To give

$$(17) \quad \frac{1}{\mu} \nabla \cdot \nabla \vec{A} - \sigma \frac{\partial \vec{A}}{\partial t} - \varepsilon \frac{\partial^2 \vec{A}}{\partial t^2} = \frac{1}{\mu} \nabla (\nabla \cdot \vec{A}) + \sigma \nabla V + \varepsilon \frac{\partial}{\partial t} \nabla V .$$

Since we now have an explicit $\nabla \cdot \vec{A}$, we are in a position to define it in any way we choose to generate a form appropriate to our needs. The definition of $\nabla \cdot \vec{A}$ is commonly known as the "Gauge Condition". The choice of gauge will be determined by what it is that we know about the problem at hand. Several common gauge conditions and the resulting forms of (11)-(12) are given below.

Note that this operation is not without consequences. The definition of the natural boundary condition has changed. It is no longer the boundary value of $\frac{\nabla \times \vec{A}}{\mu}$, but is now the boundary value of $\frac{\nabla \vec{A}}{\mu}$.

Natural(\vec{A})=0 remains the condition for a symmetry plane, and Value(\vec{A})=0 still defines a perfect conductor boundary, but care must be taken if other values are assigned. In the case $\nabla \cdot \vec{A} = 0$, the two will be equivalent, in other choices of gauge they may not be.

Also note that because of typographical constraints we have written $\nabla \cdot \nabla \vec{A}$ for the component-wise Laplacian of the vector \vec{A} . This notation is not strictly correct in curvilinear coordinates, and a more careful derivation must be made in those cases.

Without making further assumptions about ε or σ , we can apply the Coulomb gauge condition, $\nabla \cdot \vec{A} = 0$.

With this assertion, equation (17) becomes

$$(18) \quad \nabla \cdot \nabla \vec{A} - \mu \sigma \frac{\partial \vec{A}}{\partial t} - \mu \varepsilon \frac{\partial^2 \vec{A}}{\partial t^2} = \mu \sigma \nabla V + \mu \varepsilon \frac{\partial}{\partial t} \nabla V$$

$$(19) \quad \nabla \cdot (\varepsilon \nabla V) + \nabla \cdot \left(\varepsilon \frac{\partial \vec{A}}{\partial t} \right) + \rho = 0$$

Note that even though we have assumed $\nabla \cdot \vec{A} = 0$, we are not free to delete the $\nabla \cdot \left(\varepsilon \frac{\partial \vec{A}}{\partial t} \right)$ from

equation (18) unless ε is also constant. Piecewise constancy of ε is not sufficient, because $\nabla \varepsilon$ is undefined at the interface and we have no way to apply a divergence theorem to convert it to a surface integral.

4. Non-magnetic Materials with constant ε

In the special case where both μ and ε are constant, the scalar potential equation (19) with Coulomb gauge can be simplified to

$$(19') \quad \nabla \cdot (\nabla V) + \frac{\rho}{\varepsilon} = 0$$

Alternatively, we can use the "Diffusion" gauge condition:

$$\nabla \cdot \vec{A} = -\mu\varepsilon \frac{\partial V}{\partial t}$$

We can reverse the order of differentiation and cause $\nabla \cdot \vec{A}$ to cancel the $\frac{\partial}{\partial t} \nabla V$ term in equation

(11) and replace the $\frac{\partial \vec{A}}{\partial t}$ term in equation (12)

$$(20) \quad \nabla \cdot \nabla \vec{A} - \mu\sigma \frac{\partial \vec{A}}{\partial t} - \mu\varepsilon \frac{\partial^2 \vec{A}}{\partial t^2} = \mu\sigma \nabla V$$

$$(21) \quad \nabla \cdot (\nabla V) - \mu\varepsilon \frac{\partial^2 V}{\partial t^2} + \frac{\rho}{\varepsilon} = 0$$

In some cases, $\sigma \text{ Grad}(V)$ may be interpreted as the negative of the static current density, in which case the equations decouple and (20) may be eliminated.

5. Non-magnetic Materials with constant ε and σ

In the special case where μ , ε and σ are all constant, we can use the Lorentz gauge condition:

$$\nabla \cdot \vec{A} = -\mu\sigma V - \mu\varepsilon \frac{\partial V}{\partial t}$$

This allows all the V terms to cancel from equation (17) resulting in decoupled equations for \vec{A} and V

$$(22) \quad \nabla \cdot \nabla \vec{A} - \mu\sigma \frac{\partial \vec{A}}{\partial t} - \mu\varepsilon \frac{\partial^2 \vec{A}}{\partial t^2} = 0$$

$$(23) \quad \nabla \cdot (\nabla V) - \mu\sigma \frac{\partial V}{\partial t} - \mu\varepsilon \frac{\partial^2 V}{\partial t^2} + \frac{\rho}{\varepsilon} = 0$$

The equations have now been decoupled, and may be solved separately. These forms are useful in the solution of wave propagation problems.

VIII. Specializations of the Harmonic Equations

1. Non-magnetic Materials

Equations (13) and (14) can also be specialized to the case of constant μ . The basic form of equation (13) is

$$(24) \quad \left(\frac{1}{\mu}\right) \nabla \cdot \nabla \vec{A} + \omega(\varepsilon\omega - i\sigma)\vec{A} = \left(\frac{1}{\mu}\right) \nabla(\nabla \cdot \vec{A}) + (\sigma + i\varepsilon\omega)\nabla V$$

Without making further assumptions about ε or σ we may apply the Coulomb gauge condition

$$\nabla \cdot \vec{A} = 0,$$

from which equations (13) and (14) become

$$(25) \quad \nabla \cdot \nabla \vec{A} + \mu\omega(\varepsilon\omega - i\sigma)\vec{A} = \mu(\sigma + i\varepsilon\omega)\nabla V$$

$$(26) \quad \nabla \cdot (\varepsilon \nabla V) + i\omega \nabla \cdot (\varepsilon \vec{A}) + \rho = 0$$

Note that even though we have assumed $\nabla \cdot \vec{A} = 0$, we are not free to delete the $\nabla \cdot (\varepsilon \vec{A})$ from equation (26) unless ε is constant.

2. Non-magnetic Materials with constant ε

In the special case where both μ and ε are constant, equation (26) with Coulomb gauge can be simplified to

$$(26') \quad \nabla \cdot (\nabla V) + \frac{\rho}{\varepsilon} = 0$$

Alternatively, we can use the diffusion gauge condition

$$\nabla \cdot \vec{A} = -i\omega\mu\varepsilon V$$

from which we derive the equations

$$(27) \quad \nabla \cdot \nabla \vec{A} + \omega(\varepsilon\omega - i\sigma)\vec{A} = \mu\sigma\nabla V$$

$$(28) \quad \nabla \cdot \nabla V + \omega^2\mu\varepsilon V + \frac{\rho}{\varepsilon} = 0$$

In some cases, $\sigma\nabla V$ may be interpreted as the negative of the conduction current density, in which case the equations decouple and (28) may be eliminated.

3. Non-magnetic Materials with constant ε and σ

In the special case where ε , μ and σ are all constant, we can use the Lorentz gauge condition, which in the harmonic approximation becomes

$$\nabla \cdot \vec{A} = -\mu(\sigma + i\omega\varepsilon)V$$

All the ∇ terms vanish in equation (24), and the pair (13), (14) become

$$(29) \quad \nabla \cdot \nabla \bar{A} + \omega(\varepsilon\omega - i\sigma)\bar{A} = 0$$

$$(30) \quad \nabla \cdot \nabla V - \mu(\sigma + i\varepsilon\omega)V + \frac{\rho}{\varepsilon} = 0$$

The equations have now been decoupled, and may be solved separately. These forms are useful in the solution of wave propagation problems.

4.1.1 Introduction

FlexPDE is a software tool for finding numerical solutions to systems of linear or non-linear partial differential equations using the methods of finite element analysis. The systems may represent static boundary value, time dependent initial/boundary value, or eigenvalue problems. Rather than addressing the solution of specific equations related to a given area of application, FlexPDE provides a framework for treating partial differential equation systems in general. It gives users a straightforward method of defining the equations, domains and boundary conditions appropriate to their application. From this description it creates a finite element solution process tailored to the problem. Within quite broad limits, then, FlexPDE is able to construct a numerical solution to a wide range of applications, without itself having any built-in knowledge of any of them.

The goal of this technical note is not to provide a discussion of the specific grammatical rules of writing scripts for FlexPDE, nor to describe the operation of the graphical user interface. Those topics are covered in other volumes of the FlexPDE documentation, the Getting Started guide, the User Guide tutorial, and the Problem Descriptor Reference.

We will address several fields of physics in which FlexPDE finds fruitful application, describing the various problems, the mathematical statement of the partial differential equation system, and the ultimate posing of the problem to FlexPDE. The volume is accompanied by the text of all the examples, which the user can submit to FlexPDE to see the solution in progress or use as a foundation for problems of his own.

This manual is emphatically not a compendium of the problems FlexPDE “knows how to solve”. It is rather a group of examples showing ways in which the power of FlexPDE can be applied to partial differential equations systems in many fields. The true range of applicability of FlexPDE can be demonstrated only by the full range of ingenuity of users with insight into the mathematics of their own special fields.

Nor does this manual attempt to present textbook coverage of the theory of the topics addressed. The range of applications addressable by FlexPDE would make such an attempt impossible, even if we were capable of such an endeavor. Instead, we have presented enough of the theory of each topic to allow those practitioners who are familiar with the subject to see how the material has been analyzed and presented to FlexPDE. Users who are unfamiliar with the various fields of application should consult standard textbooks to find the full theoretical development of the subjects.

4.1.1.1 Finite Element Methods

It is not our intent to provide an elaborate discussion of finite element methods. One goal of FlexPDE has been to allow users in the various fields of science and engineering to begin reaping the benefits of applying finite element analysis to their individual work without becoming programmers and numerical analysts. There are hundreds of books in print detailing the method and its variants in many fields, and the interested student can find a wealth of material to keep him busy. If we have been successful in our endeavors, he won't have to.

Nevertheless, a familiarity with some of the concepts of finite element analysis can be of benefit in understanding how FlexPDE works, and why it sometimes does not. Hence this brief overview.

4.1.1.2 Principles

Partial differential equations generally arise as a mathematical expression of some conservation principle such as a conservation of energy, momentum or mass. Partial differential equations by their very nature deal with continuous functions -- a derivative is the result of the limiting process of observing differences at an infinitesimal scale. A temperature distribution in a material, for example, is assumed to vary smoothly between one extreme and another, so that as we look ever more closely at the differences between neighboring points, the values become ever closer until at "zero" separation, they are the same.

Computers, on the other hand, apply arithmetic operations to discrete numbers, of which only a limited number can be stored or processed in finite time. A computer cannot analyze an infinitude of values. How then can we use a computer to solve a real problem?

Many approaches have been devised for using computers to approximate the behavior of real systems. The finite element method is one of them. It has achieved considerable success in its few decades of existence, first in structural mechanics, and later in other fields. Part of its success lies in the fact that it approaches the analysis in the framework of integrals over small patches of the total domain, thus enforcing aggregate correctness even in the presence of microscopic error. The techniques applied are little dependent on shapes of objects, and are therefore applicable in real problems of complex configuration.

The fundamental assumption is that no matter what the shape of a solution might be over the entire domain of a problem, at some scale each local patch of the solution can be well approximated by a low-order polynomial. This is closely related to the well-known Taylor series expansion, which expresses the local behavior of a function in a few polynomial terms.

In a two-dimensional heat flow problem, for example, we assume that if we divide the domain up into a large number of triangular patches, then in each patch the temperature can be well represented by, let us say, paraboloidal surfaces. Stitching the patches together, we get a Harlequin surface that obeys the differential limiting assumption of continuity for the solution value—but perhaps not for its derivatives. The patchwork of triangles is referred to as the computation "mesh", and the sample points at vertices or elsewhere are referred to as the "nodes" of the mesh.

In three dimensions, the process is analogous, using a tetrahedral subdivision of the domain.

How do we determine the shape of the approximating patches?

1. Assign a sample value to each vertex of the triangular or tetrahedral subdivision of the domain. Then each vertex value is shared by several triangles (tetrahedra).
2. Substitute the approximating functions into the partial differential equation.
3. Multiply the result by an importance-weighting function and integrate over the triangles surrounding each vertex.
4. Solve for the vertex values which minimize the error in each integral.

This process, known as a “weighted residual” method, effectively converts the continuous PDE problem into a discrete minimization problem on the vertex values. This is usually known as a “weak form” of the equation, because it does not strictly enforce the PDE at all points of the domain, but is instead correct in an integral sense relative to the triangular subdivision of the domain.

The locations and number of sample values is different for different interpolation systems. In FlexPDE, we use either quadratic interpolation (with sample values at vertices and midsides of the triangular cells), or cubic interpolation (with values at vertices and two points along each side). Other configurations are possible, which gives rise to various “flavors” of finite element methods.

4.1.1.3 Boundary Conditions

A fundamental component of any partial differential equation system is the set of boundary conditions, which alone make the solution unique. The boundary conditions are analogous to the integration constants that arise in integral calculus. We say $\int x^2 dx = \frac{1}{3}x^3 + C$, where C is any constant. If we differentiate the right hand side, we recover the integrand, regardless of the value of C .

In a similar way, to solve the equation $\frac{\partial^2 u}{\partial x^2} = 0$, we must integrate twice. The first integration gives

$\frac{\partial u}{\partial x} + C_1$, and the second gives $C_1 x + C_2$. These integration constants must be supplied by the

boundary conditions of the problem statement.

It is clear from this example that there are as many integration constants as there are nested differentiations in the PDE. In the general case, these constants can be provided by a value at each end of an interval, a value and a derivative at one end, etc. In practice, the most common usage is to provide either a value or a derivative at each end of the domain interval. In two or three dimensions, a value or derivative condition applied over the entire bounding curve or surface provides one condition at each end of any coordinate integration path.

4.1.1.4 Integration by Parts and Natural Boundary Conditions

A fundamental technique applied by FlexPDE in treating the finite element equations is “integration by parts”, which reduces the order of a derivative integrand, and also leads immediately to a formulation of derivative boundary conditions for the PDE system.

In its usual form, integration by parts is given as

$$\int_a^b u dv = (uv) \Big|_a^b - \int_a^b v du$$

Application of integration by parts to a vector divergence in a two- or three-dimensional domain, for example, results in the Divergence Theorem, given in 2D as

$$\iint_A \nabla \cdot \vec{F} dA = \oint_l \vec{F} \cdot \hat{n} dl$$

This equation relates the integral inside the area to the flux crossing the outer boundary (\hat{n} referring to the outward surface-normal unit vector).

As we shall see, the use of integration by parts has a wide impact on the way FlexPDE interprets and solves PDE systems.

Applied to the weighted residual method, this process dictates the flux conservation characteristics of the finite element approximation at boundaries between the triangular approximation cells, and also provides a method for defining the interaction of the system with the outside world, by specifying the value of the surface integrand.

The values of the surface integrands are the ‘‘Natural’’ boundary conditions of the PDE system, a term which also arises in a similar context in variational calculus.

FlexPDE uses the term ‘‘Natural’’ boundary condition to specify the boundary flux terms arising from the integration by parts of all second-order terms in the PDE system.

For example, in a heat equation, $\nabla \cdot (-k \nabla \varphi) dA + S = 0$, the divergence term will be integrated by parts, resulting in

$$(0.1) \quad \iint_A \nabla \cdot (-k \nabla \varphi) dA = \oint_l (-k \nabla \varphi) \cdot \hat{n} dl$$

The right hand side is the heat flux crossing the outer boundary, and the value of $-k \nabla \varphi$ must be provided by the user in a Natural boundary condition statement (unless a value BC is applied instead).

At an interface between two materials, $-k_1 (\nabla \varphi)_1 \cdot \hat{n}_1$ represents the heat energy leaving material 1 at a point on the interface. Likewise, $-k_2 (\nabla \varphi)_2 \cdot \hat{n}_2$ represents the heat energy leaving material 2 at the same point. Since the outward normal from material 1 is the negative of the outward normal from material 2, the sum of the fluxes at the boundary is $[k_2 (\nabla \varphi)_2 - k_1 (\nabla \varphi)_1] \cdot \hat{n}_1$, and this becomes the Natural boundary condition at the interface. In this application, we want energy to be conserved, so that the two flux terms must sum to zero. Thus the internal Natural BC is zero at the interface, and this is the default value applied by FlexPDE.

Useful Integral Rules

$$(0.2) \quad \iiint_V \nabla f dV = \oint_S (\hat{n} f) dS \quad (\text{Gradient Theorem})$$

$$(0.3) \quad \iiint_V \nabla \cdot \vec{F} dV = \oint_S (\hat{n} \cdot \vec{F}) dS \quad (\text{Divergence Theorem})$$

$$(0.4) \quad \iiint_V \varphi \nabla \cdot \vec{F} dV = \oint_S \varphi (\hat{n} \cdot \vec{F}) dS - \iiint_V (\nabla \varphi) \cdot \vec{F} dV$$

$$(0.5) \quad \iiint_V \nabla \times \vec{F} dV = \oint_S (\hat{n} \times \vec{F}) dS \quad (\text{Curl Theorem})$$

4.1.1.5 Adaptive Mesh Refinement

We have said that at “some scale“, the solution can be adequately approximated by a set of low-order polynomials. But it is not always obvious where the mesh must be dense and where a coarse mesh will suffice. In order to address this issue, FlexPDE uses a method of “adaptive mesh refinement“. The problem domain presented by the user is divided into a triangular mesh dictated by the feature sizes of the domain and the input controls provided by the user. The problem is then constructed and solved, and the cell integrals of the weighted residual method are crosschecked to estimate their accuracy. In locations where the integrals are deemed to be of questionable accuracy, the triangles are subdivided to give a new denser mesh, and the problem is solved again. This process continues until FlexPDE is satisfied that the approximation is locally accurate to the tolerance assigned by the user. Acceptable local accuracy does not necessarily guarantee absolute accuracy, however. Depending on how errors accumulate or cancel, the global accuracy could be better or worse than the local accuracy condition implies.

4.1.1.6 Time Integration

The finite element method described above is most successful in treating boundary value problems. When addressing initial value problems, while the finite element method could be applied (and sometimes is), other techniques are frequently preferable. FlexPDE uses a variable-order implicit backward difference method (BDM) as introduced by C.W. Gear. In most cases, second order gives the best tradeoff between stability, smoothness and speed, and this is the default configuration for FlexPDE. This method fits a quadratic in time to each nodal value, using two known values and one future (unknown) value. It then solves the coupled equations for the array of nodal values at the new time. By looking backward one additional step, it is possible to infer the size of the cubic term in a four-point expansion of the time behavior of each nodal value. If these cubic contributions are large, the timestep is reduced, and if extreme, the current step repeated.

4.1.1.7 Summary

With this very cursory examination of finite element methods, we are ready to start applying FlexPDE to the solution of PDE systems of interest in real scientific and engineering work.

Disclaimer

We have tried to make these notes as accurate as possible, but because we are not experts in all the fields addressed, it is possible that errors have crept in. We invite readers to comment freely on the material presented here, and to take us to task if we have erred.

4.1.2 Electrostatics

Perhaps the most important of all partial differential equations is the simple form

$$(1.1) \quad \nabla \cdot (k \nabla \varphi) + q = 0$$

It is encountered in virtually all branches of science and engineering, and describes the diffusion of a quantity φ with diffusivity k and volume source q . With $k=1$ it is referred to as Poisson's equation, $\nabla^2 \varphi + q = 0$. With $k=1$ and $q=0$, it is referred to as Laplace's equation, $\nabla^2 \varphi = 0$.

If φ is electric potential, k is permittivity and q is charge density, then (1.1) is the electrostatic field equation.

If φ is temperature, k is thermal conductivity and q is heat source, then (1.1) is the heat equation.

If we identify derivatives of φ with fluid velocities,

$$u = \frac{\partial \varphi}{\partial x}, \quad v = \frac{\partial \varphi}{\partial y}$$

then (1.1) is the potential flow equation.

In most cases, we can identify $-k \nabla \varphi$ with the flux of some quantity such as heat, mass or a chemical. (1.1) then says that the variation of the rate of transfer of the relevant quantity is equal to the local source (or sink) of the quantity.

If we integrate the divergence term by parts (or equivalently, apply the divergence theorem), we get

$$(1.2) \quad \iiint_V \nabla \cdot (k \nabla \varphi) dV = \iint_S \hat{n} \cdot (k \nabla \varphi) dS = - \iiint_V q dV$$

That is, the total interior source is equal to the net flow across the outer boundary.

In a FlexPDE script, the equation (1.1) is represented simply as

$$\text{Div}(k * \text{grad}(\text{phi})) + q = 0$$

The boundary flow $\hat{n} \cdot (k \nabla \varphi)$ is represented in FlexPDE by the Natural boundary condition,

$$\text{Natural}(\text{phi}) = \langle \text{boundary flux} \rangle$$

The simplest form of the natural boundary condition is the insulating or “no flow“ boundary,

$$\text{Natural}(\phi) = 0.$$

4.1.2.1 Electrostatic Fields in 2D

Let us as a first example construct the electrostatic field equation for an irregularly shaped block of high-dielectric material suspended in a low-dielectric material between two charged plates.

First we must present a title:

```
title
'Electrostatic Potential'
```

Next, we must name the variables in our problem:

```
variables
V
```

We will need the value of the permittivity:


```
definitions
eps = 1
```

The equation is as presented above, using the div and grad operators in place of $\nabla \cdot$ and ∇ :

```
equations
div(eps*grad(V)) = 0
```

The domain will consist of two regions; the bounding box containing the entire space of the problem, with charged plates top and bottom:


```
boundaries
region 1
start (0,0)
value(V) = 0
line to (1,0)
natural(V) = 0
line to (1,1)
value(V) = 100
line to (0,1)
natural(V) = 0
line to close
```



and the imbedded dielectric:

```

region 2
eps = 50
start (0.4,0.4)
line to (0.8,0.4)
      to (0.8,0.8)
      to (0.6,0.8)
      to (0.6,0.6)
      to (0.4,0.6)
to close
    
```



Notice that we have used the insulating form of the natural boundary condition on the sides of the bounding box, with specified potentials top (100) and bottom (0).

We have specified a permittivity of 50 in the imbedded region. (Since we are free to multiply through the equation by the free-space permittivity ϵ_0 , we can interpret the value as relative permittivity or dielectric constant.)

What will happen at the boundary between the dielectric and the air? If we apply equation (1.2) and integrate around the dielectric body, we get

$$\oint_l \hat{n} \cdot (k \nabla \varphi) dl = - \iint_A q dA = 0$$

If we perform this integration just inside the boundary of the dielectric, we must use $k = 50$, whereas just outside the boundary, we must use $k = 1$. Yet both integrals must yield the same result. It therefore follows that the interface condition at the boundary of the dielectric is

$$\hat{n} \cdot (k \nabla \varphi)_{inside} = \hat{n} \cdot (k \nabla \varphi)_{outside}$$

Since the electric field vector is $\vec{E} = -\nabla \varphi$ and the electric displacement is $\vec{D} = \epsilon \vec{E}$, we have the condition that the normal component of the electric displacement is continuous across the interface, as required by Maxwell's equations.

We want to see what is happening while the problem is being solved, so we add a monitor of the potential:

```

monitors
  contour(V) as 'Potential'
    
```

At the end of the problem we would like to save as graphical output the computation mesh, a contour plot of the potential, and a vector plot of the electric field:

```

plots
  grid(x,y)
  contour(V) as 'Potential'
  vector(-dx(V),-dy(V)) as 'Electric Field'
    
```

The problem specification is complete, so we end the script:

end

Putting all these sections together, we have the complete script for the dielectric problem:

See also ["Samples | Applications | Electricity | Dielectric.pde"](#)³⁸³

See also ["Samples | Applications | Electricity | Fieldmap.pde"](#)³⁸⁴


Descriptor 1.1: Dielectric.pde

```
title
  'Electrostatic Potential'
variables
  V
definitions
  eps = 1
equations
  div(eps*grad(V)) = 0
boundaries
  region 1
    start (0,0)
    value(V) = 0           line to (1,0)
    natural(V) = 0         line to (1,1)
    value(V) = 100         line to (0,1)
    natural(V) = 0         line to close
  region 2
    eps = 50
    start (0.4,0.4)
    line to (0.8,0.4) to (0.8,0.8)
      to (0.6,0.8) to (0.6,0.6)
    to (0.4,0.6) to close
monitors
  contour(V) as 'Potential'
plots
  grid(x,y)
  contour(V) as 'Potential'
  vector(-dx(V),-dy(V)) as 'Electric Field'
end
```

The output plots from running this script are as follows:

Electrostatic Potential


17:52:13 12/19/08
FlexPDE 6.00

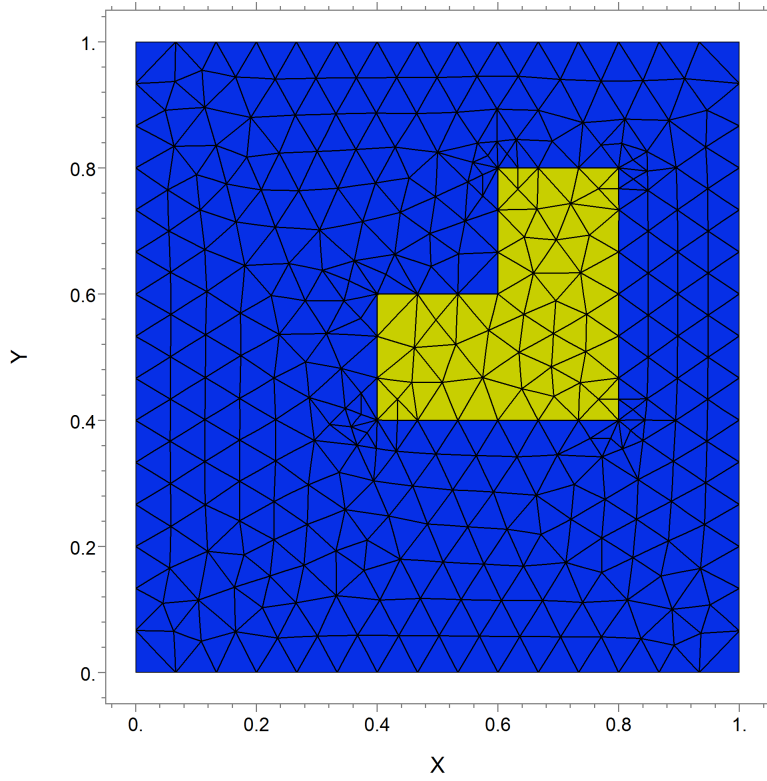


x,y

dielectric: Grid#2 P2 Nodes=1313 Cells=626 RMS Err= 9.5e-4

Electrostatic Potential

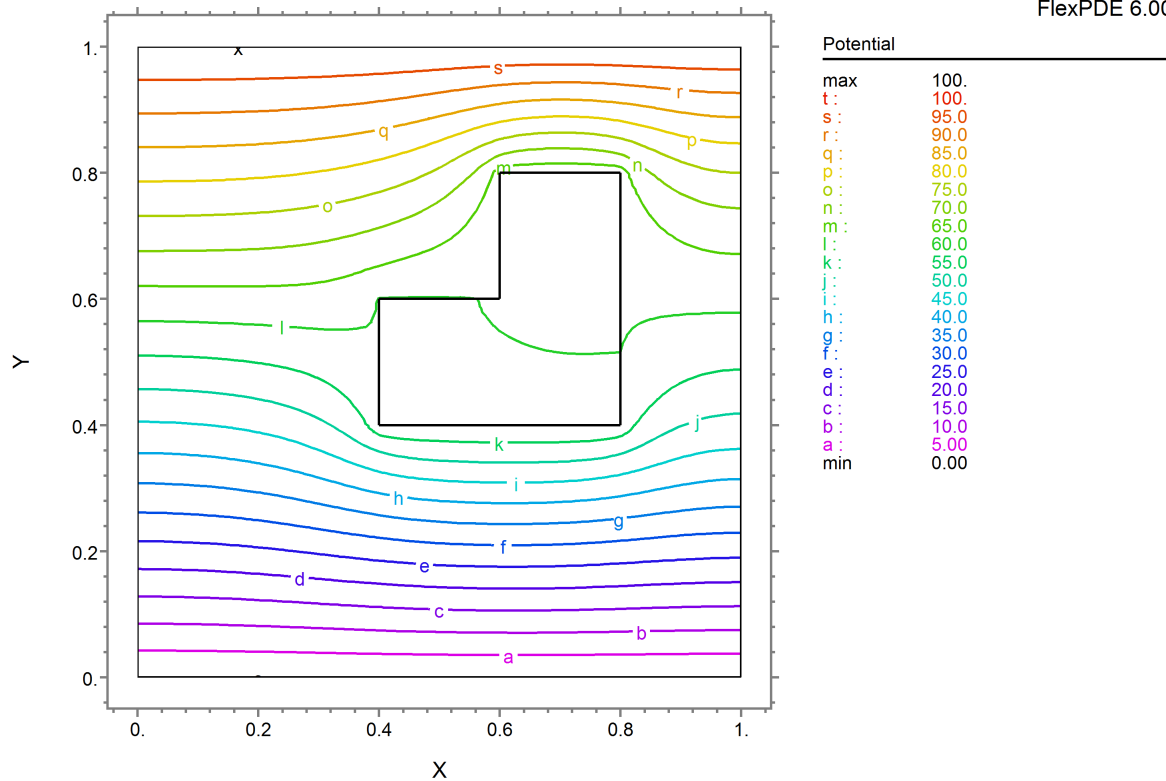17:52:13 12/19/08
FlexPDE 6.00

dielectric: Grid#2 P2 Nodes=1313 Cells=626 RMS Err= 9.5e-4
Integral= 52.85127

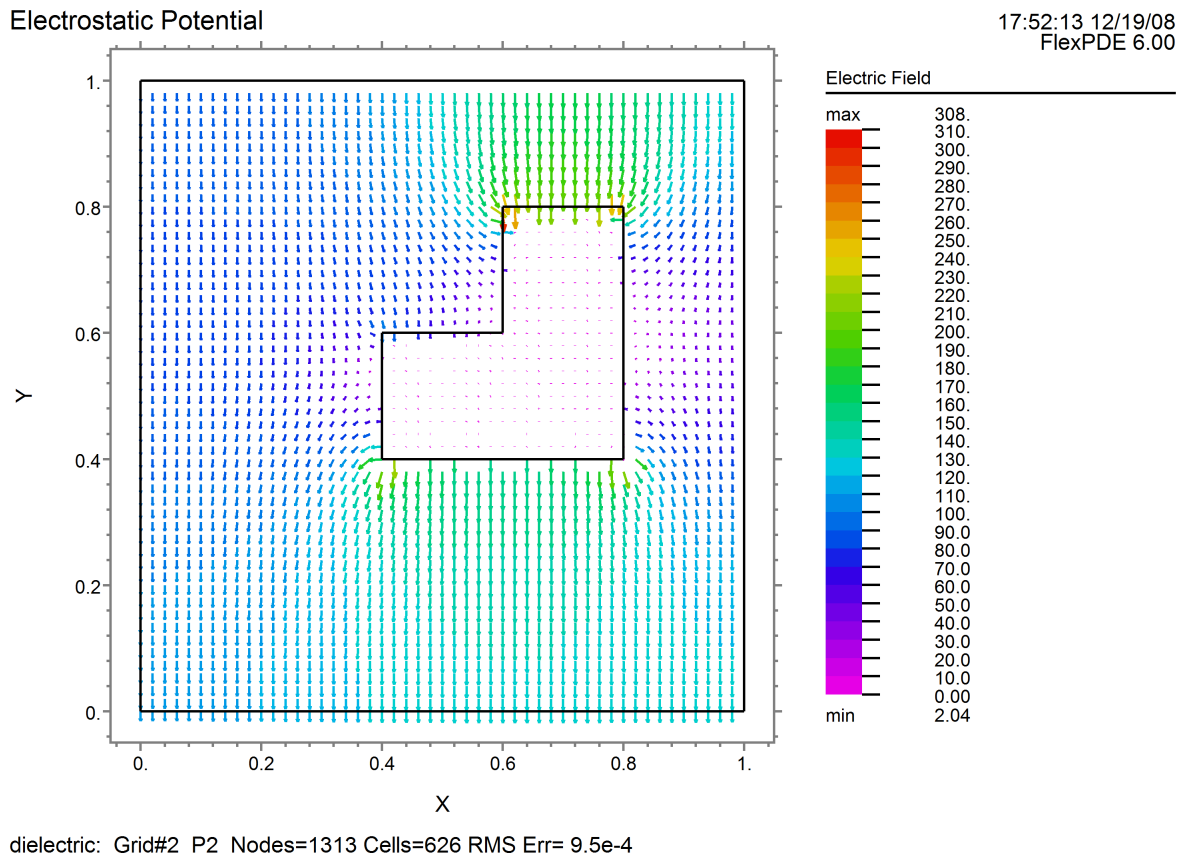

4.1.2.2 Electrostatics in 3D

We can convert this example quite simply to a three dimensional calculation. The modifications that must be made are:

- Specify cartesian3 coordinates.
- Add an extrusion section listing the dividing surfaces.
- Provide boundary conditions for the end faces.
- Qualify plot commands with the cut plane in which the plot is to be computed.

In the following descriptor, we have divided the extrusion into three layers. The dielectric constant in the first and third layer are left at the default of $k=1$, while layer 2 is given a dielectric constant of 50 in the dielectric region only.

A contour plot of the potential in the plane $x=0$ has been added, to show the resulting vertical cross section. The plots in the $z=0.15$ plane reproduce the plots shown above for the 2D case.

Modifications to the 2D descriptor are shown in red.

See also "[Samples | Applications | Electricity | 3D_Dielectric.pde](#)" ³⁸¹

Descriptor 1.2: 3D Dielectric.pde

```

title
  'Electrostatic Potential'

coordinates
  cartesian3

variables
  V

definitions
  eps = 1

equations
  div(eps*grad(V)) = 0

extrusion
  surface "bottom" z=0
  surface "dielectric_bottom" z=0.1
  layer "dielectric"
  surface "dielectric_top" z=0.2
  surface "top" z=0.3

boundaries

  surface "bottom" natural(V)=0
  surface "top" natural(V)=0

region 1
  start (0,0)
  value(V) = 0      line to (1,0)
  natural(V) = 0    line to (1,1)
  value(V) = 100   line to (0,1)
  natural(V) = 0    line to close

region 2
  layer "dielectric" eps = 50
  start (0.4,0.4)
  line to (0.8,0.4) to (0.8,0.8)
  to (0.6,0.8) to (0.6,0.6)
  to (0.4,0.6) to close


monitors
  contour(V) on z=0.15 as 'Potential'

plots
  contour(V) on z=0.15 as 'Potential'
  vector(-dx(V),-dy(V)) on z=0.15 as 'Electric Field'
  contour(V) on x=0.5 as 'Potential'

end

```

The following potential plot on $x=0$ shows the vertical cross section of the extruded domain. Notice that the potential pattern is not symmetric, due to the influence of the extended leg of the dielectric in the y direction.

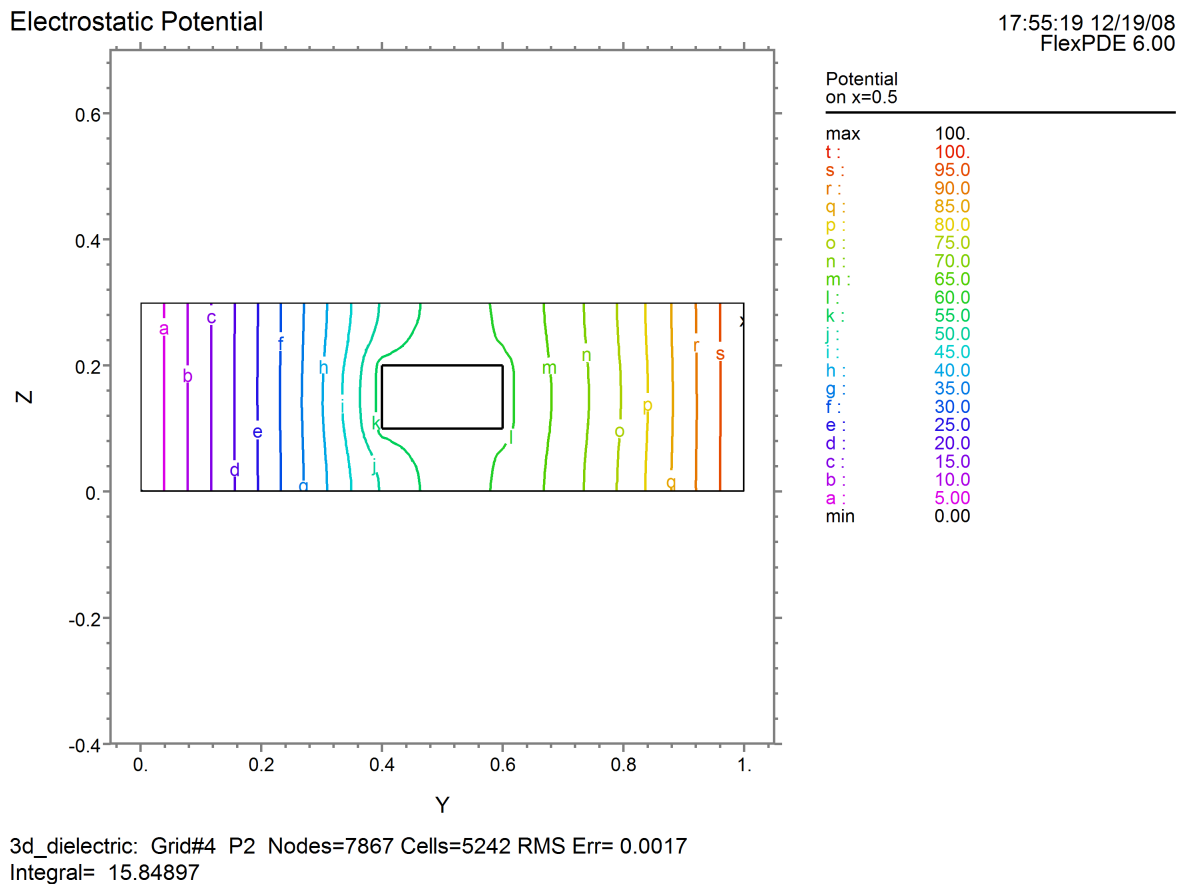

4.1.2.3 Capacitance per Unit Length in 2D Geometry

— Submitted by J.B. Trenholme

This problem illustrates the calculation of capacitance per unit length in a 2D X-Y geometry extended indefinitely in the Z direction. The capacitance is that between a conductor enclosed in a dielectric sheath and a surrounding conductive enclosure. In addition to these elements, there is also another conductor (also with a dielectric sheath) that is "free floating" so that it maintains zero net charge and assumes a potential that is consistent with that uncharged state.

We use the potential V as the system variable, from which we can calculate the electric field $\vec{E} = -\nabla V$ and displacement $\vec{D} = \epsilon \vec{E}$, where ϵ is the local permittivity and may vary with position.

In steady state, in charge-free regions, Maxwell's equation then becomes

$$\nabla \cdot \vec{D} = \nabla \cdot (\epsilon \vec{E}) = -\nabla \cdot (\epsilon \nabla V) = 0 .$$

We impose value boundary conditions on V at the surfaces of the two conductors, so that we do not have to deal with regions that contain charge.

The metal in the floating conductor is "faked" with a fairly high permittivity, which has the effect of driving the interior field and field energy to near zero. The imposition of (default) natural boundary conditions then keeps the field normal to the surface of the conductor, as Maxwell requires. Thus we get a good answer without having to solve for the charge on the floating conductor, which would be a real pain due to its localization on the surface of the conductor.

The capacitance can be found in two ways. If we know the charge Q on the conductor at fixed potential V , we solve

$Q = CV$ to get $C = Q/V$. We know V because it is imposed as a boundary condition, and we can find Q from the fact that $\int_l \hat{n} \cdot \vec{D} dl = Q$, where the integral is taken over a surface enclosing a volume and Q is the total charge in the volume.

Alternatively, we can use the energy relation $W = \frac{1}{2}CV^2$ to get $C = 2W/V^2$. We find the energy W by integrating the energy density $\frac{1}{2}\vec{E} \cdot \vec{D}$ over the area of the problem.

See also ["Samples | Applications | Electricity | Capacitance.pde"](#)³⁸²

Descriptor 1.3: Capacitance.pde

TITLE 'Capacitance per Unit Length of 2D Geometry'
{ 17 Nov 2000 by John Trenholme }

SELECT

errlim 1e-4
thermal_colors on
plotintegrate off

VARIABLES

V

DEFINITIONS

mm = 0.001 ! meters per millimeter
Lx = 300 * mm ! enclosing box dimensions
Ly = 150 * mm
b = 0.7 ! fractional radius of conductor
! position and size of cable at fixed potential:
x0 = 0.25 * Lx
y0 = 0.5 * Ly
r0 = 15 * mm

```

x1 = 0.9 * Lx
y1 = 0.3 * Ly
r1 = r0
epsr          ! relative permittivity
epsd = 3      ! epsr of cable dielectric
epsmetal = 1000 ! fake metallic conductor
eps0 = 8.854e-12 ! permittivity of free space
eps = epsr * eps0
v0 = 1        ! fixed potential of the cable
    
```

! field energy density:

```
energyDensity = dot( eps * grad( v), grad( v) )/2
```

EQUATIONS

```
div( eps * grad( v) ) = 0
```

BOUNDARIES

```

region 1 'inside' epsr = 1
  start 'outer' ( 0, 0) value( v) = 0
  line to (Lx,0) to (Lx,Ly) to (0,Ly) to close
region 2 'diel0' epsr = epsd
  start 'dieb0' (x0+r0, y0)
  arc ( center = x0, y0) angle = 360
region 3 'cond0' epsr = 1
  start 'conb0' (x0+b*r0, y0) value(v) = v0
  arc ( center = x0, y0) angle = 360
region 4 'diel1' epsr = epsd
  start 'dieb1' ( x1+r1, y1)
  arc ( center = x1, y1) angle = 360
region 5 'cond1' epsr = epsmetal
  start 'conb1' ( x1+b*r1, y1)
  arc ( center = x1, y1) angle = 360
    
```

PLOTS

```

contour( v) as 'Potential'
contour( v) as 'Potential Near Driven Conductor'
  zoom(x0-1.1*r0, y0-1.1*r0, 2.2*r0, 2.2*r0)
contour( v) as 'Potential Near Floating Conductor'
  zoom(x1-1.1*r1, y1-1.1*r1, 2.2*r1, 2.2*r1)
elevation( v) from ( 0,y0) to ( x0, y0)
  as 'Potential from Wall to Driven Conductor'
elevation( v) from ( x0, y0) to ( x1, y1)
  as 'Potential from Driven to Floating Conductor'
vector( grad( v)) as 'Field'
contour( energyDensity) as 'Field Energy Density'
contour( energyDensity)
  zoom( x1-1.2*r1, y1-1.2*r1, 2.4*r1, 2.4*r1)
  as 'Field Energy Density Near Floating Conductor'
elevation( energyDensity)
  from (x1-2*r1, y1) to ( x1+2*r1, y1)
  as 'Field Energy Density Near Floating Conductor'
contour( epsr) paint on "inside"
  as 'Definition of Inside'
    
```

SUMMARY


```

report sintegral(normal(eps*grad(v)), 'conb0', 'diel0')
  as 'Driven charge'
report sintegral(normal(eps*grad(v)), 'outer', 'inside')
  as 'Outer charge'
report sintegral(normal(eps*grad(v)), 'conb1', 'diel1')
  as 'Floating charge'
report sintegral(normal(eps*grad(v)), 'conb0', 'diel0')/v0
  as 'Capacitance (f/m)'
report integral( energyDensity, 'inside')
  as 'Energy (J/m)'
report 2 * integral( energyDensity, 'inside') / v0^2
  as 'Capacitance (f/m)'
report 2 * integral(energyDensity)/(v0*
  sintegral( normal(eps*grad(v)), 'conb0', 'diel0'))
  as 'cap_by_energy / cap_by_charge'

```

END

Capacitance per Unit Length of 2D Geometry

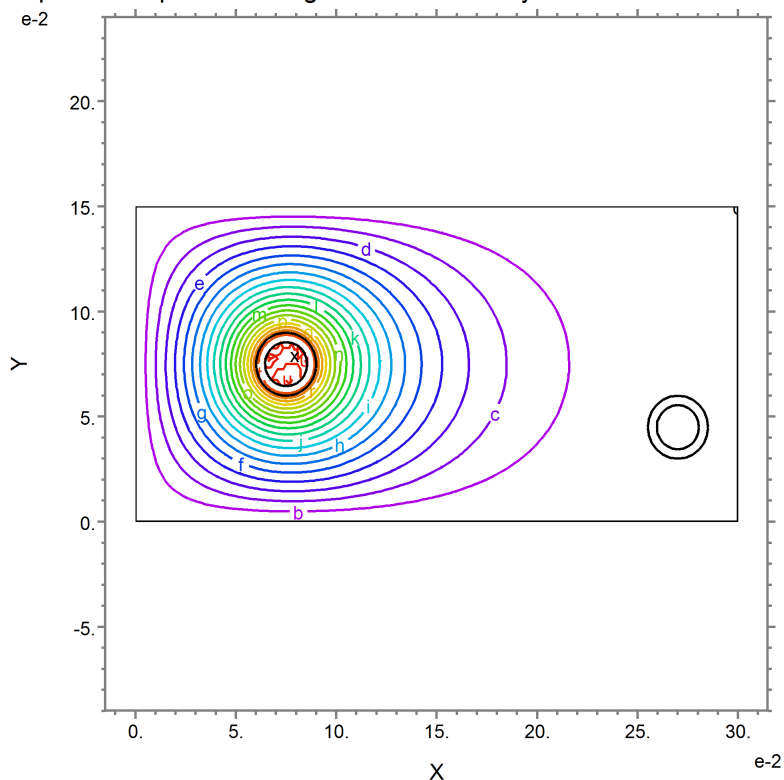17:58:32 12/19/08
FlexPDE 6.00


Potential

max	1.00
u:	1.00
t:	0.95
s:	0.90
r:	0.85
q:	0.80
p:	0.75
o:	0.70
n:	0.65
m:	0.60
l:	0.55
k:	0.50
j:	0.45
i:	0.40
h:	0.35
g:	0.30
f:	0.25
e:	0.20
d:	0.15
c:	0.10
b:	0.05
a:	0.00
min	0.00

capacitance: Grid#4 P2 Nodes=4365 Cells=2134 RMS Err= 7.7e-5

Capacitance per Unit Length of 2D Geometry

17:58:32 12/19/08
FlexPDE 6.00

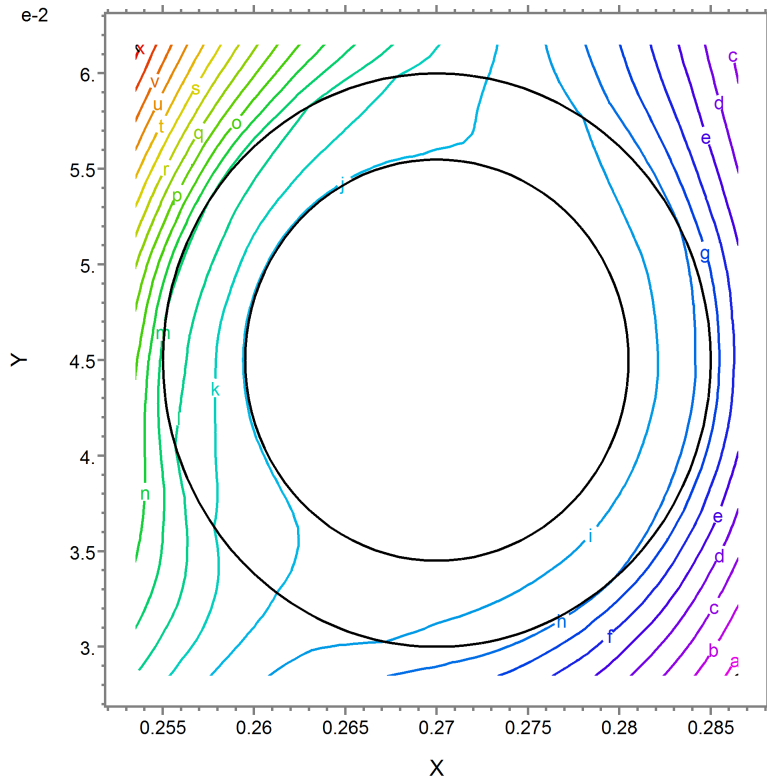


Potential Near Floating Conductor
zoom(x1 - 1.1 * r1, y1 - 1.1 * r1, 2.2 * r1, 2.2 * r

max	1.62
x :	1.60
w :	1.55
v :	1.50
u :	1.45
t :	1.40
s :	1.35
r :	1.30
q :	1.25
p :	1.20
o :	1.15
n :	1.10
m :	1.05
l :	1.00
k :	0.95
j :	0.90
i :	0.85
h :	0.80
g :	0.75
f :	0.70
e :	0.65
d :	0.60
c :	0.55
b :	0.50
a :	0.45
min	0.43

Scale = E-2

capacitance: Grid#4 P2 Nodes=4365 Cells=2134 RMS Err= 7.7e-5

Capacitance per Unit Length of 2D Geometry

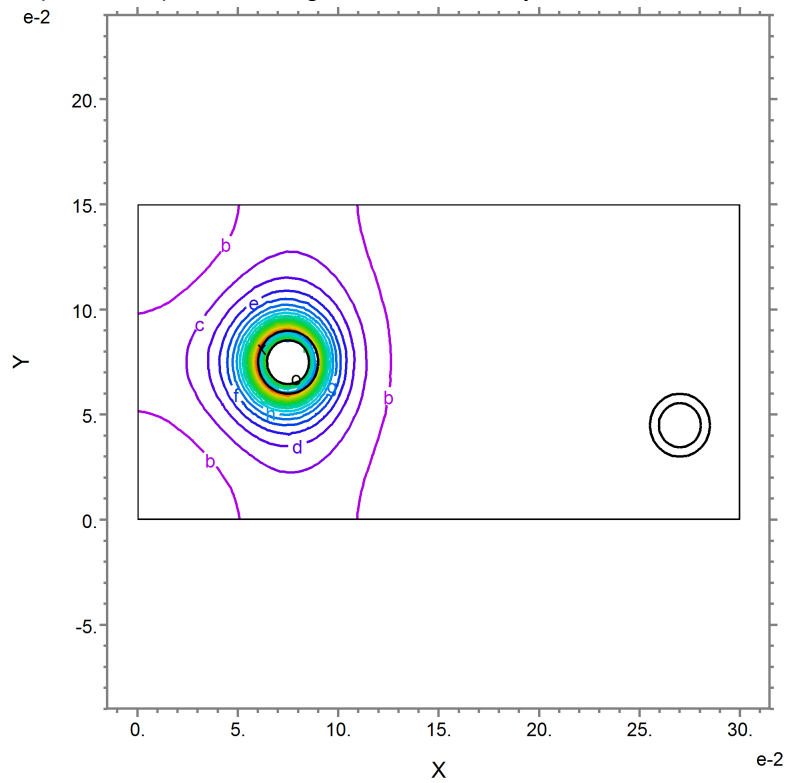

capacitance: Grid#4 P2 Nodes=4365 Cells=2134 RMS Err= 7.7e-5

Capacitance per Unit Length of 2D Geometry

 18:06:17 12/19/08
 FlexPDE 6.00

SUMMARY

Driven charge= 2.942077e-11
 Outer charge= -2.951385e-11
 Floating charge= -2.146545e-15
 Capacitance (f/m)= 2.942077e-11
 Energy (J/m)= 1.384088e-11
 Capacitance (f/m)= 2.768177e-11
 cap_by_energy / cap_by_charge= 1.004412

capacitance: Grid#4 P2 Nodes=4365 Cells=2134 RMS Err= 7.7e-5

4.1.3 Magnetostatics

From Maxwell's equations in a steady-state form we have

$$\begin{aligned}
 (2.1) \quad \nabla \times \vec{H} &= \vec{J} \\
 \nabla \cdot \vec{B} &= 0 \\
 \nabla \cdot \vec{J} &= 0
 \end{aligned}$$

where \vec{H} is the magnetic field intensity, $\vec{B} = \mu \vec{H}$ is the magnetic induction, μ is the magnetic permeability and \vec{J} is the current density.

The conditions required by Maxwell's equations at a material interface are

$$\begin{aligned}
 \vec{n} \times \vec{H}_1 &= \vec{n} \times \vec{H}_2 \\
 \vec{n} \cdot \vec{B}_1 &= \vec{n} \cdot \vec{B}_2
 \end{aligned}
 \quad (2.2)$$

It is sometimes fruitful to use the magnetic field quantities directly as variables in a model. However, eq. (2.2) shows that the tangential components of \vec{H} are continuous across an interface, while the normal components of \vec{B} are continuous.

The finite element method used by FlexPDE has a single value of each variable on an interface, and therefore requires that the quantities chosen for system variables must be continuous across the interface.

In special cases, it may be possible to choose components of \vec{B} or \vec{H} which satisfy this continuity requirement. We could, for example model B_x in a problem where material interfaces are normal to x . In the general case, however, meeting the continuity requirements can be impossible.

It is common in Magnetostatics to use instead of the field quantities the magnetic vector potential \vec{A} , defined as

$$(2.3) \quad \vec{B} = \nabla \times \vec{A}.$$

This definition automatically enforces $\nabla \cdot \vec{B} = 0$. Furthermore, \vec{A} can be shown to be continuous everywhere in the domain, and can represent the conditions (2.2) correctly.

\vec{A} can be derived from Ampere's Law, and shown to be the integrated effect at each point of all the current loops active in the domain. In this derivation, \vec{A} will have components parallel to the components of \vec{J} , so that it can be determined a priori which components of \vec{A} must be represented.

Eq. (2.3) alone is not sufficient to uniquely define \vec{A} . It must be supplemented by a definition of $\nabla \cdot \vec{A}$ to be unique. This definition (the "gauge condition") is usually taken to be $\nabla \cdot \vec{A} = 0$ ("Coulomb gauge"), a definition consistent with the derivation of \vec{A} from Ampere's Law. Other definitions are useful in some applications. It is not important what the gauge condition is; in all cases $\nabla \times \vec{A}$, and therefore the field quantities, remain the same.

Combining eq. (2.1) with (2.3) gives

$$(2.4) \quad \nabla \times ((\nabla \times \vec{A}) / \mu) = \vec{J}$$

In cases with multiple materials, where μ can take on different values, it is important to keep the μ inside the curl operator, because it is the integration of this term by parts that gives the correct jump conditions at the material interface.

Applying eq. (0.5) we have

$$(2.5) \quad \iiint_V \nabla \times ((\nabla \times \vec{A}) / \mu) dV = \iiint_V \nabla \times \vec{H} dV = \oiint_S \vec{n} \times \vec{H} dS,$$

so that the Natural boundary condition defines $\vec{n} \times \vec{H}$ on external boundaries, and $\vec{n} \times \vec{H}$ is assumed continuous across internal boundaries, consistent with Maxwell's equations.

4.1.3.1 A Magnet Coil in 2D Cylindrical Coordinates

As a first example, we will calculate the magnetic field created by a coil, using 2D cylindrical (r,z) geometry. We will apply current only in the azimuthal direction, so the only nonzero component of \vec{A} will be the azimuthal component A_ϕ . With only a single component normal to the computational plane,

the gauge condition is automatically satisfied, since $\nabla \cdot \vec{A} = \frac{1}{r} \frac{\partial A_\phi}{\partial \phi} = 0$.

In the descriptor which follows, note that we have chosen to align the cylindrical axis with the horizontal plot axis. FlexPDE uses a right-hand coordinate system, so in this case positive J_ϕ is outward from the plot page.

See also ["Samples | Applications | Magnetism | Magnet_Coil.pde"](#)⁴⁴⁰

Descriptor 2.1: Magnet_Coil.pde

Title 'AXI-SYMMETRIC MAGNETIC FIELD'

Coordinates

xcylinder(Z,R)

Variables

Aphi { azimuthal component of the vector potential }

Definitions

mu = 1 { the permeability }
 J = 0 { global source term defaults to zero }
 current = 10 { the source value in the coil }
 Br = -dz(Aphi) { definitions for plots }
 Bz = dr(r*Aphi)/r

Equations

Curl(curl(Aphi)/mu) = J

Boundaries

Region 1

start(-10,0)

value(Aphi) = 0 { specify A=0 along axis }

line to (10,0)

value(Aphi) = 0 { H x n = 0 on distant sphere }

arc(center=0,0) angle 180 to close

Region 2

J = current { redefine source value }

```

start (-0.25,1)
line to (0.25,1) to (0.25,1.5)
to (-0.25,1.5) to close

```

Monitors

```

contour(Bz) zoom(-2,0,4,4) as 'FLUX DENSITY B'
contour(Aphi) as 'Potential'

```

Plots

```

grid(z,r)
contour(Bz) as 'FLUX DENSITY B'
contour(Bz) zoom(-2,0,4,4) as 'FLUX DENSITY B'
elevation(Aphi, dr(Aphi), Aphi/r, Bz)
from (0,0) to (0,1) as 'Near Axis'
vector(Bz,Br) as 'FLUX DENSITY B'
vector(Bz,Br) zoom(-2,0,4,4) as 'FLUX DENSITY B'
contour(Aphi) as 'MAGNETIC POTENTIAL'


contour(Aphi) zoom(-2,0,4,4) as 'MAGNETIC POTENTIAL'
surface(Aphi) as 'MAGNETIC POTENTIAL'
viewpoint (-1,1,30)

```

End

AXI-SYMMETRIC MAGNETIC FIELD


20:09:51 12/19/08
FlexPDE 6.00

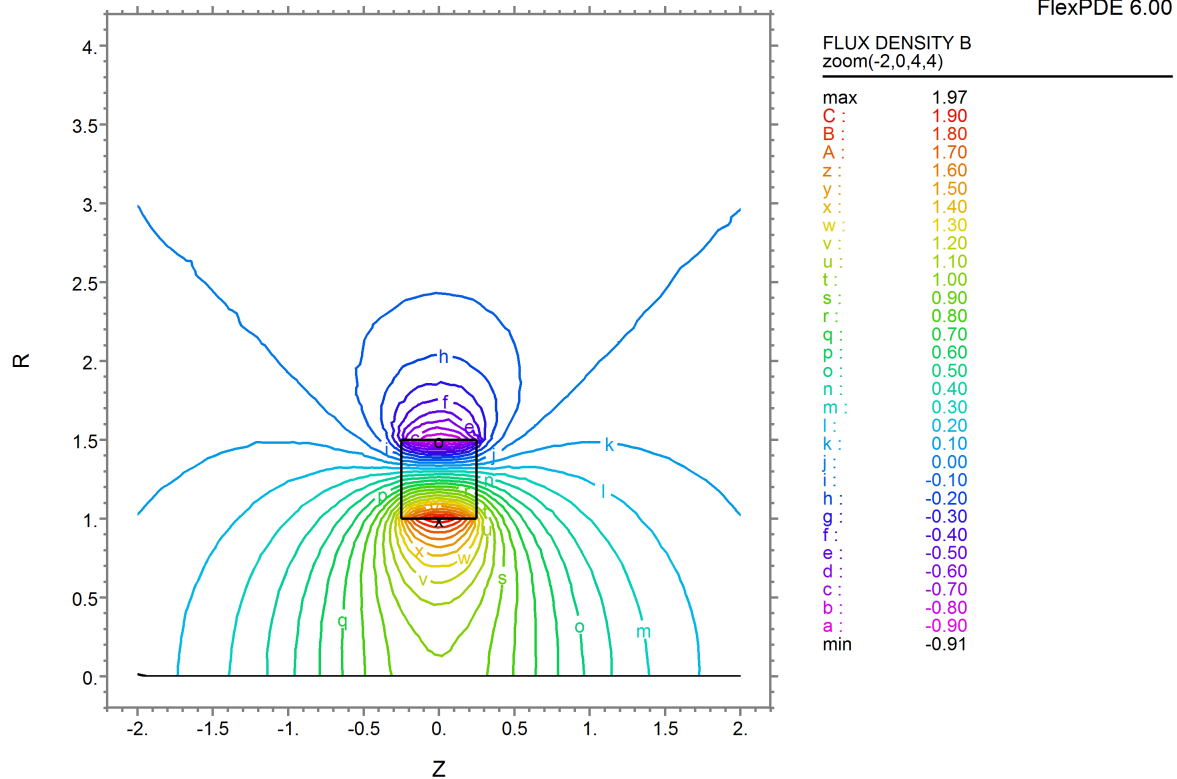

magnet_coil: Grid#4 P2 Nodes=3369 Cells=1654 RMS Err= 5.4e-5
Vol_Integral= 5.297303

AXI-SYMMETRIC MAGNETIC FIELD

20:07:29 12/19/08
FlexPDE 6.00

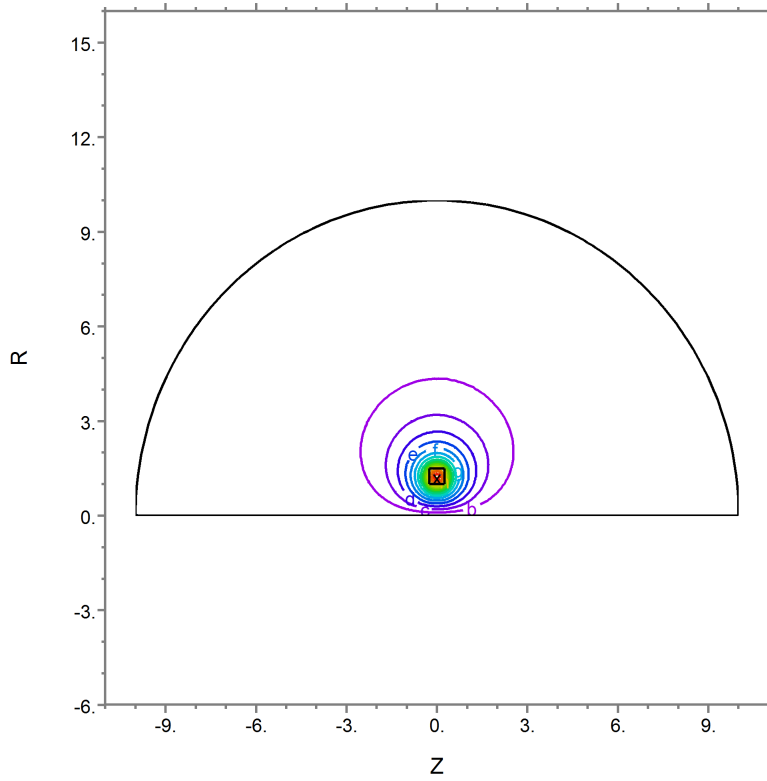


MAGNETIC POTENTIAL

max	0.82
q:	0.80
p:	0.75
o:	0.70
n:	0.65
m:	0.60
l:	0.55
k:	0.50
j:	0.45
i:	0.40
h:	0.35
g:	0.30
f:	0.25
e:	0.20
d:	0.15
c:	0.10
b:	0.05
a:	0.00
min	0.00

magnet_coil: Grid#4 P2 Nodes=3369 Cells=1654 RMS Err= 5.4e-5
Vol_Integral= 62.80235

AXI-SYMMETRIC MAGNETIC FIELD

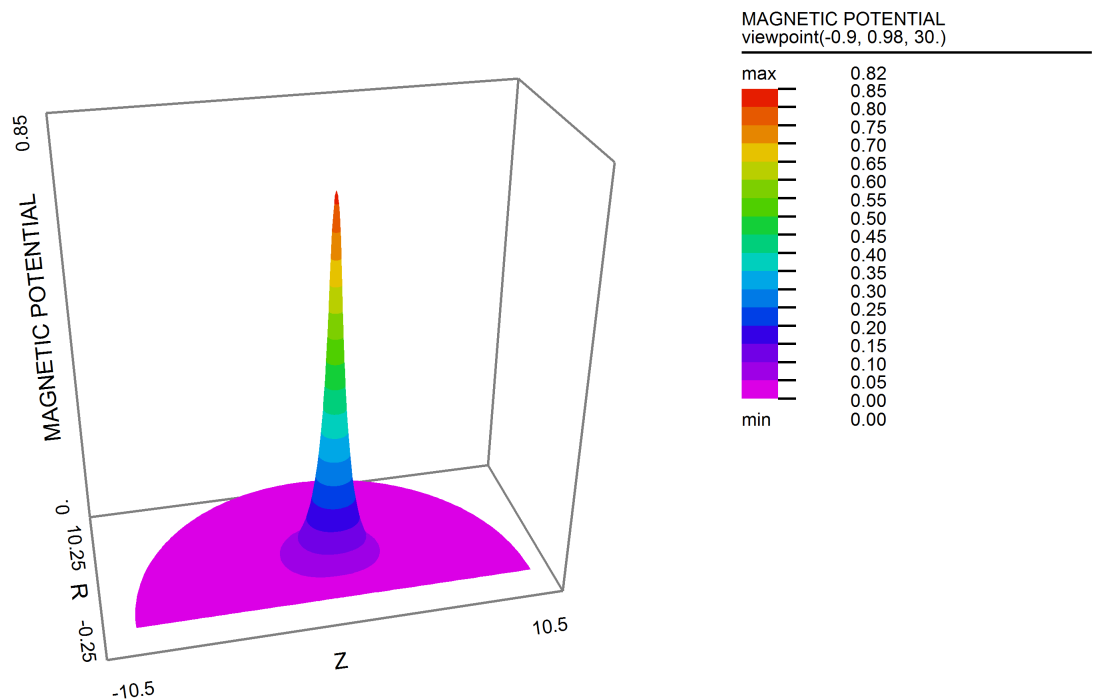20:07:29 12/19/08
FlexPDE 6.00

magnet_coil: Grid#4 P2 Nodes=3369 Cells=1654 RMS Err= 5.4e-5
Vol_Integral= 62.80235

4.1.3.2 Nonlinear Permeability in 2D

In the following 2D Cartesian example, a current-carrying copper coil is surrounded by a ferromagnetic core with an air gap. Current flows in the coil in the Z direction (out of the computation plane), and only the Z component of the magnetic vector potential is nonzero. The Coulomb gauge condition is again satisfied automatically. We assume a symmetry plane along the X-axis, and impose $A_z = 0$ along the remaining sides. The relative permeability is $\mu = 1$ in the air and the coil, while in the core it is given by

$$\mu = \frac{\mu_{\max}}{1 + C(\nabla A_z)^2} + \mu_{\min}$$

with parameters giving a behavior similar to transformer steel.

See also ["Samples | Applications | Magnetism | Saturation.pde"](#)⁴⁴³

Descriptor 2.2: Saturation.pde

Title "A MAGNETOSTATIC PROBLEM"

Select

errlim = 1e-4

Variables

A

Definitions

mu = 1 { default to air }
 mu0 = 1 { for saturation plot }
 mu_max = 5000
 mu_min = 200
 mucore = mu_max/(1+0.05*grad(A)^2) + mu_min
 S = 0
 current = 2
 y0 = 8

Equations

curl(curl(A)/mu) = S

Boundaries

Region 1 { The IRON core }
 mu = mucore
 mu0 = mu_max
 start(0,0)
 natural(A) = 0 line to (40,0)
 value(A) = 0 line to (40,40) to (0,40) to close

Region 2 { The AIR gap }
 mu = 1
 start (15,0)
 line to (40,0) to (40,y0) to (32,y0)
 arc (center=32,y0+2) to (30,y0+2)
 line to (30,20) to (15,20) to close

Region 3 { The COIL }
 S = current
 mu = 1
 start (15,12)
 line to (30,12) to (30,20) to (15,20) to close

Monitors


contour(A)

Plots

grid(x,y)
 vector(dy(A),-dx(A)) as "FLUX DENSITY B"
 vector(dy(A)/mu, -dx(A)/mu) as "MAGNETIC FIELD H"
 contour(A) as "Az MAGNETIC POTENTIAL"
 surface(A) as "Az MAGNETIC POTENTIAL"
 contour(mu0/mu) painted as "Saturation: mu0/mu"

End


A MAGNETOSTATIC PROBLEM

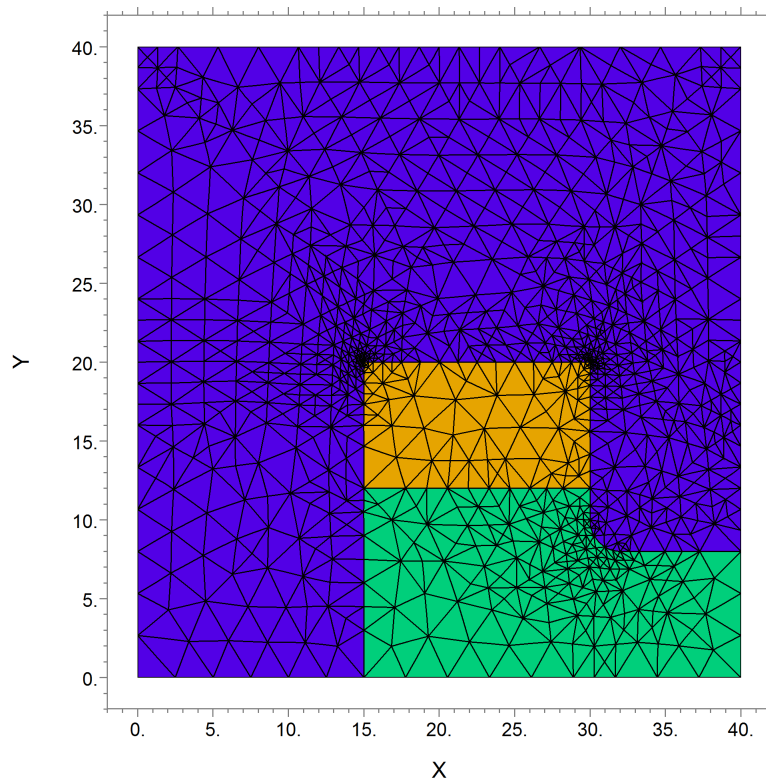20:20:51 12/19/08
FlexPDE 6.00

saturation: Grid#5 P2 Nodes=4069 Cells=1994 RMS Err= 9.7e-5


A MAGNETOSTATIC PROBLEM

20:20:51 12/19/08
FlexPDE 6.00

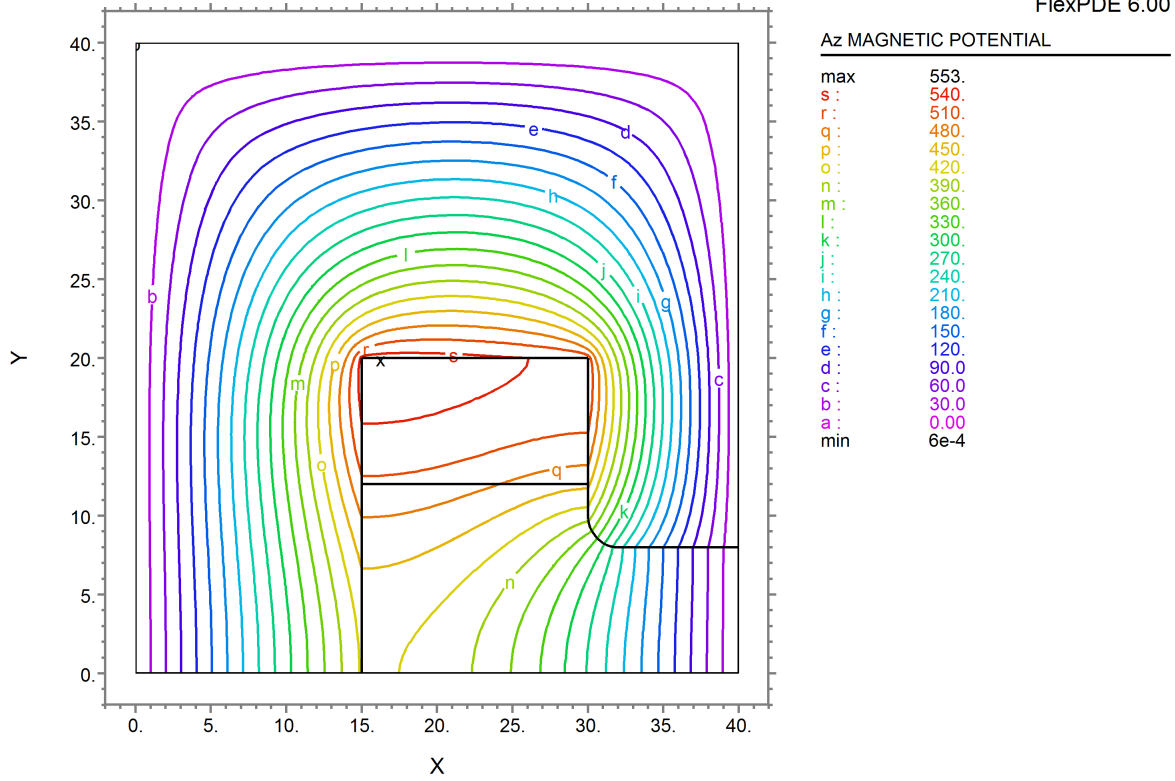

saturation: Grid#5 P2 Nodes=4069 Cells=1994 RMS Err= 9.7e-5
Integral= 380334.7

A MAGNETOSTATIC PROBLEM

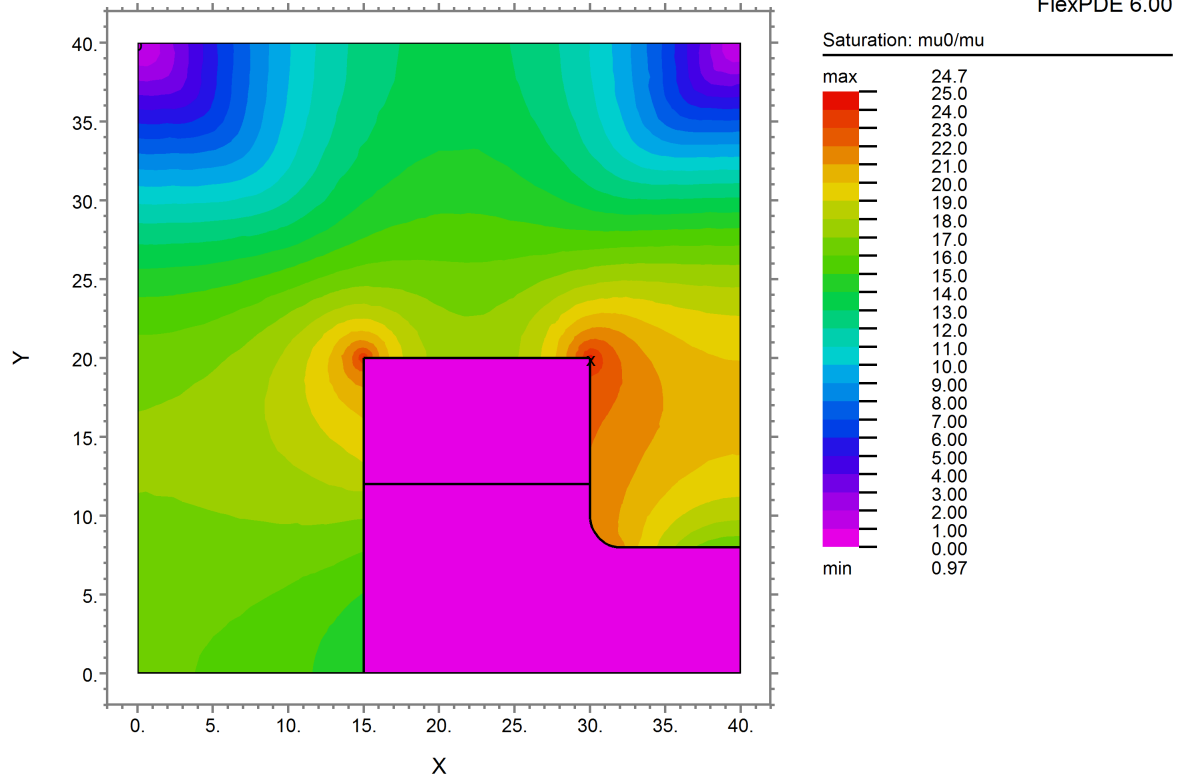20:20:51 12/19/08
FlexPDE 6.00

saturation: Grid#5 P2 Nodes=4069 Cells=1994 RMS Err= 9.7e-5
Integral= 18686.64

4.1.3.3 Divergence Form

In two dimensional geometry with a single nonzero component of \vec{A} , the gauge condition $\nabla \cdot \vec{A} = 0$ is automatically satisfied. Direct application of eq. (2.4) is therefore well posed, and we can proceed without further modification.

In 3D, however, direct implementation of eq. (2.4) does not impose a gauge condition, and is therefore ill-posed in many cases. One way to address this problem is to convert the equation to divergence form using the vector identity

$$(2.6) \quad \nabla \times (\nabla \times \vec{A}) = \nabla (\nabla \cdot \vec{A}) - \nabla^2 \vec{A}.$$

As long as μ is piecewise constant we can apply (2.6) together with the Coulomb gauge $\nabla \cdot \vec{A} = 0$ to rewrite (2.4) as

$$(2.7) \quad \nabla \cdot \left(\frac{\nabla \vec{A}}{\mu} \right) + \vec{J} = 0$$

If μ is variable, we can generalize eq. (2.6) to the relation

$$(2.8) \quad \nabla \times \left(\frac{\nabla \times \vec{A}}{\mu} \right) = \nabla \cdot \left(\frac{\nabla \vec{A}}{\mu} \right)^T - \nabla \cdot \left(\frac{\nabla \vec{A}}{\mu} \right)$$

We assert without proof that there exists a gauge condition $\nabla \cdot \vec{A} = F(x, y, z)$ which forces

$$(2.9) \quad \nabla \cdot \left(\frac{\nabla \vec{A}}{\mu} \right)^T = 0 .$$

The equations governing F can be stated as

$$\begin{aligned} \frac{\partial}{\partial x} \left(\frac{F}{\mu} \right) &= \frac{\partial}{\partial x} \left(\frac{1}{\mu} \frac{\partial A_y}{\partial y} + \frac{1}{\mu} \frac{\partial A_z}{\partial z} \right) - \frac{\partial}{\partial y} \left(\frac{1}{\mu} \frac{\partial A_y}{\partial x} \right) - \frac{\partial}{\partial z} \left(\frac{1}{\mu} \frac{\partial A_z}{\partial x} \right) \\ \frac{\partial}{\partial y} \left(\frac{F}{\mu} \right) &= \frac{\partial}{\partial y} \left(\frac{1}{\mu} \frac{\partial A_x}{\partial x} + \frac{1}{\mu} \frac{\partial A_z}{\partial z} \right) - \frac{\partial}{\partial x} \left(\frac{1}{\mu} \frac{\partial A_x}{\partial y} \right) - \frac{\partial}{\partial z} \left(\frac{1}{\mu} \frac{\partial A_z}{\partial y} \right) \\ \frac{\partial}{\partial z} \left(\frac{F}{\mu} \right) &= \frac{\partial}{\partial z} \left(\frac{1}{\mu} \frac{\partial A_x}{\partial x} + \frac{1}{\mu} \frac{\partial A_y}{\partial y} \right) - \frac{\partial}{\partial x} \left(\frac{1}{\mu} \frac{\partial A_x}{\partial z} \right) - \frac{\partial}{\partial y} \left(\frac{1}{\mu} \frac{\partial A_y}{\partial z} \right) \end{aligned}$$

It is not necessary to solve these equations; we show them merely to indicate that F embodies the commutation characteristics of the system. The value of F is implied by the assertion (2.9). Clearly, when μ is constant, the equations reduce to $\nabla F = 0$, for which $F = 0$ is a solution.

Using the definition (2.9) we can again write the divergence form

$$(2.10) \quad \nabla \cdot \left(\frac{\nabla \vec{A}}{\mu} \right) + J = 0 .$$

4.1.3.4 Boundary Conditions

In converting the equation to a divergence, we have modified the interface conditions. The natural boundary condition for each component equation of (2.10) is now the normal component of the argument of the divergence:

$$(2.11) \quad \begin{aligned} \text{Natural}(A_x) &= \hat{n} \cdot \nabla A_x / \mu \\ \text{Natural}(A_y) &= \hat{n} \cdot \nabla A_y / \mu \\ \text{Natural}(A_z) &= \hat{n} \cdot \nabla A_z / \mu \end{aligned}$$

The default interior interface condition assumes component-wise continuity of the surface terms across the interface.

Of the conditions (2.2) required by Maxwell's equations at an interface, the first describes the tangential components of \vec{H} , which by (2.3) involve the normal components of $\nabla\vec{A}$. Eq. (2.11) shows that these components scale by $1/\mu$, satisfying the tangential condition on \vec{H} .

The second condition is satisfied by the fact that the variables A_x, A_y, A_z have only a single representation on the boundary, requiring that their tangential derivatives, and therefore the normal component of \vec{B} , will be continuous across the interface.

In all cases it is important to keep the μ attached to the $\nabla\vec{A}$ term to preserve the correct interface jump conditions.

4.1.3.5 Magnetic Materials in 3D

In magnetic materials, we can modify the definition of \vec{H} to include magnetization and write

$$(2.12) \quad \vec{H} = \vec{B}/\mu - \vec{M}$$

We can still apply the divergence form in cases where $\vec{M} \neq 0$, but we must treat the magnetization terms specially.

The equation becomes:

$$(2.13) \quad \nabla \cdot \left(\frac{\nabla\vec{A}}{\mu} \right) + \nabla \times \vec{M} + \vec{J} = 0$$

FlexPDE does not integrate constant source terms by parts, and if \vec{M} is piecewise constant the magnetization term will disappear in equation analysis. It is necessary to reformulate the magnetic term so that it can be incorporated into the divergence. We have from (2.5)

$$(2.14) \quad \iiint_V \nabla \times \vec{M} dV = \oiint_S \hat{n} \times \vec{M} dS .$$

Magnetic terms that will obey

$$(2.15) \quad \hat{n} \times \vec{M} = \hat{n} \cdot \vec{N}$$

can be formed by defining \vec{N} as the antisymmetric dyadic

$$\vec{N} = \begin{pmatrix} 0 & M_z & -M_y \\ -M_z & 0 & M_x \\ M_y & -M_x & 0 \end{pmatrix}$$

Using this relation, we can write eq. (2.13) as

$$(2.16) \quad \nabla \cdot \left(\frac{\nabla \vec{A}}{\mu} + \vec{N} \right) + \vec{J} = 0$$

This follows because integration by parts will produce surface terms $\hat{n} \cdot \vec{N}$, which are equivalent to the required surface terms $\hat{n} \times \vec{M}$.

Expanded in Cartesian coordinates, this results in the three equations

$$(2.17) \quad \begin{aligned} \nabla \cdot \left(\frac{\nabla A_x}{\mu} + N_x \right) + J_x &= 0 \\ \nabla \cdot \left(\frac{\nabla A_y}{\mu} + N_y \right) + J_y &= 0 \\ \nabla \cdot \left(\frac{\nabla A_z}{\mu} + N_z \right) + J_z &= 0 \end{aligned}$$

where the N_i are the rows of \vec{N} .

In this formulation, the Natural boundary condition will be defined as the value of the normal component of the argument of the divergence, eg.

$$(2.18) \quad \text{Natural}(A_x) = \hat{n} \cdot \left(\frac{\nabla A_x}{\mu} + N_x \right).$$

As an example, we will compute the magnetic field in a generic magnetron. In this case, only M_z is applied by the magnets, and as a result A_z will be zero. We will therefore delete A_z from the analysis. The outer and inner magnets are in reversed orientation, so the applied M_z is reversed in sign.

See also ["Samples | Applications | Magnetism | 3D_Magnetron.pde"](#)^[438]

Descriptor 2.3: 3D Magnetron.pde

TITLE 'Oval Magnet'

COORDINATES

CARTESIAN3

SELECT

alias(x) = "X(cm)"
 alias(y) = "Y(cm)"
 alias(z) = "Z(cm)"
 nodelimit = 40000
 errlim=1e-4

VARIABLES

Ax,Ay { assume Az is zero! }

DEFINITIONS

MuMag=1.0 { Permeabilities: }
 MuAir=1.0
 MuSST=1000
 MuTarget=1.0
 Mu=MuAir { default to Air }

 MzMag = 10000 { permanent magnet strength }
 Mz = 0
 Nx = vector(0,Mz,0)
 Ny = vector(-Mz,0,0)

 B = curl(Ax,Ay,0) { magnetic flux density }
 Bxx= -dz(Ay)
 Byy= dz(Ax) { "By" is a reserved word. }
 Bzz= dx(Ay)-dy(Ax)

EQUATIONS

Ax: div(grad(Ax)/mu + Nx) = 0
 Ay: div(grad(Ay)/mu + Ny) = 0

EXTRUSION

SURFACE "Boundary Bottom" Z=-5
 SURFACE "Magnet Plate Bottom" Z=0
 LAYER "Magnet Plate"
 SURFACE "Magnet Plate Top" Z=1
 LAYER "Magnet"
 SURFACE "Magnet Top" Z=2
 SURFACE "Boundary Top" Z=8

BOUNDARIES

Surface "boundary bottom"
 value (Ax)=0 value(Ay)=0
 Surface "boundary top"
 value (Ax)=0 value(Ay)=0

REGION 1 { Air bounded by conductive box }
 START (20,-10)


```
value(Ax)=0 value(Ay)=0
arc(center=20,0) angle=180
Line TO (-20,10)
arc(center=-20,0) angle=180
LINE TO CLOSE
```

REGION 2 { Magnet Plate Perimeter and outer magnet }

```
LAYER "Magnet Plate"
Mu=MuSST
LAYER "Magnet"
Mu=MuMag
Mz=MzMag
START (20,-8)
  arc(center=20,0) angle=180
  Line TO (-20,8)
  arc(center=-20,0) angle=180
  LINE TO CLOSE
```

REGION 3 { Air }

```
LAYER "Magnet Plate"
Mu=MuSST
START (20,-6)
  arc(center=20,0) angle=180
  Line TO (-20,6)
  arc(center=-20,0) angle=180
  LINE TO CLOSE
```

REGION 4 { Inner Magnet }

```
LAYER "Magnet Plate"
Mu=MuSST
LAYER "Magnet"
Mu=MuMag
Mz=-MzMag
START (20,-2)
  arc(center=20,0) angle=180
  Line TO (-20,2)
  arc(center=-20,0) angle=180
  LINE TO CLOSE
```

MONITORS

```
grid(x,z) on y=0
grid(x,y) on z=1.01
grid(x,z) on y=1
```

PLOTS

```
grid(x,y) on z=1.01
grid(y,z) on x=0
grid(x,z) on y=0
contour(Ax) on x=0
contour(Ay) on y=0
vector(Bxx,Byy) on z=2.01 norm
vector(Byy,Bzz) on x=0 norm
vector(Bxx,Bzz) on y=4 norm
```


```
contour(magnitude(Bxx,Byy,Bzz)) on z=2.01 LOG
```

```
END
```

Oval Magnet

11:23:29 12/20/08
FlexPDE 6.00


x,y,z
viewpoint(-74.1,-179., 30.)

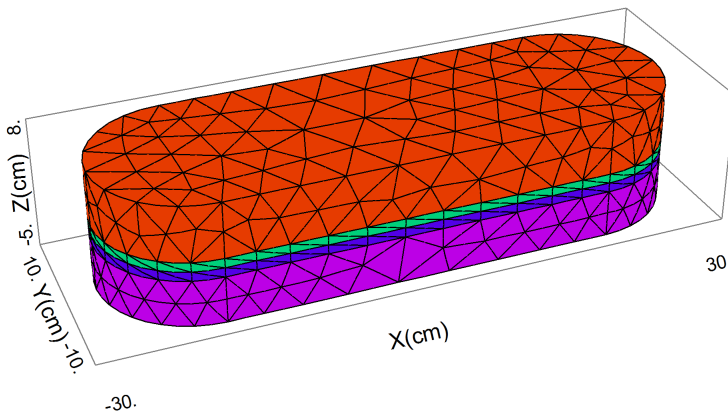

3d_magnetron: Grid#1 P2 Nodes=11826 Cells=8204 RMS Err= 0.0227

Oval Magnet


17:27:08 12/19/08
FlexPDE 6.00

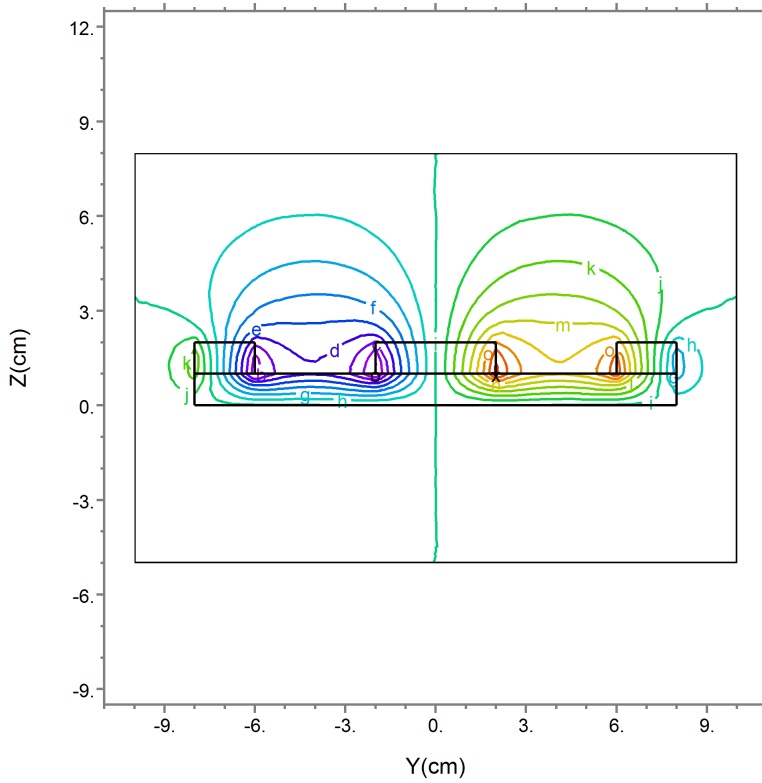

Ax on x=0	
max	8.22
q:	8.00
p:	7.00
o:	6.00
n:	5.00
m:	4.00
l:	3.00
k:	2.00
j:	1.00
i:	0.00
h:	-1.00
g:	-2.00
f:	-3.00
e:	-4.00
d:	-5.00
c:	-6.00
b:	-7.00
a:	-8.00
min	-8.21
Scale = E3	

3d_magnetron: Grid#7 P2 Nodes=184381 Cells=134358 RMS Err= 0.001
Integral= 46.91325

Oval Magnet

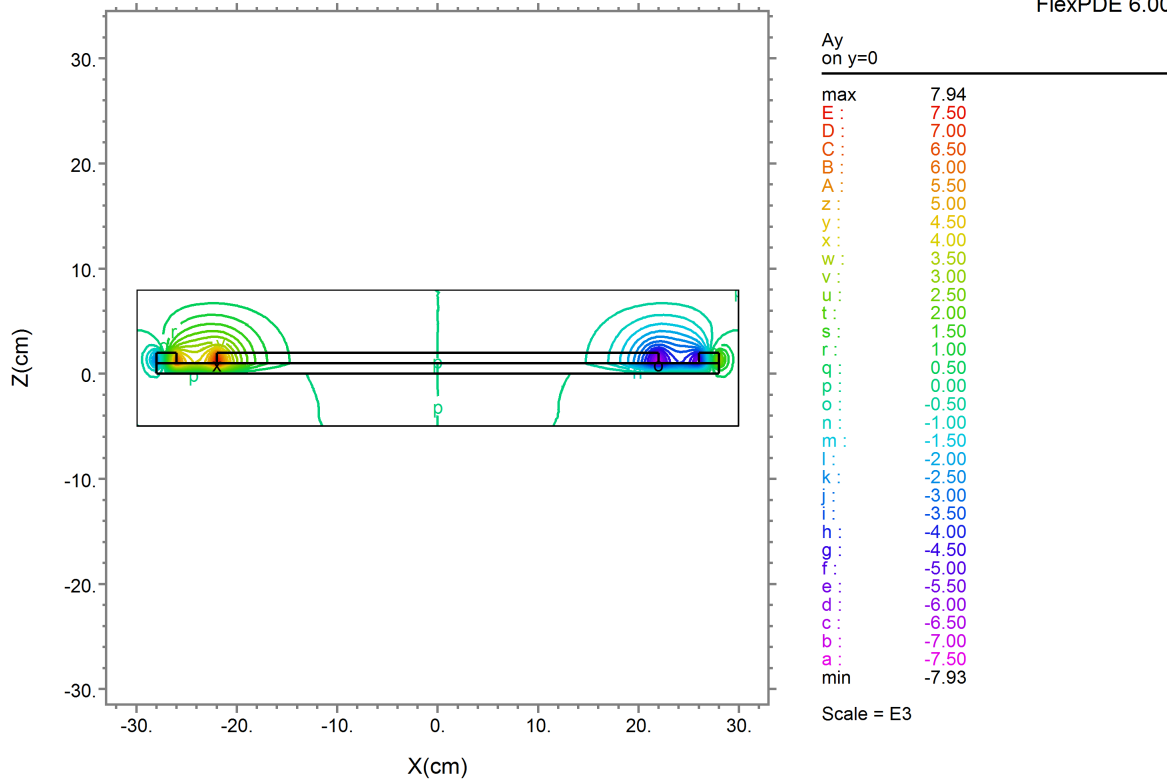17:27:08 12/19/08
FlexPDE 6.00

3d_magnetron: Grid#7 P2 Nodes=184381 Cells=134358 RMS Err= 0.001
Integral= -46.71416

4.1.4 Waveguides

A waveguide is any of several kinds of structure intended to direct the propagation of high-frequency electromagnetic energy along specific paths. While the analysis of bends and terminations in such a system is an essentially three-dimensional problem, the propagation in long straight segments of the guide can be reduced to a two-dimensional analysis. In this case, we assume that the guide is of uniform cross-section in the (X,Y) plane, unvarying in the Z-dimension of the propagation direction. In this configuration, we can make the assumption that the fields inside the guide may be represented as a sinusoidal oscillation in time and space, and write

$$(3.1) \quad \begin{aligned} \vec{E}(x, y, z, t) &= \vec{E}(x, y) \exp(i\omega t - i\gamma z) \\ \vec{H}(x, y, z, t) &= \vec{H}(x, y) \exp(i\omega t - i\gamma z) \end{aligned}$$

It is easy to see that these expressions describe a traveling wave, since the imaginary exponential generates sines and cosines, and the value of the exponential will be the same wherever $\gamma z = \omega t$. A

purely real γ implies an unattenuated propagating mode with wavelength $\lambda = 2\pi / \gamma$ along the z direction.

We start from the time-dependent form of Maxwell's equations

$$\begin{aligned}
 \nabla \times \bar{H} &= \bar{J} + \frac{\partial \bar{D}}{\partial t} = \bar{J} + \varepsilon \frac{\partial \bar{E}}{\partial t} \\
 \nabla \cdot \bar{B} &= \nabla \cdot (\mu \bar{H}) = 0 \\
 \nabla \times \bar{E} &= -\frac{\partial \bar{B}}{\partial t} = -\mu \frac{\partial \bar{H}}{\partial t} \\
 \nabla \cdot \bar{D} &= \nabla \cdot (\varepsilon \bar{E}) = \rho
 \end{aligned}
 \tag{3.2}$$

Assume then that $\bar{J} = 0$ and $\rho = 0$, and apply (3.1) :

$$\begin{aligned}
 \nabla \times \bar{H} &= i\omega \varepsilon \bar{E} & \nabla \cdot (\mu \bar{H}) &= 0 \\
 \nabla \times \bar{E} &= -i\omega \mu \bar{H} & \nabla \cdot (\varepsilon \bar{E}) &= 0
 \end{aligned}
 \tag{3.3}$$

Taking the curl of each curl equation in (3.3) and substituting gives

$$\begin{aligned}
 \nabla \times \left(\frac{\nabla \times \bar{H}}{\varepsilon} \right) &= \omega^2 \mu \bar{H} \\
 \nabla \times \left(\frac{\nabla \times \bar{E}}{\mu} \right) &= \omega^2 \varepsilon \bar{E}
 \end{aligned}
 \tag{3.4}$$

In view of (3.1), we can write

$$\begin{aligned}
 \nabla &= \bar{1}_x \frac{\partial}{\partial x} + \bar{1}_y \frac{\partial}{\partial y} - \bar{1}_z i\gamma \\
 &= \nabla_T - \bar{1}_z i\gamma
 \end{aligned}
 \tag{3.5}$$

with ∇_T denoting the operator in the transverse plane.

4.1.4.1 Homogeneous Waveguides

In many cases, the waveguide under analysis consists of a metal casing, either empty or filled homogeneously with an isotropic dielectric. In these cases, the analysis can be simplified.

Eq. (3.3) can be expanded using (3.5) and rearranged to express the transverse x and y components in terms of the axial z components H_z and E_z .

$$\begin{aligned}
 (\omega^2 \mu \varepsilon - \gamma^2) \mathbf{E}_x &= -i \left(\omega \mu \frac{\partial H_z}{\partial y} + \gamma \frac{\partial E_z}{\partial x} \right) \\
 (\omega^2 \mu \varepsilon - \gamma^2) \mathbf{E}_y &= i \left(\omega \mu \frac{\partial H_z}{\partial x} - \gamma \frac{\partial E_z}{\partial y} \right) \\
 (\omega^2 \mu \varepsilon - \gamma^2) \mathbf{H}_x &= i \left(\omega \varepsilon \frac{\partial E_z}{\partial y} - \gamma \frac{\partial H_z}{\partial x} \right) \\
 (\omega^2 \mu \varepsilon - \gamma^2) \mathbf{H}_y &= -i \left(\omega \varepsilon \frac{\partial E_z}{\partial x} + \gamma \frac{\partial H_z}{\partial y} \right)
 \end{aligned}
 \tag{3.6}$$

The i in the right hand side corresponds to a phase shift of $\pi/2$ in the expansion (3.1).

Applying the divergence equations of (3.3) become

$$\begin{aligned}
 i\gamma H_z &= \frac{\partial H_x}{\partial x} + \frac{\partial H_y}{\partial y} \\
 i\gamma E_z &= \frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y}
 \end{aligned}
 \tag{3.7}$$

so the z component equations of (3.4) are

$$\begin{aligned}
 \nabla_T \cdot (\nabla_T H_z) + (\omega^2 \mu \varepsilon - \gamma^2) H_z &= 0 \\
 \nabla_T \cdot (\nabla_T E_z) + (\omega^2 \mu \varepsilon - \gamma^2) E_z &= 0
 \end{aligned}
 \tag{3.8}$$

These are eigenvalue equations in E_z and H_z , and the values of $(\omega^2 \mu \varepsilon - \gamma^2)$ for which solutions exist constitute the propagation constants of the unattenuated propagation modes that can be supported in the guide under analysis. For any eigenvalue, there are an infinite number of combinations of $\omega, \varepsilon, \mu, \gamma$ which can excite this mode, and the exact determination will depend on the materials and the driving frequency.

4.1.4.2 TE and TM Modes

In a homogeneously filled waveguide, there exist two sets of distinct modes. One set of modes has no magnetic field component in the propagation direction, and are referred to as Transverse Magnetic, or TM, modes. The other set has no electric field component in the propagation direction, and are referred to as Transverse Electric, or TE, modes. In either case, one member of (3.8) vanishes, leaving only a single variable and a single equation. Correspondingly, equations (3.6) are simplified by the absence of one or the other field component.

In the TE case, we have $\mathbf{E}_z = 0$, and the first of (3.8)

$$(3.9) \quad \nabla_T \cdot (\nabla_T \mathbf{H}_z) + (\omega^2 \mu \varepsilon - \gamma^2) \mathbf{H}_z = 0$$

The boundary condition at an electrically conducting wall is $\hat{n} \cdot \vec{H} = 0$. Through (3.6), this implies $\hat{n} \cdot \nabla_T \mathbf{H}_z = 0$, which is the Natural boundary condition of (3.9).

In the TM case, we have $\mathbf{H}_z = 0$, and the second of (3.8)

$$(3.10) \quad \nabla_T \cdot (\nabla_T \mathbf{E}_z) + (\omega^2 \mu \varepsilon - \gamma^2) \mathbf{E}_z = 0.$$

The boundary condition at a metallic wall is $\hat{n} \times \vec{E} = 0$, which requires that tangential components of \vec{E} be zero in the wall. Since \mathbf{E}_z is always tangential to the wall, the boundary condition is the Dirichlet condition $\mathbf{E}_z = 0$.

In the following example, we compute the first few TE modes of a waveguide of complex cross-section. The natural boundary condition allows an infinite number of solutions, differing only by a constant offset in the eigenfunction, so we add an integral constraint to center the eigenfunctions around zero. Since all the material parameters are contained in the eigenvalue, it is unnecessary to concern ourselves with their values. Likewise, the computation of the transverse field components are scaled by constants, but the shapes are unaffected.

See also ["Samples | Usage | Eigenvalues | Waveguide.pde"](#)⁵⁶⁹

Descriptor 3.1 Waveguide.pde

title "TE Waveguide"

select

modes = 4 { This is the number of Eigenvalues desired. }

variables

Hz

definitions

L = 2
 h = 0.5 ! half box height
 g = 0.01 ! half-guage of wall
 s = 0.3*L ! septum depth
 tang = 0.1 ! half-width of tang
 Hx = -dx(Hz)
 Hy = -dy(Hz)
 Ex = Hy
 Ey = -Hx

equations

div(grad(Hz)) + lambda*Hz = 0

constraints { since Hz has only natural boundary conditions,
 we need to constrain the answer }

integral(Hz) = 0

boundaries

region 1

start(0,0)
 natural(Hz) = 0
 line to (L,0) to (L,1) to (0,1) to (0,h+g)
 natural(Hz) = 0
 line to (s-g,h+g) to (s-g,h+g+tang) to (s+g,h+g+tang)
 to (s+g,h-g-tang) to (s-g,h-g-tang)
 to (s-g,h-g) to (0,h-g)
 to close

monitors

contour(Hz)


plots

contour(Hz) painted
 vector(Hx,Hy) as "Transverse H" norm
 vector(Ex,Ey) as "Transverse E" norm

end


TE Waveguide

20:28:07 12/19/08
FlexPDE 6.00

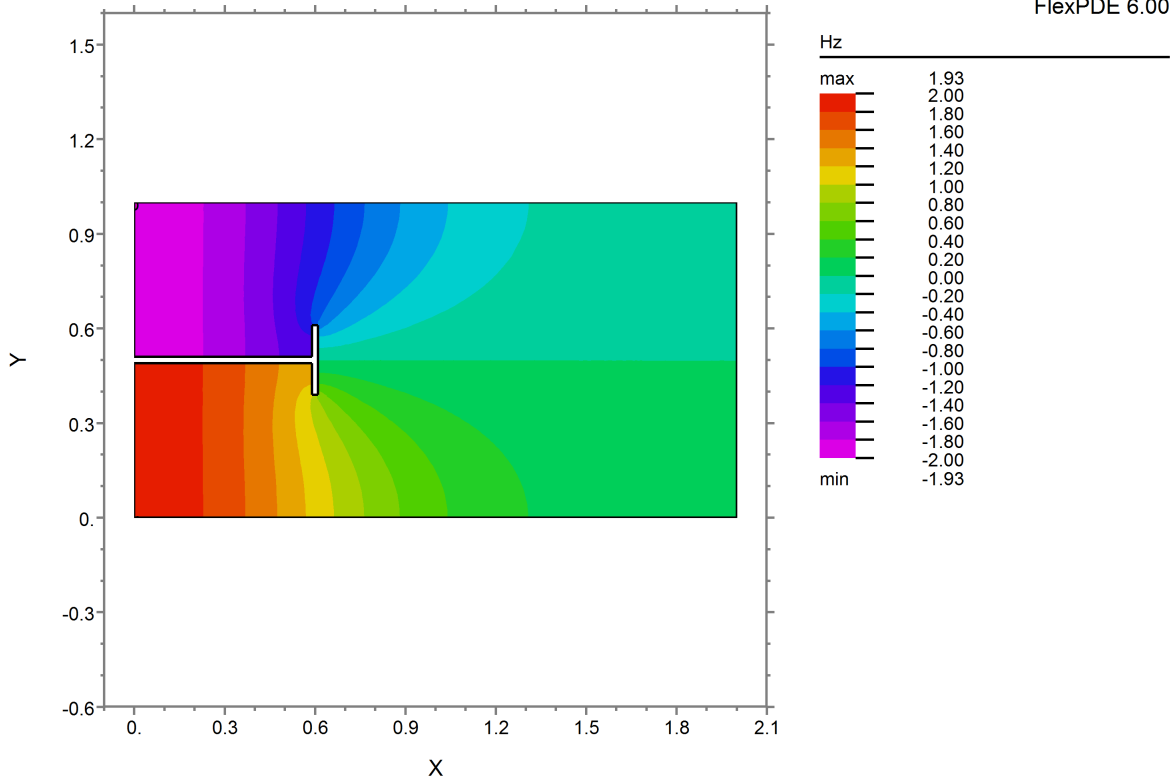

waveguide: Grid#2 P2 Nodes=863 Cells=398 RMS Err= 8.3e-4
Mode 2 Lambda= 2.6444 Integral= -6.247535e-6


TE Waveguide

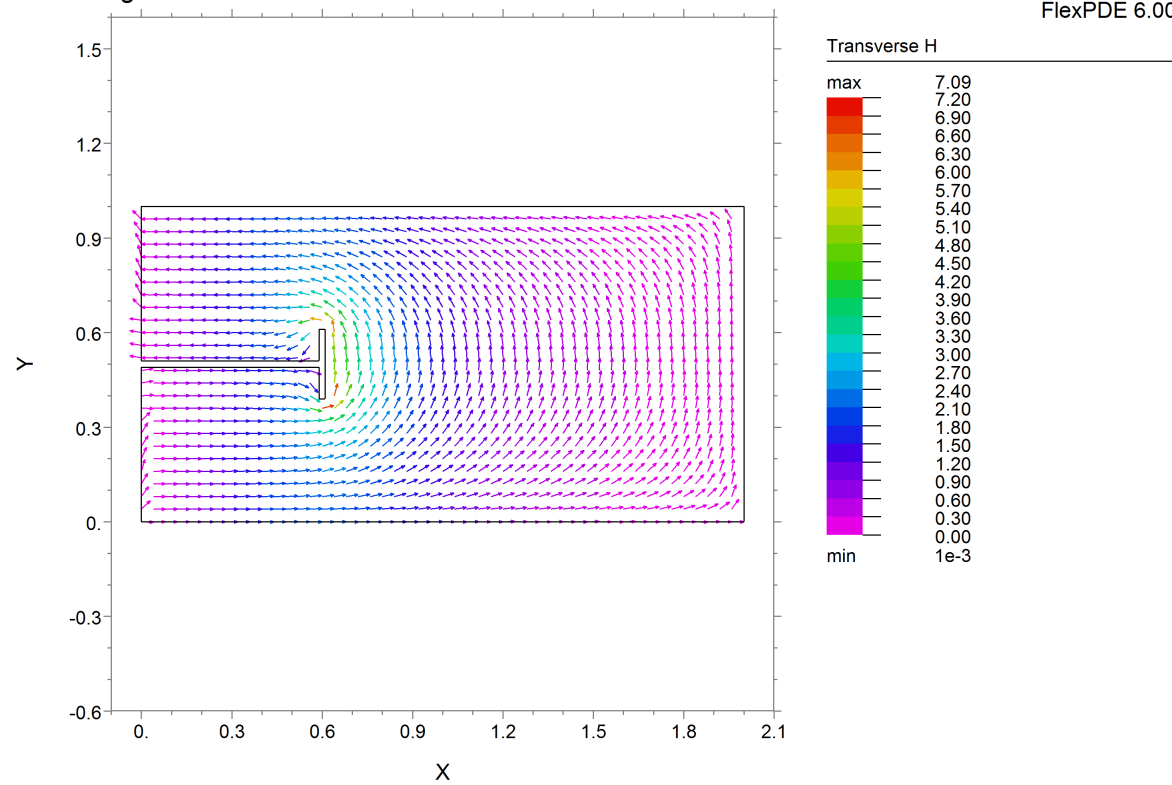20:28:07 12/19/08
FlexPDE 6.00

waveguide: Grid#2 P2 Nodes=863 Cells=398 RMS Err= 8.3e-4
Mode 2 Lambda= 2.6444

TE Waveguide

20:28:07 12/19/08
FlexPDE 6.00

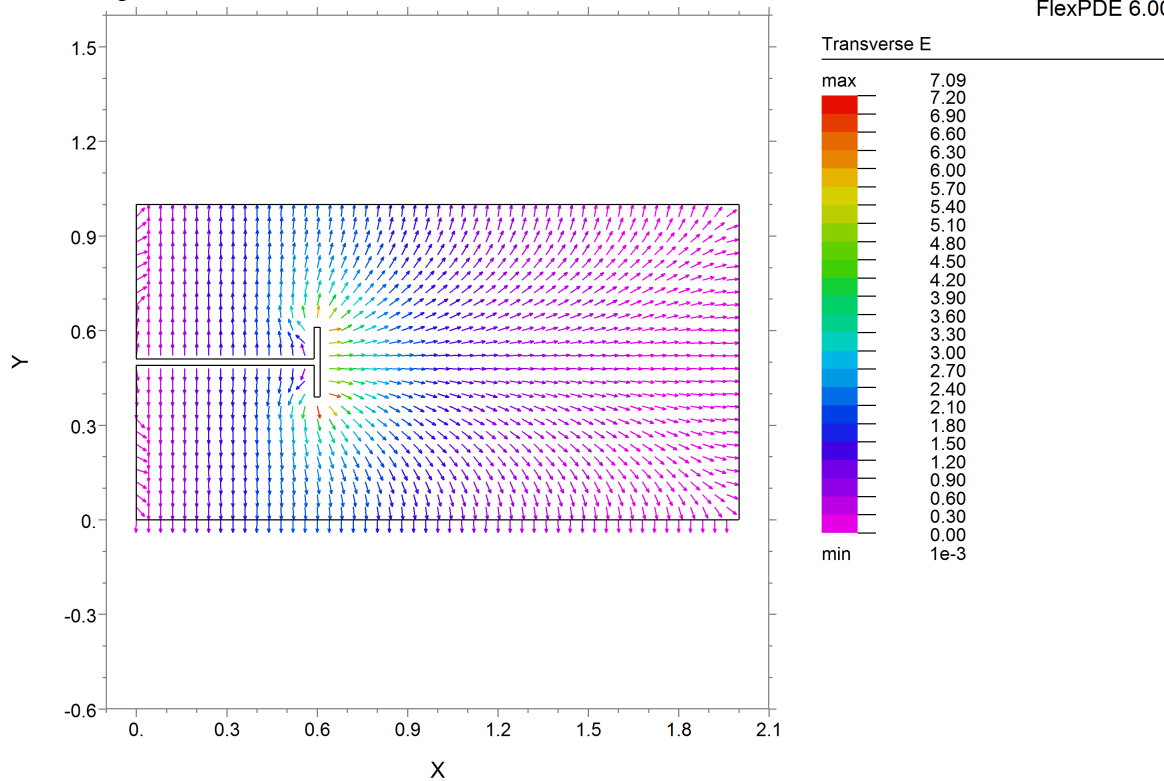

waveguide: Grid#2 P2 Nodes=863 Cells=398 RMS Err= 8.3e-4
Mode 2 Lambda= 2.6444

4.1.4.3 Non-Homogeneous Waveguides

Note: The development given here follows that of Fernandez and Lu, "Microwave and Optical Waveguide Analysis", and of Silvester and Ferrari, "Finite Elements for Electrical Engineers".

In many applications, a waveguide is partially or inhomogeneously filled with dielectric material. In this case, pure TE and TM modes do not exist. Both \mathbf{E}_z and \mathbf{H}_z exist simultaneously, and the propagation modes are hybrid in nature.

It is possible to address a simultaneous solution of equations (3.4) in a manner similar to (3.8). However, care must be taken to keep the ϵ parameter inside of some of the derivatives, and problems arise with the simplifications implicit in (3.7). This approach also has been plagued with spurious solution modes. It is claimed that these spurious modes arise because the axial field model does not explicitly impose $\nabla \cdot \vec{B} = 0$, and that the spurious modes are those for which this condition is violated.

An alternative approach seeks to reduce the equations (3.4) to a pair of equations in the transverse components of the magnetic field, $\mathbf{H}_T = H_x \mathbf{1}_x + H_y \mathbf{1}_y$. In the process, the condition $\nabla \cdot \bar{\mathbf{B}} = 0$ is explicitly imposed, and it is claimed that no spurious modes arise.

In the development that follows, we continue to treat μ as a constant (invalidating use where magnetic materials are present), but we exercise more care in the treatment of ε .

For notational convenience, we will denote the components of $\bar{\mathbf{H}}$ as $\bar{\mathbf{H}} = a \hat{\mathbf{1}}_x + b \hat{\mathbf{1}}_y + c \hat{\mathbf{1}}_z$ and use subscripts to denote differentiation. The first equation of (3.4) can then be expanded with (3.5) to give

$$(3.11) \quad \begin{aligned} & (b_x / \varepsilon)_y - (a_y / \varepsilon)_y - i\gamma c_x / \varepsilon + \gamma^2 a / \varepsilon = \omega^2 \mu a \\ & (a_y / \varepsilon)_x - (b_x / \varepsilon)_x - i\gamma c_y / \varepsilon + \gamma^2 b / \varepsilon = \omega^2 \mu b \\ & -(c_x / \varepsilon)_x - (c_y / \varepsilon)_y - i\gamma (a / \varepsilon)_x - i\gamma (b / \varepsilon)_y = \omega^2 \mu c \end{aligned}$$

The condition $\nabla \cdot \bar{\mathbf{B}} = 0$ allows us to replace

$$(3.12) \quad i\gamma c = a_x + b_y$$

and to eliminate the third equation.

We can also define $\varepsilon = \varepsilon_r \varepsilon_0$ and $\mu = \mu_0$ and multiply through by ε_0 leaving

$$(3.13) \quad \begin{aligned} & \frac{(a_x + b_y)_x}{\varepsilon_r} - \left(\frac{b_x - a_y}{\varepsilon_r} \right)_y - \frac{\gamma^2 a}{\varepsilon_r} = \omega^2 \mu_0 \varepsilon_0 a \\ & \left(\frac{b_x - a_y}{\varepsilon_r} \right)_x + \frac{(a_x + b_y)_y}{\varepsilon_r} - \frac{\gamma^2 b}{\varepsilon_r} = \omega^2 \mu_0 \varepsilon_0 b \end{aligned}$$

In vector form we can write this as

$$(3.14) \quad \nabla_T \times \left(\frac{\nabla_T \times \bar{\mathbf{H}}_T}{\varepsilon_r} \right) - \frac{\nabla_T (\nabla_T \cdot \bar{\mathbf{H}}_T)}{\varepsilon_r} + \frac{\gamma^2 \bar{\mathbf{H}}_T}{\varepsilon_r} = \omega^2 \mu_0 \varepsilon_0 \bar{\mathbf{H}}_T$$

The equation pair (3.13) is an eigenvalue problem in γ^2 . We can no longer bundle the ω^2 and γ^2 terms inside the eigenvalue, because the ϵ_r dividing γ^2 is now variable across the domain. Given a driving frequency ω , we can compute the axial wave numbers γ for which propagating modes exist.

4.1.4.4 Boundary Conditions

To see what the natural boundary conditions imply, integrate the second-order terms of (3.13) by parts:

$$(3.15) \quad \iint_T \left[(a_x + b_y)_x / \epsilon_r - (b_x - a_y)_y / \epsilon_r \right] dx dy \rightarrow \oint_S \left[n_x (a_x + b_y) / \epsilon_r - n_y (b_x - a_y) / \epsilon_r \right] dl$$

$$\iint_T \left[(b_x - a_y)_x / \epsilon_r + (a_x + b_y)_y / \epsilon_r \right] dx dy \rightarrow \oint_S \left[n_x (b_x - a_y) / \epsilon_r + n_y (a_x + b_y) / \epsilon_r \right] dl$$

We have shown only the contour integrals arising from the integration, and suppressed the area integral correcting for varying ϵ . This term will be correctly added by FlexPDE, and does not contribute to the boundary condition.

The integrand of the contour integrals is the value represented by the NATURAL boundary condition statement in FlexPDE.

Thus the NATURAL boundary condition specifications for the two equations define the values of the quantities

$$(3.16) \quad \begin{aligned} \text{Natural}(\mathbf{H}_x) &= n_x (a_x + b_y) / \epsilon_r - n_y (b_x - a_y) / \epsilon_r \\ \text{Natural}(\mathbf{H}_y) &= n_x (b_x - a_y) / \epsilon_r + n_y (a_x + b_y) / \epsilon_r \end{aligned}$$

The boundary conditions which must be satisfied at an electrically conducting wall are

$$(3.17) \quad \hat{n} \bullet \vec{\mathbf{H}} = 0; \quad \hat{n} \times \vec{\mathbf{E}} = 0.$$

The first condition requires that $n_x \mathbf{H}_x + n_y \mathbf{H}_y + n_z \mathbf{H}_z = 0$. At a vertical wall, $n_y = n_z = 0$, and the condition becomes simply $\mathbf{H}_x = 0$. Similarly, at a horizontal wall, it is $\mathbf{H}_y = 0$. Both are easily expressed as Value boundary conditions. At an oblique wall, the condition can be expressed as an implicit value boundary condition for one of the components, e.g. Value(\mathbf{H}_y) = $-(n_x/n_y) \mathbf{H}_x$.

The second condition requires that the tangential components of \vec{E} must vanish in the wall. In particular, E_z is always tangential and must therefore be zero. From (3.3) we can derive $i\omega\epsilon E_z = (b_x - a_y)$. But this term appears in each of the forms in (3.16), so at a vertical wall, where $n_y = 0$, we can set $\text{Natural}(H_y) = 0$, and at a horizontal wall, where $n_x = 0$, we can use $\text{Natural}(H_x) = 0$. These are the reverse assignments from the value conditions above, so the two form a complementary set and completely specify the boundary conditions for (3.13). Similar arguments can be used at a magnetic wall, resulting in a reversed assignment of value and natural boundary conditions.

4.1.4.5 Material Interfaces

At a material interface, Maxwell's equations require that the tangential components of \vec{E} and \vec{H} and the normal components of $\epsilon\vec{E}$ and $\mu\vec{H}$ must be continuous.

The tangential continuity of components $H_x = a$ and $H_y = b$ is automatically satisfied, because FlexPDE stores only a single value of variables at the interface.

Continuity of $H_z = c$, which is always tangential, requires, using (3.12), $(a_x + b_y)_1 = (a_x + b_y)_2$.

Continuity of E_z requires $\left(\frac{b_x - a_y}{\epsilon_r}\right)_1 = \left(\frac{b_x - a_y}{\epsilon_r}\right)_2$.

At internal boundaries, and in the absence of Natural specification, FlexPDE will consider the quantities represented by the Natural BC to be continuous.

From (3.16) it is clear that at vertical interfaces, the continuity of E_z will be satisfied by the H_y equation, while for horizontal interfaces, it will be satisfied by the H_x equation.

If all material discontinuities occur at vertical faces and ϵ_r is piecewise constant, we can multiply the H_x equation by ϵ_r , and continuity of H_z will be satisfied. Similarly, if all material discontinuities occur at horizontal faces and ϵ_r is piecewise constant, we can multiply the H_y equation by ϵ_r , and continuity of H_z will be satisfied.

Clearly, at an internal interface where ϵ_r is continuous, the internal natural boundary condition reduces to zero, which is the default condition.

In the example which follows, we consider a simple 2x1 metal box with dielectric material in the left half. Note that FlexPDE will compute the eigenvalues with lowest magnitude, regardless of sign, while negative eigenvalues correspond to modes with propagation constants below cutoff, and are therefore not physically realizable.

See also ["Samples | Usage | Eigenvalues | Filledguide.pde"](#)⁵⁶⁵

Descriptor 3.2 Filledguide.pde

title "Filled Waveguide"

{ This problem is taken from Fernandez and Lu,
"Microwave and Optical Waveguide Analysis by the Finite Element Method" page 138. }

select

modes = 5 { This is the number of Eigenvalues desired. }
ngrid = 30
overshoot = 1e-9 { request very tight Conjugate Gradient convergence }

variables

Hx, Hy

definitions

cm = 0.01 ! conversion from cm to meters
b = 1*cm ! box height
L = 2*b ! box width
epsr ! values will be given by region
epsr1=1 epsr2=1.5
eps0 = 8.85e-12
mu0 = 4e-7*pi
c = 1/sqrt(mu0*eps0) ! light speed
k0b = 4 ! normalized driving frequency
k0 = k0b/b
k02 = k0^2 ! k0^2=omega^2*mu0*eps0

! terms used in equations and BC's

curlh = dx(Hy)-dy(Hx)
divh = dx(Hx)+dy(Hy)

! the solution generates some negative eigenvalues, so we shift the eigenvalues to a range where only the

! positive values appear

shift = 200000
true_lambda=lambda+shift

! extract the propagation wave number kz

kz = if(true_lambda>0)then sqrt(true_lambda) else -sqrt(abs(true_lambda))

equations

! Hx equation multiplied by epsr to enforce continuity of Hz

$$\begin{aligned} \text{Hx: } & dx(\text{divh}) - dy(\text{curlh}) + k02*\text{Hx}*epsr - (\text{lambda}+\text{shift})*\text{Hx} = 0 \\ \text{Hy: } & dx(\text{curlh}/epsr) + dy(\text{divh})/epsr + k02*\text{Hy} - (\text{lambda}+\text{shift})*\text{Hy}/epsr = 0 \end{aligned}$$

boundaries

```
region 1 epsr=epsr1
start(0,0)
natural(Hx) = 0 value(Hy)=0
line to (L,0)
value(Hx) = 0 value(Hy)=0 natural(Hy)=0
line to (L,b)
natural(Hx) = 0 value(Hy)=0
line to (0,b)
value(Hx) = 0 natural(Hy)=0
line to close
```

```
region 2 epsr=epsr2
start(b,b)
line to (0,b) to (0,0) to (b,0)
line to close
```

monitors

```
contour(Hx) range=(-1,1)
contour(Hy) range=(-1,1)
```

plots

```
contour(Hx) range=(-1,1) report(k0) report(kz)
surface(Hx) range=(-1,1) report(k0) report(kz)
contour(Hy) range=(-1,1) report(k0) report(kz)
surface(Hy) range=(-1,1) report(k0) report(kz)
surface(divh) range=(-1,1) as "Hz" report(k0) report(kz)
surface(curlh/epsr) range=(-1,1) as "Ez" report(k0) report(kz)
```


summary export

```
report lambda
report shift
report true_lambda
report(k0)
report( if(true_lambda<0) then "*" else " ") ! mark negative eigenvalues
report(kz)
report(kz/k0)
```

end


Filled Waveguide

16:42:40 12/19/08
FlexPDE 6.00

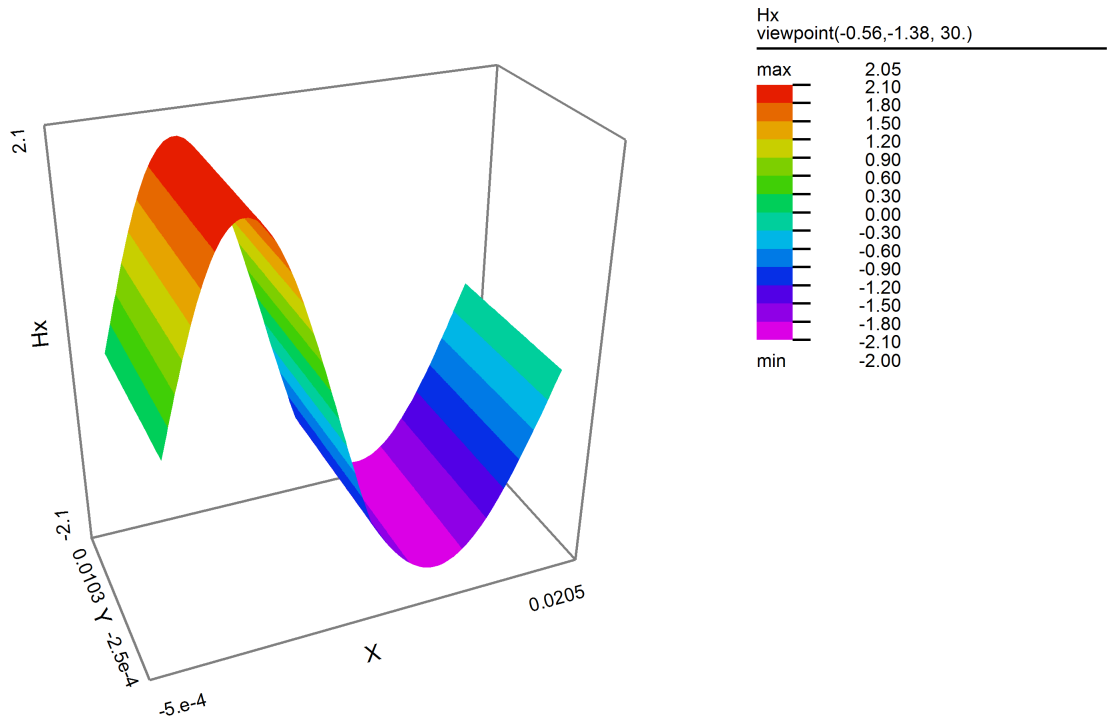

filledguide: Grid#1 P2 Nodes=2235 Cells=1072 RMS Err= 0.0062
Mode 6 Lambda= 98613. k0b= 4.000000 sqrt(abs(lambda))/k0= 0.785066 Integral= -4.020731e-5


Filled Waveguide

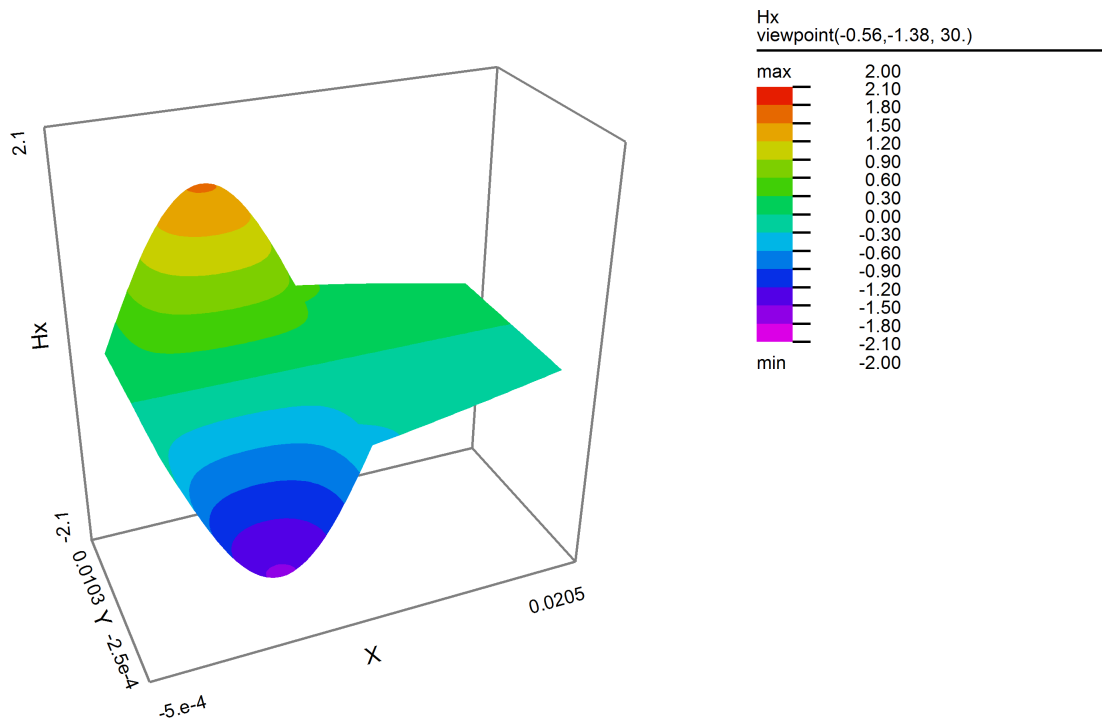16:42:40 12/19/08
FlexPDE 6.00

filledguide: Grid#1 P2 Nodes=2235 Cells=1072 RMS Err= 0.0062
Mode 4 Lambda= 56149. k0b= 4.000000 sqrt(abs(lambda))/k0= 0.592397 Integral= -6.871203e-10

Filled Waveguide

16:42:40 12/19/08
FlexPDE 6.00

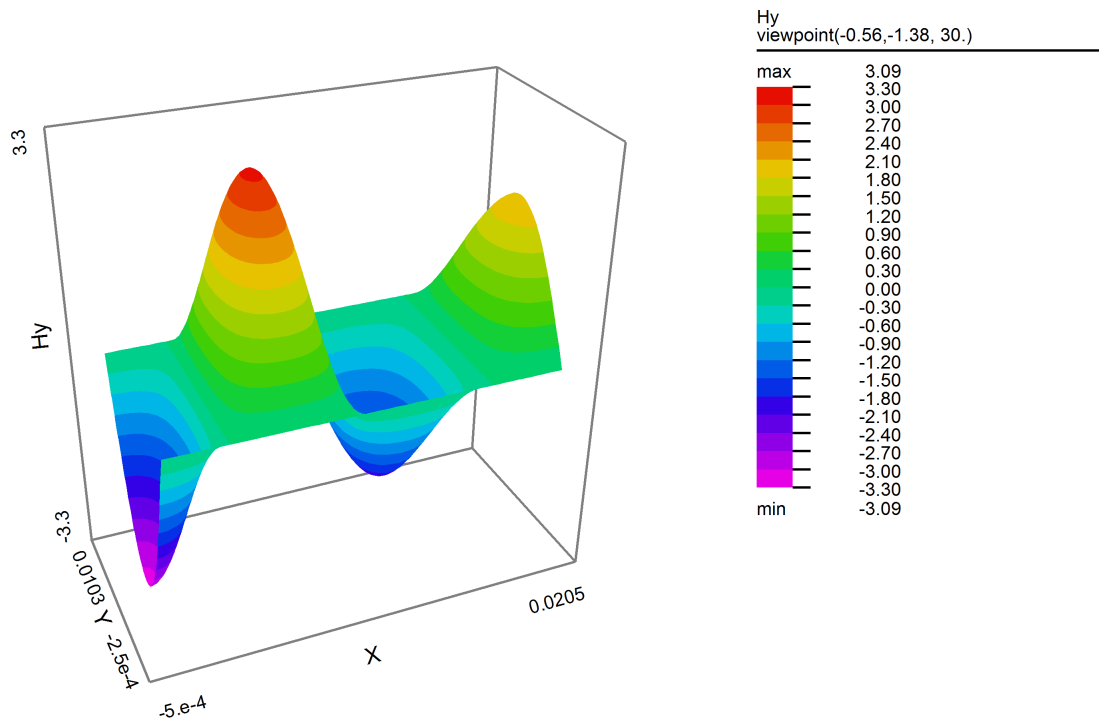

filledguide: Grid#1 P2 Nodes=2235 Cells=1072 RMS Err= 0.0062
Mode 7 Lambda=-1.1429e+5 k0b= 4.000000 sqrt(abs(lambda))/k0= 0.845175 Integral= 9.158979e-6

4.1.5 References

- N. J. Cronin, "Microwave and Optical Waveguides", London, Institute of Physics Publishing, 1995.
- F. Anibal Fernandez and Yilong Lu, "Microwave and Optical Waveguide Analysis", Somerset, UK, Research Studies Press, Ltd. 1996.
- S. R. H. Hoole, "Computer-Aided Analysis and Design of Electromagnetic Devices", New York, Elsevier, 1989.
- Nathan Ida and Joao P.A. Bastos "Electromagnetics and Calculation of Fields", New York, Springer-Verlag, 1992.
- J. D. Jackson, "Classical Electrodynamics", Second Edition, New York, John Wiley & Sons, 1975.
- Jianming Jin, "The Finite Element Method in Electromagnetics", New York, John Wiley & Sons, Inc, 1993.
- Peter P. Silvester and Ronald L. Ferrari, "Finite Elements for Electrical Engineers", Third Edition, Cambridge University Press, 1996.
- C. T. Tai, "Generalized Vector and Dyadic Analysis", New York, IEEE Press, 1992.

4.2 Natural Boundary Conditions

The [NATURAL boundary condition](#)^[85] is a generalization of the concept of a flux boundary condition. In diffusion equations, it is in fact the outward flux of the diffusing quantity. In stress equations, it is the surface load. In other equations, it can be less intuitive.

FlexPDE uses integration by parts to reduce the order of second derivative terms in the system equations.

Application of this technique over a two-dimensional computation cell produces an interior area integral term and a boundary line integral term. Forming the same integral in two adjacent computation cells produces the same boundary integral at their interface, except that the direction of integration is opposite in the two cells. If the integrals are added together to form the total integral, the shared boundary integrals cancel.

- Applied to the term $dx(f)$, where f is an expression containing further derivative terms, integration by parts yields

$$\text{Integral}(dx(f)*dV) = \text{Integral}(f*c*dS),$$

where c denotes the x-component of the outward surface-normal unit vector and dS is the differential surface element.
(Y- and Z- derivative terms are handled similarly, with c replaced by the appropriate unit-vector component.)
- Applied to the term $dxx(f)$, where f denotes a scalar quantity, integration by parts yields

$$\text{Integral}(dxx(f)*dV) = \text{Integral}(dx(f)*c*dS),$$

where c denotes the x-component of the outward surface-normal unit vector and dS is the differential surface element.
(Y- and Z- derivative terms are handled similarly, with c replaced by the appropriate unit-vector component.)
- Applied to the term $\text{DIV}(\mathbf{F})$, where \mathbf{F} denotes a vector quantity containing further derivative terms, integration by parts is equivalent to the divergence theorem,

$$\text{Integral}(\text{DIV}(\mathbf{F})dV) = \text{Integral}(\mathbf{F} \cdot \mathbf{n} dS),$$

where \mathbf{n} denotes the outward surface-normal unit vector and dS is the differential surface element.
- Applied to the term $\text{CURL}(\mathbf{F})$, where \mathbf{F} denotes a vector quantity containing further derivative terms, integration by parts is equivalent to the curl theorem,

$$\text{Integral}(\text{CURL}(\mathbf{F}) dV) = \text{Integral}(\mathbf{n} \times \mathbf{F} dS),$$

where again \mathbf{n} denotes the outward surface-normal unit vector and dS is the differential surface element.
- FlexPDE performs these integrations in 3 dimensions, including the volume and surface elements appropriate to the geometry. In 2D Cartesian geometry, the volume cell is extended one unit in the Z direction; in 2D cylindrical geometry, the volume cell is $r*dr*dtheta$.

This technique forms the basis of the treatment of exterior boundary conditions and interior material interface behavior in FlexPDE.

- All boundary integral terms are assumed to vanish at internal cell interfaces.
- All boundary integral terms are assumed to vanish at internal and external boundaries, *unless* a NATURAL boundary condition statement provides an independent evaluation of the boundary integrand.

There are several ramifications of this treatment:

In divergence equations, such as $\text{DIV}(k \mathbf{F}) = 0$,

- the quantity $(k \mathbf{F} \cdot \mathbf{n})$ will be continuous across interior material interfaces.
- The NATURAL boundary condition specifies the value of $(k \mathbf{F} \cdot \mathbf{n})$ on the boundary.
 - If $(k \mathbf{F})$ is heat flux ($k \mathbf{F} = -k \text{Grad}(T)$), then energy will be conserved across material discontinuities, and the NATURAL boundary condition defines outward heat flux.
 - If $(k \mathbf{F})$ is electric displacement ($D = -\text{eps Grad}(V)$) or magnetic induction ($B = \text{Curl}(A)$), then the material interface conditions dictated by Maxwell's equations will be satisfied, and in the electric case the NATURAL boundary condition will define the surface charge density.

In curl equations, such as $\text{CURL}(k \mathbf{F}) = 0$,

- the quantity $(k \mathbf{n} \times \mathbf{F})$ will be continuous across interior material interfaces.
- The NATURAL boundary condition specifies the value of $(k \mathbf{n} \times \mathbf{F})$ on the boundary.
- If $(k \mathbf{F})$ is magnetic field ($\mathbf{H} = (1/\mu) \text{Curl}(\mathbf{A})$) or electric field ($\mathbf{E} = -\text{Grad}(V)$), then the material interface conditions dictated by Maxwell's equations will be satisfied, and in the magnetic case the NATURAL boundary condition will define the surface current density.

Note that it is not necessary to write the equations explicitly with the DIV or CURL operators for these conditions to be met. Any valid differential equivalent in the coordinate system of the problem will be treated the same way.

Note also that the NATURAL boundary condition and the PDE are intimately related.

- If a differential operator has an argument that itself contains a differential operator, then that argument becomes the object of integration by parts, and generates a corresponding component of the NATURAL boundary condition.
- If the PDE is multiplied by some factor, then the associated NATURAL boundary condition must be multiplied by the same factor.
- The NATURAL boundary condition must have a sign consistent with the sign of the associated PDE terms *when moved to the left side of the equation*.
- The NATURAL boundary condition statement specifies to FlexPDE the integrand of the surface integral generated by the integration by parts, which is otherwise assumed to be zero.

4.3 Solving Nonlinear Problems

FlexPDE automatically recognizes when a problem is nonlinear and modifies its strategy accordingly.

In nonlinear systems, we are not guaranteed that the system will have a unique solution, and even if it does, we are not guaranteed that FlexPDE will be able to find it. The solution method used by FlexPDE is a modified Newton-Raphson iteration procedure. This is a "descent" method, which tries to fall down the gradient of an energy functional until minimum energy is achieved (i.e. the gradient of the functional goes to zero). If the functional is nearly quadratic, as it is in simple diffusion problems, then the method converges quadratically (the relative error is squared on each iteration). The default strategy implemented in FlexPDE is usually sufficient to determine a solution without user intervention.

Time-Dependent Problems

In nonlinear time-dependent problems, the default behavior is to compute the Jacobian matrix (the "slope" of the functional) and take a single Newton step at each timestep, on the assumption that any nonlinearities will be sensed by the timestep controller, and that timestep adjustments will guarantee an accurate evolution of the system from the given initial conditions.

Several selectors are provided to enable more robust (but more expensive) treatment in difficult cases. The "NEWTON=number" selector can be used to increase the maximum number of Newton iterations performed on each timestep. In this case, FlexPDE will examine the change in the system variables and recompute the Jacobian matrix whenever it seems warranted. The Selector REMATRIX=ON will force the Jacobian matrix to be re-evaluated at each Newton step.

The PREFER_SPEED selector is equivalent to the default behavior, setting NEWTON=1 and REMATRIX=Off.

The PREFER_STABILITY selector resets the values of NEWTON=3 and REMATRIX=On.

Steady-State Problems

In the case of nonlinear steady-state problems, the situation is somewhat more complicated. The default controls are usually sufficient to achieve a solution. The Newton iteration is allowed to run a large number of iterations, and the Jacobian matrix is recomputed whenever the change in the solution values seem to warrant it. The Selector REMATRIX=On may be used to force re-computation of the Jacobian matrix on each Newton step.

In cases of strong nonlinearities, it may be necessary for the user to help guide FlexPDE to a valid solution. There are several techniques that can be used to help the solution process.

Start with a Good Initial Value

Providing an initial value which is near the correct solution will aid enormously in finding a solution. Be particularly careful that the initial value matches the boundary conditions. If it does not, serious excursions may be excited in the trial solution, leading to solution difficulties.

Use STAGES²²¹ to Gradually Activate the Nonlinear Terms

You can use the staging facility of FlexPDE to gradually increase the strength of the nonlinear terms. Start with a linear (or nearly linear) system, and allow FlexPDE to find a solution which is consistent with

the boundary conditions. Then use this solution as a starting point for a more strongly nonlinear system. By judicious use of staging, you can creep up on a solution to very nasty problems.

Use CHANGELIM to Control Modifications

The selector CHANGELIM limits the amount by which any nodal value in a problem may be modified on each Newton-Raphson step. As in a one-dimensional Newton iteration, if the trial solution is near a local maximum of the functional, then shooting down the gradient will try to step an enormous distance to the next trial solution. FlexPDE limits the size of each nodal change to be less than CHANGELIM times the average value of the variable. The default value for CHANGELIM is 0.5, but if the initial value (or any intermediate trial solution) is sufficiently far from the true solution, this value may allow wild excursions from which FlexPDE is unable to recover. Try cutting CHANGELIM to 0.1, or in severe cases even 0.01, to force FlexPDE to creep toward a valid solution. In combination with a reasonable initial value, even CHANGELIM=0.01 can converge in a surprisingly short time. Since CHANGELIM limits each nodal change to a fraction of the RMS average value, not the local value, its effect disappears when a solution is reached, and quadratic final convergence is still achieved.

Watch Out for Negative Values

FlexPDE uses piecewise polynomials to approximate the solution. In cases of rapid variation of the solution over a single cell, you will almost certainly see severe under-shoot in early stages. Don't assume that the value of your variable will remain positive. If your equations lose validity in the presence of negative values, perhaps you should recast the equations in terms of the logarithm of the variable. In this case, even though the logarithm may go negative, the implied value of your actual variable will remain positive.

Recast the Problem in a Time-Dependent Form

Any steady-state problem can be viewed as the infinite-time limit of a time-dependent problem. Rewrite your PDE's to have a time derivative term which will push the value in the direction of decreasing deviation from solution of the steady-state PDE. (A good model to follow is the time-dependent diffusion equation $\text{DIV}(K*\text{GRAD}(U)) = \text{DT}(U)$. A negative value of the divergence indicates a local maximum in the solution, and results in driving the value downward.) In this case, "time" is a fictitious variable analogous to the "iteration count" in the steady-state N-R iteration, but the time-dependent formulation allows the timestep controller to guide the evolution of the solution.

4.4 Avoid Discontinuities!

Discontinuities can cause serious numerical difficulty. This is most glaringly true in time-dependent problems, but can be a factor in steady-state problems as well.

Steady-State

The finite element model used in FlexPDE assumes that all variables are continuous throughout the problem domain. This follows from the fact that the mesh nodes that sample the values of the variables are shared between the cells that they adjoin. Internally, the solution variables are interpolated by low-order polynomials over each cell of the finite element mesh. A discontinuous change in boundary conditions along the boundary path, particularly between differing VALUE conditions, will require intense mesh refinement to resolve the transition.

Whenever possible, use [RAMP](#)^[179], [URAMP](#)^[176], [SWAGE](#)^[181], part of a sine or supergaussian, or some other smooth function to make a transition in value conditions over a physically meaningful distance.

If the quantity you have chosen as a system variable is in fact expected to be discontinuous at an interface, consider choosing a different variable which is continuous, and from which the real variable can be computed.

Time-Dependent

It is a common tendency in posing problems for numerical solution to specify initial conditions or boundary conditions as discontinuous functions, such as "at time=2 seconds, the boundary temperature is raised instantaneously to 200 degrees." A little thought will reveal that such statements are totally artificial. They violate the constraints of physics, and they pose impossible conditions for numerical solution. Not quite so obvious is the case where a boundary condition is applied at the start of the problem which is inconsistent with the initial values. This is in fact a statement that "at time=0 the boundary temperature is raised instantaneously to a new value", and so is the same as the statement above.

To raise a temperature "instantaneously" requires an infinite heat flux. To move a material position "instantaneously" requires an infinite force. In the real world, nothing happens "instantaneously". Viscosity diffuses velocity gradients, elastic deformation softens displacement velocities, thermal diffusion smoothes temperature changes. At some scale, all changes in nature are smooth.

In the mathematical view, the Fourier transform of a step function is (1/frequency). This means that a discontinuity excites an infinite spectrum of spatial and temporal frequencies, with weights that diminish quite slowly at higher frequencies. An "accurate" numerical model of such a system would require an infinite number of nodes and infinitesimal time steps, to satisfy sampling requirements of two samples per cycle. Any frequency components for which the sampling requirement is not met will be modeled wrong, and will cause oscillations or inaccuracies in the solution.

How then have numerical solutions been achieved to these problems over the decades? The answer is that artificial numerical diffusion processes have secretly filtered the frequency spectrum of the solution to include only low-frequency components. Or the answers have been wrong. Right enough to satisfy the user, and wrong enough to satisfy the calculation.

It is useful in this context to note that the effect of a diffusion term $D \cdot \text{div}(\text{grad}(U))$ is to apply an attenuation of $1/(1+D \cdot K \cdot K)$ to the K-th frequency component of U. Conversely, any side effect of a numerical approximation which damps high frequency components is similar to a diffusion operator in the PDE.

We have attempted in FlexPDE to eliminate as many sources of artificial solution behavior as possible. Automatic timestep control and adaptive gridding are mechanisms which try to follow accurately the solution of the posed PDE. Discontinuities cannot be accurately modeled, and are therefore, strictly speaking, ill-posed problems. They cause tiny timesteps and intense mesh refinement in the early phases, causing long running times.

What can be done?

- Start your problem with initial conditions which are self-consistent; this means the values should correspond to a steady state solution with some set of boundary conditions. If you cannot by inspection determine these values, use the [INITIAL EQUATIONS](#)^[235] facility or a steady-state FlexPDE run with TRANSFER to precompute the initial values. See [initialeq.pde](#)^[677] and [smoothing_discontinuities.pde](#)^[678] in the Samples|Usage|Sequenced_Equations folder.
- Use RAMP, URAMP, SWAGE or other smooth function of time to turn the source value on over a meaningful interval of time.
- Whenever possible, instead of an instantaneously applied value condition, use a flux boundary condition which reflects the maximum physical initial flux that could arise from such a step condition (see the sample problem [SAMPLES|Applications|Misc|Diffusion.pde](#)^[445] for an example).
- Volume source functions and Natural boundary conditions are not as sensitive as direct conditions on the variables, because they appear in the numerical solution as integrals over some interval, and are thus somewhat "smoothed".

It may seem like an imposition that we should require such adulteration of your pure PDE, but the alternative is that we apply these adulterations behind your back, in unknown quantities and with unknown affect on your solution. At least this way, you're in control.

4.5 Smoothing Operators in PDE's

The Laplacian Operator as a Bandpass Filter Function

Assume that we have a function $v(x)$ which we wish to smooth.

The Fourier expansion of this function is $v(x) = \sum V_k \exp(i k x)$.

Let the smoothed function be $u(x) = \sum U_k \exp(i k x)$, with k the angular velocity in radians per unit distance;

then the Laplacian of u is $\nabla^2 u = \sum (-k^2) U_k \exp(i k x)$.

We define u from the relation $u - \epsilon \nabla^2 u = v$

then $\sum U_k \exp(i k x) (1 + \epsilon k^2) = \sum V_k \exp(i k x)$.

Component by component, $U_k \exp(i k x) (1 + \epsilon k^2) = V_k \exp(i k x)$

Or, $U_k = V_k / (1 + \epsilon k^2)$

so that the k th frequency component is attenuated by a factor of $1/(1 + \epsilon k^2)$.

The Sampling Theorem states (McGille and Cooper, "Continuous and Discrete Signal and System Analysis", p 164):

" A band-limited signal can be uniquely represented by a set of samples taken at intervals spaced $1/2W$ seconds apart, where W is the signal bandwidth in Hz."

The sampled signal is the product of the input signal and the sampling function, and the spectrum of the sampled signal is the convolution of the two transforms. The spectrum of the sampling function is a series of impulses at the harmonics of the sampling frequency ($2W$), and the convolution leads to a replication of the signal spectrum around each of these harmonics. If the signal bandwidth exceeds the harmonic spacing $2W$, then the harmonics will overlap, and aliasing will occur.

From this we infer that if spatial data are available at a spacing of D meters, then the maximum bandwidth in the defined signal will be $W = 1/(2D)$ cycles per meter, corresponding to $k = 2\pi W$ radians per meter.

Combining these two items, we wish to infer a value of ε that will damp components of U with frequencies above W . However, the Laplacian filter does not have a sharp cutoff at any frequency, so we have some latitude in assigning ε .

Let us find ε such that the frequency component at frequency W is attenuated by a factor N , ie.

$$1/(1 + \varepsilon 4\pi^2 W^2) = 1/N, \text{ with } 1/(2W) = D.$$

$$\text{Then } \varepsilon = (N-1)/(4\pi^2 W^2) = D^2(N-1)/\pi^2.$$

Arbitrarily choosing a frequency attenuation factor of $N=2$, we get $\varepsilon = D^2/\pi^2$.

Smoothing Steady-state Solutions

In the solution of partial differential equation systems, it sometimes happens that auxiliary equations must be solved simultaneously with the PDE, and that these auxiliary equations have no spatial coupling, being point relations or other zero-order equations. In these cases, the finite element method works poorly, because the discretization is based on integrals over space, and oscillatory solutions can satisfy the integrals. In such systems, we are justified in adding to the equation a diffusion operator to impose a smoothing on the solution. If we have, for example,

$$U = F(..)$$

then we can replace this equation with

$$U - (D^2/\pi^2)\nabla^2 U = F(..), \text{ with } D \text{ the approximate spatial wavelength of acceptable oscillations.}$$

Damping Time-dependent Systems

A similar analysis can be applied to time-dependent partial differential equations.

Suppose we have a system $\partial v/\partial t = f$, in which the discretized equations support high frequency solutions which destabilize the numerical solution process. We wish to damp high frequency components.

Assume that v can be expanded as $v(x,t) = \sum V_k \exp(i k (x-ct))$, where c is a propagation velocity.

Let the smoothed function be $u(x,t) = \sum U_k \exp(i k (x-ct))$,

then the Laplacian of u is $\nabla^2 u = \sum (-k^2) U_k \exp(ik(x-ct))$,
 while the time derivative is $\partial u/\partial t = \sum (-ikc) U_k \exp(ik(x-ct))$.

We define u from the relation $\partial u/\partial t - \varepsilon \nabla^2 u = \partial v/\partial t$
 then $\sum U_k \exp(ik(x-ct)) (-ikc + \varepsilon k^2) = \sum V_k \exp(ik(x-ct))(-ikc)$.

Component by component, $U_k = V_k (-ikc)/(\varepsilon k^2 - ikc)$

Or, $|U_k| = |V_k|/\sqrt{1 + \varepsilon^2 k^2/c^2}$

so that the kth frequency component is attenuated by a factor of

$$1/\sqrt{1 + \varepsilon^2 k^2/c^2}.$$

Again defining $W = 1/(2D)$ and seeking an attenuation factor of 2, we get

$$\varepsilon^2 = (N^2-1)c^2/(4\pi^2W^2) = D^2(N^2-1)c^2/\pi^2 = 3D^2c^2/\pi^2,$$

or approximately, $\varepsilon = 2Dc/\pi$.

We can now solve the equation $\partial u/\partial t - \varepsilon \nabla^2 u = f$ with the expectation that u will be a frequency-filtered representation of v.

Steady-state limits of Time-dependent Equations

In some cases, a steady-state limit of a known time-dependent system is desired, but while the time-dependent equation itself is stable, the steady-state equation which results from merely setting the time derivative to zero is not. In these cases, we can replace the time derivative by $-\varepsilon \nabla^2 u$, again with the expectation that u will be a frequency-filtered representation of v.

4.6 Interpreting Error Estimates

FlexPDE uses estimates of the modeling error to control mesh refinement and timestep size. This note describes the methods used and the interpretation of the reports.

Spatial Error

The Galerkin Finite Element method uses integrals of the PDE's to form the discretized equations at the mesh nodes.

Each nodal equation requires that the weighted integral of the associated equation over the mesh cells surrounding the node be satisfied within a convergence tolerance. In FlexPDE this tolerance is taken to be a relative error of (ERRLIM * OVERSHOOT) in the norm of the solution vector.

In a regular hexagonal 2D mesh, for example, the Galerkin method requires that each hexagonal set of six triangular mesh cells must produce a weighted integral residual of zero.

This method at no point imposes any conditions on the integral over a single mesh cell, and conceivably one could have cancelling errors in adjacent cells.

In FlexPDE, we choose to use the individual cell integrals as a measure of the mesh quality. If the aggregate (eg 6-cell) integral is correct but the individual cells show large error, then the mesh must be refined.

The fundamental system which is solved by FlexPDE can be indicated as $R=G(U)=0$, where R is the residual and $G(U)$ is the Galerkin integral of the PDE for variable U . If the residual over an individual cell is R , we can write $J*dU=R$, where J is the Jacobian matrix of derivatives of the Galerkin integral with respect to the nodal values, and dU is the error in U which produces the residual R .

J is of course the coupling matrix which is solved to produce the solution U . We don't want to completely repeat the solution process just to get an error estimate, so we use various simply-computed approximations J' of J , to produce the error estimate $dU=Inv(J')*R$.

The "RMS Error" reported by FlexPDE in the Status Panel is just the root-mean-square average of $dU/range(U)$ over the cells of the problem, while the reported "MAX Error" is the largest error $dU/range(U)$ seen in any cell.

Mesh cells for which $dU/range(U) > ERRLIM$ are split in the mesh refinement pass.

Notice that the error measure is not a guarantee that the computed solution is "accurate" to within the stated error, that is, that the computed solution differs from the "true" solution by no more than the stated error. The error estimate is a local measure of how much variation of the solution would produce the computed error in the cell integral. Deviations from the "true" solution might accumulate over the domain of the problem, or they might cancel in neighboring regions.

Temporal Error

In time dependent problems, an estimate must also be formed of the error in integrating the equations in time.

FlexPDE integrates equations in time using a second-order implicit Backward Difference Formula (Gear method).

In order to measure temporal error, FlexPDE stores an additional timestep of values previous to the three points of the quadratic solution, and fits a cubic in time to the sequence at each node. The size of the cubic term implies the error in the quadratic solution, and is used to either increase or decrease the timestep in order to keep the RMS temporal error within the range specified by ERRLIM.

The three-point integration method requires an independent method to create data for the initial interval. FlexPDE uses a comparison of one-step and two-step trapezoidal rule integration to adapt the initial timestep to a range that produces acceptable error.

FlexPDE Error Controls

There are several SELECT controls that can be used to alter the behavior of FlexPDE in regard to error measures.

The basic control is ERRLLIM, which specifies the desired relative error in the solution variables, and controls both spatial and temporal measures. Smaller ERRLLIM causes more mesh subdivision and smaller timesteps. Larger ERRLLIM allows cruder meshes and, in principle, larger timesteps. However, a large ERRLLIM can allow oscillations to develop, ultimately causing severe timestep cuts and a slower overall execution. It is rarely advisable to use an ERRLLIM value *larger* than the default 0.002.

XERRLLIM and TERRLLIM are analogous to ERRLLIM, but refer specifically to the spatial and temporal controls, allowing separate control of the two processes. If either of these controls is absent, it defaults to the value of ERRLLIM.

4.7 Coordinate Scaling

FlexPDE treats all spatial coordinates on an equal footing, and tries to create meshes that are balanced in size in all coordinates.

Sometimes, though, there are problems in which one dimension is expected to have much less variation than the others, and fully meshing the domain with equilateral cells creates an enormous and expensive mesh. In these cases, it would be advantageous to scale the long dimension to bring the coordinate sizes into balance. Similarly, in semiconductor problems, for example, the structure is extremely thin, and would benefit from an expansion of the Z thickness coordinate.

It is possible that FlexPDE will eventually implement automatic coordinate scaling, but in the meantime, users can implement it manually.

Consider as an example the heat equation

$$\text{div}(k*\text{grad}(T))+Q = C*dt(T)$$

with k the conductivity, Q a source and C the heat capacity.

Define a coordinate transformation,

$$z = s*w$$

where w is the physical coordinate, z is the FlexPDE coordinate, and s is a scaling factor. The expanded physical equation is then

$$dx(k*dx(T)) + dy(k*dy(T)) + dw(k*dw(T)) + Q = C*dt(T)$$

We can transform the heat equation using this transformation and observing that

$$dw(f) = (\partial f / \partial w) = (\partial f / \partial z) * (\partial z / \partial w) = s * dz(f)$$

The result is

$$(1) \quad dx(k*dx(T)) + dy(k*dy(T)) + s*dz(k*s*dz(T)) + Q = C*dt(T)$$

Flux Conservation

In forming the finite element model for this equation, FlexPDE assumes continuity of the surface integrals generated by integration-by-parts of the second-order terms (equivalent in this case to the Divergence Theorem). This is the Natural Boundary Condition for the equation, as discussed elsewhere in the FlexPDE documentation.

The z-directed flux terms in the transformed equation therefore assume that $s^2*k*dz(T)$ is continuous across cell interfaces. This is equivalent to flux conservation in the physical system as long as s is constant throughout the domain.

In order to guarantee conservation of flux in the presence of differing scale factors in layers, we must have the following equality across an interface between materials 1 and 2:

$$k1*dw(T)1 = k2*dw(T)2$$

or

$$k1*s1*dz(T)1 = k2*s2*dz(T)2$$

This will be satisfied if we divide our transformed equation by S :

$$(2) \quad dx(k*dx(T))/s + dy(k*dy(T))/s + dz(k*s*dz(T)) + Q/s = C*dt(T)/s$$

where S is defined as $S1$ in material 1 and $S2$ in material 2.

Un-Scaling Fluxes

Fluxes appropriate to the unscaled system can be recovered by the same modifications as those made in the PDE:

- Fluxes in the scaled direction must be *multiplied* by the scale factor. Integrals of these fluxes need not be further modified, as they are integrated over surfaces in true coordinates.
- Fluxes in the unscaled directions are correctly computed in true coordinates, but when integrated over surfaces, they must be *divided* by the scale factor to account for the scaled area.

Flux integrals then appear in the same form as in the scaled PDE:

$$\text{Total_Real_Flux} = \text{Surf_Integral}(\text{NORMAL}(-k*dx(T)/s, -k*dy(T)/s, -k*dz(T)*s))$$

Natural Boundary Conditions

The natural boundary condition defines the argument of the outermost derivative operator (or the argument of the divergence). In the conservative equation (2):

- Components in the unscaled direction have been divided by S . Therefore the natural boundary conditions for these components must be divided by S . (e.g. $\text{NATURAL}(T) = x_flux/s$ on x-normal surfaces.)
- In the scaled direction, the value defined by the natural is $k*s*dz(T)$ which is in fact $k*dw(T)$, the flux in the physical coordinate system. The natural in the scaled direction is therefore unmodified by the scaling. (e.g. $\text{NATURAL}(T) = z_flux$ on z-normal surfaces.)

Examples

["Samples | Usage | Coordinate Scaling | Scaled_Z.pde"](#)⁵⁵⁷ shows the implementation of this technique. ["Samples | Usage | Coordinate Scaling | UnScaled_Z.pde"](#)⁵⁵⁹ provides an unscaled reference for comparison.

4.8 Making Movies

Since version 5, FlexPDE has had a simplified the process of creating movies from problem data.

1) Replaying a movie from a stored .PG8 file:

- Open a .PG8 file from the "View | View File" menu.
- You can use the "View | Frame Delay" menu item to set the delay between frames (default 500 ms).
- Double-click to maximize a selected frame in the thumbnail display
- Click "View | Movie" to replay all the instances of the selected frame.
- Click "View | Restart" whenever you wish to begin a new replay, to move the reader to the beginning of the file.

2) Exporting a Movie from a stored .PG8 file to graphic files on disk:

- Open a .PG8 file from the "View | View File" menu.
- Double-click a thumbnail to maximize a selected frame.
- Click "View | Export Movie". This will bring up a selection dialog to set the export parameters.
- The selected frame will be scanned as for Movie, and all files will be written according to the selected parameters.

- Use JASC AnimationShop to assemble the individual files into a GIF animation.
- Use [GIF2SWF](#) or other conversion program to create Flash animations.

See [Viewing Saved Graphic Files](#)^[26] for more information.

4.9 Converting from Version 4 to Version 5

Several items have been changed in version 5 that may require some attention for users of FlexPDE version 4. In general, we have tried to make the transition as simple as possible.

- **ERROR ESTIMATION:** The algorithms used for error estimation have been changed in version 5. In most cases, the new measures are more pessimistic than those used in version 4, resulting in some cases in more intense mesh refinement and longer running. Nevertheless, we feel that the new algorithms provide an error measure closer to the actual disparity between the numerical and analytical solutions in test problems. In order to ameliorate the impact of this change, we have relaxed the default ERRLIM to 0.002 and allowed individual cells to exceed the ERRLIM specification, as long as a weighted average of errors is below ERRLIM. You may wish to adjust your ERRLIM specifications to reflect this new behavior.
- **SMOOTHING INITIAL VALUES:** Version 5 applies a smoothing procedure to initial conditions in time-dependent problems, to ameliorate the harsh behaviour caused by discontinuous initial conditions. In most cases, you will experience a much quicker startup, with no significant difference in solution. The smoothing operation is scaled to cell sizes, so you can recover accurate resolution of initial transients by merely specifying dense meshing at important initial discontinuities. The smoothing operation can be suppressed by `SELECT SMOOTHINIT=OFF`.
- **CLOSE:** The reserved word `FINISH` used in previous versions has been changed to `CLOSE`, to more accurately reflect its function. You will be warned once, after which `FINISH` will be accepted as in version 4. Except in cases where you want to run a problem on both versions, we suggest converting to the new format.
- **GLOBAL:** The designation `SCALAR VARIABLES` used in version 4 has been changed to `GLOBAL VARIABLES`, to more accurately reflect its function. You will be warned once, after which `SCALAR VARIABLES` will be accepted as in version 4. Except in cases where you want to run a problem on both versions, we suggest converting to the new format.

4.10 Converting from Version 5 to Version 6

FlexPDE version 6 is almost totally backward-compatible with version 5.

In order to support the new features of version 6, however, we have had to make a few syntactic changes:

Parentheses

Parens "(") are no longer interchangeable with square brackets "[]". In particular,

- Square brackets can no longer be used in expression grouping. They are reserved for array and matrix indexing.
- Parentheses can no longer be used for array indexing. Only square brackets will serve in this capacity.

Exponentiation

Double-asterisk "**" can no longer be used as an exponentiation operator. Double-asterisk is now the matrix multiply operator. Use the caret "^" for exponentiation.

Solution Controls

- Error estimation algorithms are somewhat different, and may result in somewhat shorter timesteps and longer running for time-dependent problems. These changes were made in the interest of more truthful reports of error.
- The selector NRMATRIX has been changed to an ON/OFF selector REMATRIX which selects recomputation of the Jacobian matrix on every Newton iteration. The default is OFF. Even without this selector, FlexPDE will recompute the Jacobian matrix whenever the variable changes are greater than an internal threshold.
- Nonlinear time-dependent problems default to one Newton step per timestep, with timestep controls to cut the timestep if convergence is not readily achieved. This is usually a more efficient scheme than other alternatives. The Selector NEWTON=number is available for specifying a more strenuous convergence policy. The Selector PREFER_STABILITY can be used to allow up to 5 Newton iterations per timestep, with full re-computation of the Jacobian matrix on each iteration. This is the most expensive option, but should provide the most stable operation.

Reserved Names

The names REAL and IMAG can no longer be used as user-defined values. They are now built-in component selectors for Complex data types. See the list of [Reserved Words](#)^[168] for other changes.

4.11 Converting from Version 6 to Version 7

FlexPDE version 7 is almost totally backward-compatible with version 6.

However, we have made a few changes:

FEM Basis

- Version 7 now uses a hierarchical basis system. Higher order components of the interpolation are now the coefficients of higher order terms in the polynomial approximation, not additional nodal values. As a result, the “Nodes” report in the Status panel is not directly comparable to the report in version 6. The new "DOF" (degrees of freedom) report in version 7 is directly comparable to the version 6 "Nodes" report.
- Cubic basis is now the default. To replicate the behavior of version 6, you must either specify “quadratic” in the Select section, or use the preference panel to default to order=2. The cubic model will run somewhat longer than a quadratic model on the same mesh. However, the cubic model can return accurate results on a smaller mesh than the quadratic model. Actual results will be problem dependent.

File Consolidation

- Version 7 by default creates a subdirectory (<problem name>_output) for each script that is run, and into which all the associated output files are written (this default can be changed in the [Preferences control](#)^[28]). Scripts that TRANSFER files from other runs need to provide the proper path to find the appropriate import files.

Solution Controls

- Error estimation algorithms are somewhat different, and may result in different behavior than with previous versions. Our goal is to make the behavior consistent across versions, but this is not always possible for all problems.

Reserved Names

- In previous versions, the names LAMBDA and MODE were activated only in eigenvalue problems. In version 7, they are always reserved and can no longer be used as user-defined values. See the list of [Reserved Words](#)^[168] for other changes.

4.12 How FlexPDE Works

1. The Finite Element Model¹

The modeling technique used in FlexPDE is a form of Finite Element Analysis.

- a) The domain of interest is divided into a large number of small patches or *elements* (line segments in 1D, triangles in 2D and tetrahedra in 3D).
- b) In each element, a modeled variable is approximated by a polynomial approximation in space. eg

$$u(x, y) = \sum_i u_i \beta_i(x, y)$$
 where each β_i is a *shape function*² within the element and the u_i are the coefficients of the approximation.

- c) The shape functions used in FlexPDE are *heirarchical*³, in that the lowest order is a linear interpolation among the vertex values. To this fundamental interpolation may be added a quadratic supplement, and possibly a cubic supplement.
- d) The shape functions used in FlexPDE are by default cubic in space. The approximation order is controllable using the selectors order=1,2 or 3 (or linear, quadratic and cubic).

2. Galerkin Weighted Residuals⁴

- a) Given a Partial Differential Equation, FlexPDE automatically generates a Galerkin Weighted Residual discretisation of the PDE. This is done by multiplying the PDE by each of the *shape functions* and integrating over each cell.

- b) For example, the PDE $\frac{\partial u}{\partial t} = \nabla \bullet \nabla u$ becomes (in 1D) the set

$$\int \left[\frac{\partial u(x)}{\partial t} \right] \beta_j(x) dx = \int \left[\frac{\partial^2 u(x)}{\partial x^2} \right] \beta_j(x) dx \text{ for each } j. \text{ Inserting the expansion rule 1(b), this}$$

$$\text{becomes } \int \sum_i \left[\frac{\partial u_i}{\partial t} \beta_i(x) \right] \beta_j(x) dx = \int \sum_i \left[u_i \frac{\partial^2 \beta_i(x)}{\partial x^2} \right] \beta_j(x) dx$$

- c) Second-order derivatives are reduced in order by applying Integration by Parts⁵ (equivalent to the Divergence Theorem in the case of a divergence operator or the Curl Theorem in the case of a curl operator). This produces

$$\sum_i \int \left[\frac{\partial u_i}{\partial t} \beta_i(x) \right] \beta_j(x) dx = \sum_i \left[u_i \frac{\partial \beta_i(x)}{\partial x} \right]_a^b - \sum_i \int \left[u_i \frac{\partial \beta_i(x)}{\partial x} \right] \frac{\partial \beta_j(x)}{\partial x} dx \text{ for each } j. \text{ The}$$

products of shape functions can be pre-computed, so that we can write

- d) The boundary terms introduced by this procedure imply the continuity of flux (e.g. the argument of the divergence operator) across element and material interfaces.
- e) The integrals involving shape functions can be precomputed. We use quadrature rules together with values of e.g. $K_{ij}(x_q) = \beta_i(x_q) \beta_j(x_q)$, $L_{ij}(x_q) = \frac{\partial \beta_i(x_q)}{\partial x} \frac{\partial \beta_j(x_q)}{\partial x}$, $M_i(x_q) = \frac{\partial \beta_i(x_q)}{\partial x}$ at each quadrature point q.

- f) This process results in a set of residual equations which can be denoted by

$$R_u = \sum_i \int \frac{\partial u_i}{\partial t} K_{ij} dx + \sum_i \int u_i L_{ij} dx - \sum_i [u_i M_i]_a^b = 0. \text{ It is the coupled set of these residual equations}$$

R_u, R_v, \dots for variables u, v, \dots that we must solve to generate a model solution.

- g) Petrov-Galerkin Stabilization^{6,7}

FlexPDE automatically applies Petrov-Galerkin weighting to equations when advection terms are present. This scheme adds a secondary weighting term $V \bullet \nabla \beta$ to the standard weighting $\beta_j(x)$.

3. The Solution Method

There are several different cases that arise when solving the systems generated in 2(c). Is the problem linear or non-linear? Is it time-dependent or steady-state? In all cases, we start by differentiating each equation with respect to all the expansion coefficients, resulting in an equation system

$$\begin{bmatrix} \frac{\partial Ru}{\partial u} & \frac{\partial Ru}{\partial v} \\ \frac{\partial Rv}{\partial u} & \frac{\partial Rv}{\partial v} \end{bmatrix} \begin{pmatrix} \Delta u \\ \Delta v \end{pmatrix} = \begin{pmatrix} Ru \\ Rv \end{pmatrix} \text{ which can be solved for modifications that must be applied to the}$$

variables u and v . Each entry in this diagram represents an entire assembly of equations and variables for each shape function in each cell of the Finite Element assembly. This can result in matrices of thousands or even millions of entries. All the methods used in FlexPDE are fully implicit and require matrix inversion to solve for new values. In a fully general system like FlexPDE, this is necessary to maintain stability and accuracy.

a) Linear Steady-State Systems

In the simplest case, the terms $\frac{\partial Ru}{\partial v}$ are independent of the variables u, v, \dots and can be solved

directly. FlexPDE uses an iteration on residuals to repeat the solution until the accuracy is within tolerance (because Preconditioned systems described below find a solution in a different space than the actual solution space).

b) Nonlinear Steady_State Systems

If the terms $\frac{\partial Ru}{\partial v}$ contain dependencies on the system variables u, v, \dots , then we must use a

Newton's method to repeatedly compute the matrix and right-hand side terms and apply the indicated changes until convergence is achieved. FlexPDE uses a method of line searches and backtracking⁸ to prevent divergent iterations.

c) Time-Dependent Systems

If the equations contain time derivatives, we will have terms arising from the $\sum_i \int \frac{\partial u_i}{\partial t} K_{ij} dx$ part of equations 2(f). In this case, we must track the time evolution of the coefficients u_i . FlexPDE uses a selectable-order Backward Difference Formulation⁹ to advance the variables in time. This is similar to Gear's method, and is adapted to stiff systems. The default method in FlexPDE is quadratic in time, but a first-order method is used during start-up.

i) In linear systems, each time step may be computed once.

ii) In nonlinear systems, each time step may require multiple Newton iterations. In FlexPDE this is controlled by the selectors PREFER_SPEED and PREFER_STABILITY, q.v.. In the former case, one Newton step is computed for each time step, on the assumption that the solution will not vary much over the step. In the latter case, a maximum of 3 Newton steps are allowed in each time step. This number can be controlled with the NEWTON selector.

4. Solving the Matrix Systems

FlexPDE uses Conjugate-Gradient iteration extensively in solving the matrix equations (3). This is because the matrices generated by element-to-element coupling are very sparse and very large. The particular variety of CG iteration used depends on the characteristics of the matrix. There are many variations of CG iteration available, and FlexPDE has defaults but offers some selection of alternate methods.

a) a) Conjugate Gradient solvers

i) Symmetric systems, as generated by diffusion-type equations, use an Orthomin system^{10,11}

ii) Nonsymmetric systems require bi-orthogonalization, and FlexPDE uses the Lanczos method^{12,13}.

This method solves the double system $Ax = q$, $A^T x^T = q^T$. q^T is arbitrary.

iii) Some nonsymmetric systems require a different technique, and FlexPDE offers a method due to Vandenberg that solves the system $Ax = q$ in the form $A^T Ax = A^T q$ ¹⁴.

iv) A changing number of other CG methods are available in FlexPDE, and are being evaluated for efficacy. At present, those listed have been the most reliable.

b) b) Preconditioning

In all cases, FlexPDE uses a preconditioner to improve the convergence of the Conjugate-Gradient iteration. The goal of this operation is to reduce the range of eigenvalues of the iteration matrix to less than one.

i) Symmetric matrices by default use an Incomplete Choleski Decomposition¹⁵. If the incomplete decomposition is possible, then the system solved is $(LAL^T)y = Lb$ and $x = L^T y$, where L is the lower triangular Incomplete Choleski decomposition of A.

If the Incomplete Choleski decomposition fails, then symmetric systems default to

$(B^{-1/2} AB^{-1/2})x = B^{-1/2} q$, where B is the matrix of diagonal blocks coupling the variables of each coefficient.

ii) For nonsymmetric systems, the system solved is $(B^{-1}A)x = B^{-1}q$, where B is the matrix of diagonal blocks as in (i).

c) A direct solver using the Intel Math Kernel Library¹⁶ is available for small systems, using the control word DIRECT. At present, this option is limited to 10,000 matrix rows.

5. Automatic Mesh Refinement

FlexPDE monitors the accuracy of the Finite Element approximation and corrects the mesh density to get higher resolution in the areas of the domain where the solution is changing rapidly and accuracy is compromised. Beginning in version 7, FlexPDE estimates the solution accuracy simply by monitoring the contribution of the highest-order term to the overall solution in each cell (in order=1 solutions, a multi-cell method is used to estimate second-order contributions). By splitting any cell in which the highest-order contribution is large, we keep the mesh density sufficiently high to achieve accuracy.

6. Moving Meshes

FlexPDE supports Finite Element meshes that move in time. In this case, surrogate system variables are declared in order to couple the main variables to changes in the node positions. The residual equations

and Jacobian matrices must then be adjusted for the fact that the cell volumes and interpolation coefficients are changing in time. These additional terms are added to the system diagrammed in (3).

1. There are many references describing Finite Element methods, see for example Zienkiewicz, O.C. and R.L. Taylor, “The Finite Element Method, Fifth Edition, Volume 1: the Basis” 2000
 2. Zienkiewicz and Taylor, chapter 8.
 3. Zienkiewicz and Taylor, section 8.16
 4. Zienkiewicz and Taylor, chapter 3.
 5. Zienkiewicz and Taylor, Appendix G
 6. Sert, C., ME582 “Finite Element Analysis in Thermo fluids” <http://users.metu.edu.tr/csert/me582/ME582%20Ch%2006.pdf>
 7. Zienkiewicz, O.C. and R.L. Taylor, “The Finite Element Method, Fifth Edition, Volume 3: Fluid Dynamics” (2000) section 2.3.2
 8. For example, Numerical Recipes in C++, second edition, section 9.7
 9. For example, Ascher and Petzold, “Computer Methods for Ordinary Differential Equations and Differential-Algebraic Equations” (1998) section 5.1.2
 10. Young, D.M. and Kang C. Jea, “On the Simplification of Generalized Conjugate-Gradient Methods for Nonsymmetrizable Linear Systems” *Linear Algebra and its Applications* 52/53:399 (1983)
 11. Saad, Yousef, “Iterative Methods for Sparse Linear Systems”, second edition (2003), section 6.9
 12. Young and Jea, op cit.
 13. Saad, op cit, section 7.1
 14. T.K. Sarkar, “Application of Conjugate Gradient Method to Electromagnetics and Signal Analysis” , Elsevier (1991), chapter 2
 15. Golub, Gene H.; Van Loan, Charles F. (1996), *Matrix Computations (3rd ed.)*, Johns Hopkins, Section 10.3.2.
 16. <https://www.intel.com/content/www/us/en/developer/tools/oneapi/onemkl.html>
-

Part



Sample Problems

5 Sample Problems

The standard distribution of FlexPDE includes over one hundred example scripts, showing the application of FlexPDE to many areas of study. These sample problems have been prepared by PDE Solutions staff and show various applications of FlexPDE, or illustrate features or techniques.

Many of these problems contain commentary describing the derivation of the model. All are keyed for execution in Professional mode by the Lite version of FlexPDE. These scripts are installed by the standard installation procedure. Modifying a copy of an existing descriptor is frequently the most efficient way to start building a descriptor for a new problem. On Windows, sample scripts are installed in the "FlexPDE8 user" folder in the user's home folder as well as in the FlexPDE installation folder. The copy in the installation folder can be used as master copies.

Also included in the distribution, in the "Backstrom_Books" folder, are many samples from books written by Prof. Gunnar Backstrom showing the use of FlexPDE in a variety of fields. See [Backstrom's books online](http://www.amazon.com/Gunnar-Backstrom/e/B003B80CE2/) at <http://www.amazon.com/Gunnar-Backstrom/e/B003B80CE2/>.

5.1 Applications

5.1.1 Chemistry

5.1.1.1 chemburn

```
{ CHEMBURN.PDE
```

```
This problem models an extremely nonlinear chemical reaction in an open tube reactor with a gas flowing through it. The problem illustrates the use of FlexPDE to solve mixed boundary value - initial value problems and involves the calculation of an extremely nonlinear chemical reaction.
```

```
while the solutions sought are the 3D steady state solutions, the problems are mixed boundary value / initial value problems with vastly different phenomena dominating in the radial and axial direction.
```

```
The equations model a cross-section of the reactor which flows with the gas down the tube. There is therefore a one to one relation between the time variable used in the equations and distance down the tube given by  $z = v*t$ .
```

```
The chemical reaction has a reaction rate which is exponential in temperature, and shows an explosive reaction completion, once an 'ignition' temperature is reached. The problem variable 'C' represents the fractional conversion (with 1 representing reaction completion). The reaction rate 'RC' is given by
```

$$RC(C,Temp) = (1-C)*exp[\gamma*(1-1/Temp)]$$

```
where the parameter GAMMA is related to the activation energy of the reaction.
```

```
The gas is initially at a temperature of 1, in our normalized units, with convective cooling at the tube surface coupled to a cooling bath at a temperature of 0.92.
```

```
The problem is cylindrically symmetric about the tube axis. Because of the reaction the axis of the tube will remain hotter than the periphery, and eventually the reaction will ignite on the tube axis, sending completion and temperature fronts propagating out toward the wall. For small GAMMA, these fronts are gentle, but for GAMMA greater than about twelve the fronts becomes very steep and completion is reached rapidly
```


and sharply creating very rapid transition from a very high reaction rate reaction rate to a zero reaction rate. The adaptive gridding and adaptive evolution 'time' stepping capabilities of FlexPDE come into play in this extreme nonlinear and process nonisotropic problem, allowing a wave of dense gridding in time to accompany the completion and temperature fronts across the tube.

In this problem we introduce a heating strip on the two vertical faces of the tube, for a width of ten degrees of arc. These strips are held at a temperature of 1.2, not much above the initial gas temperature. The initial timesteps are held small while the abrupt temperature gradient at the heating strips diffuses into the gas.

As the cross-section under study moves down the reactor, the heat generated by the reaction combines with the heat diffusing in from the strip heater to cause ignition at a point on the x-axis and cause the completion front and temperature front to propagate from this point across the cross-section.

We model only a quarter of the tube, with mirror planes on the X- and Y-axes. The calculation models a cross-section of the tube, and this cross-section flows with the gas down the tube.

The "cycle=10" plots allow us to see the flame-front propagating across the volume, which happens very quickly, and would not be seen in a time-interval sampling.

While the magnitudes of the numerical values used for the various constants including gamma are representative of those found with real reactions and real open tube reactors they are not meant to represent a particular reaction or reactor.


```

}
title
  'Open Tube Chemical Reactor with Strip Heater'
select
  painted      { make color-filled contour plots }
variables
  Temp(threshold=0.1)
  C(threshold=0.1)
definitions
  LZ = 1
  r1=1
  heat=0
  gamma = 16
  beta = 0.2
  betap = 0.3
  BI = 1
  T0 = 1
  Tw = 0.92
  { the very nasty reaction rate: }
  RC = (1-C)*exp(gamma-gamma/Temp)
  xev=0.96      { some plot points }
  yev=0.25
initial values
  Temp=T0
  C=0
equations
  Temp:    div(grad(Temp)) + heat + betap*RC = dt(Temp)
  C:      div(grad(C)) + beta*RC = dt(C)
boundaries
  region 1
  start (0,0)

  { a mirror plane on x-axis }
  natural(Temp) = 0
  natural(C) = 0
  line to (r1,0)

  { "Strip Heater" at fixed temperature }

```

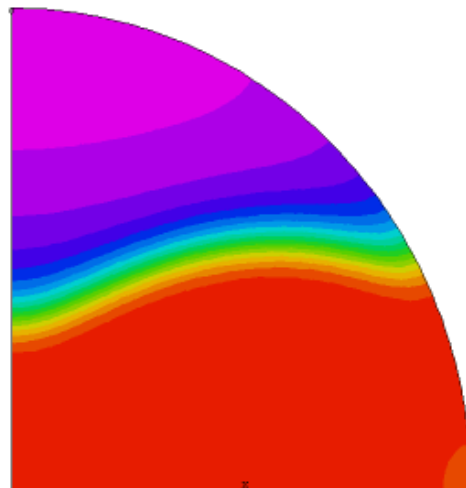

```

{ ramp the boundary temp in time, because discontinuity is costly to diffuse }
value(Temp)=T0 + 0.2*uramp(t,t-0.05)

natural(C)=0          { no mass flow on strip heater }
arc(center=0,0) angle 5

{ convective cooling and no mass flow on outer arc }
natural(Temp)=BI*(TW-Temp)
natural(C)=0
arc(center=0,0) angle 85

{ a mirror plane on Y-axis }
natural(Temp) = 0
natural(C) = 0
line to (0,0) to close

time 0 to 1

plots
for cycle=10          { watch the fast events by cycle }
  grid(x,y)
  contour(Temp) fixed range (0.9,2.5)
  contour(C) as "Completion" fixed range(0,1.1)
}
for t= 0.1 by 0.05 to 0.2 by 0.01 to 0.3 0.5 endtime { show some surfaces during burn
}
  contour(Temp) fixed range (0.9,2.5)
  surface(Temp) fixed range (0.9,2.5)
  contour(C) as "Completion" fixed range(0,1.1)
  surface(C) as "Completion" fixed range(0,1.1)

histories
history(Temp) at (0,0) (xev/2,yev/2) (xev,yev) (yev/2,xev/2) (yev,yev)
history(C) at (0,0) (xev/2,yev/2) (xev,yev) (yev/2,xev/2) (yev,yev) as "Completion"
end

```

5.1.1.2 melting

```
{ MELTING.PDE
```

This problem shows the application of FlexPDE to the melting of metal.

We choose as our system variables the temperature, "temp", and the fraction of material which is solid at any point, "solid".

The temperature is given by the heat equation,

$$\rho \cdot c_p \cdot dt(\text{temp}) - \text{div}(\lambda \cdot \text{grad}(\text{temp})) = \text{Source}$$

where c_p is the heat capacity, ρ the density and λ the conductivity.

The latent heat, Q_m , is an amount of heat released as "solid" changes from zero to one. We have $Q_m = \int_0^1 (dH/d\text{Solid}) \cdot d\text{Solid}$, or assuming $dH/d\text{Solid}$ is constant, $dH/d\text{Solid} = Q_m$. Then heat source from freezing is

$$dH/dt = (dH/d\text{Solid}) \cdot (d\text{Solid}/dt) = Q_m \cdot dt(\text{Solid}).$$

We assume that the solid fraction can be represented by a linear ramp from one down to zero as the temperature passes from $(T_m - T_0/2)$ to $(T_m + T_0/2)$.

$$\text{solid} = \begin{cases} 1 & \text{when } \text{temp} < T_m - T_0 \\ (T_m + T_0/2 - \text{temp})/T_0 & \text{when } T_m - T_0 \leq \text{temp} \leq T_m + T_0 \\ 0 & \text{when } \text{temp} > T_m + T_0 \end{cases}$$

where T_m is the melting temperature, and T_0 is a temperature range over which the melting transition occurs. Since there are no spatial derivatives in this equation, we introduce a diffusion term with small coefficient to act as a noise filter.

The particular problem addressed here is a disk of cold solid material immersed in a bath of liquid. The initial temperatures are such that material

first freezes onto the disk, but after equilibrium is reached all the material is liquid. The outer boundary is insulated.

Since the initial condition is a discontinuous distribution, we use a separate **REGION**^[248] to define the cold initial disk, so that the grid lines will follow the shape. We also add a **FEATURE**^[249] bounding the disk to help the gridded define the abrupt transition. **SELECT**^[197] **SMOOTHINIT**^[197] helps minimize interpolator overshoots.

```

}
TITLE
'Melting Metal'

COORDINATES
cylinder('r','z')

SELECT
smoothinit
threads=2

VARIABLES
temp(threshold=1)
solid(threshold=0.01)

DEFINITIONS

Qm= 225000      { latent heat }
Tm=1850        { Melting temperature }
T0= 20         { Melting interval +- T0 }
temp_liq=2000  { initial liquid temperature }
temp_sol=400   { initial solid temperature }
Tinit

R_inf = 0.7     { Domain Radius m}

{ plate }
d=0.05
dd = d/5       { a defining layer around discontinuity }
R_Plate=0.15

K = 30+4.5e-5*(temp-1350)^2 { Conductivity }
rho=2500        { Density kg/m3 }
cp = 700        { heat capacity }

INITIAL VALUES
temp=Tinit
solid = 0.5*erfc((tinit-Tm)/T0)

EQUATIONS
temp: rho*cp*dt(temp) - div(K*grad(temp)) = Qm*dt(solid)
solid: solid - 1e-6*div(grad(solid)) = RAMP((temp-Tm), 1, 0, T0)

BOUNDARIES

region 'Outer'
Tinit = temp_liq
start 'outer' (0,-R_inf)
value(temp)= temp_liq      arc(center=0,0) angle 180
natural(temp)=0           line to close

region 'Plate'
Tinit = temp_sol
start(0,0)
mesh_spacing=dd
line to (R_Plate,0) to (R_Plate,d) to (0,d) to close

TIME 0 by 1e-5 to 600

MONITORS
for cycle=10
grid(r,z) zoom (0,-0.1,0.25,0.25)
elevation(temp) from(0.1,-0.1) to (0.1,0.15) range=(0,2000)
elevation(solid) from(0.1,-0.1) to (0.1,0.15) range=(0,1)

PLOTS
for t= 0 1e-4 1e-3 1e-2 0.1 1 10 by 10 to 100 by 100 to 300 by 300 to endtime

```

```

contour(temp)      range=(0,2000)
contour(temp)      zoom (0,-0.2,0.45,0.45) range=(0,2000)
elevation(temp)    from(0.1,-0.1) to (0.1,0.15) range=(0,2000)
contour(solid)     range=(0,1)
contour(solid)     zoom (0,-0.2,0.45,0.45) range=(0,1)
surface(solid)     zoom (0,-0.2,0.45,0.45) range=(0,1) viewpoint(1,-1,30)
elevation(solid)   from(0.1,-0.1) to (0.1,0.15) range=(0,1)

```

HISTORIES

```

history(temp) at (0.051,d/2) (0.075,d/2) (R_plate,d/2)
history(temp) at (0.051,d) (0.075,d) (R_plate,d)
history(solid) at (0.051,d/2) (0.075,d/2) (R_plate,d/2)
history(solid) at (0.051,d) (0.075,d) (R_plate,d)
history(integral(cp*temp+Qm*(1-solid))) as "Total Energy"

```

END

5.1.1.3 reaction

```
{ REACTION.PDE
```

This example shows the application of FlexPDE to the solution of reaction-diffusion problems.

We describe three chemical components, A,B and C, which react and diffuse, and a temperature, which is affected by the reactions.

- I) A combines with B to form C, liberating heat.
- II) C decomposes to A and B, absorbing heat. The decomposition rate is temperature dependent.
- III) A, B, C and Temperature diffuse with differing diffusion constants.

The boundary of the vessel is held cold, and heat is applied to a circular exclusion patch near the center, intended to model an immersion heater.

A, B and C cannot diffuse out the boundary.

The complete equations including the Arrhenius terms that describe the system are:

$$\begin{aligned}
& \text{div}(Kt*\text{grad}(\text{Temp})) + \text{heat} + K1*\exp(-H1/(\text{Temp}+273))*\text{eabs}*A*B \\
& \quad - K2*\exp(-H2/(\text{Temp}+273))*\text{eabs}*C*(\text{Temp}+273) = 0 \\
& \text{div}(Ka*\text{grad}(A)) - K1*\exp(-H1/(\text{Temp}+273))*A*B \\
& \quad + K2*\exp(-H2/(\text{Temp}+273))*C*(\text{Temp}+273) = 0 \\
& \text{div}(Kb*\text{grad}(B)) - K1*\exp(-H1/(\text{Temp}+273))*A*B \\
& \quad + K2*\exp(-H2/(\text{Temp}+273))*C*(\text{Temp}+273) = 0 \\
& \text{div}(Kc*\text{grad}(C)) + K1*\exp(-H1/(\text{Temp}+273))*A*B \\
& \quad - K2*\exp(-H2/(\text{Temp}+273))*C*(\text{Temp}+273) = 0
\end{aligned}$$

where Kt,Ka,Kb and Kc are the diffusion constants, EABS is the heat liberated when A and B combine, and HEAT is any internal heat source.

Notice that the system is non-linear, as it contains terms involving A*B and C*Temp.

There are an infinite number of solutions to these equations, differing only in the total particle count. In reality, since particles are conserved, the final solution is uniquely determined by the initial conditions. But this fact is not embodied in the steady-state equations. The only way to impose this condition on the steady-state system is through an integral constraint equation, which describes the conservation of total particle number.

```
}
```

```
title "Chemical Beaker"
```

```
variables { declare the system variables }
temp,a,b,c
```

```
definitions
kt = 0.001 { define the diffusivities }
```

```

ka = 0.005
kb = 0.02
kc = 0.01

heat = 0      { define the volume heat source }
eabs = 0.0025 { define the reaction energy }

K1 = 1      { Reaction rate coef for A + B -> C }
H1 = 10     { Activation energy/K for A + B -> C }
K2 = 0.0025 { Reaction rate coef for C -> A + B }
H2 = 200    { Activation energy/K for C -> A + B }

a0 = 0.1    { define the initial distribution }
b0 = 0.1    { (we will need this for the constraint) }
c0 = 0.01

tabs = Temp+273
tfac1 = K1*exp(-H1/tabs)
tfac2 = K2*exp(-H2/tabs)

initial values { Initialize the variables }
temp = 100*(1-x^2-y^2)
a = a0
b = b0
c = c0

equations      { define the equations }
temp: div(kt*grad(Temp)) + heat + tfac1*eabs*a*b - tfac2*eabs*c*tabs = 0
a:      div(ka*grad(a)) - tfac1*a*b + tfac2*c*tabs = 0
b:      div(kb*grad(b)) - tfac1*a*b + tfac2*c*tabs = 0
c:      div(kc*grad(c)) + tfac1*a*b - tfac2*c*tabs = 0

constraints    { demand particle conservation }
integral(a+b+2*c) = integral(a0+b0+2*c0)

boundaries
Region 1
{ the cold outer boundary - impermeable to the chemicals }
start(0,-1)
value(temp)= 0
natural(a) = 0
natural(b) = 0
natural(c) = 0
arc to (1,0) to (0,1) to (-1,0) to close


{ the hot inner boundary - also impermeable to the chemicals }
start(-0.2,0)
value(temp)= 100
natural(a) = 0
natural(b) = 0
natural(c) = 0
arc(center=-0.2,-0.2) angle 360

monitors
contour(temp)
contour(a)
contour(b)
contour(c)

plots
contour(temp)
contour(a)
contour(b)
contour(c)
surface(temp) as "temperature"
surface(a) as "A-concentration"
surface(b) as "B-concentration"
surface(c) as "C-concentration"

end

```

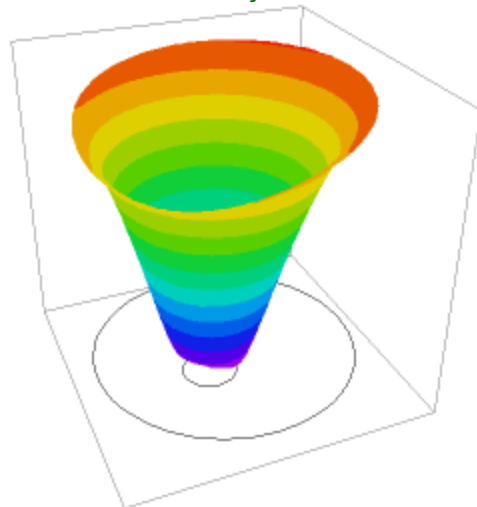

5.1.2 Control

5.1.2.1 control_steady

```
{ CONTROL_STEADY.PDE

This example shows the use of a GLOBAL VARIABLE[213] in a control application.
It is analogous to the example USAGE/OPTIMIZATION/POWER\_CONTROL.PDE[653].
We wish to find the required power input to a heater, such that the resulting
average temperature over the domain is a specified value.

Notice that the equation nominally defining power does not explicitly reference
the power variable, but is coupled through the heat term in the temperature
equation.
}

TITLE "steady-state Control test"

VARIABLES
temp      { The temperature field }

GLOBAL VARIABLES
power     { a single value for input power }

DEFINITIONS
setpoint=700      { the desired average temperature }
skintemp=325     { fixed outer boundary temperature }
k=1              { conductivity }
heat=0           { the heat function for the temperature.
                 it is non-zero only in the heater region }

tcontrol=integral(temp)/integral(1) { the control function, average temperature }
{ tcontrol=val(temp,0,0)           -- an alternative control method, unused }

INITIAL VALUES
temp = setpoint
power= 100      { initial guess for power }

EQUATIONS
temp:  div(-k*grad(temp))-heat = 0  { diffusion of temperature field }
power: tcontrol = setpoint          { single equation defining power }

BOUNDARIES

REGION 'Insulation'
k=0.1
heat=0
start(-4,-4)
value(temp)=skintemp
line to (4,-4) to (4,4) to (-4,4) to close

REGION 'Heater'
k=50
heat=power
start(-1,-1) line to (1,-1) to (1,1) to (-1,1) to close

MONITORS
contour(temp)
report power
report tcontrol

PLOTS
contour(temp)
report power
report power*integral(1,'Heater') as "Total Power"
report tcontrol as "Average Temp"
elevation(temp) from(-4,0) to (4,0)
elevation(temp) from(-4,-4) to (4,4)
summary
report power*integral(1,'heater') as "Total Power needed to establish an average
temperature of 700 "

END
```

5.1.2.2 control_transient

```
{ CONTROL_TRANSIENT.PDE
```

This example shows the use of a [GLOBAL VARIABLE](#)^[213] in a control application. We wish to find the required power input to a heater, such that the resulting average temperature over the domain is a specified value.

The temperature on the outer surface is prescribed, with a time-sinusoidal oscillation.

The input power is driven by a time-relaxation equation. The coefficient of the right hand side is the reciprocal of the response time of the power.

This problem is a modification of [CONTROL_STEADY.PDE](#)^[377], showing the use of time-dependent GLOBAL equations.

```
}
```

```
TITLE "Time-dependent Control test"
```

```
VARIABLES
```

```
temp      { The temperature field }
```

```
GLOBAL VARIABLES
```

```
power     { a single value for input power }
```

```
DEFINITIONS
```

```
setpoint = 700      { the desired average temperature }
skintemp = 325+20*sin(t) { oscillating outer boundary temperature }
responsetime = 0.1  { response time of the power input }
k=1      { conductivity }
heat=0    { the heat function for the temperature.
           it is non-zero only in the heater region }
```

```
{ the control function, average temperature }
tcontrol = integral(temp)/integral(1)
{ tcontrol = val(temp,0,0) -- an alternative control method, which tracks the
  temperature value at a specified point (unused here) }
```

```
{initial guess for temperature distribution }
tinit1=min(1767-400*abs(x), 1767-400*abs(y))
```

```
INITIAL VALUES
```

```
temp=min(1500,tinit1)
power=137      { initial guess for power }
```

```
EQUATIONS
```

```
temp: div(-k*grad(temp))-heat = 0 { diffusion of temperature field }
{ single equation defining power. response time is 1/100 }
power: dt(power) = (setpoint - tcontrol)/responsetime
```

```
BOUNDARIES
```

```
REGION 'Insulation'
k=0.1
heat=0
start(-4,-4)
value(temp)=skintemp
line to (4,-4) to (4,4) to (-4,4) to close
```

```
REGION 'Heater'
k=50
heat = power
start(-1,-1) line to (1,-1) to (1,1) to (-1,1) to close
```

```
TIME 0 to 20 by 1e-4
```

```
PLOTS
```

```
for cycle=10
contour(temp)
report power
report tcontrol as "Avg Temp"
```

```
HISTORIES
```

```
History(tcontrol-setpoint, skintemp-325) as "Skin Temperature and Error"
```

```
History(tcontrol-setpoint) as "Controlled temperature error"
History(power)
```

```
END
```

5.1.3 Electricity

5.1.3.1 3d_capacitor

```
{ 3D_CAPACITOR.PDE
```

This problem is an extension of ["3D_EXTRUSION_SPEC.PDE"](#)⁴⁸⁴, and shows a capacitor formed by two metal strips of different size separated by a sheet of dielectric.

```
}
```

```
TITLE '3D Capacitor'
```

```
COORDINATES
  CARTESIAN3
```

```
SELECT
  { rename the axes }
  alias(x) = "X(mm)"
  alias(y) = "Y(mm)"
  alias(z) = "Z(mm)"
  { paint all contours }
  PAINTED
```

```
VARIABLES
  V
```

```
DEFINITIONS
```

```
Kdiel= 6
Kmetal=1e6
Kair=1
K = Kair { default K to Kair - this will change in some layers/regions }
V0 = 0
V1 = 1
Eps0 = 8.854e-12 { Farads/M }
Eps0mm = 0.001*Eps0 { Farads/mm }
W = integral(0.5*K*eps0mm*grad(V)^2) { Stored Energy }
C = 1.0e6*2*W/(V1-V0)^2 { Capacitance in microFarads }
```

```
EQUATIONS
```

```
V : DIV(K*GRAD(V)) = 0
```

```
EXTRUSION
```


```
SURFACE "Bottom" Z=0
  LAYER "Bottom Air"
SURFACE "Bottom Air - Metal" Z=0.9
  LAYER "Bottom Metal"
SURFACE "Bottom Metal - Dielectric" Z=1
  LAYER "Dielectric"
SURFACE "Top Metal - Dielectric" Z=2
  LAYER "Top Metal"
SURFACE "Top Metal - Air" Z=2.1
  LAYER "Top Air"
SURFACE "Top" Z=3
```

```
BOUNDARIES
```

```
SURFACE "Bottom" NATURAL(V)=0 { Insulators top and bottom }
SURFACE "Top" NATURAL(V)=0
```

```
REGION 1 { this is the outer boundary of the system }
  LAYER "dielectric" K = Kdiel { all other layers default to Kair }
  START(0,0)
  LINE TO (5,0) TO (5,5) TO(0,5) to close
```

```
LIMITED REGION 2 { the larger bottom plate }
  SURFACE "Bottom Air - Metal" VALUE(V)=V0
  SURFACE "Bottom Metal - Dielectric" VALUE(V)=V0
  LAYER "Bottom Metal" K = Kmetal
  START(1,0)
```

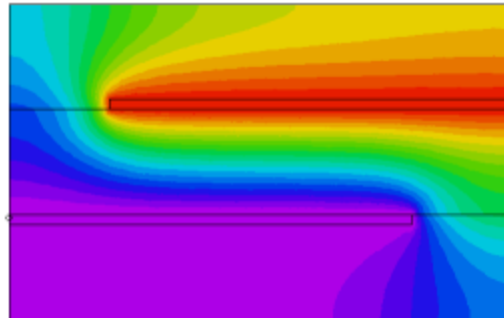


```

LAYER "Bottom Metal" VALUE(V)=V0
LINE TO (4,0)
LAYER "Bottom Metal" NATURAL(V)=0
Line TO (4,4) TO (1,4) to close

LIMITED REGION 3 { the smaller top plate}
SURFACE "Top Metal - Dielectric" VALUE(V)=V1
SURFACE "Top Metal - Air" VALUE(V)=V1
LAYER "Top Metal" K = Kmetal
START(2,1)
LINE TO (3,1) TO (3,5)
LAYER "Top Metal" VALUE(V)=V1
LINE TO (2,5)
LAYER "Top Metal" NATURAL(V)=0
LINE to close

MONITORS
CONTOUR(V) ON Y=2.5

PLOTS
GRID(X,Z) ON Y=2.5
CONTOUR(V) ON X=2.5 REPORT(C) as "Capacitance(uF)"
CONTOUR(V) ON Y=2.5 REPORT(C) as "Capacitance(uF)"
CONTOUR(V) ON Z=1.5 REPORT(C) as "Capacitance(uF)"
CONTOUR(1/K) ON Y=2.5 as "Material"

END

```

5.1.3.2 3d_capacitor_check

```
{ 3D_CAPACITOR_CHECK.PDE
```

```

This problem shows a parallel-plate capacitor, and compares the computed
capacitance to the ideal value.
}

```

```
TITLE '3D Capacitor validation'
```

```
COORDINATES
CARTESIAN3
```

```
SELECT
{ rename the axes }
alias(x) = "X(mm)"
alias(y) = "Y(mm)"
alias(z) = "Z(mm)"
{ paint all contours }
PAINTED
```

```
VARIABLES
V
```

```
DEFINITIONS
Kmetal=1e6
kdiel = 88 { Water @ 0 C }
Kair=1
```

```

K = Kair { default K to Kair - this will change in some layers/regions }
V0 = 0
V1 = 1

```

```

X0 = 2   Xwid = 3   X1 = X0+Xwid   X2 = X1+X0   Xc = X2/2
Y0 = 2   Ywid = 3   Y1 = Y0+Ywid   Y2 = Y1+Y0   Yc = Y2/2
Z0 = 3   Zdist=0.1 Zthick=0.1     Zc = Z0+Zdist/2

```


```

Eps0 = 8.854e-12 { Farads/M }
Eps0mm = 0.001*Eps0 { Farads/mm }
W = integral(0.5*K*eps0mm*grad(V)^2) { Stored Energy }
C = 1.0e6*2*W/(V1-V0)^2 { Capacitance in microFarads }
C0 = 1.0e6*Kdiel*eps0mm*Xwid*Ywid/Zdist

```

```
EQUATIONS
V : DIV(K*GRAD(V)) = 0
```

```
EXTRUSION
```

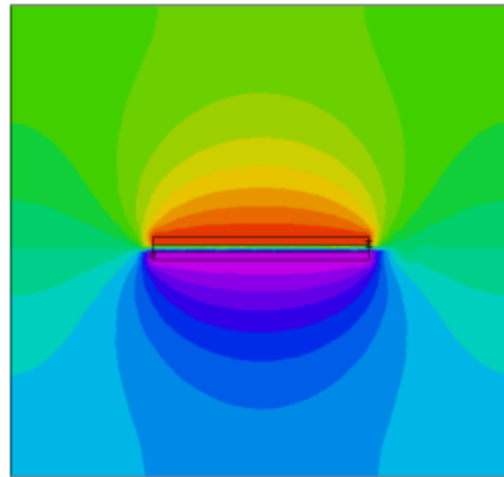

```

SURFACE "Bottom" Z=0
LAYER "Bottom Air"
SURFACE "Bottom Air - Metal" Z=z0-Zthick
LAYER "Bottom Metal"
SURFACE "Bottom Metal - Dielectric" Z=z0
LAYER "Dielectric"
SURFACE "Top Metal - Dielectric" Z=z0+zdist
LAYER "Top Metal"
SURFACE "Top Metal - Air" Z=z0+zdist+zthick
LAYER "Top Air"
SURFACE "Top" Z=z0+zthick+zdist+zthick+z0

BOUNDARIES
SURFACE "Bottom" natural(v)=0
SURFACE "Top" natural(v)=0

REGION 1 { this is the outer boundary of the system }
START(0,0)
LINE TO (x2,0) TO (x2,y2) TO(0,y2) to close

LIMITED REGION 2 { plates and dielectric }
SURFACE "Bottom Air - Metal" VALUE(v)=v0
SURFACE "Bottom Metal - Dielectric" VALUE(v)=v0
SURFACE "Top Metal - Dielectric" VALUE(v)=v1
SURFACE "Top Metal - Air" VALUE(v)=v1
LAYER "Bottom Metal" K = Kmetal
LAYER "Dielectric" K = Kdiel
LAYER "Top Metal" K = Kmetal
START(x0,y0)
LAYER "Bottom Metal" VALUE(v)=v0
LAYER "Top Metal" VALUE(v)=v1
LINE TO (x1,y0) TO (x1,y1) TO (x0,y1) to close

MONITORS
CONTOUR(v) ON Y=Yc
REPORT(C) as "Capacitance(uF)"
REPORT(C0) as "Cideal(uF)"
CONTOUR(magnitude(grad(v))) ON Y=Yc as "Em"
ZOOM(x0-zthick,z0-2*zthick, 5*zthick,5*zthick)

PLOTS
CONTOUR(v) ON X=Xc
REPORT(C) as "Capacitance(uF)"
REPORT(C0) as "Cideal(uF)"
CONTOUR(v) ON Y=Yc
REPORT(C) as "Capacitance(uF)"
REPORT(C0) as "Cideal(uF)"
CONTOUR(v) ON Z=Zc
REPORT(C) as "Capacitance(uF)"
REPORT(C0) as "Cideal(uF)"
CONTOUR(v) ON Y=Yc
ZOOM(x0-zthick,z0-2*zthick, 5*zthick,5*zthick)
GRID(x,z) ON Y=Yc
GRID(x,y) ON Z=Zc
CONTOUR(log10(K)) ON Y=Yc PAINTED as "Material"

SUMMARY
REPORT(C) as "Capacitance(uF)"
REPORT(C0) as "Cideal(uF)"
REPORT(w) as "Stored Energy"

END

```

5.1.3.3 3d_dielectric

```

{ 3D_DIELECTRIC.PDE
  This problem is a 3D extension of DIELECTRIC.PDE 383
}

title
'Electrostatic Potential'

coordinates
cartesian3

```

```

variables
  V

definitions
  eps = 1

equations
  div(eps*grad(V)) = 0 { Potential equation }

extrusion
  surface "bottom" z=0
  surface "dielectric_bottom" z=0.1
  layer "dielectric"
  surface "dielectric_top" z=0.2
  surface "top" z=0.3

boundaries

  surface "bottom" natural(V)=0
  surface "top" natural(V)=0

  region 1
    start (0,0)
    value(V) = 0      line to (1,0)
    natural(V) = 0    line to (1,1)
    value(V) = 100   line to (0,1)
    natural(V) = 0    line to close

  region 2
    layer "dielectric" eps = 50
    start (0.4,0.4)
    line to (0.8,0.4) to (0.8,0.8) to (0.6,0.8)
    to (0.6,0.6) to (0.4,0.6) to close

monitors
  contour(V) on z=0.15 as 'Potential'

plots
  contour(V) on z=0.15 as 'Potential'
  vector(-dx(V),-dy(V)) on z=0.15 as 'Electric Field'
  contour(V) on x=0.5 as 'Potential'

end

```

5.1.3.4 capacitance

```

{ CAPACITANCE.PDE
  See discussion in Help section "Electromagnetic Applications | Electrostatics"[304].
}

TITLE 'Capacitance per Unit Length of 2D Geometry'
{ 17 Nov 2000 by John Trenholme }

SELECT
  errlim 1e-4
  thermal_colors on
  plotintegrate off
VARIABLES
  V
DEFINITIONS
  mm = 0.001          ! meters per millimeter
  Lx = 300 * mm      ! enclosing box dimensions
  Ly = 150 * mm
  b = 0.7            ! radius of conductor / radius of entire cable
  x0 = 0.25 * Lx    ! position and size of cable raised to fixed potential
  y0 = 0.5 * Ly
  r0 = 15 * mm
  x1 = 0.9 * Lx
  y1 = 0.3 * Ly
  r1 = r0
  epsr                ! relative permittivity of any particular region
  epsd = 3           ! relative permittivity of cable dielectric

```

```

eps0 = 8.854e-12      ! permittivity of free space
eps = epsr * eps0
v0 = 1                ! fixed potential of the cable

energyDensity = dot( eps * grad( v), grad( v))/2  ! field energy density

EQUATIONS
div( eps * grad( v)) = 0

BOUNDARIES
region 1 'inside' epsr = 1
start 'outer' ( 0, 0) value( v) = 0
line to ( Lx, 0) line to ( Lx, Ly) line to ( 0, Ly) line to close
region 2 'diel0' epsr = epsd
start 'dieb0' ( x0 + r0, y0)
arc ( center = x0, y0) angle = 360
region 3 'cond0' epsr = 1
start 'conb0' ( x0 + b * r0, y0) value( v) = v0
arc ( center = x0, y0) angle = 360
region 4 'diel1' epsr = epsd
start 'dieb1' ( x1 + r1, y1)
arc ( center = x1, y1) angle = 360
region 5 'cond1' epsr = 1000 ! fake metallic conductor
start 'conb1' ( x1 + b * r1, y1)
arc ( center = x1, y1) angle = 360

PLOTS
grid(x,y) zoom(x0-1.1*r0, y0-1.1*r0, 2.2*r0) ! 3-term zoom generates a square
window }
contour( v) as 'Potential'
contour( v) as 'Potential Near Driven Conductor'
zoom(x0-1.1*r0, y0-1.1*r0, 2.2*r0)
contour( v) as 'Potential Near Floating Conductor'
zoom(x1-1.1*r1, y1-1.1*r1, 2.2*r1)
elevation( v) as 'Potential from wall to Driven Conductor' from ( 0,y0) to ( x0, y0)
elevation( v) as 'Potential from Driven to Floating Conductor' from ( x0, y0) to ( x1,
y1)
vector( grad( v)) as 'Field'
contour( energyDensity) as 'Field Energy Density' png(3072,2)
contour( energyDensity) as 'Field Energy Density Near Floating Conductor'
zoom(x1-1.2*r1, y1-1.2*r1, 2.4*r1)
elevation( energyDensity) from ( x1 - 2 * r1, y1) to ( x1 + 2 * r1, y1)
as 'Field Energy Density Near Floating Conductor'
contour( epsr) paint on "inside" as 'Definition of Inside'

SUMMARY png(3072,2)
report sintegral( normal( eps * grad( v)), 'conb0', 'diel0') as 'Driven charge'
report sintegral( normal( eps * grad( v)), 'outer', 'inside') as 'Outer charge'
report sintegral( normal( eps * grad( v)), 'conb1', 'diel1') as 'Floating charge'
report sintegral( normal( eps * grad( v)), 'conb0', 'diel0') / v0 as 'Capacitance
(f/m)'
report integral( energyDensity, 'inside') as 'Energy (J/m)'
report 2 * integral( energyDensity, 'inside') / v0^2 as 'Capacitance (f/m)'
report 2 * integral( energyDensity, 'inside') / ( v0 * sintegral( normal( eps *
grad( v)), 'conb0', 'diel0'))
as 'cap_by_energy / cap_by_charge'

END

```

5.1.3.5 dielectric

```

{ DIELECTRIC.PDE

This problem shows the electrostatic potential and the electric field
in a rectangular domain with an internal region in which the dielectric
constant is fifty times that of the surrounding material.
The electric field E is -grad(V), where V is the electrostatic potential.

See also FIELDMAP.PDE[384]
}

title 'Electrostatic Potential'

```

```

variables v
definitions
  eps = 1
equations
  div(eps*grad(V)) = 0
boundaries
  region 1
    start (0,0)
    value(V) = 0   line to (1,0)
    natural(V) = 0 line to (1,1)
    value(V) = 100 line to (0,1)
    natural(V) = 0 line to close
  region 2
    eps = 50
    start (0.4,0.4)
    line to (0.8,0.4) to (0.8,0.8)
    to (0.6,0.8) to (0.6,0.6)
    to (0.4,0.6) to close
monitors
  contour(V) as 'Potential'
plots
  grid(x,y)
  contour(V) as 'Potential'
  vector(-dx(V),-dy(V)) as 'Electric Field'
end

```

5.1.3.6 fieldmap

```
{ FIELDMAP.PDE
```

This example shows the use of the adjoint equation to display Electric field lines and to compare these to the vector plot of E.

The problem shows the electrostatic potential and the electric field in a rectangular domain with an internal region in which the dielectric constant is five times that of the surrounding material. The electric field E is $-\text{grad}(V)$, where V is the electrostatic potential.

The adjoint equation method of generating field lines will only work if there are no internal sources (charged bodies).

See also DIELECTRIC.PDE

```
}
```

```

title
'Electrostatic Potential and Electric Field'

variables
V
Q

definitions
eps = 1

equations
{ Potential equation }
V: div(eps*grad(V)) = 0
then
{ adjoint equation }
Q: div(grad(Q)/eps) = 0

boundaries
region 1
start (0,0)
value(V) = 0
natural(Q) = tangential(grad(V))
line to (1,0)
natural(V) = 0
natural(Q) = tangential(grad(V))
line to (1,1)
label 'v100'
value(V) = 100
natural(Q) = tangential(grad(V))
line to (0,1)
endlabel 'v100'
natural(V) = 0
natural(Q) = tangential(grad(V))
line to close


region 2
eps = 5
start (0.4,0.4)
line to (0.8,0.4) to (0.8,0.8) to (0.6,0.8)
to (0.6,0.6) to (0.4,0.6) to close

monitors
contour(V) as 'Potential'
contour(Q) as 'Field'

plots
grid(x,y)
contour(V) as 'Potential'
contour(Q) as 'Adjoint Field Lines'
contour(V,Q) as 'Potential and Adjoint Field Lines'
vector(-dx(V),-dy(V)) as 'Electric Field'
vector(-dx(V),-dy(V)) norm notips as 'Electric Field'
fieldmap(V) on "v100" fieldlines=24 points=200 as "Field Map"
contour fieldmap(V) on "v100" fieldlines=24 points=200 as "Potential and Field Map"

end

```

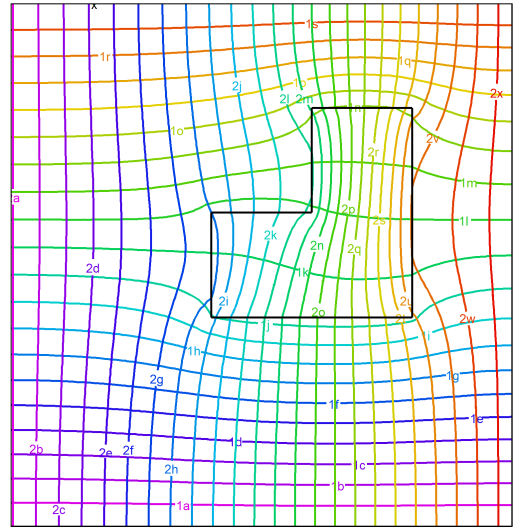

5.1.3.7 plate_capacitor

```
{ PLATE_CAPACITOR.PDE
```

This problem computes the field around a plate capacitor.
(adapted from "Fields of Physics on the PC" by Gunnar Backstrom)

```
}
```

```


title 'Plate capacitor'
variables
  u
definitions
  Lx=1      Ly=1
  delx=0.5  d=0.2
  ddy=0.2*d
  Ex=-dx(u)   Ey=-dy(u)
  Eabs=sqrt(Ex^2+Ey^2)
  eps0=8.854e-12
  eps
  DEx=eps*Ex  DEy=eps*Ey
  Dabs=sqrt(DEx^2+DEy^2)
  zero=1.e-15
equations
  u : div(-eps*grad(u)) = 0
boundaries
  Region 1
  eps=eps0
  start "V0" (-Lx,-Ly)
  Load(u)=0
  line to (Lx,-Ly) to (Lx,Ly) to (-Lx,Ly) to close

  start "V1" (-delx/2,-d/2)
  value(u)=0
  line to (delx/2,-d/2) to (delx/2,-d/2-ddy) to (-delx/2,-d/2-ddy)
  to close

  start(-delx/2,d/2+ddy)
  value(u)=1
  line to (delx/2,d/2+ddy) to (delx/2,d/2) to(-delx/2,d/2)
  to close

  Region 2
  eps = 7.0*eps0
  start(-delx/2,-d/2)
  line to (delx/2,-d/2) to (delx/2,d/2) to(-delx/2,d/2)
  to close
monitors
  contour(u)
plots
  contour(u)
  surface(u)
  vector(dx(u),dy(u))
  fieldmap(u) on "V1" fieldlines=40 as "Field Map"
  contour fieldmap(u) on "V1" fieldlines=40 points=400 as "Potential and Field Map"
end

```

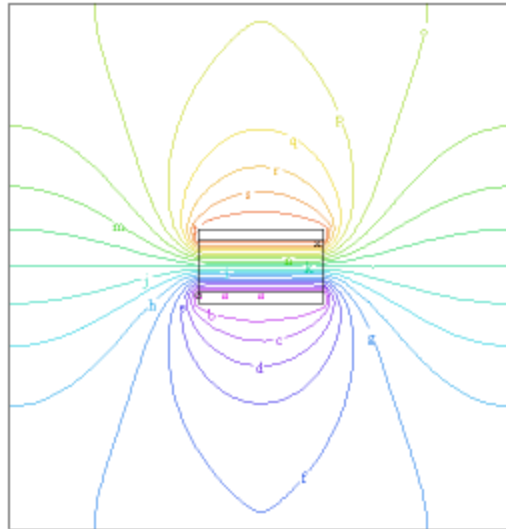

5.1.3.8 space_charge

```

{ SPACE_CHARGE.PDE
  This problem describes the electric field in an insulated cardioid-like
  chamber due to an electrode at the tip of the cardioid and a localized
  space charge near the center of the body.

  Adaptive grid refinement detects the space charge and refines
  the computation mesh to resolve its shape.
}
title "Electrostatic Potential with probe and space charge"

```

```

select errlim = 1e-4

definitions
  bigr = 1
  smallr = 0.4
  x0 = sqrt(bigr^2/2)
  y0 = x0
  r = sqrt(x^2+y^2)
  { define the electrode center }
  xc = sqrt((bigr-smallr)^2/2)
  yc = xc
  { A space charge source at -xc }
  source = x/((x+xc)^2 + y^2 + 0.001)
  k=0.1

variables
  V

equations
  V : div(k*grad(V)) + source = 0

boundaries
  region 1
  start(xc,yc-smallr)
  natural(V) = 0 { -- insulated outer boundary }
  arc(center=xc,yc) to (x0,y0)
  arc(center=0,0) angle 270
  arc(center=xc,-yc) to (xc,smallr-yc)
  value(V)=1 { -- applied voltage = 1 on tip }
  arc(center=xc,0) angle -180 to close

plots
  grid(x,y)
  contour(V) as "Potential"
  contour(V) zoom(0.2,-0.2,0.4,0.4)
  surface(V) viewpoint (0,10,30)
  surface(V) zoom(-0.6,-0.2,0.4,0.4)
  surface(source) zoom(-0.6,-0.2,0.4,0.4)

end

```



5.1.4 Fluids

5.1.4.1 1d_eulerian_shock

```

{ 1D_EULERIAN_SHOCK.PDE
  Comparison with shock tube problem of G.A. Sod
  See 1D\_LAGRANGIAN\_SHOCK.PDE388 for a Lagrangian model of the same problem.
  Ref: G.A. Sod, "A Survey of Several Finite Difference Methods for Systems of
  Nonlinear Hyperbolic Conservation Laws", J. Comp. Phys. 27, 1-31 (1978)
  See also Kershaw, Prasad and Shaw, "3D Unstructured ALE Hydrodynamics with the
  Upwind Discontinuous Finite Element Method", UCRL-JC-122104, Sept 1995.
}

```

TITLE "Sod's Shock Tube Problem - Eulerian"

COORDINATES
cartesian1

SELECT
ngrid=200 { increase the grid density }
regrid=off { disable the adaptive mesh refinement }
errlim=1e-4 { lower the error limit }

VARIABLES
rho(1)
u(1)
P(1)

DEFINITIONS
len = 1


```

gamma = 1.4
smeardist = 0.001 { a damping term to kill unwanted oscillations }
eps = sqrt(gamma)*smeardist { ~ cspeed*dist }

INITIAL VALUES
rho = 1.0 - 0.875*uramp(x-0.49, x-0.51)
u = 0
P = 1.0 - 0.9*uramp(x-0.49, x-0.51)

EQUATIONS
rho: dt(rho) + u*dx(rho) + rho*dx(u) = eps*dxx(rho)
u: dt(u) + u*dx(u) + dx(P)/rho = eps*dxx(u)
P: dt(P) + u*dx(P) + gamma*P*dx(u) = eps*dxx(P)

BOUNDARIES
REGION 1
START(0) point value(u)=0
Line to (len) point value(u)=0

TIME 0 TO 0.375

MONITORS
for cycle=5
  elevation(rho) from(0) to (len)
  elevation(u) from(0) to (len)
  elevation(P) from(0) to (len)
  history(rho) at (0.5)
  history(u) at (0.48) (0.49) (0.5) (0.51) (0.52)
  history(p) at (0.48) (0.49) (0.5) (0.51) (0.52)
  history(deltat)
  grid(x)

PLOTS
for t=0.143, 0.375
  elevation(rho) from(0) to (len)
  elevation(u) from(0) to (len)
  elevation(P) from(0) to (len)
  history(rho) at (0.48) (0.49) (0.5) (0.51) (0.52)
  history(u) at (0.48) (0.49) (0.5) (0.51) (0.52)
  history(p) at (0.48) (0.49) (0.5) (0.51) (0.52)

END

```

5.1.4.2 1d_lagrangian_shock

```

{ 1D_LAGRANGIAN_SHOCK.PDE

This example solves Sod's shock tube problem on a 1D moving mesh.
Mesh nodes are given the local fluid velocity, so the model is fully Lagrangian.

see 1D\_EULERIAN\_SHOCK.PDE387 for an Eulerian model of the same problem.

Ref: G.A. Sod, "A Survey of Several Finite Difference Methods for Systems of
Nonlinear Hyperbolic Conservation Laws", J. Comp. Phys. 27, 1-31 (1978)

See also Kershaw, Prasad and Shaw, "3D Unstructured ALE Hydrodynamics with the
Upwind Discontinuous Finite Element Method", UCRL-JC-122104, Sept 1995.
}

TITLE "Sod's Shock Tube Problem - Lagrangian"

COORDINATES
cartesian1

SELECT
ngrid = 100 { increase the grid density }
regrid = off { disable the adaptive mesh refinement }
errlim = 1e-4 { lower the error limit }

VARIABLES
rho(1)
u(1)
P(1)
xm=move(x)

```

DEFINITIONS

```

len = 1
gamma = 1.4
smearDist = 0.001 { a damping term to kill unwanted oscillations }
eps = sqrt(gamma)*smearDist { ~ cspeed*dist }

v = 0
rho0 = 1.0 - 0.875*uramp(x-0.49, x-0.51)
p0 = 1.0 - 0.9*uramp(x-0.49, x-0.51)

```

INITIAL VALUES

```

rho = rho0
u = 0
P = p0

```

EULERIAN EQUATIONS

```

{ equations are stated as appropriate to the Eulerian (lab) frame.
  FlexPDE will convert to Lagrangian form for moving mesh }
rho: dt(rho) + u*dx(rho) + rho*dx(u) = eps*dxx(rho)
u:   dt(u) + u*dx(u) + dx(P)/rho = eps*dxx(u)
P:   dt(P) + u*dx(P) + gamma*P*dx(u) = eps*dxx(P)
xm:  dt(xm) = u

```

BOUNDARIES

```

REGION 1
START(0) point value(u)=0 point value(xm)=0
line to (len) point value(u)=0 point value(xm)=len

```

TIME 0 TO 0.375

MONITORS

```

for cycle=5
elevation(rho) from(0) to (len) range (0,1)
elevation(u) from(0) to (len) range (0,1)
elevation(P) from(0) to (len) range (0,1)

```

PLOTS

```

for t=0 by 0.02 to 0.143, 0.16 by 0.02 to 0.375
elevation(rho) from(0) to (len) range (0,1)
elevation(u) from(0) to (len) range (0,1)
elevation(P) from(0) to (len) range (0,1)
grid(x)

```

END

5.1.4.3 2d_eulerian_shock

```
{ 2D_EULERIAN_SHOCK.PDE
```

Comparison with shock tube problem of G.A. Sod

See [1D_EULERIAN_SHOCK.PDE](#) ^[387] for a 1D model of the same problem.

Ref: G.A. Sod, "A Survey of Several Finite Difference Methods for Systems of Nonlinear Hyperbolic Conservation Laws", J. Comp. Phys. 27, 1-31 (1978)

See also Kershaw, Prasad and Shaw, "3D Unstructured ALE Hydrodynamics with the Upwind Discontinuous Finite Element Method", UCRL-JC-122104, Sept 1995.

```
}
```

TITLE "Sod's Shock Tube Problem - 2D Eulerian"

SELECT

```

ngrid = 100 { increase the grid density }
regrid = off { disable the adaptive mesh refinement }
errlim = 1e-4 { lower the error limit }

```

VARIABLES

```

rho(1)
u(1)
P(1)

```

DEFINITIONS

```

len = 1
wid = 0.02

```

```

gamma = 1.4
eps = 0.001 {=4*(1/63)^2}

INITIAL VALUES
rho = 1.0 - 0.875*uramp(x-0.49, x-0.51)
u = 0
P = 1.0 - 0.9*uramp(x-0.49, x-0.51)

EQUATIONS
rho: dt(rho)+u*dx(rho) = eps*div(grad(rho)) - rho*dx(u)
u:   dt(u)+u*dx(u) = eps*div(grad(u)) - dx(P)/rho
P:   dt(P)+u*dx(P) = eps*div(grad(P)) - gamma*P*dx(u)

BOUNDARIES
REGION 1
START(0,0)
Line to (len,0)
value(u)=0 line to (len,wid)
Natural(u)=0 line to (0,wid) to close

TIME 0 TO 0.375

MONITORS
for cycle=5
  elevation(rho) from(0,wid/2) to (len,wid/2)
  elevation(u)   from(0,wid/2) to (len,wid/2)
  elevation(P)   from(0,wid/2) to (len,wid/2)
  history(rho)   at (0.5,wid/2)
  history(u)     at (0.48,wid/2) (0.49,wid/2) (0.5,wid/2) (0.51,wid/2) (0.52,wid/2)
  history(p)     at (0.48,wid/2) (0.49,wid/2) (0.5,wid/2) (0.51,wid/2) (0.52,wid/2)
  history(deltat)

PLOTS
for t=0.143, 0.375
  elevation(rho) from(0,wid/2) to (len,wid/2)
  elevation(u)   from(0,wid/2) to (len,wid/2)
  elevation(P)   from(0,wid/2) to (len,wid/2)
  history(rho)   at (0.48,wid/2) (0.49,wid/2) (0.5,wid/2) (0.51,wid/2) (0.52,wid/2)
  history(u)     at (0.48,wid/2) (0.49,wid/2) (0.5,wid/2) (0.51,wid/2) (0.52,wid/2)
  history(p)     at (0.48,wid/2) (0.49,wid/2) (0.5,wid/2) (0.51,wid/2) (0.52,wid/2)

END

```

5.1.4.4 2d_piston_movingmesh

```

{ 2D_PISTON_MOVINGMESH.PDE

  This problem models the flow of a perfect gas in a compressor cylinder.
  The initial gas pressure is chosen as 1e-4 Atm, to show interesting swirling.
  The boundaries of the domain are moved according to the oscillation of the piston,
  while the interior mesh is tensioned within the moving boundaries.
  This results in a mixed Lagrange/Eulerian model, in that the mesh is moving,
  but with different velocity than the fluid.
}
TITLE "Piston"

COORDINATES
ycylinder

SELECT
  regrid=off { disable the adaptive mesh refinement }
  painted    { paint all contours }

DEFINITIONS
my_ngrid = 30 { later applied to the NGRID control and smoother }
stroke = 8 { cylinder stroke cm }
rad = 4 { cylinder bore radius cm }
zraise = 1 { raised height of piston center }
rraise = 3*rad/4 { radius or raised piston center }
gap = 2 { piston/head clearance }
gamma = 1.4

rho0 = 0.001
P0 = 100 { initial pressure (dyne/cm2) = 1e-4 Atm }
visc = 0.15 { kinematic viscosity, cm^2/sec }

```

```

rpm = 1000      { compressor speed }
period = 60/rpm { seconds }
vpeak = (pi*stroke/period)

{ velocity profile: }
vprofile =vpeak*sin(2*pi*t/period)

{ the piston shape: }
zpiston = if r<rraise then zraise else zraise*(rad-r)/(rad-rraise)

{ the time-dependent piston profile: }
zprofile = zpiston+0.5*stroke*(1-cos(2*pi*t/period))
ztop = stroke+gap+zraise { maximum z position }

VARIABLES
rho(threshold = rho0/10)      { gas density }
u(threshold = vpeak/10)      { radial velocity }
v(threshold = vpeak/10)      { axial velocity }
P(threshold = P0/10)         { pressure }
vm(threshold = vpeak/10)     { mesh velocity }
zm=move(z)                   { mesh position }

DEFINITIONS
{ sound speed }
cspeed = sqrt(gamma*P/rho)
cspeed0 = sqrt(gamma*P0/rho0)

{ a smoothing coefficient: }
smoother = cspeed0*(rad/my_ngrid)
evisc = max(visc,smoother)

SELECT
ngrid= my_ngrid

INITIAL VALUES
rho = rho0
u = 0
v = 0
P = P0

EULERIAN EQUATIONS
{ Eulerian gas equations: (FlexPDE will add motion terms) }
rho: dt(rho) + dr(rho*u*r)/r + dz(rho*v) = smoother*div(grad(rho))
u: dt(u) + u*dr(u)+v*dz(u) + dr(P)/rho = evisc*div(grad(u))-evisc*u/r^2
v: dt(v) + u*dr(v)+v*dz(v) + dz(P)/rho = evisc*div(grad(v))
P: dt(P) + u*dr(P)+v*dz(P) + gamma*P*(dr(r*u)/r+dz(v)) = smoother*div(grad(P))
vm: dzz(vm)=0 { balance mesh velocities in z only }
zm: dt(zm)=vm { node positions - move only in z }

BOUNDARIES
{ use a piston and compression chamber with beveled edge, to create a swirl }
REGION 1
START(0,zraise)
value(u)=0 value(v)=vprofile value(vm)=vprofile dt(zm)=vprofile
line to (rraise,zraise) to (rad,0)
value(u)=0 nbc(v) nbc(vm) nbc(zm)
line to (rad,stroke+gap)
value(u)=0 value(v)=0 value(vm)=0 dt(zm)=0
line to (rraise,ztop) to (0,ztop)
value(u)=0 nbc(v) nbc(vm) nbc(zm)
line to close

{ add a diagonal feature to help control cell shapes at upper corner }
FEATURE start(rraise,zraise) line to (rad,stroke+gap)

TIME 0 TO 2*period by 1e-6

PLOTS
for t=0 by period/120 to endtime
{ control the frame size and data scaling to create a useable movie
- the movie can be created by replaying the .PG7 file and selecting
EXPORT MOVIE, or we could add PNG() commands here to create it directly }
grid(r,z) frame(0,0, rad,ztop)
contour(rho) frame(0,0, rad,ztop) fixed range(0,0.01) contours=50 nominmax
contour(u) frame(0,0, rad,ztop) fixed range(-500,500) contours=50
contour(v) frame(0,0, rad,ztop) fixed range(-550,550) contours=50
contour(P) frame(0,0, rad,ztop) fixed range(0,2600) contours=50 nominmax

```

```

vector(u,v) frame(0,0, rad,ztop) fixed range(0,550)
contour(cspeed) frame(0,0, rad,ztop) fixed range(0,610)
contour(magnitude(u,v)/cspeed) frame(0,0, rad,ztop) fixed range(0,1.5)

history(vprofile/vpeak,zprofile/stroke) range(-1,1)
      report(vpeak) report(stroke)
history(globalmax(P), globalmin(P))
history(integral(P))
history(globalmax(rho), globalmin(rho))
history(integral(rho))
history(deltat)

END

```

5.1.4.5 3d_flowbox

```
{ 3D_FLOWBOX.PDE
```

This problem demonstrates the use of FlexPDE in 3D fluid flow. It shows the flow of fluid through a plenum box with a circular inlet at the bottom and an offset circular outlet at the top.

The corners of the duct are beveled to remove discontinuities in the flow, and the inlet pressure is arbitrarily set at 0.05 units.

The solution uses a "penalty pressure", in which the pressure variable is used merely to guarantee mass conservation. This technique is described in more detail in VISCOUS.PDE.

The order of interpolation is staged from linear to quadratic to cubic, which allows FlexPDE to solve for the general distribution with far fewer unknowns, and then solve for more detail in later stages.

Adaptive mesh refinement is turned off for speed in demonstration.

```
}
```

```
title '3D flow through a plenum'
```

```
coordinates
  cartesian3
```

```
variables
  v(1e-6) = vector(vx,vy,vz)
  p
```

```
select
  order = staged(1,2,3)
  regrid = off
```

```
definitions
  long = 2
  wide = 1
  high = 1/2
  xin = -1   yin = 0
  xout = 1   yout = 0
  rc = 0.5
  duct = 0.2


  { construct beveled surface }
  b = 0.05 ! duct bevel
  r2 = sqrt((x-xin)^2+(y-yin)^2)
  H2 = -high-(rc+b)
  z2 = max(min(H2+r2,-high),-high-b)
  r3 = sqrt((x-xout)^2+(y-yout)^2)
  H3 = high+(rc+b)
  z3 = min(max(H3-r3,high),high+b)

```

```

dens = 1      { fluid density }
visc = 0.01   { fluid viscosity }
vm = magnitude(v)

```

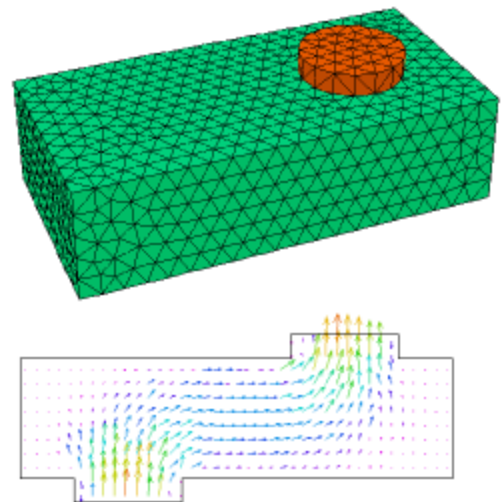

```

div_v = dx(vx) + dy(vy) + dz(vz)

pfactor = 500
PENALTY = pfactor*visc/high^2

Pin = 0.05
Pout = 0

initial values
v = vector(0,0,0)
p = Pin+(Pout-Pin)*(z+high+duct)/(2*high+2*duct)

equations
v: dens*dot(v,grad(v)) + grad(p) - visc*div(grad(v)) = 0
p: div(grad(p)) = PENALTY*div_v

extrusion
surface 'induct bottom' z = -high-duct
layer 'induct'
surface 'bottom' z = z2
layer 'body'
surface 'top' z = z3
layer 'outduct'
surface 'outduct top' z = high+duct

boundaries

region 1 { plenum box }
surface 2 value(v) = vector(0,0,0) natural(p)=0
surface 3 value(v) = vector(0,0,0) natural(p)=0
layer 1 void
layer 3 void
start(-long,-wide)
value(v) = vector(0,0,0) natural(p)=0 { fix all side values }
line to (long,-wide)
to (long,wide)
to (-long,wide)
to close

limited region 2 { input hole }
layer 1
surface 1 natural(v) = vector(0,0,0) value(p)=Pin { input duct opening }
start(xin,yin-rc)
layer 1 value(v) = vector(0,0,0) natural(p)=0 { duct sidewall drag }
surface 2 mesh_spacing=rc/2
arc(center=xin,yin) angle=360

limited region 3 { exit hole }
layer 3
surface 4 natural(v) = vector(0,0,0) value(p)=Pout { output duct opening }
start(xout,yout-rc)
layer 3 value(v) = vector(0,0,0) natural(p)=0 { duct sidewall drag }
surface 3 mesh_spacing=rc/2
arc(center=xout,yout) angle=360

limited feature
surface 2
start(xin,yin-rc-b) arc(center=xin,yin) angle=360

limited feature
surface 3
start(xout,yout-rc-b) arc(center=xout,yout) angle=360

monitors
grid(x,z) on y=0
contour(vx) on x=0 report dens report pin
contour(vx) on y=0 report dens report pin
contour(vz) on y=0 report dens report pin
vector(vx,vz) on y=0 report dens report pin
contour(vx) on z=0 report dens report pin
contour(vy) on z=0 report dens report pin
contour(vz) on z=0 report dens report pin
vector(vx,vy) on z=0 report dens report pin
contour(p) on y=0 report dens report pin
contour(div_v) on y=0 report dens report pin

```

```

plots
  grid(x,z) on y=0
  contour(vx) on x=0 report dens report pin
  contour(vx) on y=0 report dens report pin
  contour(vz) on y=0 report dens report pin
  vector(vx,vz) on y=0 report dens report pin
  contour(vx) on z=0 report dens report pin
  contour(vy) on z=0 report dens report pin
  contour(vz) on z=0 report dens report pin
  vector(vx,vy) on z=0 report dens report pin
  contour(p) on y=0 report dens report pin
  contour(div_v) on y=0 report dens report pin

summary
  report(sintegral(vz,'induct bottom','input')) as "Inflow"
  report(sintegral(vz,'outduct top','exit')) as "Outflow"
  report(sintegral(vz,'outduct top','exit')/sintegral(vz,'induct bottom','input')) as
  "Ratio"

end

```

5.1.4.6 airfoil

```
{ AIRFOIL.PDE
```

This example considers the laminar flow of an incompressible, inviscid fluid past an obstruction.

We assume that the flow can be represented by a stream function, Ψ , such that the velocities, U in the x -direction and V in the y -direction, are given by:

$$\begin{aligned} U &= -dy(\Psi) \\ V &= dx(\Psi) \end{aligned}$$

The flow can then be described by the equation

$$\text{div}(\text{grad}(\Psi)) = 0.$$

The contours of Ψ describe the flow trajectories of the fluid.

The problem presented here describes the flow past an airfoil-like figure. The left and right boundaries are held at $\Psi=y$, so that $U=-1$, and $V=0$.

```
}
```

```
title "Stream Function Flow past an Airfoil"
```

```
variables
```

```
{ define  $\Psi$  as the system variable }
psi
```

```
definitions
```

```
far = 5 { size of solution domain }
psi_far = y { solution at large x,y }
```


```
equations { the equation of continuity: }
```

```
psi :  $\text{div}(\text{grad}(\psi)) = 0$ 
```

```
boundaries
```

```
region 1 { define the domain boundary }
  start(-far,-far) { start at the lower left }
  { impose  $-dy(\psi)=U=-1$  (outward normal of  $\psi$ ) on the bottom boundary }
  natural(psi)=-1
  line to (far,-far) { walk the boundary Counter-Clockwise }
  natural(psi)=0 { impose  $dx(\psi)=0$  on right }
  line to (far, far)
  natural(psi)=1 { impose  $dy(\psi)=-U=1$  on top }
  line to (-far, far)
  natural(psi)=0 { impose  $-dx(\psi)=0$  on left }
  line to close { return to close }

  start(-0.5,-0.05) { start at lower left corner of airfoil }
  value(psi)=0 { specify no flow through the airfoil surface }
  arc to (0.0,0.02) to (0.5,0.05) { specify a gentle arc by three points }
```

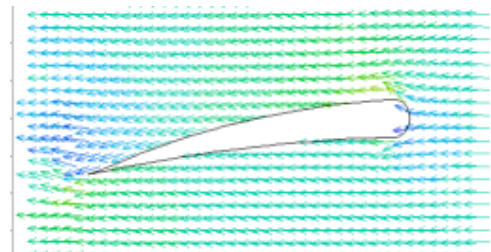

```

arc (center=0.495,0.1) to (0.5,0.15) { a tight arc by two points and center }
arc to (0.075,0.105) to (-0.35,0) { the top arc by three points }
line to close { finally a straight line to close the figure }

monitors{ monitor progress while running }
contour(psi) zoom (-0.6,-0.4,1.4,1.2) as "stream lines"

plots { write hardcopy files at termination }
grid(x,y) zoom (-0.6,-0.4,1.4,1.2)
contour(psi) zoom (-0.6,-0.4,1.4,1.2) as "stream lines" painted
{ show the flow vectors: }
vector(-dy(psi),dx(psi)) zoom (-0.6,-0.4,1.4,1.2) as "flow" norm
surface(psi) zoom (-0.6,-0.4,1.4,1.2) as "stream lines"

end

```

5.1.4.7 black_oil

```
{ BLACK_OIL.PDE
```

This example considers the transport of oil and water in soil.

The model is given in Gelinias, et al, "Adaptive Forward-Inverse Modeling of Reservoir Fluids Away from Wellbores", (Lawrence Livermore National Laboratory report UCRL-ID-126377) and in Saad & Zhang, " Adaptive Mesh for Two-Phase Flow in Porous Media" (in Recent Advances in Problems of Flow and Transport in Porous Media, Crolet and El Hatri, eds., Kluwer Academic Publishers, Boston, 1998).

The saturation of water is represented by S , with the saturation of oil defined as $1-S$. The relative permeabilities of water and oil are assumed to be S^2 and $(1-S)^2$, respectively. The total mobility M is defined as

$$M = S^2/\mu_w + (1-S)^2/\mu_o,$$

where μ_w and μ_o are the viscosities of water and oil.

The total velocity, V , and the fractional flux, f , are defined as

$$V = -K^*M \text{ grad}(P)$$

$$f = [S^2/\mu_w]/M,$$

where K represents the saturation-independent permeability coefficient, and P is the pressure, assuming capillary to be zero and oil and water pressures equal.

If the porosity Φ is taken as constant and gravity effects are negligible, the PDE's governing the system reduce to

$$\Phi \text{ dt}(S) + \text{div}(V*f) = 0$$

$$\text{div}(V) = 0.$$

Here we study the flow through a 30-meter box with an inlet pipe in the upper left and an outlet pipe in the lower right. The box is initially filled with oil, and water is pumped into the inlet pipe at a constant pressure. Time is measured in seconds.

-- Submitted by Said Doss, Lawrence Livermore National Laboratory.

```
}
```

```
TITLE 'Black Oil Model'
```

```
SELECT
```

```
smoothinit { Smooth the initial conditions a little, to minimize
the time wasted tracking the initial discontinuity }
```

```
VARIABLES
```

```
s(1), p { Saturation and Pressure }
```

```
DEFINITIONS
```

```
muo = 4.e-3 { oil viscosity }
muw = 1.e-3 { water viscosity }
K = 1.e-12 { Saturation-independent permeability coefficient }
Pin = 1.5e6 { Inlet pressure }
Pout = 1.e6 { Outlet pressure }
M = S^2/muw + (1-S)^2/muo { Total mobility }
f = S^2/muw/M { Fractional flux }
krw = S^2/muw { Relative permeability of water }
phi = .206 { porosity }
```



```

xmax = 30                { Box dimensions }
ymax = xmax
out_ctr = 8
tfrac = 2*out_ctr
diam = 2
in_ctr = ymax-out_ctr
rad = diam/5
pipe = 2*rad            { an extended inlet and outlet pipe }

epsvisc = 1.e-6        { A little artificial diffusion helps smooth the solution }

sint = integral(s)     { the total extraction integral }

hour = 60*60
day = hour*24         { seconds per day }

INITIAL VALUES
s = max(0,-x/pipe )    { start with all oil , but ramp the value in the
inlet pipe to speed startup }
p = Pin + (Pout-Pin)*x/xmax { start with a rough approximation to the pressure }

EQUATIONS
s: phi*dt(s) - div(K*krw*grad(p)) - epsvisc*div(grad(s)) = 0
p: div(K*M*grad(p)) = 0

BOUNDARIES
REGION 1
{ fillet the input pipe, and define
no-flow boundaries of the box }
start(-pipe,in_ctr-diam)
natural(p)=0 natural(s) = 0
line to (0,in_ctr-diam) fillet(rad)
line to (0,0) to (xmax,0)
to (xmax,out_ctr-diam) fillet(rad)
line to (xmax+pipe,out_ctr-diam)

{ set constant outlet pressure, and
"tautological" saturation flux }
value(p) = Pout
natural(s) = -K*krw*dx(p)
line to (xmax+pipe,out_ctr+diam)

{ reset no-flow box boundaries }
natural(p)=0 natural(s)=0
line to (xmax,out_ctr+diam) fillet(rad)
line to (xmax,ymax) to (0,ymax)
to (0,in_ctr+diam) fillet(rad)
line to (-pipe,in_ctr+diam)


{ set constant inlet pressure and saturation
}
value(p) = Pin value(s) = 1
line to close

TIME 0 to 120*day by 10

MONITORS
for cycle=5
contour(s) as "Saturation" range(0,1)
contour(s) zoom(xmax-tfrac+pipe,0, tfrac,tfrac) as "Outflow Saturation"
range(0,1)
contour(p) as "Pressure"
vector(-K*M*grad(p)) norm as "Flow Velocity"

PLOTS
for t = day by day to 20*day
by 10*day to 120*day
grid(x,y)
contour(s) as "Saturation" range(0,1) painted
surface(s) as "Saturation" range(0,1) painted viewpoint(60,-120,30)
contour(s) zoom(xmax-tfrac+pipe,0, tfrac,tfrac) as "Outflow Saturation"
range(0,1) painted
contour(p) as "Pressure" painted
vector(-K*M*grad(p)) norm as "Flow Velocity"
contour(K*M*magnitude(grad(p))) norm as "Flow Speed" painted

```

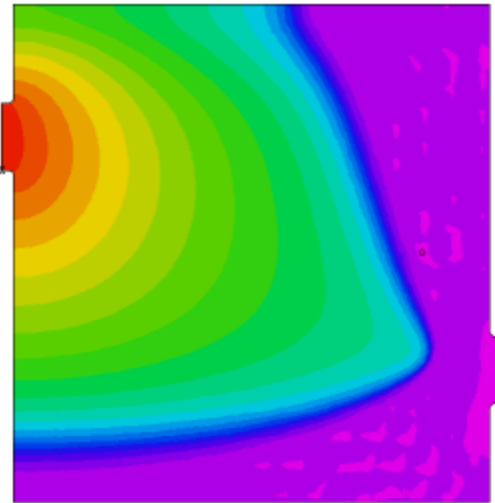

```
HISTORIES
  history(sint) at (0,0) as "Extraction"
END
```

5.1.4.8 buoyant

```
{ BUOYANT.PDE
```

This example addresses the problem of thermally driven buoyant flow of a viscous liquid in a vessel in two dimensions.

In the Boussinesq approximation, we assume that the fluid is incompressible, except for thermal expansion effects which generate a buoyant force.

The incompressible form of the Navier-Stokes equations for the flow of a fluid can be written

$$\begin{aligned} \text{dt}(U) + U.\text{grad}(U) + \text{grad}(p) &= \text{nu}*\text{div}(\text{grad}(U)) + F \\ \text{div}(U) &= 0 \end{aligned}$$

where U represents the velocity vector,
 p is the pressure,
 nu is the kinematic viscosity
 and F is the vector of body forces.

The first equation expresses the conservation of momentum, while the second, or Continuity Equation, expresses the conservation of mass. If the flow is steady, we may drop the time derivative.

If we take the curl of the (steady-state) momentum equation, we get
 $\text{curl}(U.\text{grad}(U)) + \text{curl}(\text{grad}(p)) = \text{nu}*\text{curl}(\text{div}(\text{grad}(U))) + \text{curl}(F)$

Using $\text{div}(U)=0$ and $\text{div}(\text{curl}(U))=0$, and defining the vorticity $w = \text{curl}(U)$, we get

$$U.\text{grad}(w) = w.\text{grad}(U) + \text{nu}*\text{div}(\text{grad}(w)) + \text{curl}(F)$$

$w.\text{grad}(U)$ represents the effect of vortex stretching, and is zero in two-dimensional systems. Furthermore, in two dimensions the velocity has only two components, say u and v , and the vorticity has only one, which we shall write as w .

Consider now the continuity equation. If we define a scalar function ψ such that

$$\begin{aligned} u &= \text{dy}(\psi) & v &= -\text{dx}(\psi) \\ \text{then } \text{div}(U) &= \text{dx}(\text{dy}(\psi)) - \text{dy}(\text{dx}(\psi)) = 0, \text{ and the continuity equation is} \\ \text{satisfied exactly. We may write} & & & \\ \text{div}(\text{grad}(\psi)) &= -\text{dx}(v) + \text{dy}(u) = -w \end{aligned}$$

Using ψ and w , we may write the final version of the Navier-Stokes equations as

$$\begin{aligned} \text{dy}(\psi)*\text{dx}(w) - \text{dx}(\psi)*\text{dy}(w) &= \text{nu}*\text{div}(\text{grad}(w)) + \text{curl}(F) \\ \text{div}(\text{grad}(\psi)) + w &= 0 \end{aligned}$$

If F is a gravitational force, then

$$\begin{aligned} F &= (0, -g*\rho) \text{ and} \\ \text{curl}(F) &= -g*\text{dx}(\rho) \end{aligned}$$

where ρ is the fluid density and g is the acceleration of gravity.

The temperature of the system may be found from the heat equation

$$\rho*\text{cp}*\text{dt}(T) + U.\text{grad}(T) = \text{div}(k*\text{grad}(T)) + S$$

Dropping the time derivative, approximating ρ by ρ_0 , and expanding U in terms of ψ , we get

$$\text{div}(k*\text{grad}(T)) + S = \rho_0*\text{cp}*\text{[dy}(\psi)*\text{dx}(T) - \text{dx}(\psi)*\text{dy}(T)]$$

If we assume linear expansion of the fluid with temperature, then

$$\begin{aligned} \rho &= \rho_0*(1 + \alpha*(T - T_0)) \text{ and} \\ \text{curl}(F) &= -g*\rho_0*\alpha*\text{dx}(T) \end{aligned}$$

In this problem, we define a trough filled with liquid, heated along a center strip by an applied heat flux, and watch the convection pattern and the heat distribution. We compute only half the trough, with a symmetry plane in the center.

Along the symmetry plane, we assert $w=0$, since on this plane

$dx(v) = 0$ and $u=0$, so $dy(u) = 0$.

Applying the boundary condition $\psi=0$ forces the stream lines to be parallel to the boundary, enforcing no flow through the boundary.

On the surface of the bowl, we apply a penalty function to enforce a "no-slip" boundary condition. We do this by using a natural BC to introduce a surface source of vorticity to counteract the tangential velocity. The penalty weight was arrived at by trial and error. Larger weights can force the surface velocity closer to zero, but this has no perceptible effect on the temperature distribution.

On the free surface, the proper boundary condition for the vorticity is problematic. We choose to apply $\text{NATURAL}(w)=0$, because this implies no vorticity transport across the free surface. (11/16/99)

}

TITLE 'Buoyant Flow by Stream Function and Vorticity - No Slip'

VARIABLES

temp psi w

DEFINITIONS



Lx = 1 Ly = 0.5
Rad = 0.5*(Lx^2+Ly^2)/Ly
Gy = 980

```
{ surface heat loss coefficient }
sigma_top = 0.01
{ bowl heat loss coefficient }
sigma_bowl = 1
{ thermal conductivity }
k = 0.0004
{ thermal expansion coefficient }
alpha = 0.001
visc = 1
rho0 = 1
heatin = 10 { heat source }
t0 = 50
```

```
dens = rho0*(1 - alpha*temp)
cp = 1
```

```
penalty = 5000
```

```
u = dy(psi)
v = -dx(psi)
```

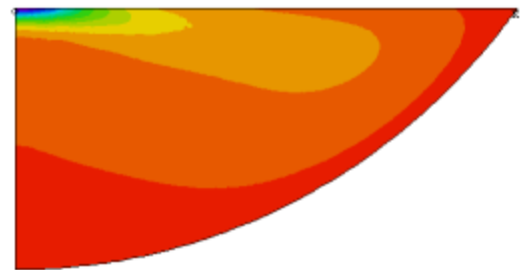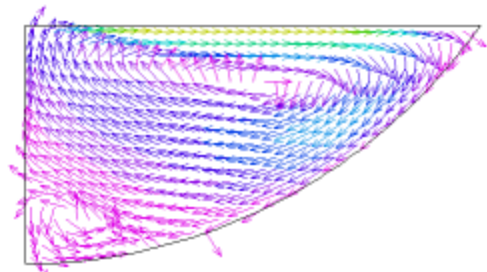

EQUATIONS

```
temp: div(k*grad(temp)) = rho0*cp*(u*dx(temp) + v*dy(temp))
psi: div(grad(psi)) + w = 0
w: u*dx(w) + v*dy(w) = visc*div(grad(w)) - Gy*dx(dens)
```

BOUNDARIES

region 1

```
{ on the arc of the bowl, set Psi=0, and apply a conductive loss to T.
Apply a penalty function to w to force the tangential velocity to zero }
```

```
start "outer" (0,0)
natural(temp) = -sigma_bowl*temp
value(psi) = 0
natural(w) = penalty*tangential(curl(psi))
arc (center=0, Rad) to (Lx, Ly)
```

```
{ on the top, continue the Psi=0 BC, but add the heat in put term to T,
and apply a natural=0 BC for w }
```

```
natural(w)=0
load(temp) = heatin*exp(-(10*x/Lx)^2) - sigma_top*temp
line to (0, Ly)
```

```
{ in the symmetry plane assert w=0, with a reflective BC for T }
```

```
value(w)=0
load(temp) = 0
line to close
```

```

MONITORS
  contour(temp) as "Temperature"
  contour(psi) as "Stream Function"
  contour(w) as "Vorticity"
  vector(u,v) as "Flow Velocity" norm

PLOTS
  grid(x,y)
  contour(temp) as "Temperature" painted
  contour(psi) as "Stream Function"
  contour(w) as "Vorticity" painted
  vector(u,v) as "Flow Velocity" norm
  contour(dens) as "Density" painted
  contour(magnitude(u,v)) as "Speed" painted
  elevation(magnitude(u,v)) on "outer"
  elevation(temp) on "outer"

END

```

5.1.4.9 buoyant+time

```

{ BUOYANT+TIME.PDE

This example is the time-dependent form of the steady-state example
BUOYANT.PDE[397].

Here we gradually ramp up the heat input to the level given in the
steady-state problem.

At early times, a single convection cell is established, but at later
times the bottom of the bowl stagnates and establishes the two-cell
flow pattern seen in the steady problem.

}

TITLE 'Buoyant Flow by Stream Function and Vorticity - no slip'

VARIABLES
  temp(100)
  psi(0.001)
  w(1)

DEFINITIONS
  Lx = 1   Ly = 0.5
  Rad = 0.5*(Lx^2+Ly^2)/Ly
  Gy = 980

  sigma_top = 0.01   { surface heat loss coefficient }
  sigma_bowl = 1     { bowl heat loss coefficient }
  k = 0.0004         { thermal conductivity }

  alpha = 0.001     { thermal expansion coefficient }
  visc = 1

  heatin = min(10,t)
  t0 = 50

  rho0 = 1
  rho = rho0*(1 - alpha*temp)
  cp = 1

  u = dy(psi)
  v = -dx(psi)

  penalty = 5000

EQUATIONS
  temp: div(k*grad(temp)) = rho0*cp*(dt(temp) + u*dx(temp) + v*dy(temp))
  psi:  div(grad(psi)) + w = 0
  w:    dt(w) + u*dx(w) + v*dy(w) = visc*div(grad(w)) - Gy*dx(rho)

BOUNDARIES
  region 1

  { on the arc of the bowl, set Psi=0, apply conduction loss to T,
    and apply penalty function to w to enforce no-slip condition. }

```

```

start(0,0)
natural(temp) = -sigma_bowl*temp
value(psi) = 0
natural(w)=penalty*tangential(u,v)
arc (center=0,Rad) to (Lx,Ly)

{ on the top, continue the prior BC for Psi,
  but apply a heat input and loss to T.
  Apply natural=0 BC (no vorticity transport) for w }
load(temp) = heatin*exp(-(10*x/Lx)^2) - sigma_top*temp
natural(w)=0
line to (0,Ly)

{ in the symmetry plane assert w=0, with a reflective BC for T }
value(w)=0
load(temp) = 0
line to close

TIME 0 to 100

MONITORS
for cycle=5 { watch what's happening }
contour(temp) as "Temperature"
contour(psi) as "Stream Function"
contour(w) as "Vorticity"
vector(curl(psi)) as "Flow velocity" norm

PLOTS
for t = 1 by 1 to 10 by 10 to endtime
grid(x,y)
contour(temp) as "Temperature" painted
contour(psi) as "Stream Function"
contour(w) as "Vorticity" painted
vector(curl(psi)) as "Flow velocity" norm
contour(rho) as "Density" painted

HISTORIES
history(temp) at (0.1*Lx,Ly) (0.2*Lx,Ly) (0.5*Lx,Ly) (0.8*Lx,Ly)
(0.7*Lx,0.5*Ly) (0.04*Lx,0.1*ly) as "Temperature"
history(u) at (0.1*Lx,Ly) (0.2*Lx,Ly) (0.5*Lx,Ly) (0.8*Lx,Ly)
(0.7*Lx,0.5*Ly) (0.04*Lx,0.2*Ly) as "X-velocity"
history(v) at (0.04*Lx,0.1*ly) as "Y-velocity"

END

```

5.1.4.10 cavity_1k

```
{ CAVITY_1K.PDE
```

This problem computes the flow velocities in a square cavity driven by a velocity on the top surface, with a Reynolds number of 1000. The initial conditions are zero interior velocity and zero pressure. We use a non-dimensional form of the Navier-Stokes equations, with a "penalty pressure". The pressure equation simulates a "somewhat compressible" fluid. Because a very hard incompressibility is subject to instabilities when the initial condition is far from equilibrium, we stage the pressure penalty, starting with a very soft fluid and progressing to more and more strict incompressibility.

As a visual assistance, we also display the stream function and vorticity when each stage completes.

This is a common test problem, see for example Hendriana and Bathe, Int J Numer Meth Engng 47, 317-340 (2000)

```

}
title 'Lid-driven Cavity Re=1000'
coordinates cartesian2
select

```

```

ngrid=20
regrid=off
busymon      ! display monitors during iteration

variables
u,v
p
psi

definitions
Lx=Ly=1
Re = 1000
penalty = staged(1,10,100,1000) ! perform the computation in stages with increasing
pressure penalty
w = dx(v)-dy(u)      ! report vorticity
u0 = 1
h=1/10

equations
u: div(grad(u)) - Re*dx(p) = Re*(u*dx(u) + v*dy(u))
v: div(grad(v)) - Re*dy(p) = Re*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))

then
psi: div(grad(psi)) +w = 0      ! Report the Stream function

boundaries
region 1
start (0,1)
! left wall
value(u)=0 value(v)=0 ! no fluid slip on bottom and sides
value(psi)=0 ! stream function BC: no flow across walls or top
line to (0,0)
! bottom
value(p)=0 !fix the pressure at the bottom
value(psi)=0
line to(1,0)
! right wall
natural(p) = 0
natural(psi)=normal(-v,u)
line to (1,1)
! open top with imposed velocity
! since a hard shift from 0 to 1 would invite catastrophe, we ramp the driving
velocity to zero at the corners.
value(u) = (1-x)*u0/h
mesh_spacing=h/5 ! more mesh density at the corners helps define the rapid velocity
transitions
line to(1-h,1)
! full driving velocity
value(u)=u0
value(v)=0
mesh_spacing=h
line to(h,1)
! ramp down to zero
value(u) = x*u0/h
mesh_spacing=h/5
line to close

monitors
contour(u) report(Re) report(penalty)
contour(v) report(Re) report(penalty)
contour(p) report(Re) report(penalty)

plots
grid(x,y) report(Re) report(penalty)
contour(u) report(Re) report(penalty)
contour(v) report(Re) report(penalty)
contour(p) report(Re) report(penalty)
vector(u,v) report(Re) report(penalty)
contour(psi) as "Streamlines" report(Re) report(penalty)
contour(w) as "Vorticity" report(Re) report(penalty)

```

end

5.1.4.11 channel

```
{ CHANNEL.PDE
```

This example is a modification of the [LOWVISC.PDE](#)^[414] problem, in which the no-slip boundary has been placed at the bottom of the domain, with free flow at the top.

The declared parameters in this problem are chosen for demonstration purposes, and are not intended to represent any real conditions. The fluid is far more viscous than water.

```
}
```

```
title 'Flow in 2D channel'
```

```
select errlim = 0.005
```

```
variables
```

```
u(0.1)
v(0.01)
p(1)
```

```
definitions
```

```
Lx = 5          Ly = 1.5
p0 = 1          { input pressure }
speed2 = u^2+v^2
speed = sqrt(speed2)
dens = 1
visc = 0.04
vxx = -(p0/(2*visc*(2*Lx)))*y^2  { open-channel x-velocity with drag at the bottom }
```

```
rball=0.4
```

```
cut = 0.1      { value for bevel at the corners of the obstruction }
```

```
penalty = 100*visc/rball^2
```

```
Re = globalmax(speed)*(Ly/2)/(visc/dens)
```

```
initial values
```

```
{ In nonlinear problems, Newton's method requires a good initial guess at the solution,
or convergence may not be achieved. You can use SELECT CHANGELIM=0.1 to
force the solver to creep toward a solution from a bad guess.
In our problem, the open channel velocity is a good place to start. }
u = vxx  v = 0  p = p0*x/(2*Lx)
```

```
equations
```

```
u: visc*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
v: visc*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))
```

```
boundaries
```

```
region 1
```

```
start(-Lx,0)
value(u) = 0  value(v) = 0  load(p) = 0
line to (Lx/2-rball,0)
to (Lx/2-rball,rball) bevel(cut)
to (Lx/2+rball,rball) bevel(cut)
to (Lx/2+rball,0)
to (Lx,0)
```

```
load(u) = 0  value(v) = 0  value(p) = p0
```

```
mesh_spacing=Ly/20
line to (Lx,Ly)
```

```
mesh_spacing=100
```

```
load(p) = 0
line to (-Lx,Ly)
```

```
value(p) = 0
line to close
```

```

monitors
  contour(speed) report(Re)

plots
  contour(u) report(Re)
  contour(v) report(Re)
  contour(speed) painted report(Re)
  vector(u,v) as "flow" report(Re)
  contour(p) as "Pressure" painted
  contour(dx(u)+dy(v)) as "Continuity Error"
  elevation(u) from (-Lx,0) to (-Lx,Ly)
  elevation(u) from (0,0) to (0,Ly)
  elevation(u) from (Lx/2,0) to (Lx/2,Ly)
  elevation(u) from (Lx,0) to (Lx,Ly)

end

```

5.1.4.12 contaminant_transport

```
{ CONTAMINANT_TRANSPORT.PDE
```

This example shows the use of sequenced equations in the calculation of steady-state contaminant transport in which the fluid properties are independent of the contaminant concentration.

Fluid equations are solved first on each grid refinement, then the contaminant concentration is updated.

The problem is a modification of the example [CHANNEL.PDE](#)⁴⁰².

```
}
```

```
title 'Contaminant transport in 2D channel'
```

```
select
```

```
  errlim = 0.005
  ngrid = 40
```

```
variables
```

```
  u(0.1)
  v(0.01)
  p(1)
  c(0.01)
```

```
definitions
```

```
  Lx = 5      Ly = 1.5
  p0 = 2
  speed2 = u^2+v^2
  speed = sqrt(speed2)
  dens = 1
  visc = 0.04
  vxx = -(p0/(2*visc*(2*Lx)))*y^2  { open-channel x-velocity with drag at the bottom }
```

```
  rball=0.4
  cut = 0.1  { value for bevel at the corners of the obstruction }
```

```
  penalty = 100*visc/rball^2
  Re = globalmax(speed)*(Ly/2)/(visc/dens)
```

```
  Kc = 0.01  { contaminant diffusivity }
```

```
initial values
```

```
  u = vxx  v=0  p = p0*x/Lx
```

```
equations
```

```
  u: visc*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
  v: visc*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
  p: div(grad(p)) = penalty*(dx(u)+dy(v))
```

```
then
```

```
  c: u*dx(c) + v*dy(c) = div(Kc*grad(c))
```

```
boundaries
```

```
  region 1
  start(-Lx,0)
```



```

value(u) = 0 value(v) = 0 load(p) = 0 natural(c)=0
  line to (Lx/2-rball,0)
        to (Lx/2-rball,rball) bevel(cut)
        to (Lx/2+rball,rball) bevel(cut)
        to (Lx/2+rball,0)
        to (Lx,0)

mesh_spacing=Ly/20
load(u) = 0 value(v) = 0 value(p) = p0 value(c) = Upulse(y,y-Ly/3)
  line to (Lx,Ly)

mesh_spacing = 100
load(p) = 0 natural(c)=0
  line to (-Lx,Ly)

value(p) = 0
  line to close

monitors
  contour(speed)
  contour(c)

plots
  contour(c) report(Re)
  contour(u) report(Re)
  contour(v) report(Re)
  contour(speed) painted report(Re)
  vector(u,v) as "flow" report(Re)
  contour(p) as "Pressure" painted
  contour(dx(u)+dy(v)) as "Continuity Error"
  elevation(u) from (-Lx,0) to (-Lx,Ly)
  elevation(u) from (0,0) to (0,Ly)
  elevation(u) from (Lx/2,0) to (Lx/2,Ly)
  elevation(u) from (Lx,0) to (Lx,Ly)

end

```

5.1.4.13 coupled_contaminant

```
{ COUPLED_CONTAMINANT.PDE
```

This example shows the use of FlexPDE in a contaminant transport calculation in which the fluid viscosity is strongly dependent on the contaminant concentration.

The example LOWVISC.PDE must first be solved to establish flow velocities. This time-dependent modification of that example then reads the initial values and computes the flow of a contaminant in the channel. Fluid equations are solved fully implicitly with the contaminant concentration.

```
}
title 'Contaminant transport in 2D channel, Re > 40'
```

```
variables
```

```
u(0.1)
v(0.01)
p(1)
c(0.01)
```

```
definitions
```

```
Lx = 5      Ly = 1.5
p0 = 2
speed = sqrt(u^2+v^2)
dens = 1
visc0 = 0.04
visc = visc0*(1+c)
vxx = -(p0/(2*visc*(2*Lx)))*(Ly^2-y^2)      { open-channel x-velocity }
```

```
rball=0.4
cut = 0.1      { value for bevel at the corners of the obstruction }
```

```
penalty = 100*visc/rball^2
Re = globalmax(speed)*(Ly/2)/(visc0/dens)
```

```

{ define a contaminant pulse function in space and time
  use SWAGE to eliminate discontinuous changes }
swagepulse(f,a,b,rise) = swage(f-a,0,1,rise)*swage(f-b,1,0,rise)
C0=2
cinput = C0*swage(y-0.4,1,0,0.08 )*swagepulse(t,0.4,1,0.08)

Kc = 0.002      { contaminant diffusivity }

{ read the initial velocity field from Lowvisc.pde }
transfermesh("lowvisc_output/lowvisc_01.xfr", uin, vin, pin)

Initial Values
u=uin
v=vin
p=pin

equations
u: visc*div(grad(u)) - dx(p) = dens*dt(u) + dens*(u*dx(u) + v*dy(u))
v: visc*div(grad(v)) - dy(p) = dens*dt(v) + dens*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))
c: dt(c) + u*dx(c) + v*dy(c) = div(Kc*grad(c))

boundaries
region 1
start(-Lx,0)
load(u) = 0 value(v) = 0 load(p) = 0 load(c)=0
line to (Lx/2-rball,0)
value(u) = 0 value(v) = 0 load(p) = 0
mesh_spacing=rball/10 ! dense mesh to resolve obstruction
line to (Lx/2-rball,rball) bevel(cut)
to (Lx/2+rball,rball) bevel(cut)
to (Lx/2+rball,0)

mesh_spacing=10*rball ! cancel dense mesh requirement
load(u) = 0 value(v) = 0 load(p) = 0
line to (Lx,0)

load(u) = 0 value(v) = 0 value(p) = p0
{ Introduce a lump of contaminant: }
value(c) = cinput
mesh_spacing=Lx/20
line to (Lx,Ly)

mesh_spacing=100
value(u)=0 value(v)=0 load(p)= 0 load(c)=0
line to(-Lx,Ly)

load(u) = 0 value(v) = 0 value(p) = 0
line to close

time 0 to 10

monitors
for cycle = 1
contour(speed) report(Re)
contour(c) range(0,1) report(Re)
elevation(cinput) from (Lx,-Ly) to (Lx,Ly) range=(0,C0)

plots
for t=0 by 0.05 to endtime
contour(u) report(Re)
contour(v) report(Re)
contour(speed) painted report(Re)
vector(u,v) as "flow" report(Re)
contour(p) as "Pressure" painted
contour(dx(u)+dy(v)) as "Continuity Error"

```

```

history(integral(c))
history(u) at (0,0.8) (2,0.8) (3,0.8) (4,0.8) (Lx,0)
history(v) at (0,0.8) (2,0.8) (3,0.8) (4,0.8)

end

```

5.1.4.14 coupled_contaminant_initeq

```
{ COUPLED_CONTAMINANT_INITEQ.PDE
```

This example is a modification of the example [COUPLED_CONTAMINANT.PDE](#)^[404] where [LOWVISC.PDE](#)^[414] does not need to be run first. Instead it uses the [INITIAL EQUATIONS](#)^[235] section to solve for the flow velocities.

```
}
```

```
title 'Contaminant transport in 2D channel, Re > 40'
```

```
variables
```

```
u(0.1)
v(0.01)
p(1)
c(0.01)
```

```
definitions
```

```
Lx = 5      Ly = 1.5
p0 = 2
speed = sqrt(u^2+v^2)
dens = 1
visc0 = 0.04
visc = visc0*(1+c)
vxx = -(p0/(2*visc*(2*Lx)))*(Ly^2-y^2)      { open-channel x-velocity }
```

```
rball=0.4
cut = 0.1      { value for bevel at the corners of the obstruction }
```

```
penalty = 100*visc/rball^2
Re = globalmax(speed)*(Ly/2)/(visc0/dens)
```

```
{ program a contaminant pulse in space and time
  use SWAGE to eliminate discontinuous changes }
swagepulse(f,a,b,rise) = swage(f-a,0,1,rise)*swage(f-b,1,0,rise)
C0=2
cinput = C0*swage(y-0.4,1,0,0.08 )*swagepulse(t,0.4,1,0.08)
```

```
Kc = 0.002      { contaminant diffusivity }
```

```
Initial Values
```

```
u = 0.5*vxx  v = 0  p = p0*(Lx+x)/(2*Lx)
```

```
initial equations
```

```
{ solve these steady-state equations to establish initial conditions for the time-
dependent run }
```

```
u: visc0*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
v: visc0*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))
```

```
equations
```

```
u: visc*div(grad(u)) - dx(p) = dens*dt(u) + dens*(u*dx(u) + v*dy(u))
v: visc*div(grad(v)) - dy(p) = dens*dt(v) + dens*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))
c: dt(c) + u*dx(c) + v*dy(c) = div(Kc*grad(c))
```

```
boundaries
```

```
region 1
start(-Lx,0)
load(u) = 0  value(v) = 0  load(p) = 0  load(c)=0
line to (Lx/2-rball,0)
```

```

value(u) = 0 value(v) = 0 load(p) = 0
mesh_spacing=rball/10 ! dense mesh to resolve obstruction
  line to (Lx/2-rball,rball) bevel(cut)
      to (Lx/2+rball,rball) bevel(cut)
      to (Lx/2+rball,0)

mesh_spacing=10*rball ! cancel dense mesh requirement
load(u) = 0 value(v) = 0 load(p) = 0
  line to (Lx,0)

load(u) = 0 value(v) = 0 value(p) = p0
{ Introduce a lump of contaminant: }
value(c) = cinput
mesh_spacing=Ly/20
  line to (Lx,Ly)

mesh_spacing=100
value(u)=0 value(v)=0 load(p)= 0 load(c)=0
  line to(-Lx,Ly)

load(u) = 0 value(v) = 0 value(p) = 0
  line to close

time 0 to 10

monitors
for cycle = 10
  contour(speed) report(Re)
  contour(c) range(0,1) report(Re)
  elevation(cinput) from (Lx,-Ly) to (Lx,Ly) range=(0,C0)

plots
for t=0 by 0.5 to endtime
  contour(c) range(0,1) report(Re)
  contour(u) report(Re)
  contour(v) report(Re)
  contour(speed) painted report(Re)
  vector(u,v) as "flow" report(Re)
  contour(p) as "Pressure" painted
  contour(dx(u)+dy(v)) as "Continuity Error"

history(integral(c))
history(u) at (0,0.8) (2,0.8) (3,0.8) (4,0.8) (Lx,0)
history(v) at (0,0.8) (2,0.8) (3,0.8) (4,0.8)

end

```

5.1.4.15 flowslab

```

{ FLOWSLAB.PDE

This problem considers the laminar
flow of an incompressible, inviscid
fluid past an obstruction.

We assume that the flow can be
represented by a stream function, PSI,
such that the velocities, U in the
x-direction and v in the y-direction,
are given by:
  U = -dy(PSI)
  V = dx(PSI)


The flow can then be described by the
equation
  div(grad(PSI)) = 0.

```

The contours of PSI describe the flow trajectories of the fluid.

The problem presented here describes the flow past a slab tilted at 45 degrees to the flow direction. The left and right boundaries are held at $\text{PSI}=y$, so that $U=-1$, and $V=0$.

}

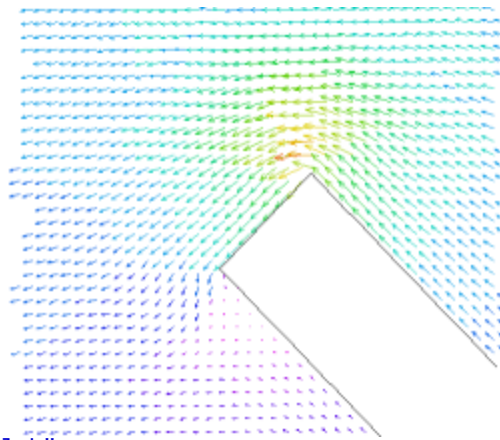

```

title "Stream Function Flow past 45-degree slab"
variables
    psi                { define PSI as the system variable }
definitions
    a = 3; b = 3        { size of solution domain }
    len = 0.5           { projection of length/2 }
    wid = 0.1           { projection of width/2 }
    psi_far = y         { solution at large x,y }
equations              { the equation of continuity: }
    psi : div(grad(psi)) = 0
boundaries
    region 1
        start(-a,-b)    { define the domain boundary }
        value(psi)= psi_far { start at the lower left }
        line to (a,-b)  { impose U=-1 on the outer boundary }
        to (a,b)        { walk the boundary Counter-Clockwise }
        to (-a,b)
        to close        { return to close }

        start(-len-wid,len-wid) { start at upper left corner of slab }
        value(psi)=0           { specify no flow on the slab surface }
        line to (-len-wid,len-wid) { walk around the slab CLOCKWISE for exclusion }
        to (len-wid,-len-wid)
        to (len-wid,-len-wid)
        to close              { return to close }
monitors
    contour(psi) { show the potential during solution }
plots
    { write hardcopy files at termination }
    grid(x,y) { show the final grid }
    grid(x,y) zoom(-1,0,1,1) { magnify gridding at corner }
    contour(psi) as "stream lines" { show the stream function }
    vector(-dy(psi),dx(psi)) as "flow" { show the flow vectors }
    vector(-dy(psi),dx(psi)) as "flow" zoom(-1,0,1,1)
end

```

5.1.4.16 geoflow

{ GEOFLOW.PDE

In its simplest form, the nonlinear steady-state quasi-geostrophic equation is the coupled set:

$$q = \text{eps} \cdot \text{del}^2(\text{psi}) + y \quad (1)$$

$$J(\text{psi}, q) = F(x, y) - k \cdot \text{del}^2(\text{psi}) \quad (2)$$

where psi is the stream function
 q is the absolute vorticity

F is a specified forcing function
 eps and k are specified parameters
 J is the Jacobian operator:
 $J(a,b) = dx(a)*dy(b) - dy(a)*dx(b)$

The single boundary condition is the one on psi stating that the closed boundary C of the 2D area should be streamline:

psi = 0 on C.

In this test, the term $k*\text{del}^2(\text{psi})$ in (2) has been replaced by $(k/\text{eps})*(q-y)$, and a smoothing diffusion term $\text{damp}*\text{del}^2(q)$ has been added.

Only the natural boundary condition is needed for Q.
 }

title 'Quasi-Geostrophic Equation, square, eps=0.005'

variables

psi
 q

definitions

kappa = .05
 epsilon = 0.005
 koe = kappa/epsilon
 size = 1.0
 f = -sin(pi*x)*sin(pi*y)
 damp = 1.e-3*koe

initial values

psi = 0.
 q = y

equations

psi: $\text{epsilon}*\text{del}^2(\text{psi}) - q = -y$
 q: $\text{dx}(\text{psi})*\text{dy}(q) - \text{dy}(\text{psi})*\text{dx}(q) + \text{koe}*q - \text{damp}*\text{del}^2(q) = \text{koe}*y + f$

boundaries

region 1
 start(0,0) value(psi)=0 natural(q)=0
 line to (1,0) to (1,1) to (0,1) to close

monitors

contour(psi)
 contour(q)

plots

contour(psi) as "Potential"
 contour(q) as "Vorticity"
 surface(psi) as "Potential"
 surface(q) as "Vorticity"
 vector(-dy(psi),dx(psi)) as "Flow"

end

5.1.4.17 hyperbolic

{ HYPERBOLIC.PDE

This problem shows the capabilities of FlexPDE in hyperbolic systems.

We analyze a single turn of a helical tube with a programmed flow velocity. A contaminant is introduced into the center of the flow on the input surface. Contaminant outflow is determined from the flow equations. The contaminant concentration should flow uniformly around the helix.

}

title 'Helical Flow: a hyperbolic system.'

select

ngrid=30
 regrid=off { Fixed grid works better in hyperbolic systems }

```

vanderberg { most effective method for hyperbolic systems }

variables
u

definitions
Rin = 1
Rout = 2
R0 = 1.5
dR = 0.3 { width of the input contaminant profile }
gap = 10 { angular gap between input and output faces }
gapr = gap*pi/180 { gap in radians }
cg = cos(gapr)
sg = sin(gapr)
pin = point(Rin*cg,-Rin*sg)
pout = point(Rout*cg,-Rout*sg)

r = magnitude(x,y)
v = 1
vx = -v*y/r
vy = v*x/r
q = 0 { No Source }
sink = 0 { No Sink }

initial values
u = 0

equations
u : div(vx*u, vy*u) + sink*u + q = 0

boundaries
region 1
start (Rout,0)
value(u) = 0 { We know there should be no contaminant on walls }
arc(center=0,0) angle=360-gap { positive angle on outside }

nobc(u) { "No BC" on exit plane allows internal solution to dictate outflow }
line to pin

value(u)=0
arc(center=0,0) angle=gap-360 { negative angle on inside }

value(u)=exp(-((x-R0)/dR)^4) { programmed inflow is supergaussian }
line to (1.2,0) to (1.4,0) to (1.6,0) to (1.8,0) to close { resolve shape }

monitors
contour(u)

plots
contour(u) painted
surface(u)
elevation(u) from (Rin,0.01) to (Rout,0.01)
elevation(u) from (0,Rin) to (0,Rout)
elevation(u) from (-Rin,0.01) to (-Rout,0.01)
elevation(u) from (0,-Rin) to (0,-Rout)
elevation(u) from pout to pin

end

```



5.1.4.18 landfill_gas_flow

```
{ LANDFILL_GAS_FLOW.PDE
```

This script solves 2D flow of ideal gas through a porous medium combined of 2 contiguous layers of distinct permeability in elliptic coordinates. The outermost of the two layers generates gas that flows inwards and is collected by a pipe in the centre. When the cross-sections are ellipses of a common focal length f , there are exact solutions available that are used for verification. Note: the domain appears almost circular, but if the coordinates are checked carefully, all boundaries are ellipses.

Includes usage of:
- redefinition of Cartesian coordinates to custom curvilinear system

- definition of inverse hyperbolic functions
- discontinuous material properties
- definition of features via a repeat loop
- file export via a repeat loop

Written at:

Department of Mathematics, Thompson Rivers University (British Columbia, Canada) by Damian Halvorsen and Yana Nec.
 Reference for the geometry and all formulae: appendix B in
 DOI: <https://doi.org/10.1016/j.pce.2018.10.003> ;
http://faculty.tru.ca/ynec/index_papers.html

}

Title 'Planar flow, elliptic geometry, 2 laminae'

COORDINATES cartesian2

VARIABLES P

DEFINITIONS

```

C2K = 273.15 { 0 deg C in kelvin }
g = 9.8067 { gravity constant m/s^2 }
ps = 101325 { standard atmospheric pressure at sea level Pa }
Ts = C2K+15 { standard atmospheric temperature at sea level K }
Tc = C2K+20 { standard chemical temperature K }
Latm = 0.0065 { standard atmospheric cooling rate deg/m }
R_air = 286.9 { air gas constant p = rho R T }
Ro = 8.3145 { universal gas constant, specific R = Ro/M }
i2m_p = ps/406.8 { inwc to Pa conversion factor }

elev = 0; { surface elevation m }
p_bar = ps { barometer pressure Pa }
p_atm = p_bar*(1-Latm*elev/Ts)^(g/(R_air*Latm)) { atmospheric pressure at given
elevation}
pB = p_atm-0.5*i2m_p { pressure under the cover (if applicable), converted from inwc }
p_out = p_atm-15*i2m_p { outlet pressure, converted from inwc }
d_P = 0.5*0.3048 { pipe diameter m }
r_P = d_P/2 {pipe radius}

{ pack, waste and cover laminae thickness m }
h = array(1,8,3)
r_A = r_P+h[1] {gravel pack radius}
r_B = r_A+h[2] {landfill cavity radius}

{ porosity }
p_eps = array(0.6,0.4,0.7)
{ effective packing sphere diameter to represent grain size m }
sphere_diam = array(0.05,0.1,0.01) {k_b>k_a}
{ tortuosity }
tau = 100

k = array for i (1 by 1 to 3) : p_eps[i]^3*sphere_diam[i]^2*(72*tau*(1-p_eps[i])^2)^(-
1)

{ temperature deg C }
Tlfg = 15+C2K

{ hole diameter m }
dh = 3/8*0.0254

{ # of holes in each perforated cross-section }
nh = 2
d1 = nh*(dh/2)^2/d_P

{molar weights}
M_CH4 = 0.016044
M_CO2 = 0.04401
M_O2 = 0.0319988
M_N2 = 0.0280134
MW = array(M_CH4,M_CO2,M_O2,M_N2)
{ gas composition CH4, CO2 and O2, balance N2 }

```



```

x1fg0 = array(0.5,0.4,0.01);
x1fg = array(x1fg0[1],x1fg0[2],x1fg0[3],1-sum(i,1,3,x1fg0[i]))
R1fg = Ro/sum(i,1,4,x1fg[i]*Mw[i])

{ Sutherland's formula }
{ base values for Sutherland's formula }

To_CH4 = 273.15; s_CH4 = 197.8; muo_CH4 = 12.01*10^(-6);
To_CO2 = 293.15; s_CO2 = 240; muo_CO2 = 14.8*10^(-6);
!To_CO2 = 273.15; s_CO2 = 222.2; muo_CO2 = 13.7*10^(-6);
To_O2 = 292.25; s_O2 = 127; muo_O2 = 20.18*10^(-6);
To_N2 = 300.55; s_N2 = 111; muo_N2 = 17.81*10^(-6);

mu_CH4 = muo_CH4*(T1fg/To_CH4)^1.5*(To_CH4+s_CH4)/(T1fg+s_CH4);
mu_CO2 = muo_CO2*(T1fg/To_CO2)^1.5*(To_CO2+s_CO2)/(T1fg+s_CO2);
mu_O2 = muo_O2*(T1fg/To_O2)^1.5*(To_O2+s_O2)/(T1fg+s_O2);
mu_N2 = muo_N2*(T1fg/To_N2)^1.5*(To_N2+s_N2)/(T1fg+s_N2);

{ exponential formula }

mu = array(mu_CH4, mu_CO2, mu_O2, mu_N2)
a = 3/8 { empirical constant from Thomas A. Davidson's paper - 3/8 or 1/3
        a = 3/8 appears to work negligibly better }
Y1fg = sum(i,1,4,sqrt(Mw[i])*x1fg[i])

f1 = 2^a/Y1fg^2*sum(i,1,4,sum(j,1,4,
    x1fg[i]*x1fg[j]*Mw[i]^((a+1)/2)*Mw[j]^((a+1)/2)/
    (sqrt(mu[i]*mu[j])*(Mw[i]+Mw[j])^a)))
mu_lfg = 1/f1

{ number of perforated cross-sections }
n = 28

{ generation rate m^3/hr }
C_init = 375
C = C_init*ps/(3600*R1fg*Tc*pi*(r_B^2-r_A^2)*d1*n)
RT = R1fg*T1fg
muRT = mu_lfg*RT
muRTC = muRT*C

Kp
Cp
ang_jump = pi/8
Px ! constant, to be used as a normalisation pressure value
Px2 = Px^2
f = 0.5*r_P ! focal length, common to all ellipses
fb = f^2*muRTC/(4*Px2*k[2]) ! combined constants
fc = f^2*muRT*Cp/(4*Px2*Kp)
muRTCpx = muRT*Cp/Px2
grav = 0*vector(0,-g,0) ! toggle the factor to turn gravity on and off

! define inverse hyperbolic functions not available as built in functions
atanh(q) = 0.5*ln((1+q)/(1-q))
acosh(q) = ln(q+sqrt(q^2 -1))
asinh(q) = ln(q+sqrt(q^2 +1))

{ define the elliptic coordinates: xi runs along the hyperbolae (normal
coordinate) and phi is the elliptic arc length (tangential coordinate)
Note: radial arc length = angle from horizontal,
elliptic arc length != angle from horizontal except 0, pi
}
xyf = f^2+y^2-x^2
tanhxi = if(x=0) then sqrt(y^2/xyf)
        else sqrt(0.5*(-xyf+sqrt(xyf^2+(2*x*y)^2))/x^2)
xi = atanh(tanhxi)
phi = if(x=0) then pi/2*sign(y)
      else if(x>0) then arctan(y/(x*tanhxi))
      else arctan(y/(x*tanhxi))+pi
! common expressions needed in exact solutions
xip = acosh(r_P/f)
xia = acosh(r_A/f)
xib = acosh(r_B/f)

```

```

xiPB = xip-xib
xiBA = xib-xia
xiAP = xia-xip

r_outx = f*cosh(xib)
r_outy = f*sinh(xib)
r_inx = f*cosh(xia)
r_iny = f*sinh(xia)
r_px = f*cosh(xip)
r_py = f*sinh(xip)

! coefficients needed in exact solutions
! block/unblock one type of boundary condition
! pressure boundary condition
Px = pB
rhs = -fb*(1+k[2]/(k[1]-k[2])*cosh(2*xiBA)+
      k[1]/(k[1]-k[2])*(sinh(2*xiPB)+sinh(2*xiBA)*cosh(2*xiAP))/sinh(2*xiAP))
theta_P = 0
theta_B = rhs-theta_P*k[1]/k[2]*sinh(2*xiBA)/sinh(2*xiAP)
a0a = k[2]/(k[2]*xiAP+k[1]*xiBA)*((pB/Px)^2-(p_out/Px)^2+
  fb*(cosh(2*xiB)-cosh(2*xiA))-2*fb*sinh(2*xiA)*xiBA)
a0b = 1/(k[2]*xiAP+k[1]*xiBA)*(((pB/Px)^2-(p_out/Px)^2+
  fb*(cosh(2*xiB)-cosh(2*xiA)))*k[1]+2*k[2]*fb*sinh(2*xiA)*xiAP)
b0a = (p_out/Px)^2-a0a*xip
b0b = (pB/Px)^2-a0b*xib+fb*cosh(2*xiB)
a1a = 1/(sinh(2*xiPB))*((theta_P*cosh(2*xiB)-theta_B*k[2]/k[1]*cosh(2*xiP)+
  fb*k[2]/k[1]*cosh(2*xiP)*(cosh(2*xiBA)-1))
b1b = 1/(sinh(2*xiPB))*(-theta_P*k[1]/k[2]*sinh(2*xiB)+theta_B*sinh(2*xiP)+
  fb*(sinh(2*xiP)-sinh(2*xiB)*cosh(2*xiAP)))
a1b = 1/(sinh(2*xiPB))*((theta_P*k[1]/k[2]*cosh(2*xiB)-theta_B*cosh(2*xiP)+
  fb*(cosh(2*xiB)*cosh(2*xiAP)-cosh(2*xiP)))
b1a = 1/(sinh(2*xiPB))*(-theta_P*sinh(2*xiB)+theta_B*k[2]/k[1]*sinh(2*xiP)+
  fb*k[2]/k[1]*sinh(2*xiP)*(1-cosh(2*xiBA)))

a0
b0
a1
b1
P_ell = sqrt(a0*xi+b0-fc*cosh(2*xi)+
  cos(2*phi)*(a1*sinh(2*xi)+b1*cosh(2*xi)-fc))

```

MATERIALS

```

'ACmat' :
  Kp = k[2]
  Cp = c
  a0 = a0b
  b0 = b0b
  a1 = a1b
  b1 = b1b
'ABmat' :
  Kp = k[1]
  Cp = 0
  a0 = a0a
  b0 = b0a
  a1 = a1a
  b1 = b1a

```

INITIAL VALUES

```
P = P_atm/Px
```

EQUATIONS

```
div(Kp*p*(grad(p)-p/RT*grav)) = -muRTcpx
```

BOUNDARIES

```

REGION 'AC'
  use material 'ACmat'
  start (r_outx,0)
  value(P) = sqrt((pB/Px)^2 + theta_B*cos(2*phi)) ! pressure boundary condition
  arc(center=0,0) to (0,r_outy) to (-r_outx,0)
                  to (0,-r_outy) to (r_outx,0)
  start (r_px,0)
  value(P) = sqrt((P_out/Px)^2 + theta_P*cos(2*phi))
  arc(center=0,0) to (0,r_py) to (-r_px,0)
                  to (0,-r_py) to (r_px,0)

```

```

REGION 'AB'
  use material 'ABmat'
  start (r_inx,0)
  arc(center=0,0) to (0,r_iny) to (-r_inx,0)
                  to (0,-r_iny) to (r_inx,0)
  start (r_px,0)
  arc(center=0,0) to (0,r_py) to (-r_px,0)
                  to (0,-r_py) to (r_px,0)

  repeat th = 0 by ang_jump to 3/8*pi
    Feature 'Ray_' + $th
    start(r_px*cos(th),r_py*sin(th)) line to (r_outx*cos(th), r_outy*sin(th))
  endrepeat

PLOTS
  contour(P) painted zoom(-r_px,-r_px,2*r_px)

  repeat th = 0 by ang_jump to 3/8*pi
    Elevation (P, P_e11) on 'Ray_' + $th as 'P on Ray_' + $th
    export points=30 file = 'qpe2L_' + $round(th*10000) + '.tbl'
    Elevation (P-P_e11) on 'Ray_' + $th as 'P error on Ray_' + $th
  endrepeat

END

```

5.1.4.19 lowvisc

```
{ LOWVISC.PDE
```

This example is a modification of the [VISCOUS.PDE](#)^[418] problem, in which the viscosity has been lowered to produce a Reynold's number of approximately 40.

As the input pressure is raised, the disturbance in velocities propagates farther down the channel. The channel must be long enough that the velocities have returned to the open-channel values, or the $P=0$ boundary condition at the outlet will be invalid and the solution will not succeed.

The problem computes half of the domain, with a reflective boundary at the bottom.

We have included four elevation plots of x -velocity, at the inlet, channel center, obstruction center and outlet of the channel. The integrals presented on these plots show the consistency of mass transport across the channel.

We have added a variable ψ to compute the stream function for plotting stream lines.

```
}
```


```
title 'Viscous flow in 2D channel, Re > 40'
```

```
variables
  u(0.1)
  v(0.01)
  p(1)
  psi
```

```
select
  ngrid = 40
```

```
definitions
  Lx = 5
  Ly = 1.5
  p0 = 2
  speed2 = u^2+v^2
  speed = sqrt(speed2)
  dens = 1
  visc = 0.04   vxx = -(p0/(2*visc*(2*Lx)))*(Ly^2-y^2) { open-channel x-velocity }

  rball=0.4
  cut = 0.1   { value for bevel at the corners of the obstruction }
```

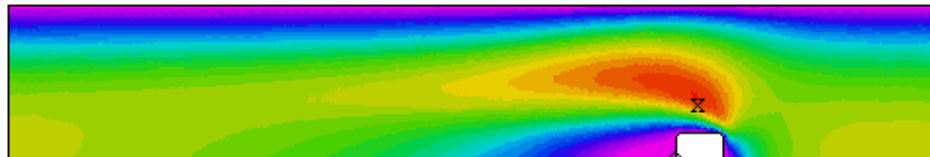

```

penalty = 100*visc/rball^2
Re = globalmax(speed)*(Ly/2)/(visc/dens)

w = zcomp(curl(u,v)) ! vorticity is the source for streamline equation

initial values
u = 0.5*vxx  v = 0  p = p0*(Lx+x)/(2*Lx)

equations
u: visc*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
v: visc*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
p: div(grad(p)) = penalty*(dx(u)+dy(v))
then
psi: div(grad(psi)) + w = 0 ! solve streamline equation separately from velocities

boundaries
region 1
start(-Lx,0)
load(u) = 0  value(v) = 0  load(p) = 0  value(psi) = 0
line to (Lx/2-rball,0)

value(u) = 0  value(v) = 0  load(p) = 0
mesh_spacing = rball/10 ! dense mesh to resolve obstruction
line to (Lx/2-rball,rball) bevel(cut)
to (Lx/2+rball,rball) bevel(cut)
to (Lx/2+rball,0)

mesh_spacing = 10*rball ! cancel dense mesh requirement
load(u) = 0  value(v) = 0  load(p) = 0
line to (Lx,0)

load(u) = 0  value(v) = 0  value(p) = p0  natural(psi) = 0
line to (Lx,Ly)

value(u) = 0  value(v) = 0  load(p) = 0  natural(psi) = normal(-v,u)
line to (-Lx,Ly)

load(u) = 0  value(v) = 0  value(p) = 0  natural(psi) = 0
line to close

monitors
contour(speed) report(Re)
contour(psi) as "Streamlines"
contour(max(psi,-0.003)) zoom(Lx/2-3*rball,0, 3*rball,3*rball) as "Vortex
Streamlines"
vector(u,v) as "flow" zoom(Lx/2-3*rball,0, 3*rball,3*rball) norm

plots
contour(u) report(Re)
contour(v) report(Re)
contour(speed) painted report(Re)
vector(u,v) as "flow" report(Re)
contour(p) as "Pressure" painted
contour(dx(u)+dy(v)) as "Continuity Error"
elevation(u) from (-Lx,0) to (-Lx,Ly)
elevation(u) from (0,0) to (0,Ly)
elevation(u) from (Lx/2,0) to (Lx/2,Ly)
elevation(u) from (Lx,0) to (Lx,Ly)
contour(psi) as "Streamlines"
contour(max(psi,-0.003)) zoom(Lx/2-3*rball,0, 3*rball,3*rball) as "Vortex
Streamlines"
vector(u,v) as "flow" zoom(Lx/2-3*rball,0, 3*rball,3*rball) norm

Transfer(u,v,p) ! write flow solution as initial values for Coupled_Contaminant.pde

end

```

5.1.4.20 swirl

```
{ SWIRL.PDE
```

This problem addresses swirling flow in a cylindrical vessel driven by a bottom impeller using a vector description of the equations.

In two-dimensional cylindrical coordinates, we can represent three velocity components (radial, axial and tangential) as long as there is no variation of cross-section or velocity in the azimuthal coordinate.

The Navier-Stokes equation for flow in an incompressible fluid with no body forces can be written in FlexPDE notation as

$$\text{dens}*(\text{dt}(U) + \text{dot}(U,\text{grad}(u))) = -\text{grad}(p) + \text{visc}*\text{de12}(U)$$

where U represents the vector fluid velocity, p is the pressure, dens is the density and visc is the viscosity of the fluid. Here the pressure can be considered as the deviation from static pressure, because uniform static forces like gravity can be cancelled out of the equation.

In two-dimensional steady-state axisymmetric form, this equation becomes three component equations, radial (v_r), tangential (v_t) and axial (v_z):

$$\text{dens}*(v_r*\text{dr}(v_r) - v_t^2/r + v_z*dz(v_r)) + \text{dr}(p) = \text{visc}*\text{[div(grad}(v_r)) - v_r/r^2]$$

$$\text{dens}*(v_r*\text{dr}(v_t) + v_r*v_t/r + v_z*dz(v_t)) = \text{visc}*\text{[div(grad}(v_t)) - v_t/r^2]$$

$$\text{dens}*(v_r*\text{dr}(v_z) + v_z*dz(v_z)) + \text{dz}(p) = \text{visc}*\text{div(grad}(v_z))$$

Notice that various strange terms arise, representing centrifugal and coriolis forces in cylindrical coordinates and derivatives of the unit vectors in the viscosity term. Notice also that there are no tangential derivatives, these having been assumed zero.

In principle, these equations are supplemented by the equation of incompressible mass conservation:

$$\text{div}(U) = 0$$

but this equation contains no reference to the pressure, which is nominally the remaining variable to be determined.

In practice, we choose to solve a "slightly compressible" system by defining a hypothetical equation of state

$$p(\text{dens}) = p_0 + L*(\text{dens}-\text{dens}_0)$$

where p_0 and dens_0 represent a reference density and pressure, and L is a large number representing a strong response of pressure to changes of density. L is chosen large enough to enforce the near-incompressibility of the fluid, yet not so large as to erase the other terms of the equation in the finite precision of the computer arithmetic.

The compressible form of the continuity equation is

$$\text{dt}(\text{dens}) + \text{div}(\text{dens}*U) = 0$$

which, together with the equation of state yields

$$\text{dt}(p) = -L*\text{dens}_0*\text{div}(U)$$

In steady state, we can replace the $\text{dt}(p)$ by $-\text{div}(\text{grad}(p))$

[\[see Help | Tech Notes | Smoothing Operators in PDEs"\]](#)³⁵⁶, resulting in the final pressure equation:


$$\text{div}(\text{grad}(p)) = L*\text{dens}_0*\text{div}(U)$$

In a real stirring vessel, the fluid is driven by an impeller bar in the bottom of the fluid. Since we cannot directly represent this geometry in an axisymmetric model, we approximate the effect of the impeller by a body force on the fluid in the lower segment of the domain. This body force attempts to accelerate the fluid to the velocity of the stir bar, with an arbitrary partition of the velocity into v_r , v_t and v_z .

```
}
```

```
TITLE 'Swirling cylindrical flow'
```

```
COORDINATES
```

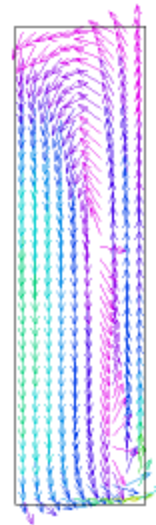

```

ycylinder ('r','z')

VARIABLES
v(0.001) = vector(vr, vz, vt)
p(0.001) { pressure, with linear interpolation and minimum expected range }

DEFINITIONS
rad=0.01 { vial radius }
ht=0.02 { vial height }
radimp = 0.98*rad { radial impeller size }
radwall = 0.95*rad { a gridding feature to put finer mesh at vial wall }

dens=1000 { fluid density }
visc=0.001 { fluid viscosity }

vm=magnitude(V)

div_v= div(V) { velocity divergence }

PENALTY = 1e4*visc/rad^2 { the phony equation of state coefficient }

band = ht/20 { height of force band }
bf = 1e5 { arbitrary body-force scaling }
f { stirbar force - assigned by region later }
rpm =staged(10,20,30) { several stirring speeds }
vimp = 2*pi*r*rpm/60 { impeller velocity }
vr0 = 0.2*vimp { arbitrary partition of stirring velocity }
vt0 = 1.0*vimp
vz0 = 0.3*vimp

V0 = vector(vr0, vz0, vt0)

mass_balance = div_v/integral(1)

INITIAL VALUES
vr=0
vz=0
vt=0
p=0

EQUATIONS
v: dens*dot(V,grad(V)) + grad(p) - visc*div(grad(V)) = F*(V0-V)
p: div(grad(p)) = penalty*div_v

BOUNDARIES

Region 'domain'
F=0
Start 'outer' (0,0)
{ mirror conditions on bottom boundary }
natural(vr)=0 natural(vt)=0 value(vz)=0 natural(p)=0 line to (rad,0)
value(vr)=0 ! impenetrable radial wall
{ no slip on sides (ie, velocity=0) }
! value(vt)=0 value(vz)=0
{ friction on sides - generate an outward "Flux" of v (i.e. -visc*grad(V)) to
drive it toward zero }
natural(vt)=100*vt natural(vz)=100*vz natural(p)=0 line to (rad,ht)
{ zero pressure and no z-flow on top, but free vr and vt }
natural(vr)=0 natural(vt)=0 value(vz)=0 value(p)=0 line to (0,ht)
{ no radial or tangential velocity on spin axis }
value(vr)=0 value(vt)=0 natural(vz)=0 natural(p)=0 line to close

Region "impeller"
F=bf
Start(0,0) line to (radimp,0) to (radimp,band) to (0,band) to close

{ add a gridding feature to help resolve the shear layer at the wall }
Feature start(radwall,0) line to (radwall,ht)

```

```

MONITORS
  contour(vr) as "Radial Velocity" report(rpm)
  contour(vt) as "Swirling Velocity" report(rpm)
  contour(vz) as "Axial Velocity" report(rpm)
  elevation(vt,vt0) from(0,0) to (rad,0) as "Impeller Velocity" report(rpm)
  contour(p) as "Pressure"
  vector(vr,vz) as "R-Z Flow"

PLOTS
  contour(vr) as "Radial Velocity" report(rpm)
  contour(vt) as "Swirling Velocity" report(rpm)
  contour(vz) as "Axial Velocity" report(rpm)
  contour(vm) as "Velocity Magnitude" report(rpm)
  contour(p) as "Pressure" report(rpm)
  vector(vr,vz) norm as "R-Z Flow" report(rpm)
  contour(mass_balance) report(rpm)
  elevation(vr) from (0,band) to (rad,band) as "Radial Velocity" report(rpm)
  elevation(vt) from (0,band) to (rad,band) as "Swirling Velocity" report(rpm)
  elevation(vz) from (0,band) to (rad,band) as "Axial Velocity" report(rpm)
  elevation(vt,vt0) from(0,band) to (rad,band) as "Impeller Velocity" report(rpm)
  elevation(vm) from (0,band) to (rad,band) as "Velocity Magnitude" report(rpm)
  elevation(vr) from (0,ht/2) to (rad,ht/2) as "Radial Velocity" report(rpm)
  elevation(vt) from (0,ht/2) to (rad,ht/2) as "Swirling Velocity" report(rpm)
  elevation(vz) from (0,ht/2) to (rad,ht/2) as "Axial Velocity" report(rpm)
  elevation(vm) from (0,ht/2) to (rad,ht/2) as "Velocity Magnitude" report(rpm)
  elevation(vr) from (0,0.9*ht) to (rad,0.9*ht) as "Radial Velocity" report(rpm)
  elevation(vt) from (0,0.9*ht) to (rad,0.9*ht) as "Swirling Velocity" report(rpm)
  elevation(vz) from (0,0.9*ht) to (rad,0.9*ht) as "Axial Velocity" report(rpm)
  elevation(vm) from (0,0.9*ht) to (rad,0.9*ht) as "Velocity Magnitude" report(rpm)
  elevation(vm) from (rad/2,0) to (rad/2,ht) as "Velocity Magnitude" report(rpm)

END

```

5.1.4.21 viscous

```
{ VISCOUS.PDE
```

This example shows the application of FlexPDE to problems in viscous flow.

The Navier-Stokes equation for steady incompressible flow in two cartesian dimensions is

$$\begin{aligned} \text{dens}*(\text{dt}(U) + U*\text{dx}(U) + V*\text{dy}(U)) &= \text{visc}*d\text{el}2(U) - \text{dx}(P) + \text{dens}*F_x \\ \text{dens}*(\text{dt}(V) + U*\text{dx}(V) + V*\text{dy}(V)) &= \text{visc}*d\text{el}2(V) - \text{dy}(P) + \text{dens}*F_y \end{aligned}$$

together with the continuity equation

$$\text{div}[U,V] = 0$$

where

U and V are the X- and Y- components of the flow velocity
P is the fluid pressure
dens is the fluid density
visc is the fluid viscosity
Fx and Fy are the X- and Y- components of the body force.

In principle, the third equation enforces incompressible mass conservation, but the equation contains no reference to the pressure, which is nominally the remaining variable to be determined.

In practice, we choose to solve a "slightly compressible" system by defining a hypothetical equation of state

$$p(\text{dens}) = p_0 + L*(\text{dens}-\text{dens}_0)$$

where p_0 and dens_0 represent a reference pressure and density, and L is a large number representing a strong response of pressure to changes of density. L is chosen large enough to enforce the near-incompressibility of the fluid, yet not so large as to erase the other terms of the equation in the finite precision of the computer arithmetic.

The compressible form of the continuity equation is

$$\text{dt}(\text{dens}) + \text{div}(\text{dens}*U) = 0$$

which, together with the equation of state yields

$$\text{dt}(p) = -L*\text{dens}_0*\text{div}(U)$$

In steady state, we can replace the $\text{dt}(p)$ by $-\text{div}(\text{grad}(p))$ [see Help | Tech Notes | Smoothing Operators in PDEs"], resulting in the final pressure equation:

$\text{div}(\text{grad}(p)) = M \cdot \text{div}(U)$
 Here M has the dimensions of density/time or viscosity/distance².

The problem posed here shows flow in a 2D channel blocked by a bar of square cross-section. The channel is mirrored on the bottom face, and only the upper half is computed.

We have chosen a "convenient" value of M, one that gives good accuracy in reasonable time. The user can alter this value to find one which is satisfactory for his application.


We have included three elevation plots of X-velocity, at the inlet, center and outlet of the channel. The integrals presented on these plots show the consistency of mass transport across the channel.

}

title 'Viscous flow in 2D channel, Re < 0.1'

variables

u(0.1)
 v(0.01)
 p(1)

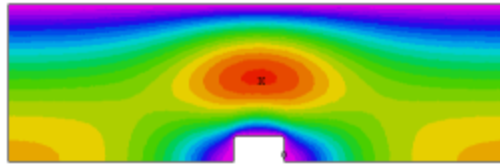

select

ngrid = 40

definitions

Lx = 5 Ly = 1.5
 Gx = 0 Gy = 0
 p0 = 1
 speed2 = u²+v²
 speed = sqrt(speed2)
 dens = 1
 visc = 1

vxx = (p0/(2*visc*Lx))*(Ly-y)² { open-channel x-velocity }

rball=0.25
 cut = 0.05 { value for bevel at the corners of the obstruction }

pfactor = staged(1,10,100,1000)
 penalty = pfactor*visc/rball² { "equation of state" }
 Re = globalmax(speed)*(Ly/2)/(visc/dens)

initial values

u = 0.5*vxx v = 0 p = p0*x/Lx

equations

u: visc*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
 v: visc*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
 p: div(grad(p)) = penalty*(dx(u)+dy(v))

boundaries

region 1
 start(0,0)
 { unspecified boundary conditions default to LOAD=0 }
 value(v)=0 line to (Lx/2-rball,0)
 value(u)=0 line to (Lx/2-rball,rball) bevel(cut)
 line to (Lx/2+rball,rball) bevel(cut)
 line to (Lx/2+rball,0)
 load(u)=0 line to (Lx,0)
 value(p)=p0 line to (Lx,Ly)
 value(u)=0 load(p)=0 line to (0,Ly)
 load(u)=0 value(p)=0 line to close

monitors

contour(speed) report(Re)

plots

grid(x,y)
 contour(u) report(Re)
 contour(v) report(Re)
 contour(speed) painted report(Re)
 vector(u,v) as "flow" report(Re)
 contour(p) as "Pressure" painted


```

contour(dx(u)+dy(v)) as "Continuity Error"
contour(p) zoom(Lx/2,0,1,1) as "Pressure"
elevation(u) from (0,0) to (0,Ly)
elevation(u) from (Lx/2,0) to (Lx/2,Ly)
elevation(u) from (Lx,0) to (Lx,Ly)

end

```

5.1.5 Groundwater

5.1.5.1 porous

```

{ POROUS.PDE

  This problem describes the flow through an anisotropic porous foundation.
  It is taken from Zienkiewicz, "The Finite Element Method in Engineering Science",
  p. 305.

}

title 'Anisotropic Porous flow'

variables
  pressure

definitions
  ky = 1
  kx = 4

equations
  pressure : dx(kx*dx(pressure)) + dy(ky*dy(pressure)) = 0

boundaries
  region 1
    start(0,0)
    natural(pressure)=0 line to (5,0) to (5,5)
    value(pressure)=0 line to (2,2)
    natural(pressure)=0 line to (2.5,2) to (2.5,1.95) to (1.95,1.95)
    value(pressure)=100 line to close

monitors
  contour(pressure)

plots
  contour(pressure)
  surface(pressure)

end

```

5.1.5.2 richards

```

{ RICHARDS.PDE

  A solution of Richards' equation in 1D.
  Constant negative head at surface, unit gradient at bottom.
  This problem runs slowly, because the very steep wave front
  requires small cells and small timesteps to track accurately.

  submitted by Neil Soicher of University of Hawaii.
}

title "1-D Richard's equation"

coordinates
  cartesian1('y')

variables
  h (1)

definitions

```

```

thr = 0.2
ths = 0.58
alpha = .08
n = 1.412
ks = 10
{Using Van Genuchten parameters for water content (wc),
 water capacitance (C=d(wc)/dh), effective saturation (se),
 and hydraulic conductivity (k) }
m = 1-1/n
wc = if h<0 then thr+(ths-thr)*(1+(abs(alpha*h))^n)^(-m) else ths
C = ((1-n)*abs(-alpha*h)^n*(1+abs(-alpha*h)^n)^((1/n)-2)*(ths-thr))/h
se = (wc-thr)/(ths-thr)
k = ks*sqrt(se)*(1-(1-se^(1/m))^m)^2

initial values
h = 199*exp(-(y-100)^2)-200

equations
h : dy(k*(dy(h)+1)) = C*dt(h)

boundaries
region 1
start(0)
line to (100) point value(h) = -1

front(h+150,1)

time 0 to 2

monitors
for cycle=10
elevation(h) from (0) to (100) as "pressure"
elevation(c) from (0) to (100) as "capacitance"
elevation(k) from (0) to (100) log as "conductivity"
grid(y)

plots
for t=0.001 by 0.001 to 0.01 0.1 by 0.1 to endtime
elevation(h) from (0) to (100) as "pressure"
elevation(c) from (0) to (100) as "capacitance"
elevation(k) from (0) to (100) log as "conductivity"
grid(y)

history(k) at (90) (95) (99) (100)
history(c) at (90) (95) (99) (100)

end "IE3vuxq/blOMIRLitv+
+FYgmXZuPz8D1+vwzXgpATJSSnTmsgWgsZOaLi+YOaMBSdxHjOXQUBxLPMVwceTZ+tzU0r6xbZ0Y9YaEBD8IG48nP
CNezshKtEYPOYKh4ucd1KJWVP08XzbScXAA9wKdows86YuxXbtMkiY/S4U2KCpa"

```

5.1.5.3 water

```

{ WATER.PDE

This problem shows the flow of water to two wells, through soil regions of
differing porosity. It also displays the ability of FlexPDE to grid features
of widely varying size.

}

title 'Groundwater flow to two wells'

definitions
k { no value is required, as long as it appears later }
s = 0 { no volumetric source }
k1 = 0.1 { high porosity value }
k2 = 1.0e-7 { low porosity value }
sx1 = 0.7 sy1 = 0.4 { well 1 location }
sx2 = 0.5 sy2 = 0.2 { well 2 location }
srad = 0.001 { well radius = one thousandth of domain size }
w = 0.05 { a zoom window size }

```

```

px = 0.4   py = 0.4 { percolation pond center }
pr = 0.025 { percolation pond radius }
ps = 1e-4   { percolation rate }

variables
h

equations
h : div(k*grad(h)) + s = 0

boundaries

region 1 { The domain boundary, held at constant pressure head }
k=k1
start(0,0)
value(h)=0 line to (0.25,-0.1)
               to (0.45,-0.1)
               to (0.65,0)
               to (0.95,0.1)
               to (0.95,0.4)
               to (0.75,0.6)
               to (0.45,0.65)
               to (0,0.4)
               to close

{ Two wells, held at constant draw-down depths }
start(sx1,sy1-srad)
value(h) = -1   arc(center=sx1,sy1) angle=-360
start(sx2,sy2-srad)
value(h) = -2   arc(center=sx2,sy2) angle=-360

region 2 { Some regions of low porosity }
k=k2
start(0,0) line to (0.25,-0.1)
               to (0.45,-0.1)
               to (0.45,0.05)
               to (0,0.05)
               to close

start(0.95,0.1) line to (0.95,0.3)
                  to (0.65,0.3)
                  to (0.65,0)
                  to close

start(0.3,0.3) line to (0.5,0.4)
                  to (0.5,0.6)
                  to (0.3,0.5)
                  to close


region 3 { A percolation pond }
k = k2
s = ps { percolation rate }
start (px,py-pr) arc(center=px,py) angle=360

monitors
contour(h)

plots
grid(x,y)
grid(x,y) zoom(sx1-w/2,sy1-w/2,w,w)
grid(x,y) zoom(sx2-w/2,sy2-w/2,w,w)
contour(h) as 'Head'
contour(h) as 'Head' zoom(0.65,0.35,0.1,0.1)
surface(h) as 'Head'

end

```

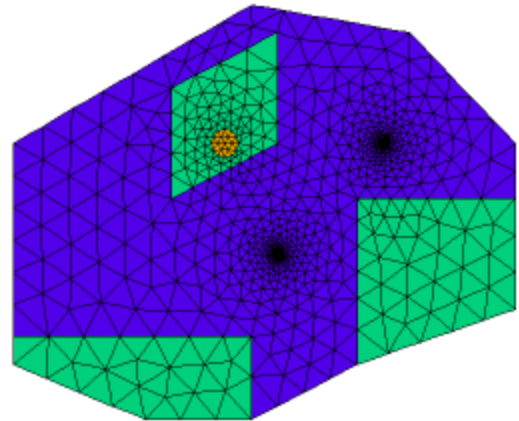

5.1.6 Heatflow

5.1.6.1 1d_float_zone

```
{ 1D_FLOAT_ZONE.PDE
```

This is a version of the example [FLOAT_ZONE.PDE](#)^[42] in 1D cartesian geometry.

```

}
title
"Float Zone in 1D Cartesian geometry"
select
cell_limit=100
coordinates
cartesian1
variables
temp(threshold=100)
definitions
k = 10 {thermal conductivity}
cp = 1 {heat capacity}
long = 18
H = 0.4 {free convection boundary coupling}
Ta = 25 {ambient temperature}
A = 4500 {amplitude}

source = A*exp(-((x-1*t)/.5)^2)*(200/(t+199))
initial value
temp = Ta
equations
temp: div(k*grad(temp)) + source -H*(temp - Ta) = cp*dt(temp)
boundaries
region 1
start(0) point value(temp) = Ta
line to (long) point value(temp) = Ta
time -0.5 to 19 by 0.01
monitors
for t = -0.5 by 0.5 to (long + 1)
elevation(temp) from (0) to (long) range=(0,1800) as "Surface Temp"
plots
for t = -0.5 by 0.5 to (long + 1)
elevation(temp) from (0) to (long) range=(0,1800) as "Axis Temp"
elevation(source) from(0) to (long)
elevation(-k*grad(temp)) from(0) to (long)
histories
history(temp) at (0) (1) (2) (3) (4) (5) (6) (7) (8) (9)
(10) (11) (12) (13) (14) (15) (16) (17) (18)
end

```

5.1.6.2 3d_bricks

```
{ 3D_BRICKS.PDE
```

This problem demonstrates the application of FlexPDE to steady-state three dimensional heat conduction. An assembly of four bricks of differing conductivities has a gaussian internal heat source, with all faces held at zero temperature. After a time, the temperature reaches a stable distribution.

This is the steady-state analog of problem [3D_BRICKS+TIME.PDE](#) ^[425]

```
}
title 'steady-state 3D heat conduction'

select
  regrid=off { use fixed grid }

coordinates
  cartesian3

variables
  Tp

definitions
  long = 1
  wide = 1
  K { thermal conductivity -- values supplied later }
  Q = 10*exp(-x^2-y^2-z^2) { thermal source }

initial values
  Tp = 0.

equations
  Tp : div(k*grad(Tp)) + Q = 0 { the heat equation }

extrusion z = -long,0,long { divide z into two layers }


boundaries
  Surface 1 value(Tp)=0 { fix bottom surface temp }
  Surface 3 value(Tp)=0 { fix top surface temp }

  Region 1 { define full domain boundary in base plane }
  layer 1 k = 1.0 { bottom right brick }
  layer 2 k = 0.1 { top right brick }
  start(-wide,-wide)
  value(Tp) = 0 { fix all side temps }
  line to (wide,-wide) { walk outer boundary in base plane }
  to (wide,wide)
  to (-wide,wide)
  to close

  Region 2 { overlay a second region in left half }
  layer 1 k = 0.2 { bottom left brick }
  layer 2 k = 0.4 { top left brick }
  start(-wide,-wide)
  line to (0,-wide) { walk left half boundary in base plane }
  to (0,wide)
  to (-wide,wide)
  to close

monitors
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "XZ Temp"
  elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
  elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
  elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp"

plots
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "XZ Temp"
```

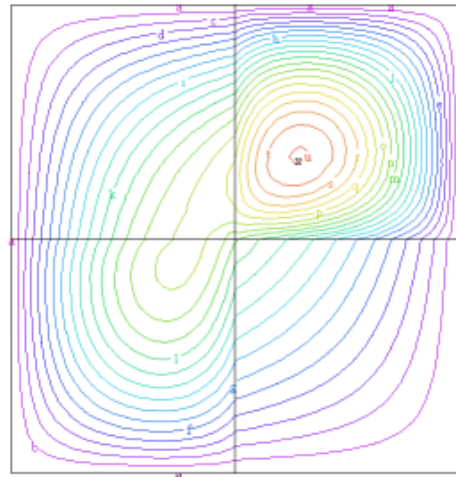

```
elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp"
```

```
end
```

5.1.6.3 3d_bricks+time

```
{ 3D_BRICKS+TIME.PDE
```

This problem demonstrates the application of FlexPDE to time-dependent three dimensional heat conduction. An assembly of bricks of differing conductivities has a gaussian internal heat source, with all faces held at zero temperature. After a time, the temperature reaches a stable distribution.

This is the time-dependent analog of example problem [3D_BRICKS.PDE](#)^[424].

```
}
```

```
title 'time-dependent 3D heat conduction'
```

```
select
  regrid=off { use fixed grid }
  ngrid=5    { smaller grid for quicker run }
```

```
coordinates
  cartesian3
```

```
variables
  Tp(threshold=0.1) { the temperature variable, with approximate size }
```

```
definitions
  long = 1
  wide = 1
  K { thermal conductivity -- values supplied later }
  Q = 10*exp(-x^2-y^2-z^2) { thermal source }
  tmax = 6 { plot range control }
```

```
initial values
  Tp = 0.
```

```
equations
  Tp : div(k*grad(Tp)) + Q = dt(Tp) { the heat equation }
```

```
extrusion z = -long,0,long { divide z into two layers }
```

```
boundaries
  surface 1 value(Tp)=0 { fix bottom surface temp }
  surface 3 value(Tp)=0 { fix top surface temp }

  region 1 { define full domain boundary in base plane }
  k = bylayer (1.0, 0.1) { bottom and top right brick }
  start(-wide,-wide)
  value(Tp) = 0 { fix all side temps }
  line to (wide,-wide) { walk outer boundary in base plane }
  to (wide,wide)
  to (-wide,wide)
  to close

  region 2 { overlay a second region in left half }
  k = bylayer (0.2, 0.4) { bottom and top left brick }
  start(-wide,-wide)
  line to (0,-wide) { walk left half boundary in base plane }
  to (0,wide)
  to (-wide,wide)
  to close
```

```
time 0 to 3 by 0.01 { establish time range and initial timestep }
```

```
monitors
  for cycle=1
    contour(Tp) on z=0 as "XY Temp" range=(0,tmax)
    contour(Tp) on x=0 as "YZ Temp" range=(0,tmax)
    contour(Tp) on y=0 as "XZ Temp" range=(0,tmax)
    elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp" range=(0,tmax)
    elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp" range=(0,tmax)
```

```

    elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp" range=(0,tmax)

plots
  for t = endtime
    contour(Tp) on z=0 as "XY Temp" range=(0,tmax)
    contour(Tp) on x=0 as "YZ Temp" range=(0,tmax)
    contour(Tp) on y=0 as "XZ Temp" range=(0,tmax)

histories
  history(Tp) at (wide/2,-wide/2,-long/2)
               (wide/2,wide/2,-long/2)
               (-wide/2,wide/2,-long/2)
               (-wide/2,-wide/2,-long/2)
               (wide/2,-wide/2,long/2)
               (wide/2,wide/2,long/2)
               (-wide/2,wide/2,long/2)
               (0,0,0) range=(0,tmax)

end

```

5.1.6.4 axisymmetric_heat

```

{ AXISYMMETRIC_HEAT.PDE

This example demonstrates axi-symmetric
heatflow.

The heat flow equation in any coordinate
system is

$$\text{div}(K*\text{grad}(T)) + \text{Source} = 0.$$


The following problem is taken from
Zienkiewicz, "The Finite Element Method
in Engineering Science", p. 306 (where
the solution is plotted, but no dimensions
are given). It describes the flow of heat
in a spherical vessel.
The outer boundary is held at Temp=0,
while the inner boundary is held at Temp=100.

}

title "Axi-symmetric Heatflow "

coordinates
  cylinder("R","Z") { select a cylindrical coordinate system, with
                    the rotational axis along the "Y" direction
                    and the coordinates named "R" and "Z" }

variables
  Temp { Define Temp as the system variable }

definitions
  K = 1 { define the conductivity }
  source = 0 { define the source (this problem doesn't have one) }

initial values
  Temp = 0 { unimportant in linear steady-state problems }


equations
  { define the heatflow equation: }
  Temp : div(K*grad(Temp)) + Source = 0

boundaries
  { define the problem domain }
  Region 1 { ... only one region }

  start(5,0)
  natural(Temp)=0 { define the bottom symmetry boundary condition }
  line to (6,0)

  value(Temp)=0 { fixed Temp=0 in outer boundary }
  line to (6,3) { walk the funny stair-step outer boundary }
  to (5,3)
  to (5,4)
  to (4,4)
  to (4,5)
  to (3,5)
  to (3,6)

```

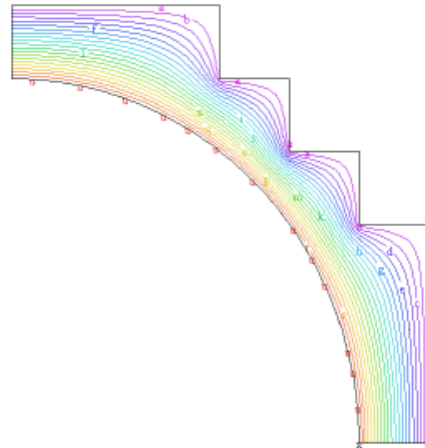

```

    to (0,6)
    natural(Temp)= 0    { define the left symmetry boundary }
    line to (0,5)

    value(Temp)=100    { define the fixed inner temperature }
    arc( center=0,0) to close { walk an arc to the starting point }

monitors
  contour(Temp)      { show contour plots of solution in progress }

plots
  contour(Temp)      { write these hardcopy files at completion }
  surface(Temp)      { show solution }
  vector(-2*pi*r*k*grad(Temp)) as "Heat Flow"

end

```

5.1.6.5 float_zone

```

{ FLOAT_ZONE.PDE

  This example illustrates time-dependent axi-symmetric heat flow with a
  moving source.

  A rod of conductive material of unit radius and "long" units length
  is clamped to a heat sink at either end. An RF coil passes the
  length of the rod, creating a moving heat source of gaussian profile.
  This produces a moving melt zone which carries impurities with it as it moves.
  A cam adjusts the source amplitude by 200/(t+199) to produce an approximately
  constant maximum temperature.

}
title
  "Float Zone"

coordinates
  xylinder('Z','R')

select
  cubic    { Use Cubic Basis }

variables
  temp(threshold=100)

definitions
  k = 0.85    { thermal conductivity }
  cp = 1      { heat capacity }
  long = 18
  H = 0.4     { free convection boundary coupling }
  Ta = 25     { ambient temperature }
  A = 4500    { amplitude }

  source = A*exp(-((z-1*t)/.5)^2)*(200/(t+199))

initial value
  temp = Ta

equations
  temp : div(k*grad(temp)) + source = cp*dt(temp)

boundaries
  region 1
  start(0,0)
  natural(temp) = 0 line to (long,0)
  value(temp) = Ta line to (long,1)
  natural(temp) = -H*(temp - Ta) line to (0,1)
  value(temp) = Ta line to close
  feature
  start(0.01*long,0) line to (0.01*long,1)

time -0.5 to 19 by 0.01

monitors
  for t = -0.5 by 0.5 to (long + 1)
    elevation(temp) from (0,1) to (long,1) range=(0,1800) as "Surface Temp"

```



```

contour(temp)

plots
for t = -0.5 by 0.5 to (long + 1)
  elevation(temp) from (0,0) to (long,0) range=(0,1800) as "Axis Temp"

histories
history(temp) at (0,0) (1,0) (2,0) (3,0) (4,0) (5,0) (6,0) (7,0) (8,0)
                (9,0) (10,0) (11,0) (12,0) (13,0) (14,0) (15,0) (16,0)
                (17,0) (18,0)

end

```

5.1.6.6 heat_boundary

```
{ HEAT_BOUNDARY.PDE
```

This problem shows the use of natural boundary conditions to model insulation, reflection, and convective losses.

The heatflow equation is

$$\text{div}(K*\text{grad}(\text{Temp})) + \text{Source} = 0$$

The Natural boundary condition specifies the value of the surface-normal component of the argument of the divergence operator, ie:
 Natural Boundary Condition = normal <dot> K*grad(Temp)

Insulating boundaries and symmetry boundaries therefore require the boundary condition:
 Natural(Temp) = 0

At a convective boundary, the heat loss is proportional to the temperature difference between the surface and the coolant. Since the heat flux is

$$F = -K*\text{grad}(\text{Temp}) = b*(\text{Temp} - T_{\text{coolant}})$$
 the appropriate boundary condition is
 Natural(Temp) = b*(Tcoolant - Temp).

In this problem, we define a quarter of a circle, with reflective boundaries on the symmetry planes to model the full circle. There is a uniform heat source of 4 units throughout the material. The outer boundary is insulated, so the natural boundary condition is used to specify no heat flow.

Centered in the quadrant is a cooling hole. The temperature of the coolant is Tzero, and the heat loss to the coolant is (Tzero - Temp) heat units per unit area.

In order to illustrate the characteristics of the Finite Element model, we have selected output plots of the normal component of the heat flux along the system boundaries. The F.E. method forms its equations based on the weighted average of the deviation of the approximate solution to the PDE over each cell. There is no guarantee that on the outer boundary, for example, where the Natural(Temp) = 0, the point-by-point value of the normal derivative will necessarily be zero. But the integral of the PDE over each cell should be correct to within the requested accuracy.

Here we have requested three solution stages, with successively tighter accuracy requirements of 1e-3, 1e-4 and 1e-5.

Notice in plot 7 that while the pointwise values of the normal flux oscillate by ten percent in the first stage, they oscillate about the same solution as the later stages, and the integral of the heat loss is 2.628, 2.642 and 2.6395 for the three stages. Compare this with the analytic integral of the source (2.6389) and with the numerical integral of the source in plot 5 (all 2.6434). The Divergence Theorem is therefore satisfied to 0.004, 0.001, and 0.0002 in the three stages.

In plot 7, "Integral" and "Bintegral" differ because they are the result of different quadrature rules applied to the data.

```
}
```

```

title "Coolant Pipe Heatflow"

select
  stages = 3
  errlim = staged(1e-3,1e-4,1e-5)
  autostage=off

variables
  Temp

definitions
  K = 1           { conductivity }
  source = 4      { source }
  Tzero = 0       { coolant temperature }
  flux = -K*grad(Temp) { thermal flux vector }
initial values
  Temp = 0

equations
  Temp : div(K*grad(Temp)) + source = 0

boundaries
  Region 1       { define the problem domain }
  start "OUTER" (0,0) { ... only one region }
  natural(Temp)=0 { start at the center }
  line to(1,0)    { define the bottom symmetry boundary condition }
                  { walk to the surface }

  natural(Temp)=0 { define the "Zero Flow" boundary condition }
  arc (center=0,0) to (0,1) { walk the outer arc }

  natural(Temp)=0 { define the Left symmetry B.C. }
  line to close   { return to close }

  start "INNER" (0.4,0.2) { define the excluded coolant hole }
  natural(Temp)=Tzero-Temp { "Temperature-difference" flow boundary.
                             Negative value means negative K*grad(Temp)
                             or POSITIVE heatflow INTO coolant hole }
  arc (center=0.4,0.4){ walk boundary CLOCKWISE for exclusion }
    to (0.6,0.4)
    to (0.4,0.6)
    to (0.2,0.4)
    to close


monitors
  contour(Temp) { show contour plots of solution in progress }

plots
  { write these hardcopy files at completion: }
  grid(x,y) { show the final grid }
  contour(Temp) { show the solution }
  surface(Temp)
  vector(-K*dx(Temp),-K*dy(Temp)) as "Heat Flow"
  contour(source) { show the source to compare integral }
  elevation(normal(flux)) on "outer" range(-0.08,0.08)
  report(bintegral(normal(flux),"outer")) as "bintegral"
  elevation(normal(flux)) on "inner" range(1.95,2.3)
  report(bintegral(normal(flux),"inner")) as "bintegral"

histories
  history(bintegral(normal(flux),"inner"))

end

```

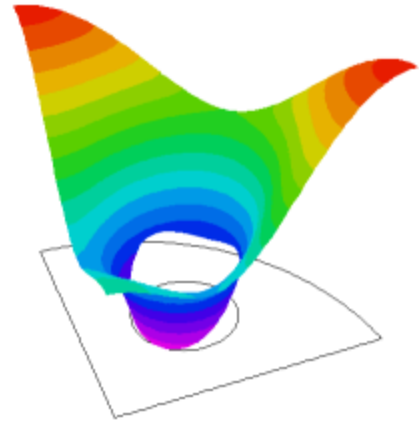

5.1.6.7 radiation_flow

```
{ RADIATION_FLOW.PDE
```

This problem demonstrates the use of FlexPDE in the solution of problems in radiative transfer.


Briefly summarized, we solve a Poisson equation for the radiation energy density, assuming that at every point in the domain the local temperature has come into equilibrium with the impinging radiation field.

We further assume that the spectral characteristics of the radiation field are adequately described by three average cross-sections: the emission average, or "Planck Mean", σ_{map} ; the absorption average, σ_{maa} ; and the transport average, or "Rosseland Mean-Free-Path", λ_{md} . These averages may, of course, differ in various regions, but they must be estimated by facilities outside the scope of FlexPDE.

And finally, we assume that the radiation field is sufficiently isotropic that Fick's Law, that the flux is proportional to the gradient of the energy density, is valid.

The problems shows a hot slab radiating across an air gap and heating a distant dense slab.

```
}
```

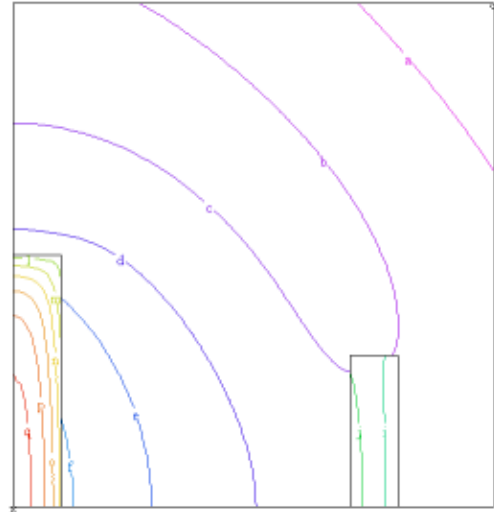

```
title 'Radiative Transfer'
```

```
variables
```

```
  erad    { Radiation Energy Density }
```

```
definitions
```

```
  source      { declare the parameters, values will follow }
  lambda_r    { Rosseland Mean Free Path }
  sigma_map   { Planck Mean Emission cross-section }
  sigma_maa   { absorption average cross-section }
  beta = 1/3  { Fick's Law proportionality factor }
```

```
materials
```

```
  'air'       : source=0    sigma_map=2    sigma_maa=1    lambda_r=10
  'hot slab'  : source=100  sigma_map=10   sigma_maa=10   lambda_r=1
  'dense slab': source=0    sigma_map=10   sigma_maa=10   lambda_r=1
```

```
equations { The radiation flow equation: }
```

```
  erad : div(beta*lambda_r*grad(erad)) + source = 0
```

```
boundaries
```

```
  region 1 { the bounding region is tenuous }
```

```
  use material 'air'
```

```
  start(0,0)
```

```
  natural(erad)=0 { along the bottom, a zero-flux symmetry plane }
```

```
  line to (1,0)
```

```
  natural(erad)=-erad { right and top, radiation flows out }
```

```
  line to (1,1) to (0,1)
```

```
  natural(erad)=0 { Symmetry plane on left }
```

```
  line to close
```

```
  region 2 { this region has a source and large cross-section }
```

```
  use material 'hot slab'
```

```
  start(0,0)
```

```
  line to (0.1,0) to (0.1,0.5) to (0,0.5) to close
```

```
  region 3 { this opaque region is driven by radiation }
```

```
  use material 'dense slab'
```

```
  start(0.7,0)
```

```
  line to (0.8,0) to (0.8,0.3) to (0.7,0.3) to close
```

```

monitors
  contour(erad)

plots
  contour(erad) as 'Radiation Energy'
  surface(erad) as 'Radiation Energy'
  vector(-beta*lambda*grad(erad)) as 'Radiation Flux'

  { the temperature can be calculated from the assumption of equilibrium: }
  contour(sqrt(sqrt(erad*sigmaa/sigmap))) as 'Temperature'
  surface(sqrt(sqrt(erad*sigmaa/sigmap))) as 'Temperature'

end

```

5.1.6.8 radiative_boundary

```

{ RADIATIVE_BOUNDARY.PDE

  This example demonstrates the implementation of radiative heat loss
  at the boundary of a heat transfer system.

}

title "Axi-symmetric Anisotropic Heatflow, Radiative Boundary"

select
  errlim=1.0e-4

coordinates
  { Define cylindrical coordinates with
    symmetry axis along "Y" }
  ycylinder("R","Z")

variables
  { Define Temp as the system variable,
    with approximate variation range of 1 }
  Temp(1)

definitions
  kr = 1 { radial conductivity }
  kz = 4 { axial conductivity }

  { define a Gaussian source density: }
  source = exp(-(r^2+(z-0.5)^2))

  { define the heat flux: }
  flux = vector(-kr*dr(Temp),-kz*dz(Temp))

initial values
  Temp = 1


equations { define the heatflow equation: }
  Temp : div(flux) = Source

boundaries { define the problem domain }
  Region 1 { ... only one region }
  start "RAD" (0,0) { start at bottom on axis and name the boundary }
  natural(temp)= 0.5*temp^4 { specify a T^4 boundary loss }
  line to (0.5,0) { walk the boundary }
  arc(center=0.5,0.5) angle 180 { a circular outer edge }
  line to (0,1)
  natural(temp)=0 { define a symmetry boundary at the axis }
  line to close

monitors
  elevation(magnitude(2*pi*r*flux)) on "RAD" as "Heat Flow"
  contour(Temp) { show contour plots of solution in progress }

plots { write these hardcopy files at completion }
  grid(r,z) { show final grid }

```

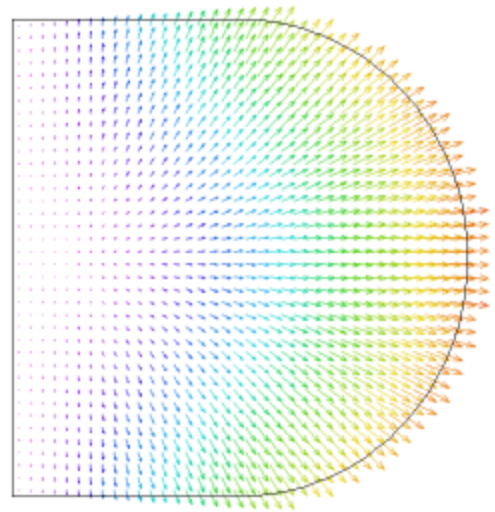

```

contour(Temp)                { show solution }
surface(Temp)
vector(2*pi*r*flux) as "Heat Flow"
elevation(magnitude(2*pi*r*flux)) on "RAD" as "Heat Flow" export
end

```

5.1.6.9 slider

```

{ SLIDER.PDE

  This problem represents a cross section of a wood-frame sliding window.
  -- submitted by Elizabeth Finleyson, Lawrence Berkeley Labs
}

title
  "NFRC wood slider"

variables
  Temp

definitions
  K = 0.97      {Thermal Conductivity}
  B1 = 1.34    {Film coefficients interior wood}
  B2 = 1.41    {' ' interior glass}
  B3 = 5.11    {' ' exterior glass}
  Tin = 70.0   {Ambient Temperature Inside}
  Tout = 0.0   {' ' Outside}

equations
  Temp : dx(K*dx(Temp)) + dy(K*dy(Temp)) = 0

boundaries
  region 1      {Defines the maximum extent of the system (wood)}
  start(6.813,1.813)
  natural(Temp) = B1*(Tin - Temp)
  line to (6.813,3.001) to (6.344,3.001) to (6.344,3.323)
  line to (6.183,3.323) to (6.183,4.885) to (5.988,4.885)
  line to (5.988,5.104) to (5.678,5.104)
  natural(Temp) = B2*(Tin - Temp)
  line to (5.678,7.604)
  natural(Temp) = 0.0
  line to (5.153,7.604)
  natural(Temp) = B3*(Tout - Temp)
  line to (5.153,5.104) to (5.012,5.104) to (5.012,4.889)
  line to (4.871,4.889) to (4.871,3.323) to (4.248,3.323)
  line to (4.248,2.845) to (3.233,2.845) to (3.233,3.323) to (2.906,3.323)
  line to (2.906,3.001) to (2.250,3.001) to (2.250,2.501) to (1.156,2.501)
  natural(Temp) = 0.0
  line to (1.156,1.813) to close

  {Rigid PVC}
  region 2      k = 1.18
  start(6.516,2.800)
  line to (6.516,2.845) to (6.344,2.845) to (6.344,3.323)
  line to (5.737,3.323) to (5.737,3.278) to (6.017,3.278)
  line to (6.017,2.845) to (5.002,2.845) to (5.002,3.278)
  line to (5.317,3.278) to (5.317,3.323)
  line to (4.248,3.323) to (4.248,2.845) to (3.233,2.845)
  line to (3.233,3.323) to (2.906,3.323) to (2.906,2.845)
  line to (2.547,2.845) to (2.547,2.800) to close

  {Air cavity overlays}
  region 3      k = 0.59
  start(4.293,2.845)
  line to (4.957,2.845) to (4.957,3.278) to (4.293,3.278) to close

  region 4      k = 0.31
  start(2.951,2.800)
  line to (3.188,2.800) to (3.188,3.278) to (2.951,3.278) to close

  region 5      k = 0.51
  start(2.547,2.501)
  line to (3.188,2.501) to (3.188,2.800) to (2.547,2.800) to close

  region 6      k = 0.81

```

```

    start(5.002,2.845)
    line to (6.017,2.845) to (6.017,3.278) to (5.002,3.278) to close

    region 7 k = 0.39
    start(5.317,3.278)
    line to (5.737,3.278) to (5.737,3.551) to (5.317,3.551) to close

    region 8 k = 0.31
    start(6.062,2.800)
    line to (6.299,2.800) to (6.299,3.278) to (6.062,3.278) to close

    region 9 k = 0.41
    start(6.062,2.501)
    line to (6.516,2.501) to (6.516,2.800) to (6.062,2.800) to close

    {Silicon sealant}
    region 10 k = 2.5
    start(5.133,4.573)
    line to (5.153,4.573) to (5.153,5.104) to (5.133,5.104) to close

    region 11 k = 2.5
    start(5.678,4.573)
    line to (5.698,4.573) to (5.698,5.104) to (5.678,5.104) to close

    {Glass layers}
    region 12 k = 6.93
    start(5.153,4.573)
    line to (5.678,4.573) to (5.678,7.604) to (5.153,7.604) to close

    {Eurythane spacer seal}
    region 13 k = 2.5
    start(5.278,4.573)
    line to (5.553,4.573) to (5.553,4.771) to (5.278,4.771) to close

    {Spacer}
    region 14 k = 18.44
    start(5.278,4.771)
    line to (5.553,4.771) to (5.553,5.012) to (5.278,5.012) to close

    {Gas gap}
    region 15 k = 0.32
    start(5.278,5.012)
    line to (5.553,5.012) to (5.553,7.604) to (5.278,7.604) to close

    {Frame fill}
    region 16 k = 0.21
    start(3.188,2.501)
    line to (6.062,2.501) to (6.062,2.800) to (3.188,2.800) to close

    {Spacer air gap}
    region 17 k = 0.28
    start(5.133,4.479)
    line to (5.698,4.479) to (5.698,4.573) to (5.133,4.573) to close

    monitors
    contour(Temp)

    plots
    grid(x,y)
    contour(Temp)
    contour(Temp) zoom(4.6,4.2,1.8,1.8)
    elevation(Temp) from (5.416,1.813) to (5.416,7.604)
    vector((K*(-dx(Temp))), (K*(-dy(Temp)))) as "HEAT FLUX"

    end

```

5.1.7 Lasers

5.1.7.1 laser_heatflow

```
{ LASER_HEATFLOW.PDE
```

```
    This problem shows a complex heatflow application.
```

A rod laser is glued inside a cylinder of copper.

Manufacturing errors allow the rod to move inside the glue, leaving a non-uniform glue layer around the rod. The glue is an insulator, and traps heat in the rod. The copper cylinder is cooled only on a 60-degree portion of its outer surface.

The laser rod has a temperature-dependent conductivity.

We wish to find the temperature distribution in the laser rod.

The heat flow equation is

$$\text{div}(K*\text{grad}(\text{Temp})) + \text{Source} = 0.$$

We will model a cross-section of the cylinder. While this is a cylindrical structure, in cross-section there is no implied rotation out of the cartesian plane, so the equations are cartesian.

```

-- Submitted by Luis Zapata, LLNL
}
title "Nd:YAG Rod - End pumped. 200 W/cm3 volume source. 0.005in uropol"
Variables
temp    { declare "temp" to be the system variable }

definitions
k = 3          { declare the conductivity parameter for later use }
krod=39.8/(300+temp){ Nonlinear conductivity in the rod.(W/cm/K) }
Rod=0.2       { cm Rod radius }
Qheat=200     { W/cc, heat source in the rod }

kuropol=.0019 { Uropol conductivity }
Qu=0          { Volumetric source in the Uropol }
Ur=0.005     { Uropol annulus thickness in r dim }

kcopper=3.0   { Copper conductivity }
Rcu=0.5       { Copper convection surface radius }

tcoolant=0.   { Edge coolant temperature }
ASE=0.        { ASE heat/area to apply to edge, heat bar or mount }
source=0

initial values
temp = 50     { estimate solution for quicker convergence }

equations
temp : div(k*grad(temp)) + source = 0;

boundaries
region 1      { the outer boundary defines the copper region }
k = kcopper
start (0,-Rcu)
natural(temp) = -2 * temp    {convection boundary}
arc(center=0,0) angle 60
natural(temp) = 0           {insulated boundary}
arc(center=0,0) angle 300
arc(center=0,0) to close

region 2      { next, overlay the Uropol in a central cylinder }
k = kuropol
start (0,-Rod-Ur) arc(center=0,0) angle 360

region 3      { next, overlay the rod on a shifted center }
k = krod
Source = Qheat
start (0,-Rod-Ur/2) arc(center=0,-Ur/2) angle 360

monitors
grid(x,y) zoom(-8*Ur, -(Rod+8*Ur),16*Ur,16*Ur)
contour(temp)

plots
grid(x,y)
contour(temp)
contour(temp) zoom(-(Rod+Ur), -(Rod+Ur), 2*(Rod+Ur), 2*(Rod+Ur))

```

```

contour(temp) zoom(-(Rod+Ur)/4, -(Rod+Ur), (Rod+Ur)/2, (Rod+Ur)/2)
vector(-k*dx(temp), -k*dy(temp)) as "heat flow"
surface(temp)

```

```
end
```

5.1.7.2 self_focus

```

{ SELF_FOCUS.PDE

  This problem considers the self-focussing of a laser beam of Gaussian profile.
  -- Submitted by John Trenholme, LLNL
}

title "2D GAUSSIAN BEAM PROFILE"

select
  elevationgrid = 300

variables
  realf (threshold=0.1)      { real (in-phase) part of field envelope }
  imagf (threshold=0.1)    { imaginary (quadrature) part of field envelope }

definitions
  radX = 2                  { X "radius" of beam }
  radY = 2                  { Y "radius" of beam }
  bMax = 2.25              { maximum B integral (= Time) }
  zm = 5                   { zoom-in factor for plots }
  xHi = 7.17 * SQRT( radX * radY) { size of calculation domain... }
  yHi = 7.17 * SQRT( radX * radY) { set for field = 0.001 at edge }
  x45 = xHi * 0.7071      { point on boundary at 45 degrees }
  y45 = yHi * 0.7071
  tn = 1e-30              { tiny number to force zero on plot scales }
  power = PI * radX * radY * 2.73 ^ 2 / 8 { analytic integral }
  inten = realf * realf + imagf * imagf { definition for later use }

time
  0 to bMax by 0.03 * bMax { "time" is really B integral }

initial values
  realf = EXP( - ( x / ( radX * 2.73)) ^ 2 - ( y / ( radY * 2.73)) ^ 2 )
  imagf = 0

equations
  { normalized, low-secular-phase nonlinear propagation }
  realf: DEL2( imagf ) + imagf * ( inten - 1 ) = -DT( realf )
  imagf: DEL2( realf ) + realf * ( inten - 1 ) = DT( imagf )

boundaries
  region 1
  start ( 0, 0) { bump is at center; only do one quadrant }
  natural( realf ) = 0 { set slope to zero on boundary }
  natural( imagf ) = 0 { if boundary value too big, move boundary out }
  line to ( xHi, 0)
  arc ( center = 0, 0) to ( 0, yHi)
  line to ( 0, 0)
  to close

monitors
  for cycle = 1 { do this every cycle }
  elevation( inten ) from ( 0, 0) to ( xHi, 0) as "INTENSITY"
  range( 0, tn)
  contour( inten ) as "INTENSITY" zoom ( 0, 0, xHi / zm, yHi / zm)

plots
  for t = starttime { at the beginning only }
  grid( x, y)
  surface( inten ) as "INTENSITY" range( 0, tn) viewpoint( 1000, 200, 40)
  elevation( LOG10( inten )) from ( 0, 0) to ( xHi, 0) as "LOG10 INTENSITY"

  for t = endtime { at the end only }
  grid( x, y)
  grid( x, y) zoom ( 0, 0, xHi / zm, yHi / zm)
  surface( inten ) as "INTENSITY" range( 0, tn) viewpoint( 1000, 200, 40)
  zoom ( 0, 0, xHi / zm, yHi / zm)
  elevation( LOG10( inten )) from ( 0, 0) to ( xHi, 0) as "LOG10 INTENSITY"

```



```

for t = starttime by (endtime - starttime) / 5 to endtime { snapshots }
  elevation( ARCTAN( imagf / realf) * 180 / PI) from ( 0, 0)
  to ( xHi / zm, 0) as "PHASE (DEGREES)"
  elevation( inten) from ( 0, 0) to ( xHi / zm, 0) as "INTENSITY"
  range( 0, tn)
histories
  history( inten) at ( 0, 0) ( 0.01 * xHi, 0) ( 0.03 * xHi, 0) ( 0.1 * xHi, 0)
  ( 0.3 * xHi, 0) ( xHi, 0) ( x45, y45) as "INTENSITY" export
  history( realf) at ( 0, 0) ( 0.01 * xHi, 0) ( 0.03 * xHi, 0) ( 0.1 * xHi, 0)
  ( 0.3 * xHi, 0) as "IN-PHASE FIELD"
  history( imagf) at ( 0, 0) ( 0.01 * xHi, 0) ( 0.03 * xHi, 0) ( 0.1 * xHi, 0)
  ( 0.3 * xHi, 0) as "QUADRATURE FIELD"
  history( ARCTAN( imagf / realf) * 180 / PI) at ( 0, 0) ( 0.01 * xHi, 0)
  ( 0.03 * xHi, 0) ( 0.1 * xHi, 0) ( 0.3 * xHi, 0) as "PHASE (DEGREES)"
  history( MIN( ( ABS( inten - 0.33)) ^ ( -0.75), 1)) at ( 0, 0)
  range ( 0.045, 1) as "( INTENSITY - 0.33) ^ -0.75" { goes linearly to 0}
  history( ABS( INTEGRAL( inten) / power - 1)) as "POWER CHANGE (EXACT = 0)"
end

```

5.1.8 Magnetism

5.1.8.1 3d_helmholtz_coil

```

{ HELMHOLTZ_COIL.PDE
  This example shows the calculation of magnetic fields in a Helmholtz coil.
  -- submitted by Bill Hallbert, Honeywell
}
TITLE 'Helmholtz Coil'
COORDINATES cartesian3
VARIABLES A = vector(Ax, Ay) {Magnetic Vector Potential Components}
DEFINITIONS
  { Defining parameters of the Coil }
  coil_current=200 {Amps in 1 turn}
  Lsep=6.89 {Layer separation - cm}
  Cthick=2.36 {Coil thickness - cm}
  { Regional Current Definition }
  CurrentControl=1
  Current=CurrentControl*coil_current
  { Circulating Current Density in Coil }
  J0=Current/Cthick^2 {A/cm^2}
  theta=atan2(y,x)
  Jx=-J0*sin(theta)
  Jy=J0*cos(theta)
  { Magnetic Permeability }
  m0=4*3.1415e-2 {dynes/A^2}
  { Coil Radii }
  Rcoil_inner=Lsep {cm}
  Rcoil_outer=Lsep+Cthick {cm}
  Rmax=1.5*Lsep {cm}
  { Z Surfaces }
  za=2*Lsep {cm}
  zb=za+Cthick {cm}
  zc=zb+Lsep {cm}

```

```

zd=zc+Cthick           {cm}
zmax=zd+2*Lsep        {cm}
zmiddle=(zd+za)/2    {cm}

{ Magnetic Field }
H=curl(A)/m0          {AT}
Hxx = Xcomp(H)
Hyy = Ycomp(H)
Hzz = Zcomp(H)

{ Magnetic Field Error }
Hzvec=val(Hzz,0,0,zmiddle)
H_Error=(magnitude(H)-Hzvec)/Hzvec*100

```

EQUATIONS

```
A:   div(grad(A))/m0 + vector(Jx,Jy,0) = 0
```

EXTRUSION

```

Surface 'Bottom'      z = 0
  Layer 'Bottom_Air'
Surface 'CoilB'       z = za
  Layer 'Coil1Cu'
Surface 'Coil1T'      z = zb
  Layer 'Middle_Air'
Surface 'Coil2B'      z = zc
  Layer 'Coil2Cu'
Surface 'Coil2T'      z = zd
  Layer 'Top_Air'
Surface 'Top'         z = zmax

```

BOUNDARIES

```

Surface "Bottom" value (Ax)=0 value (Ay)=0
Surface "Top"    value (Ax)=0 value (Ay)=0

```

REGION 1 'Air'

```

CurrentControl=0
start(Rmax,0) arc(center=0,0) angle =360

```

LIMITED REGION 2 'Outer Coil'

```

CurrentControl=1
Layer 'Coil1Cu'
Layer 'Coil2Cu'
start(Rcoil_outer,0) arc(center=0,0) angle =360

```

LIMITED REGION 3 'Inner Coil'

```

mesh_spacing = Rcoil_inner/10
CurrentControl=0
Layer 'Coil1Cu'
Layer 'Coil2Cu'
start(Rcoil_inner,0) arc(center=0,0) angle =360

```

MONITORS

```

grid(y,z) on x=0
grid(x,y) on surface 'Coil1T'
contour(Ax) on x=0

```

PLOTS

```

grid(y,z) on x=0
grid(x,y) on surface 'Coil1T'
contour(Ax) on x=0
vector(Hxx,Hyy) on surface 'Coil1T' norm
vector(Hyy,Hzz) on x=0 norm
contour(magnitude(H)) on z=zmiddle
contour(magnitude(H)) on x=0
contour(H_Error) on Layer 'Middle_Air' on x=0

```

END

5.1.8.2 3d_magnetron

```

{ 3D_MAGNETRON.PDE
  MODEL OF A GENERIC MAGNETRON IN 3D

  The development of this model is
  described in the Magnetostatics[318] chapter
  of the Electromagnetic Applications[299]
  section.
}

TITLE 'Oval Magnet '

COORDINATES
  CARTESIAN3

SELECT
  ngrid=25
  alias(x) = "X(cm)"
  alias(y) = "Y(cm)"
  alias(z) = "Z(cm)"

VARIABLES
  Ax,Ay { assume Az is zero! }

DEFINITIONS
  MuMag=1.0 ! Permeabilities:
  MuAir=1.0
  MuSST=1000
  MuTarget=1.0
  Mu=MuAir ! default to Air
  MzMag = 10000 ! permanent magnet strength
  Mz = 0 ! global magnetization variable
  Nx = vector(0,Mz,0)
  Ny = vector(-Mz,0,0)

  B = curl(Ax,Ay,0) ! magnetic induction vector
  Bxx= -dz(Ay)
  Byy= dz(Ax) ! unfortunately, "By" is a reserved word.
  Bzz= dx(Ay)-dy(Ax)

EQUATIONS
  Ax: div(grad(Ax)/mu+Nx) = 0
  Ay: div(grad(Ay)/mu+Ny) = 0



EXTRUSION
  SURFACE "Boundary Bottom" Z=-5
  SURFACE "Magnet Plate Bottom" Z=0
  LAYER "Magnet Plate"
  SURFACE "Magnet Plate Top" Z=1
  LAYER "Magnet"
  SURFACE "Magnet Top" Z=2
  SURFACE "Boundary Top" Z=8

BOUNDARIES
  Surface "boundary bottom" value (Ax)=0 value(Ay)=0
  Surface "boundary top" value (Ax)=0 value(Ay)=0

REGION 1 {Air bounded by conductive box }
  START (20,-10)
  value(Ax)=0 value(Ay)=0
  arc(center=20,0) ANGLE=180
  Line TO (-20,10)
  arc(center=-20,0) ANGLE=180
  LINE TO CLOSE

LIMITED REGION 2 { Magnet Plate }
  LAYER "Magnet Plate" Mu=MuSST
  LAYER "Magnet" Mu=MuMag Mz = MzMag
  START (20,-8)
  ARC(center=20,0) ANGLE=180
  LINE TO (-20,8)
  ARC(center=-20,0) ANGLE=180
  LINE TO CLOSE

```

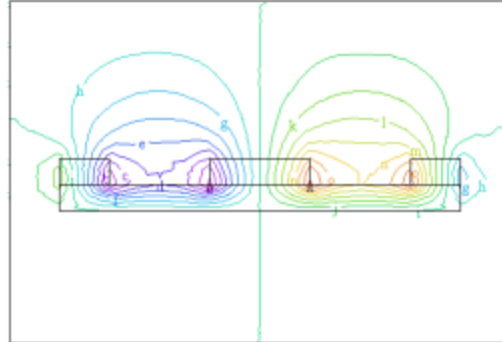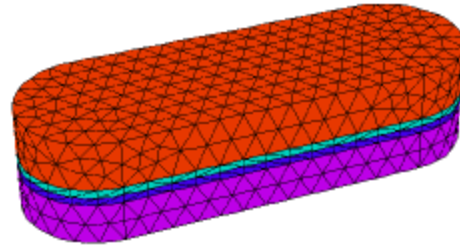

```

LIMITED REGION 3      { Inner Gap }
LAYER "Magnet"
START (20,-6)
  ARC(center=20,0) ANGLE=180
  LINE TO (-20,6)
  ARC(center=-20,0) ANGLE=180
  LINE TO CLOSE

LIMITED REGION 4      {Inner Magnet }
LAYER "Magnet" Mu=MuMag Mz = -MzMag
START (20,-2)
  ARC(center=20,0) ANGLE=180
  LINE TO (-20,2)
  ARC(center=-20,0) ANGLE=180
  LINE TO CLOSE

MONITORS
grid(y,z) on x=0
grid(x,z) on y=0
grid(x,y) on z=1.01
contour(Ax) on x=0
contour(Ay) on y=0

PLOTS
grid(y,z) on x=0
grid(x,z) on y=0
grid(x,y) on z=1.01
contour(Ax) on x=0
contour(Ay) on y=0
vector(Bxx,Byy) on z=2.01 norm
vector(Byy,Bzz) on x=0 norm
vector(Bxx,Bzz) on y=4 norm
contour(magnitude(Bxx,Byy,Bzz)) on z=2

END

```

5.1.8.3 3d_vector_magnetron

```

{ 3D_VECTOR_MAGNETRON

MODEL OF A GENERIC MAGNETRON IN 3D USING VECTOR VARIABLES
This is a modification of 3D\_MAGNETRON.PDE[438].

The development of this model is described in the Magnetostatics[318] chapter of the
Electromagnetic Applications[299] section.

}

TITLE 'Oval Magnet'

COORDINATES
  CARTESIAN3

SELECT
  ngrid=25
  alias(x) = "X(cm)"
  alias(y) = "Y(cm)"
  alias(z) = "Z(cm)"

VARIABLES
  A = vector (Ax,Ay)          { assume Az is zero! }

DEFINITIONS
  MuMag=1.0 ! Permeabilities:
  MuAir=1.0
  MuSST=1000
  MuTarget=1.0
  Mu=MuAir ! default to Air

  MzMag = 10000 ! permanent magnet strength
  Mx=0 My=0 Mz=0
  M = vector(Mx,My,Mz) ! global magnetization variable
  N = tensor((0,Mz,0),(-Mz,0,0),(0,0,0))

  B = curl(Ax,Ay,0) ! magnetic induction vector
  Bxx= xcomp(B)

```

```

Byy= ycomp(B) ! unfortunately, "By" is a reserved word.
Bzz= zcomp(B)

EQUATIONS
A: div((grad(A)+N)/mu) = 0

EXTRUSION
SURFACE "Boundary Bottom" Z=-5
SURFACE "Magnet Plate Bottom" Z=0
LAYER "Magnet Plate"
SURFACE "Magnet Plate Top" Z=1
LAYER "Magnet"
SURFACE "Magnet Top" Z=2
SURFACE "Boundary Top" Z=8

BOUNDARIES
Surface "boundary bottom" value (Ax)=0 value(Ay)=0
Surface "boundary top" value (Ax)=0 value(Ay)=0
REGION 1 {Air bounded by conductive box }
START (20,-10)
value(A)=vector(0,0,0)
ARC(center=20,0) angle=180
LINE TO (-20,10)
ARC(center=-20,0) angle=180
LINE TO CLOSE

LIMITED REGION 2 { Magnet Plate }
LAYER "Magnet Plate" Mu=MUSST
LAYER "Magnet" Mu=MuMag Mz = MzMag
START (20,-8)
ARC(center=20,0) angle=180
LINE TO (-20,8)
ARC(center=-20,0) angle=180
LINE TO CLOSE

LIMITED REGION 3 { Inner Gap }
LAYER "Magnet"
START (20,-6)
ARC(center=20,0) angle=180
LINE TO (-20,6)
ARC(center=-20,0) angle=180
LINE TO CLOSE

LIMITED REGION 4 {Inner Magnet }
LAYER "Magnet" Mu=MuMag Mz = -MzMag
START (20,-2)
ARC(center=20,0) angle=180
LINE TO (-20,2)
ARC(center=-20,0) angle=180
LINE TO CLOSE

MONITORS
grid(y,z) on x=0
grid(x,z) on y=0
grid(x,y) on z=1.01
contour(Ax) on x=0
contour(Ay) on y=0

PLOTS
grid(y,z) on x=0
grid(x,z) on y=0
grid(x,y) on z=1.01
contour(Ax) on x=0
contour(Ay) on y=0
vector(Bxx,Byy) on z=2.01 norm
vector(Byy,Bzz) on x=0 norm
vector(Bxx,Bzz) on y=4 norm
contour(magnitude(Bxx,Byy,Bzz)) on z=2

END

```

5.1.8.4 magnet_coil

```

{ MAGNET_COIL.PDE
  AXI-SYMMETRIC MAGNETIC FIELDS

```

This example considers the problem of determining the magnetic vector potential A around a coil.

According to Maxwell's equations,

$$\begin{aligned}\text{curl } H &= J \\ \text{div } B &= 0 \\ B &= \mu * H\end{aligned}$$

where B is the magnetic flux density
 H is the magnetic field strength
 J is the electric current density
and μ is the magnetic permeability of the material.

The magnetic vector potential A is related to B by

$$\begin{aligned}B &= \text{curl } A \\ \text{therefore} \\ \text{curl}((1/\mu) * \text{curl } A) &= J\end{aligned}$$

This equation is usually supplemented with the Coulomb Gauge condition
 $\text{div } A = 0$.

In the axisymmetric case, the current is assumed to flow only in the azimuthal direction, and only the azimuthal component of the vector potential is present. Henceforth, we will simply refer to this component as A .

The Coulomb Gauge is identically satisfied, and the PDE to be solved in this model takes the form

$$\begin{aligned}\text{curl}((1/\mu) * \text{curl } (A)) &= J(x,y) && \text{in the domain} \\ A &= g(x,y) && \text{on the boundary.}\end{aligned}$$

The magnetic induction B takes the simple form

$$B = (-dz(A), 0, dr(A) + A/r)$$

and the magnetic field is given by

$$H = (-dz(A)/\mu, 0, (dr(A) + A/r)/\mu)$$

Expanding the equation in cylindrical geometry results in the final equation,
 $dz(dz(A)/\mu) + dr((dr(A) + A/r)/\mu) = -J$

The interpretation of the natural boundary condition becomes

$$\text{Natural}(A) = n \times H$$

where n is the outward surface-normal unit vector.

Across boundaries between regions of different material properties, the continuity of $(n \times H)$ assumed by the Galerkin solver implies that the tangential component of H is continuous, as required by the physics.

In this simple test problem, we consider a circular coil whose axis of rotation lies along the X -axis. We bound the coil by a distant spherical surface at which we specify a boundary condition $(n \times H) = 0$. At the axis, we use a Dirichlet boundary condition $A=0$.

The source J is zero everywhere except in the coil, where it is defined arbitrarily as "10". The user should verify that the prescribed values of J are dimensionally consistent with the units of his own problem.

}

title 'AXI-SYMMETRIC MAGNETIC FIELD'

coordinates

{ Cylindrical coordinates, with cylinder axis along Cartesian X direction }
xylinder("Z", "R")

variables

Aphi { the azimuthal component of the vector potential }

definitions

mu = 1 { the permeability }
rmu = 1/mu { the source defaults to zero }
J = 0 { the source value in the coil }
current = 10
Bz = dr(r*Aphi)/r

```

initial values
  Aphi = 2          { unimportant unless mu varies with H }

equations
  { FlexPDE expands CURL in proper coordinates }
  Aphi : curl(rmu*curl(Aphi)) = J

boundaries
  region 1
    start(-10,0)
    value(Aphi) = 0      { specify A=0 along axis }
    line to (10,0)
    natural(Aphi) = 0    { H<dot>n = 0 on distant sphere }
    arc(center=0,0) angle 180 to close

  region 2
    J = current          { override source value in the coil }
    start (-0.25,1)
    line to (0.25,1) to (0.25,1.5) to (-0.25,1.5) to close

monitors
  contour(Bz) zoom(-2,0,4,4) as 'FLUX DENSITY B'
  contour(Aphi) as 'Potential'

plots
  grid(z,r)
  contour(Bz) as 'FLUX DENSITY B'
  contour(Bz) zoom(-2,0,4,4) as 'FLUX DENSITY B'
  elevation(Aphi, dr(Aphi), Aphi/r, dr(Aphi)+Aphi/r, Aphi+r*dr(Aphi))
    from (0,0) to (0,1) as 'Bz'
  vector(dr(Aphi)+Aphi/r, -dz(Aphi)) as 'FLUX DENSITY B'
  vector(dr(Aphi)+Aphi/r, -dz(Aphi)) zoom(-2,0,4,4) as 'FLUX DENSITY B'
  contour(Aphi) as 'MAGNETIC POTENTIAL'
  contour(Aphi) zoom(-2,0,4,4) as 'MAGNETIC POTENTIAL'
  surface(Aphi) as 'MAGNETIC POTENTIAL' viewpoint (-1,1,30)

end

```

5.1.8.5 permanent_magnet

```
{ PERMANENT_MAGNET.PDE
```

This example demonstrates the implementation of permanent magnets in magnetic field problems.

FlexPDE integrates second-order derivative terms by parts, which creates surface integral terms at cell boundaries.

By including magnetization vectors inside the definition of H, these surface terms correctly

model the effect of magnetization through jump terms at boundaries.

If the magnetization terms are listed separately from H, they will be seen as piecewise

constant in space, and their derivatives will be deleted.

See the [Electromagnetic Applications](#) ^[29] section for further discussion.

```
}
```

```
Title 'A PERMANENT-MAGNET PROBLEM'
```

```
Variables
```

```
  A { z-component of Vector Magnetic Potential }
```

```
Definitions
```


```

mu = 1
S = 0          { current density }
Px = 0        { Magnetization components }

Py = 0
P = vector(Px,Py) { Magnetization vector }
H = (curl(A)-P)/mu { Magnetic field }
y0 = 8        { Size parameter }

```

```
Materials
```

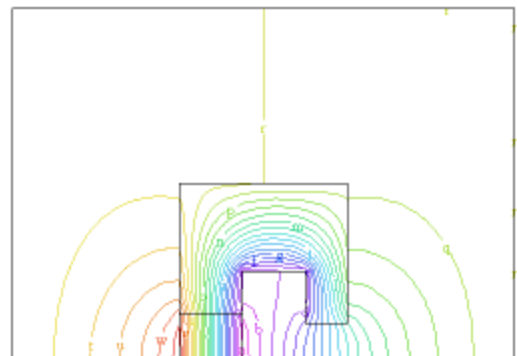

```

'Magnet' : Py = 10
'other'  : mu = 5000

Initial values
  A = 0

Equations
  A : curl(H) + S = 0

Boundaries
  Region 1
  start(-40,0)
  natural(A) = 0 line to (80,0)
  value(A) = 0 line to (80,80) to (-40,80) to close

  Region 2
  use material 'other'
  start(0,0)
  line to (15,0) to (15,20) to (30,20) to (30,y0) to (40,y0) to (40,40)
  to (0,40) to close

  Region 3 { the permanent magnet }
  use material 'Magnet'
  start (0,0) line to (15,0) to (15,10) to (0,10) to close

Monitors
  contour(A)

Plots
  grid(x,y)
  vector(dy(A),-dx(A)) as 'FLUX DENSITY B'
  vector((dy(A)-Px)/mu, (-dx(A)-Py)/mu) as 'MAGNETIC FIELD H'
  contour(A) as 'AZ MAGNETIC POTENTIAL'
  surface(A) as 'AZ MAGNETIC POTENTIAL'

End

```

5.1.8.6 saturation

```
{ SATURATION.PDE
```

A NONLINEAR MAGNETOSTATIC PROBLEM

This example considers the problem of determining the magnetic vector potential A in a cyclotron magnet.

The problem domain consists of

- 1) a ferromagnetic medium - the magnet core,
- 2) the surrounding air medium,
- 3) a current-carrying copper coil.

According to Maxwell's equations,

$$\text{curl } H = J \quad (1)$$

$$\text{div } B = 0 \quad (2)$$

with

$$B = \mu * H$$

where B is the magnetic flux density
H is the magnetic field strength
J is the electric current density
and mu is the magnetic permeability of the material.

Maxwell's equations can be satisfied if we introduce a magnetic vector potential A such that

$$B = \text{curl } A$$

therefore

$$\text{curl}(\text{curl } A / \mu) = J$$

This equation is usually supplemented with the Coulomb Gauge condition

$$\text{div } A = 0.$$

In most common 2D applications, magnet designers assume either

- 1) that the magnet is sufficiently long in the z direction or
- 2) that the magnet is axi-symmetric.

In the first instance the current is assumed to flow parallel to the z axis, and in the latter it flows in the azimuthal direction. Under these conditions,

only the z or the azimuthal component of A is present. (Henceforth, we will simply refer to this component as A).

In the Cartesian case, the magnetic induction B takes the simple form,

$$\begin{aligned} B &= (dy(A), -dx(A), 0) \\ \text{and the magnetic field is given by} \\ H &= (dy(A)/\mu, -dx(A)/\mu, 0). \end{aligned}$$

We can integrate equation (1) over the problem domain using the curl analog of the Divergence Theorem, giving

$$\text{Integral}(\text{curl}(H))dV = \text{Integral}(n \times H)ds$$

where ds is a differential surface area on the bounding surface of any region, and n is the outward surface normal unit vector.

Across interior boundaries between regions of different material properties, FlexPDE assumes cancellation of the surface integrals from the two sides of the boundary. This implies continuity of (n x H).

At exterior boundaries, the same theorem defines the natural boundary condition to be the value of (n x H).

For the present example, let us define the permeability mu by the expression

$$\begin{aligned} \mu &= 1 && \text{in the air and the coil} \\ \mu &= \mu_{\max}/(1+C*\text{grad}(A)^2) + \mu_{\min} && \text{in the core} \end{aligned}$$

where C = 0.05 gives a behaviour similar to transformer steel.

We assume a symmetry plane along the x-axis, and impose the boundary value A = 0 along the remaining sides.

The core consists of a "C"-shaped region enclosing a rectangular coil region.

The source J is zero everywhere except in the coil, where it is defined by

$$J = - (4*\pi/10)*\text{amps}/\text{area}$$

Note:

This example uses scaled units. It is important for the user to validate the dimensional consistency of his formulation.

}

Title "A MAGNETOSTATIC PROBLEM"

Select

{ Since the nonlinearity in this problem is driven by the GRADIENT of the system variable, we require a more accurate resolution of the solution: }

errlim = 1e-4

Variables

A

Definitions

```

rmu = 1
rmu0 = 1
mu0core = 5000
mulcore = 200
mucore = mu0core/(1+0.05*grad(A)^2) + mulcore
rmucore = 1/mucore
S = 0
current = 2
y0 = 8

```

Initial Value

{ In nonlinear problems, a good starting value is sometimes essential for convergence }


$$A = \text{current}*(400-(x-20)^2-(y-20)^2)$$

Equations

A : curl(rmu*curl(A)) = S

Boundaries

Region 1 { The IRON core }
 rmu = rmucore rmu0 = 1/mu0core

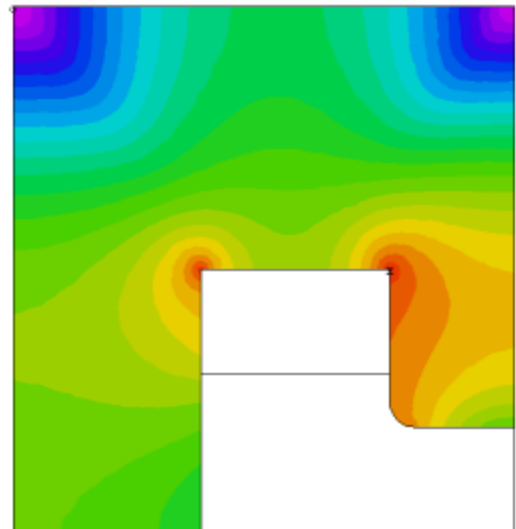

```

start(0,0)
natural(A) = 0      line to (40,0)
value(A) = 0      line to (40,40) to (0,40) to close

Region 2          { The AIR gap }
rmu = 1
start (15,0) line to (40,0) to (40,y0) to (32,y0)
arc (center=32,y0+2) to (30,y0+2)
{ short boundary segments force finer gridding: }
line to (30,19.5) to (30,20) to (29.5,20)
to (15.5,20) to (15,20) to close

Region 3          { The COIL }
S = current
rmu = 1
start (15,12) line to (30,12) to (30,20) to (15,20) to close

Monitors
  contour(A)

Plots
  grid(x,y)
  vector(dy(A),-dx(A)) as "FLUX DENSITY B"
  vector(dy(A)*rmu, -dx(A)*rmu) as "MAGNETIC FIELD H"
  contour(A) as "Az MAGNETIC POTENTIAL"
  surface(A) as "Az MAGNETIC POTENTIAL"
  contour(rmu/rmu0) painted as "Saturation: mu0/mu"

End

```

5.1.9 Misc

5.1.9.1 diffusion

```
{ DIFFUSION.PDE
```

This problem considers the thermally driven diffusion of a dopant into a solid from a constant source. Parameters have been chosen to be those typically encountered in semiconductor diffusion.

```

  surface concentration = 1.8e20 atoms/cm^2
  diffusion coefficient = 3.0e-15 cm^2/sec

```

The natural tendency in this type of problem is to start with zero concentration in the material, and a fixed value on the boundary. This implies an infinite curvature at the boundary, and an infinite transport velocity of the diffusing particles. It also generates over-shoot in the solution, because the Finite-Element Method tries to fit a step function with quadratics.

A better formulation is to program a large input flux, representative of the rate at which dopant can actually cross the boundary, (or approximately the molecular velocity times the concentration deficiency at the boundary).

Here we use a masked source, in order to generate a 2-dimensional pattern. This causes the result to lag a bit behind the analytical Plane-diffusion result at late times.

```
}
```

```

title
'Masked Diffusion'

```

```

variables
  u(threshold=0.1)      { fraction of external concentration }

```

```

definitions
  concs = 1.8e8          { surface concentration atom/micron^3}
  D = 1.1e-2            { diffusivity micron^2/hr}
  conc = concs*u
  uexact1d = erfc(x/(2*sqrt(D*t))) { analytic solution to corresponding 1D problem }
  cexact1d = concs*uexact1d
  M = upulse(y-0.3,y-0.7) { masked surface flux multiplier }

```

```
initial values
```

```

u = 0
equations
  u : div(D*grad(u)) = dt(u)
boundaries
  region 1
    start(0,0)
    natural(u) = 0
    line to (1,0) to (1,1) to (0,1)
    natural(u) = 10*M*(1-u)
    line to close

  feature { a "gridding feature" to help localize the activity }
    start (0.02,0.3) line to (0.02,0.7)

time 0 to 1 by 0.001

plots
  for t=1e-5 1e-4 1e-3 1e-2 0.05 by 0.05 to 0.2 by 0.1 to endtime
    contour(u)
    surface(u)
    elevation(u,uexact1d) from (0,0.5) to (1,0.5)
    elevation(u-uexact1d) from (0,0.5) to (1,0.5)

histories
  history(u) at (0.05,0.5) (0.1,0.5) (0.15,0.5) (0.2,0.5)

end

```

5.1.9.2 minimal_surface

```
{ MINIMUM_SURFACE.PDE
```

This example shows the application of FlexPDE to the non-linear problem of surface tension or "minimal surface".

The surface area of an infinitesimal rectangular patch of an arbitrary surface

$$U = U(x,y)$$

is (by the Pythagorean theorem)

$$dA = dx*dy*sqrt[1 + (dU/dx)^2 + (dU/dy)^2],$$

where dx and dy are the projections of the patch in the X-Y plane.

The total surface area of a function U(x,y) over a domain is then

$$A = \text{integral}(dx*dy*sqrt[1 + dx(U)^2 + dy(U)^2])$$

For the function U to have minimal surface area, it must satisfy the

Euler equation

$$dx(dF/dUx) + dy(dF/dUy) - dF/dU = 0$$

where

$$F = sqrt[1 + (dU/dx)^2 + (dU/dy)^2]$$

$$dF/dUx = (dU/dx)/F$$

$$dF/dUy = (dU/dy)/F$$

$$dF/dU = 0$$

The equation for the minimizing surface is therefore (in FlexPDE notation):

$$dx((1/F)*dx(U)) + dy((1/F)*dy(U)) = 0$$

This is analogous to a heatflow problem

$$\text{div}(K*grad(T)) = 0$$

where the conductivity has the value

$$K = 1/F$$

This is a highly nonlinear problem, in that the conductivity, K, becomes small in regions of high gradient, which tends to increase the gradient even more.

In the present example, we stretch a soap-bubble across a square bent wire frame, in which the first quadrant of the boundary has been bent inward and raised up.

```

}
title "MINIMAL SURFACE"

variables
  u

definitions
  size = 6
  a
  pressure = 0
  r = sqrt(x^2+y^2)

equations
  u : div(a*grad(u)) + pressure = 0


boundaries
  region 1
  a = 1/sqrt(1+grad(u)^2)
  start(-size,-size)
  value(u)=0      line to (size,-size) to (size,0)
  value(u) = size-r  line to (size/2,0)
  value(u) = size/2  arc(center=size/2,size/2) angle -90
  value(u) = size-r  line to (0,size)
  value(u) = 0      line to (-size,size)
  to close

monitors
  contour(u)

plots
  grid(x,y)
  contour(u)
  surface(u)

end

```

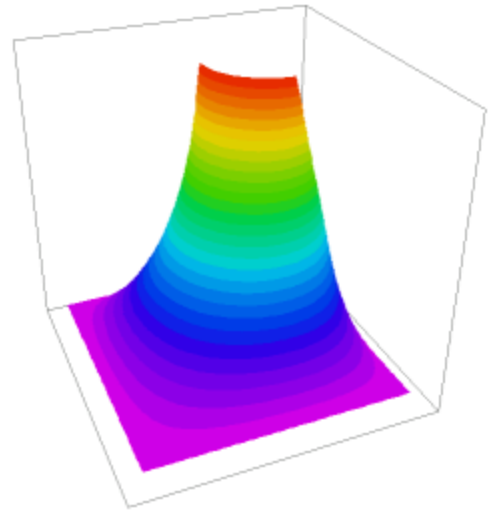

5.1.9.3 surface_fit

```
{ SURFACE_FIT.PDE
```

This problem illustrates the use of FlexPDE in a data fitting application.

THE NUMERICAL SOLUTION OF THE BIHARMONIC EQUATION WITH A DISCONTINUOUS LINEAR SOURCE TERM USING FlexPDE.

STATEMENT OF THE PROBLEM:

Find the solution U of the fourth order elliptic PDE

$$(dxx + dyy)(dxx + dyy) (U) = -beta*(U - C) \quad \text{in } \Omega, \quad (1)$$

where in the usual FlexPDE notation, dxx indicates 2nd partial derivative with respect to x , and where Ω is a given connected domain. Equation (1) arises from the minimization of the strain energy function of a thin plate which is constrained to nearly pass thru a given set of discrete set of points specified by C and $beta$. Namely, a given set of n data values $[C(i)]$ is assigned at locations $[(x(i), y(i))]$, $i=1,..,n$, and the factor $beta$ has its support only at the locations $(x(i), y(i))$.

Along with equation (1), we must prescribe a set of boundary conditions involving U and its derivatives which must be satisfied everywhere on the domain boundary.

```
}
```

```

title " The Biharmonic Equation in Surface Fitting Designs and Visualization"

variables
  u

```

```

v
definitions
  eps = .001
  beta0 = 1.e7
  beta = 0.0
  a = 1/sqrt(2.)
  two = 2.5
  b = two*a

  xbox = array (0, 1, -1, 0, 0, a, -a, a, -a, two, -two, 0, 0, b, -b, b, -b )
  ybox = array (0, 0, 0, 1, -1, a, -a, -a, a, 0, 0, two, -two, b, -b, -b, b )

  xi = .05  eta = .05
  r0 = x*x + y*y
  C = exp(-r0/1.)*sin(pi*((x^2-y^2)/64.))

initial values
  U = 0
  V = .001

equations
  U: del2(U) = v
  V: del2(V) = -beta*(U-C)

boundaries
  region 1
  start (-4,0)
  value(U) = C      value(V) = 0.
  arc(center=0.,0.)  angle -360      to
close


  region 2  beta = beta0
  repeat i=1 to 17
  start (xbox[i]-xi,ybox[i]-eta)
  line to (xbox[i]+xi,ybox[i]-eta)
  to (xbox[i]+xi,ybox[i]+eta)
  to (xbox[i]-xi,ybox[i]+eta) to close
  endrepeat

monitors
  contour(U)
  contour(C)
  contour(C-U)  as "Error C - U"

plots
  contour (U)  as "Potential"
  surface(U)  as "Potential"
  surface(C)  as " Expected Surface"
  contour(beta)
  surface(beta)
  surface(U-C)

end

```

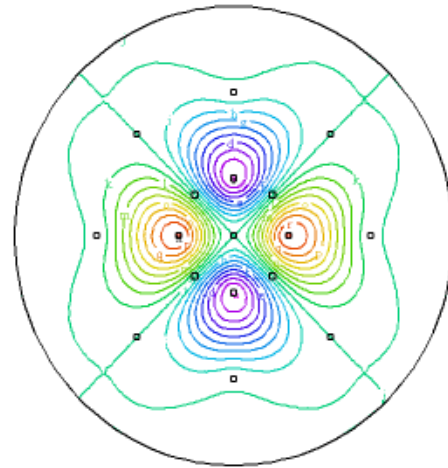

5.1.10 Quantun_Mechanics

5.1.10.1 1d_finite_potential_well

```

{ 1D_FINITE_POTENTIAL_WELL.PDE
  Submitted by Ali Reza Ghaffari, 07/22/2016.

```

```

  This script solves the Schrodinger equation for a one dimensional finite potential well
  and finds energy levels for bound states plus unnormalized wave functions.
}

```

```

TITLE '1D Finite Potential well'

```

```

COORDINATES CARTESIAN1

```

```

VARIABLES Phi

```

```

SELECT

```

```

modes=3
NGRID=30
ERRLIM=1e-3

DEFINITIONS
volt { in eV}
hbar=1.05457e-34
e0=1.6022e-19
m0=9.11e-31
v0=64
a=1.8e-10

EQUATIONS
Phi: (-hbar^2/2/m0/e0)*(dx(dx(Phi)))+volt*Phi-LAMBDA*Phi=0

BOUNDARIES
REGION 1
volt=v0
START (-3*a) point value(phi)=0
LINE TO (-a/2)

REGION 2
volt=0
START (-a/2) LINE TO (a/2)

REGION 3
volt=v0
START (a/2)
LINE TO (3*a ) point value(phi)=0

!MONITORS
! no monitors since problem solves so fast

PLOTS
elevation(phi*5+lambda,volt) from (-3e-10) to (3e-10)

SUMMARY
REPORT(LAMBDA)

END

```

5.1.10.2 2d_finite_potential_well

```

{ 2D_FINITE_POTENTIAL_WELL.PDE
  Submitted by Ali Reza Ghaffari, 07/22/2016.

  This script solves the Schrodinger equation for a two dimensional finite potential
  well.
  This script finds energies and wave functions of a wire with rectangle cross section.
  The wire is made up of GaAs which is placed in a AlGaAs medium.
}
TITLE 'infinitely deep rectangular wires'

COORDINATES cartesian2

VARIABLES Phi {the wavefunction}

SELECT
modes=4
NGRID=13
ERRLIM=1e-3
painted { show colour-filled contours }
thermal_colors = on { red is minimum }

DEFINITIONS
mass{default value}
volt { in eV}

```

```

hbar=1.05457e-34
m0=9.11e-31
e0=1.6e-19
xx=200e-10
yy=200e-10
x1=50e-10
y1=50e-10
x2=150e-10
y2=150e-10
v0=.228
mass_shell=0.067*m0 {mhh}!0.067 {GaAs}
mass_core=0.1*m0! {Al0.5Ga0.5As}
N=integral(phi^2)

```

EQUATIONS

```
Phi: ((-1)* hbar^2/(2*mass*e0))*div(grad(Phi))+volt*Phi-LAMBDA*Phi =0
```

BOUNDARIES

```

Region 1
mass= mass_shell, volt=v0
start(0,0)
point value (phi)=0 line to (xx,0)
value (phi)=0 line to (xx,yy)
value (phi)=0 line to (0,yy)
to close

Region 2
mass= mass_core, volt=0
start(x1,y1)
line to (x2,y1) to (x2,y2) to (x1,y2)
to close

```

!MONITORS

```
! no monitors since problem solves so fast
```

PLOTS

```
CONTOUR(Phi^2/sqrt(N))
```

SUMMARY

```
REPORT(LAMBDA*1000) as "Energy Level (meV)" !in milielectron volt
```

```
END
```

5.1.10.3 morse_potential

```
{ MORSE_POTENTIAL.PDE
Submitted by Ali Reza Ghaffari, 07/21/2016.
```

This is a Quantum Mechanics example that shows the power of Flexpde to solve such examples.

We want to solve the Schrodinger equation for Morse Potential $V(x)=V_0(1-\exp(-\alpha*x))^2$ and

find the Eigen values and functions. The exact energies can be extracted from the formula below.

$$E[n] := h^2 \wedge (1/2) * (V_0 * \alpha^2 / m_0) \wedge (1/2) * (n+1/2) - 1/2 * \alpha^2 * h^2 / m_0 * (n+1/2) \wedge 2$$

```

For n=0 to 4 :
E[0] := 3.037277660
E[1] := 8.361832980
E[2] := 12.68638830
E[3] := 16.01094362
E[4] := 18.33549894

```

```
} You can compare the results of this script with above energies.
```

```
TITLE 'Morse Potential'
```

```

COORDINATES CARTESIAN1

VARIABLES Phi

SELECT
  modes=6
  NGRID=30
  ERRLLIM=1e-3

DEFINITIONS
  v0t
  hbar=1
  m0=1
  v0=20
  a=10 ! the range of integrals
  alpha=1
  v0t=v0*(1-exp(-alpha*x))^2
  N=integral(phi^2)

EQUATIONS
  Phi : (-hbar^2/2/m0)*(dx(dx(Phi)))+v0t*Phi-LAMBDA*Phi=0

BOUNDARIES
  REGION 1
  START (-3*a) point value(phi)=0
  LINE TO (3*a) point value(phi)=0

!MONITORS
! no monitors since problem solves so fast

PLOTS
  ELEVATION(Phi+lambda,v0t) FROM (-1) to (6) zoom (-1,0,6,10)

SUMMARY
  REPORT(LAMBDA)

END

```

5.1.11 Stress

5.1.11.1 3d_bimetal

```
{ 3D_BIMETAL.PDE
```

This problem considers a small block of aluminum bonded to a larger block of iron. The assembly is held at a fixed temperature at the bottom, and is convectively cooled on the sides and top. We solve for the 3D temperature distribution, and the associated deformation and stress.

All faces of the assembly are unconstrained, allowing it to grow as the temperature distribution demands. We do not use an integral constraint to cancel translation and rotation, as we have done in 2D samples, because in 3D this is very expensive. Instead, we let FlexPDE find a solution, and then remove the mean translation and rotation before plotting.


```

}
title 'Bimetal Part'
coordinates
  cartesian3

select
  painted { show color-filled contours }
  biprecon { use the Block-Inverse
preconditioner - it works better than the
default ICG }

variables
  Tp { temperature difference from
stress-free state }
  U { X displacement }
  V { Y displacement }
  W { Z displacement }

materials
  'iron' :
    K = 0.11 { thermal conductivity }
  }
    E = 20e11 { Youngs modulus }
    nu = 0.28 { expansion
coefficient }
    alpha = 1.7e-6 { Poisson's Ratio }

  'aluminum' :
    K = 0.5
    E = 6e11
    nu = 0.25
    alpha = 2*(2.6e-6) !
Exaggerate expansion

  'default' :
    K = 1
    E = 1e11
    nu = 0.1
    alpha = 1e-6

definitions
  long = 1
  wide = 0.3
  high = 1
  tabx = 0.2
  taby = 0.4


  Q = 0 { Thermal source }
  Ta = 0. { define the ambient thermal sink temperature }

  { define the constitutive relations }
  G = E/((1+nu)*(1-2*nu))
  C11 = G*(1-nu)
  C12 = G*nu
  C13 = G*nu
  C22 = G*(1-nu)
  C23 = G*nu
  C33 = G*(1-nu)
  C44 = G*(1-2*nu)/2
  b = G*alpha*(1+nu)

  { Strains }
  ex = dx(U)
  ey = dy(V)
  ez = dz(W)
  gxy = dy(U) + dx(V)
  gyz = dz(V) + dy(W)
  gzx = dx(W) + dz(U)

  { Stresses }
  Sx = C11*ex + C12*ey + C13*ez - b*Tp
  Sy = C12*ex + C22*ey + C23*ez - b*Tp
  Sz = C13*ex + C23*ey + C33*ez - b*Tp
  Txy = C44*gxy

```

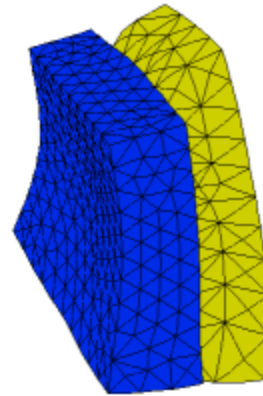

```

Tyz = C44*gyz
Tzx = C44*gzx

{ find mean translation and rotation }
Vol = Integral(1)
Tx = integral(U)/Vol           { X-motion }
Ty = integral(V)/Vol           { Y-motion }
Tz = integral(W)/Vol           { Z-motion }
Rz = 0.5*integral(dx(V) - dy(U))/Vol { Z-rotation }
Rx = 0.5*integral(dy(W) - dz(V))/Vol { X-rotation }
Ry = 0.5*integral(dz(U) - dx(W))/Vol { Y-rotation }

{ displacements with translation and rotation removed }
{ This is necessary only if all boundaries are free }
Up = U - Tx + Rz*y - Ry*z
Vp = V - Ty + Rx*z - Rz*x
Wp = W - Tz + Ry*x - Rx*y

{ scaling factors for displacement plots }
Mx = 0.2*globalmax(magnitude(y,z))/globalmax(magnitude(vp,wp))
My = 0.2*globalmax(magnitude(x,z))/globalmax(magnitude(Up,Up))
Mz = 0.2*globalmax(magnitude(x,y))/globalmax(magnitude(Up,Vp))
Mt = 0.4*globalmax(magnitude(x,y,z))/globalmax(magnitude(Up,Vp,wp))

initial values
Tp = 5.
U = 1.e-5
V = 1.e-5
W = 1.e-5

equations
Tp: div(k*grad(Tp)) + Q = 0.           { the heat equation }
U:  dx(Sx) + dy(Txy) + dz(Tzx) = 0    { the U-displacement equation }
V:  dx(Txy) + dy(Sy) + dz(Tyz) = 0    { the V-displacement equation }
W:  dx(Tzx) + dy(Tyz) + dz(Sz) = 0    { the W-displacement equation }

extrusion z = 0, long

boundaries
surface 1 value(Tp)=100                { fixed temp bottom }
surface 2 natural(Tp)=0.01*(Ta-Tp)    { poor convective cooling top }

Region 1 { Iron }
use material 'iron'
start(0,0)
natural(Tp) = 0.1*(Ta-Tp)             { better convective cooling on vertical sides }
line to (wide,0)
to (wide,(high-tabx)/2)
to (wide+tabx,(high-tabx)/2)
to (wide+tabx,(high+taby)/2)
to (wide,(high+taby)/2)
to (wide,high)
to (0,high)
to close

Region 2 { Aluminum }
use material 'aluminum'
start(wide,(high-tabx)/2)
line to (wide+tabx,(high-tabx)/2)
to (wide+tabx,(high+taby)/2)
to (wide,(high+taby)/2)
to close

monitors
contour(Tp) on y=high/2 as "Temperature"
contour(Up) on y=high/2 as "X-displacement"
contour(Vp) on x=4*wide/5 as "Y-displacement"
contour(Wp) on y=high/2 as "Z-displacement"
grid(x+Mt*Up,y+Mt*Vp,z+Mt*Wp) as "Shape"
grid(x+My*Up,z+My*Wp) on y=high/2 as "XZ Shape"
grid(y+Mx*Vp,z+Mx*Wp) on x=wide/2 as "YZ Shape"
grid(x+Mz*Up,y+Mz*Vp) on z=long/4 as "XY Shape"

plots
glcontour(Tp)
contour(Tp) on y=high/2 as "XZ Temperature"
contour(Up) on y=high/2 as "X-displacement"

```

```

contour(Vp) on x=4*wide/5 as "Y-displacement"
contour(Wp) on y=high/2 as "Z-displacement"
glgrid(x+Mt*Up,y+Mt*Vp,z+Mt*Wp) as "Shape"
grid(x+Mt*Up,y+Mt*Vp,z+Mt*Wp) as "Shape"
grid(x+My*Up,z+My*Wp) on y=high/2 as "XZ Shape"
grid(y+Mx*Vp,z+Mx*Wp) on x=4*wide/5 as "YZ Shape"
grid(x+Mz*Up,y+Mz*Vp) on z=long/4 as "XY Shape"
contour(Sx) on y=high/2 as "X-stress"
contour(Sy) on y=high/2 as "Y-stress"
contour(Sz) on y=high/2 as "Z-stress"
contour(Txy) on y=high/2 as "XY Shear stress"
contour(Tyz) on y=high/2 as "YZ Shear stress"
contour(Tzx) on y=high/2 as "ZX Shear stress"

```

```
end
```

5.1.11.2 anisotropic_stress

```
{ ANISOTROPIC_STRESS.PDE
```

This example shows the application of FlexPDE to an extremely complex problem in anisotropic thermo-elasticity. The equations of thermal diffusion and plane strain are solved simultaneously to give the thermally-induced stress and deformation in a laser application.

```
-- Submitted by Steve Sutton
Lawrence Livermore National Laboratory
```

```
}
```


```
title "ANISOTROPIC THERMAL STRESS"
```

```
select
errlim = 1e-4      { more accuracy to resolve stresses }
```

```
variables
Tp(5)              { Temperature }
up(1e-6)           { X-displacement }
vp(1e-6)           { Y-displacement }
```

```
definitions
Qs                 { The heat source, to be defined }
Q0 = 3.16          { Heat source radius }
ro = 0.2
W = 2              { slab size constants }
L = 0.5
mag = 5000
kp11 = 0.0135      { anisotropic conductivities }
kp33 = 0.0135
kp13 = 0.0016
```

```
C11 = 49.22e5      { anisotropic elastic constants }
C12 = 3.199e5
C13 = 23.836e5
C15 = -3.148e5
C21 = C12
C22 = 67.2e5
C23 = 3.199e5
C25 = 8.997e5
C31 = C13
C32 = C23
C33 = 49.22e5
C35 = -3.148e5
C51 = C15
C52 = C25
C53 = C35
C55 = 24.335e5
```

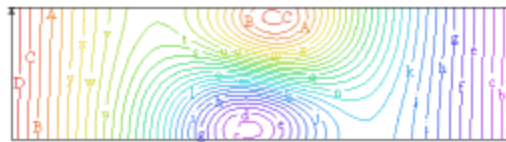

```
ayy = 34.49e-6    { anisotropic expansion coefficients }
axx = 34.49e-6
azz = 25.00e-6
axy = 9.5e-6
```

```

h = 1.0
Tb = 0.
Q = Q0*(exp(-2*(x^2+y^2)/ro^2)) { Gaussian heat distribution }

      { some auxilliary definitions }
qx = -kp33*dx(Tp) - kp13*dy(Tp)      { heat flux }
qy = -kp13*dx(Tp) - kp11*dy(Tp)

      { expansion stress coefficients }
apxx = C31*ayy + C32*azz + C33*axx + C35*axy
apyy = C11*ayy + C12*azz + C13*axx + C15*axy
apzz = C21*ayy + C22*azz + C23*axx + C25*axy
apxy = C51*ayy + C52*azz + C53*axx + C55*axy

exx = dx(up)                          { strain }
eyy = dy(vp)
exy = 0.5*(dy(up)+dx(vp))

      { stress }
sxx = C31*eyy + C33*exx + 2*C35*exy - apxx*Tp
syy = C11*eyy + C13*exx + 2*C15*exy - apyy*Tp
szz = C21*eyy + C23*exx + 2*C25*exy - apzz*Tp
sxy = C51*eyy + C53*exx + 2*C55*exy - apxy*Tp

initial values
Tp = 5.
up = 0
vp = 0

equations

Tp: dx(qx) + dy(qy) = Qs
Up: dx(sxx) + dy(sxy) = 0.
Vp: dx(sxy) + dy(syy) = 0.

constraints
integral(up) = 0 { prevent rigid-body motion: }
integral(vp) = 0 { cancel X-motion }
integral(dx(vp) - dy(up)) = 0 { cancel Y-motion }
                                { cancel rotation }

boundaries
region 1
Qs = 0
start(-0.5*w,-0.5*L)
    natural(up) = 0. { zero normal stress on all faces }
    natural(vp) = 0.
    natural(Tp) = h*(Tp-Tb) { convective cooling on bottom boundary }
line to (0.5*w,-0.5*L)
    natural(Tp) = 0. { no heat flux across end }
line to (0.5*w,0.5*L)
    natural(Tp) = h*(Tp-Tb) { convective cooling on top boundary }
line to (-0.5*w,0.5*L)
    natural(Tp) = 0. { no heat flux across end }
line to close

monitors
grid (x+mag*up,y+mag*vp)
contour(Tp) as "Temperature"

plots
grid (x+mag*up,y+mag*vp)
contour(Tp) as "Temperature" on grid (x+mag*up,y+mag*vp)
contour(Tp) as "Temperature" zoom(-.2,-.2,0.4,0.4) on grid (x+mag*up,y+mag*vp)
contour(up) as "x-displacement" on grid (x+mag*up,y+mag*vp)
contour(vp) as "y-displacement" on grid (x+mag*up,y+mag*vp)
vector(up,vp) as "Displacement vector plot" on grid (x+mag*up,y+mag*vp)
contour(sxx) as "x-normal stress" on grid (x+mag*up,y+mag*vp)
contour(syy) as "y-normal stress" on grid (x+mag*up,y+mag*vp)
contour(sxy) as "shear stress" on grid (x+mag*up,y+mag*vp)
elevation(Tp) from (0,-0.5*L) to (0,0.5*L) as "Temperature"
elevation(sxx) from (0,-0.5*L) to (0,0.5*L) as "x-normal stress"
elevation(syy) from (0,-0.5*L) to (0,0.5*L) as "y-normal stress"
surface(Tp) as "Temperature"

end

```

5.1.11.3 axisymmetric_stress

```
{ AXISYMMETRIC_STRESS.PDE
```

This example shows the application of FlexPDE to problems in axis-symmetric stress.

The equations of Stress/Strain arise from the balance of forces in a material medium, expressed in cylindrical geometry as

$$\begin{aligned} dr(r*Sr)/r - St/r + dz(Trz) + Fr &= 0 \\ dr(r*Trz)/r + dz(Sz) + Fz &= 0 \end{aligned}$$

where S_r , S_t and S_z are the stresses in the r - θ - and z - directions, Trz is the shear stress, and Fr and Fz are the body forces in the r - and z - directions.

The deformation of the material is described by the displacements, U and V , from which the strains are defined as

$$\begin{aligned} er &= dr(U) \\ et &= U/r \\ ez &= dz(V) \\ grz &= dz(U) + dr(V). \end{aligned}$$

The quantities $U, V, er, et, ez, grz, S_r, S_t, S_z$ and Trz are related through the constitutive relations of the material,

$$\begin{aligned} S_r &= C11*er + C12*et + C13*ez - b*Temp \\ S_t &= C12*er + C22*et + C23*ez - b*Temp \\ S_z &= C13*er + C23*et + C33*ez - b*Temp \\ Trz &= C44*grz \end{aligned}$$

In isotropic solids we can write the constitutive relations as

$$\begin{aligned} C11 = C22 = C33 &= G*(1-\nu)/(1-2*\nu) &= C1 \\ C12 = C13 = C23 &= G*\nu/(1-2*\nu) &= C2 \\ b &= \alpha*G*(1+\nu)/(1-2*\nu) \\ C44 &= G/2 \end{aligned}$$

where $G = E/(1+\nu)$ is the Modulus of Rigidity

E is Young's Modulus

ν is Poisson's Ratio

and α is the thermal expansion coefficient.

from which

$$\begin{aligned} S_r &= C1*er + C2*(et + ez) - b*Temp \\ S_t &= C1*et + C2*(er + ez) - b*Temp \\ S_z &= C1*ez + C2*(er + et) - b*Temp \\ Trz &= C44*grz \end{aligned}$$

Combining all these relations, we get the displacement equations:

$$\begin{aligned} dr(r*Sr)/r - St/r + dz(Trz) + Fr &= 0 \\ dr(r*Trz)/r + dz(Sz) + Fz &= 0 \end{aligned}$$

These can be written as

$$\begin{aligned} \text{div}(P) &= St/r - Fr \\ \text{div}(Q) &= -Fz \end{aligned}$$

where $P = [S_r, Trz]$

and $Q = [Trz, S_z]$

The natural (or "load") boundary condition for the U -equation defines the outward surface-normal component of P , while the natural boundary condition for the V -equation defines the surface-normal component of Q . Thus, the natural boundary conditions for the U - and V - equations together define the surface load vector.

On a free boundary, both of these vectors are zero, so a free boundary is simply specified by

$$\begin{aligned} \text{load}(U) &= 0 \\ \text{load}(V) &= 0. \end{aligned}$$

The problem analyzed here is a steel doughnut of rectangular cross-section, supported on the inner surface and loaded downward on the outer surface.

```
}
```

```
title "Doughnut in Axial Shear"
```

```
coordinates
```

```

ycylinder('R','Z')

variables
  U          { declare U and V to be the system variables }
  V

definitions
  nu = 0.3          { define Poisson's Ratio }
  E = 20            { Young's Modulus x 10^11 }
  alpha = 0         { define the thermal expansion coefficient }
  G = E/(1+nu)
  C1 = G*(1-nu)/(1-2*nu)  { define the constitutive relations }
  C2 = G*nu/(1-2*nu)
  b = alpha*G*(1+nu)/(1-2*nu)
  Fr = 0           { define the body forces }
  Fz = 0
  Temp = 0        { define the temperature }

  Sr = C1*dr(U) + C2*(U/r + dz(V)) - b*Temp
  St = C1*U/r + C2*(dr(U) + dz(V)) - b*Temp
  Sz = C1*dz(V) + C2*(dr(U) + U/r) - b*Temp
  Trz = G*(dz(U) + dr(V))/2

  r1 = 2           { define the inner and outer radii of a doughnut }
  r2 = 5
  q21 = r2/r1
  L = 1.0         { define the height of the doughnut }

initial values
  U = 0
  V = 0

equations          { define the axi-symmetric displacement equations }
  U: dr(r*Sr)/r - St/r + dz(Trz) + Fr = 0
  V: dr(r*Trz)/r + dz(Sz) + Fz = 0

boundaries
  region 1
  start(r1,0)
  load(U) = 0      { define a free boundary along bottom }
  load(V) = 0
  line to (r2,0)

  value(U) = 0    { constrain R-displacement on right }
  load(V) = -E/100 { apply a downward shear load }
  line to (r2,L)

  load(U) = 0     { define a free boundary along top }
  load(V) = 0
  line to (r1,L)

  value(U) = 0    { constrain all displacement on inner wall }
  value(V) = 0
  line to close

monitors
  grid(r+U,z+V)   { show deformed grid as solution progresses }

plots
  grid(r+U,z+V)   { hardcopy at to close: }
  { show final deformed grid }
  contour(U) as "X-Displacement" { show displacement field }
  contour(V) as "Y-Displacement" { show displacement field }
  vector(U,V) as "Displacement"  { show displacement field }
  contour(Trz) as "Shear Stress"
  surface(Sr) as "Radial Stress"

end

```

5.1.11.4 bentbar

```
{ BENTBAR.PDE
```

This is a test problem from Timoshenko: Theory of Elasticity, pp41-46

A cantilever is loaded by a distributed shearing force on the free end,

while a point at the center of the mounted end is fixed.

The solution is compared to Timoshenko's analytic solution.

The equations of Stress/Strain arise from the balance of forces in a material medium, expressed as

$$\begin{aligned} dx(S_x) + dy(T_{xy}) + F_x &= 0 \\ dx(T_{xy}) + dy(S_y) + F_y &= 0 \end{aligned}$$

where S_x and S_y are the stresses in the x - and y - directions, T_{xy} is the shear stress, and F_x and F_y are the body forces in the x - and y - directions.

The deformation of the material is described by the displacements, U and V , from which the strains are defined as

$$\begin{aligned} e_x &= dx(U) \\ e_y &= dy(V) \\ g_{xy} &= dy(U) + dx(V). \end{aligned}$$

The eight quantities $U, V, e_x, e_y, g_{xy}, S_x, S_y$ and T_{xy} are related through the constitutive relations of the material. In general,

$$\begin{aligned} S_x &= C_{11}e_x + C_{12}e_y + C_{13}g_{xy} - b \cdot \text{Temp} \\ S_y &= C_{12}e_x + C_{22}e_y + C_{23}g_{xy} - b \cdot \text{Temp} \\ T_{xy} &= C_{13}e_x + C_{23}e_y + C_{33}g_{xy} \end{aligned}$$

In orthotropic solids, we may take $C_{13} = C_{23} = 0$.

In this problem we consider the thermal effects to be negligible.

}

title "Timoshenko's Bar with end load"

variables

U { X-displacement }
 V { Y-displacement }

definitions

$L = 1$ { Bar length }
 $hL = L/2$
 $w = 0.1$ { Bar thickness }
 $hw = w/2$
 $eps = 0.01 * L$
 $I = 2 * hw^3 / 3$ { Moment of inertia }

 $nu = 0.3$ { Poisson's Ratio }
 $E = 2.0e11$ { Young's Modulus for Steel (N/M^2) }
{ plane stress coefficients }

 $G = E / (1 - nu^2)$
 $C_{11} = G$
 $C_{12} = G * nu$
 $C_{22} = G$
 $C_{33} = G * (1 - nu) / 2$

$amplitude = GLOBALMAX(abs(v))$ { for grid-plot scaling }
 $mag = 1 / amplitude$

$force = -250$ { total loading force in Newtons (~10 pound force) }
 $dist = 0.5 * force * (hw^2 - y^2) / I$ { Distributed load }

$S_x = (C_{11} * dx(U) + C_{12} * dy(V))$ { Stresses }
 $S_y = (C_{12} * dx(U) + C_{22} * dy(V))$
 $T_{xy} = C_{33} * (dy(U) + dx(V))$

{ Timoshenko's analytic solution: }

$V_{exact} = (force / (6 * E * I)) * ((L - x)^2 * (2 * L + x) + 3 * nu * x * y^2)$
 $U_{exact} = (force / (6 * E * I)) * (3 * y * (L^2 - x^2) + (2 + nu) * y^3 - 6 * (1 + nu) * hw^2 * y)$
 $S_{xexact} = -force * x * y / I$
 $T_{xyexact} = -0.5 * force * (hw^2 - y^2) / I$

initial values

$U = 0$
 $V = 0$

equations { the displacement equations }

$U: dx(S_x) + dy(T_{xy}) = 0$
 $V: dx(T_{xy}) + dy(S_y) = 0$

boundaries

```

region 1
  start (0,-hw)

  load(U)=0          { free boundary on bottom, no normal stress }
  load(V)=0
  line to (L,-hw)

  value(U) = Uexact { clamp the right end }
  mesh_spacing=hw/10
  line to (L,0) point value(V) = 0
  line to (L,hw)

  load(U)=0          { free boundary on top, no normal stress }
  load(V)=0
  mesh_spacing=10
  line to (0,hw)

  load(U) = 0
  load(V) = dist     { apply distributed load to Y-displacement equation }
  line to close

plots
  grid(x+mag*U,y+mag*V) as "deformation" { show final deformed grid }
  elevation(V,Vexact) from(0,0) to (L,0) as "Center Y-Displacement(M)"
  elevation(V,Vexact) from(0,hw) to (L,hw) as "Top Y-Displacement(M)"
  elevation(U,Uexact) from(0,hw) to (L,hw) as "Top X-Displacement(M)"
  elevation(Sx,Sxexact) from(0,hw) to (L,hw) as "Top X-Stress"
  elevation(Txy,Txyexact) from(0,0) to (L,0) as "Center Shear Stress"

end

```

5.1.11.5 bentbar_moving

```

{ BENTBAR_MOVING.PDE
  This problem is a moving mesh variant of BENTBAR.PDE
}

title "Timoshenko's Bar with end load"

variables
  U(1e-6)          { X-displacement }
  V(1e-6)          { Y-displacement }
  Xm = move(x)
  Ym = move(y)

definitions
  L = 1            { Bar length }
  hL = L/2
  w = 0.1          { Bar thickness }
  hw = w/2
  eps = 0.01*L
  I = 2*hw^3/3    { Moment of inertia }

  nu = 0.3        { Poisson's Ratio }
  E = 2.0e11      { Young's Modulus for Steel (N/M^2) }
  { plane stress coefficients }

  G = E/(1-nu^2)
  C11 = G
  C12 = G*nu
  C22 = G
  C33 = G*(1-nu)/2

  amplitude=GLOBALMAX(abs(v)) { for grid-plot scaling }
  mag=1/(amplitude+1e-6)

  force = -250    { total loading force in Newtons (~10 pound force) }
  dist = 0.5*force*(hw^2-y^2)/I { Distributed load }

  Sx = (C11*dx(U) + C12*dy(V)) { Stresses }
  Sy = (C12*dx(U) + C22*dy(V))
  Txy = C33*(dy(U) + dx(V))

```



```

{ Timoshenko's analytic solution: }
Vexact = (force/(6*E*I))*((L-x)^2*(2*L+x) + 3*nu*x*y^2)
Uexact = (force/(6*E*I))*(3*y*(L^2-x^2) + (2+nu)*y^3 - 6*(1+nu)*hw^2*y)
Sxexact = -force*x*y/I
Txyexact = -0.5*force*(hw^2-y^2)/I

initial values
U = 0
V = 0

equations { the displacement equations }
! force the displacements to evolve in pseudo-time, to allow a smooth deformation of
the mesh.
! the time scale of these equations is arbitrary
U: dx(Sx) + dy(Txy) = dt(U)
V: dx(Txy) + dy(Sy) = dt(V)
! the mesh surrogate variables. They move at the same rate as the material deformation
Xm: dt(Xm) = dt(U)
Ym: dt(Ym) = dt(V)

boundaries
region 1
start (0,-hw)

load(U)=0 { free boundary on bottom, no normal stress }
load(V)=0
line to (L,-hw)

value(U) = Uexact { clamp the right end }
mesh_spacing=hw/10
line to (L,0) point value(V) = 0
line to (L,hw)

load(U)=0 { free boundary on top, no normal stress }
load(V)=0
mesh_spacing=10
line to (0,hw)

load(U) = 0
load(V) = dist { apply distributed load to Y-displacement equation }
line to close

time 0 to 1e-8 !by 1e-10

plots
for cycle=1
! x and y have already been moved by u and v, but this is small compared to mag*u,
etc.
grid(x+mag*U,y+mag*V) as "deformation" { show final deformed grid }
elevation(v,Vexact) from(0,0) to (L,0) as "Center Y-Displacement(M)"
elevation(v,Vexact) from(0,hw) to (L,hw) as "Top Y-Displacement(M)"
elevation(U,Uexact) from(0,hw) to (L,hw) as "Top X-Displacement(M)"
elevation(Sx,Sxexact) from(0,hw) to (L,hw) as "Top X-Stress"
elevation(Txy,Txyexact) from(0,0) to (L,0) as "Center Shear Stress"

end
"JqARWPEgsA1HmFOIXNmCNfb+qwFQGus/TmzjXhVHKZ2Q6NnpPJOCREi6wK8g8g+PnvY7DriMhujFA11qcBgg5yF+
MkmYxGJoetheissilVHa1rvSKiA1A0QLkuYpmTajG2+/v5G68e+flbisgXy2m4KBHCsFJGbjSy2FFnplf6"

```

5.1.11.6 elasticity

```
{ ELASTICITY.PDE
```

This example shows the application of FlexPDE to a complex problem in thermo-elasticity. The equations of thermal diffusion and plane strain are solved simultaneously to give the thermally-induced stress and deformation in a laser application.

A rod amplifier of square cross-section is imbedded in a large copper heat-sink. The rod is surrounded by a thin layer of compliant metal. Pump light is focussed on the exposed side of the rod.

We wish to calculate the effect of the thermal load on the laser rod.

The equations of Stress/Strain arise from the balance of forces in a material medium, expressed as

$$\begin{aligned} dx(S_x) + dy(T_{xy}) + F_x &= 0 \\ dx(T_{xy}) + dy(S_y) + F_y &= 0 \end{aligned}$$

where S_x and S_y are the stresses in the x- and y- directions, T_{xy} is the shear stress, and F_x and F_y are the body forces in the x- and y- directions.

The deformation of the material is described by the displacements, U and V , from which the strains are defined as

$$\begin{aligned} e_x &= dx(U) \\ e_y &= dy(V) \\ g_{xy} &= dy(U) + dx(V). \end{aligned}$$

The eight quantities $U, V, e_x, e_y, g_{xy}, S_x, S_y$ and T_{xy} are related through the constitutive relations of the material. In general,

$$\begin{aligned} S_x &= C_{11}e_x + C_{12}e_y + C_{13}g_{xy} - b \cdot \text{Temp} \\ S_y &= C_{12}e_x + C_{22}e_y + C_{23}g_{xy} - b \cdot \text{Temp} \\ T_{xy} &= C_{13}e_x + C_{23}e_y + C_{33}g_{xy} \end{aligned}$$

In orthotropic solids, we may take $C_{13} = C_{23} = 0$.

Combining all these relations, we get the displacement equations:

$$\begin{aligned} dx[C_{11}dx(U) + C_{12}dy(V)] + dy[C_{33}(dy(U) + dx(V))] + F_x &= dx(b \cdot \text{Temp}) \\ dy[C_{12}dx(U) + C_{22}dy(V)] + dx[C_{33}(dy(U) + dx(V))] + F_y &= dy(b \cdot \text{Temp}) \end{aligned}$$

The "Plane-Strain" approximation is appropriate for the cross-section of a cylinder which is long in the Z-direction, and in which there is no Z-strain. The cylinder is loaded by surface tractions and body forces applied along the length of cylinder, and which are independent of Z.

In this case, we may write

$$\begin{aligned} C_{11} &= G \cdot (1 - \nu) & C_{12} &= G \cdot \nu & b &= G \cdot \alpha \cdot (1 + \nu) \\ C_{22} &= G \cdot (1 - \nu) & C_{33} &= G \cdot (1 - 2 \cdot \nu) / 2 \end{aligned}$$

where $G = E / [(1 + \nu) \cdot (1 - 2 \cdot \nu)]$

E is Young's Modulus

ν is Poisson's Ratio

and α is the thermal expansion coefficient.

The displacement form of the stress equations (for uniform temperature and no body forces) is then (dividing out G):

$$dx[(1 - \nu)dx(U) + \nu dy(V)] + 0.5 \cdot (1 - 2 \cdot \nu) \cdot dy[dy(U) + dx(V)] = \alpha \cdot (1 + \nu) \cdot dx(\text{Temp})$$

$$dy[\nu dx(U) + (1 - \nu)dy(V)] + 0.5 \cdot (1 - 2 \cdot \nu) \cdot dx[dy(U) + dx(V)] = \alpha \cdot (1 + \nu) \cdot dy(\text{Temp})$$

In order to quantify the "natural" (or "load") boundary condition mechanism, consider the stress equations in their original form:

$$\begin{aligned} dx(S_x) + dy(T_{xy}) &= 0 \\ dx(T_{xy}) + dy(S_y) &= 0 \end{aligned}$$

These can be written as

$$\begin{aligned} \text{div}(P) &= 0 \\ \text{div}(Q) &= 0 \end{aligned}$$

where $P = [S_x, T_{xy}]$

and $Q = [T_{xy}, S_y]$

The natural (or "load") boundary condition for the U-equation defines the outward surface-normal component of P , while the natural boundary condition for the V-equation defines the surface-normal component of Q . Thus, the natural boundary conditions for the U- and V- equations together define the surface load vector.

```

On a free boundary, both of these vectors are zero, so a free boundary
is simply specified by
    load(U) = 0
    load(V) = 0.

-- Submitted by Steve Sutton, Lawrence Livermore National Laboratory
}

title "Thermo-Elastic Stress"
select errlim = 1.0e-4

variables
    Tp                { declare the system variables to be Tp, Up and Vp }
    Up
    Vp

definitions
    k                 { declare thermal conductivity - values come later }
    Q                 { declare thermal source - values come later }
    E                 { declare Young's Modulus - values come later }
    nu                { declare Poisson's Ratio - values come later }
    alpha             { declare Expansion coefficient - values come later }

    { The heat deposition function: }
    adep = 1.8        { define the absorption coefficient }
    yo = 0.6          { define the pattern width }
    I0 = 1            { define the input flux }
    Qrodp = adep*I0*(exp(-adep*x))*(exp(-(y/yo)^2))

    Tb = 0.           { define the distant thermal sink temperature }

    { define the constitutive relations }
    G = E/((1+nu)*(1-2.*nu))
    C11 = G*(1-nu)
    C12 = G*nu
    C22 = G*(1-nu)
    C33 = G*(1-2*nu)/2
    b = G*alpha*(1+nu)

    { define some utility functions }
    ex = dx(Up)
    ey = dy(Vp)
    gxy = dy(Up) + dx(Vp)
    Sx = C11*ex + C12*ey - b*Tp
    Sy = C12*ex + C22*ey - b*Tp
    Txy = C33*gxy

boundary conditions
    'main' :
    value(Tp) = Tb    { fixed temperature }
    natural(Up) = 0.  { zero X-load }
    natural(Vp) = 0.  { zero Y-load }

    'left' :
    natural(Tp) = 0.  { no heat loss }
    natural(Up) = 0.  { zero X-load }
    natural(Vp) = 0.  { zero Y-load }

initial values
    Tp = 5.           { give FlexPDE an estimate of variable range }
    Up = 1.e-5
    Vp = 1.e-5

equations
    { the heat equation }
    Tp: dx(k*dx(Tp)) + dy(k*dy(Tp)) + Q = 0.

    { the U-displacement equation }
    Up: dx(C11*dx(Up)+C12*dy(Vp)-b*Tp) + dy(C33*(dy(Up)+dx(Vp))) = 0.

    { the V-displacement equation }
    Vp: dx(C33*(dy(Up)+dx(Vp))) + dy(C12*dx(Up)+C22*dy(Vp)-b*Tp) = 0.

constraints
    integral(up) = 0    { prevent rigid-body motion: }
                       { cancel X-motion }

```

```

integral(vp) = 0           { cancel Y-motion }
integral(dx(vp) - dy(up)) = 0 { cancel rotation }

boundaries

region 1                   { region one defines the problem domain as all copper
                           and sets the boundary conditions for the problem }
k = 0.083
Q = 0.
E = 117.0e3
nu = 0.4
alpha = 10e-6

start(0,-5)

use bc 'main'
line to (5,-5) to (5,5) to (0,5)

use bc 'left'
line to close

region 2                   { region two overlays an Indium potting layer }
k = 0.083
Q = 0.
E = 60.0e3
nu = 0.4
alpha = 16e-6
start (0,-0.6)
line to (0.6,-0.6) to (0.6,0.6) to (0,0.6) to (0,0.5) to (0,-0.5) to close


region 3                   { region three overlays the laser rod }
k = 0.0098
Q = Qrod
E = 282.0e3
nu = 0.28
alpha = 7e-6
start (0,-0.5)
line to (0.5,-0.5) to (0.5,0.5) to (0,0.5) to close

monitors
contour(Tp) as "Temperature"
contour(Tp) as "Temperature" zoom(0,0,1,1)
contour(Q) as "Heat deposition" zoom(0,0,1,1)
contour(Up) as "X-displacement" zoom(0,0,1,1)
contour(Vp) as "Y-displacement" zoom(0,0,1,1)
grid(x+10000*Up,y+10000*Vp) as "deformation"

plots
grid(x,y)
contour(Tp) as "Temperature"
contour(Tp) as "Temperature" zoom(0,0,1,1)
contour(Q) as "Heat deposition" zoom(0,0,1,1)
contour(Up) as "X-displacement" !zoom(0,0,1,1)
contour(Vp) as "Y-displacement" !zoom(0,0,1,1)
contour(Sx) as "X-Stress" zoom(0,-0.75,1.5,1.5)
contour(Sy) as "Y-Stress" zoom(0,-0.75,1.5,1.5)
contour(Txy) as "Shear Stress" zoom(0,-0.75,1.5,1.5)
vector(Up,vp) as "displacement"
vector(Up,vp) as "displacement" zoom(0,0,1,1)
grid(x+10000*Up,y+10000*Vp) as "deformation"

end

```

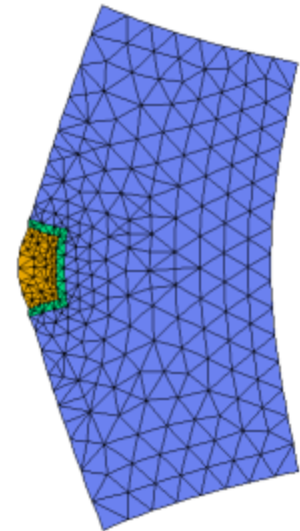

5.1.11.7 fixed_plate

```
{ FIXED_PLATE.PDE
```

This example considers the bending of a thin rectangular plate under a distributed transverse load.

For small displacements, the deflection U is described by the Biharmonic equation of plate flexure

$$\text{del2}(\text{del2}(U)) + Q/D = 0$$

where

Q is the load distribution,

```

D = E*h^3/(12*(1-nu^2))
E is Young's Modulus
nu is Poisson's ratio
and h is the plate thickness.

```

The boundary conditions to be imposed depend on the way in which the plate is mounted. Here we consider the case of a clamped boundary, for which

$$U = 0$$

$$dU/dn = 0$$

FlexPDE cannot directly solve the fourth order equation, but if we define $v = \text{del}2(U)$, then the deflection equation becomes

$$\text{del}2(U) = v$$

$$\text{del}2(v) + Q = 0$$

with the boundary conditions

$$dU/dn = 0$$

$$dv/dn = L*U$$

where L is a very large number.

In this system, dv/dn can only remain bounded if $U \rightarrow 0$, satisfying the value condition on U .

The particular problem addressed here is a plate of 16-gauge steel, 8 x 11.2 inches, covering a vacuum chamber, with atmospheric pressure loading the plate. The edges are clamped. Solutions to this problem are readily available, for example in Roark's Formulas for Stress & Strain, from which the maximum deflection is $U_{\text{max}} = 0.219$, in exact agreement with the FlexPDE result.

(See [FREE_PLATE.PDE](#)⁴⁶⁸ for the solution with a simply supported edge.)

Note: Care must be exercised when extending this formulation to more complex problems. In particular, in the equation $\text{del}2(U) = v$, v acts as a source in the boundary-value equation for U . Imposing a value boundary condition on U does not enforce $v = \text{del}2(U)$.

```

}

```

Title " Plate Bending - clamped boundary "

Select

```

errlim = 0.005
cubic      { Use Cubic Basis }

```

Variables

```

u(0.1)
v(0.1)

```

Definitions

```

xslab = 11.2
yslab = 8
h = 0.0598 {16 ga}
L = 1.0e4
E = 29e6
Q = 14.7
nu = .3
D = E*h^3/(12*(1-nu^2))

```

Initial Values

```

u = 0
v = 0

```

Equations

```

u: del2(u) = v
v: del2(v) = Q/D


```

Boundaries

```

Region 1
start (0,0)
natural(u) = 0
natural(v) = L*u
line to (xslab,0)
      to (xslab,yslab)
      to (0,yslab)
to close

```

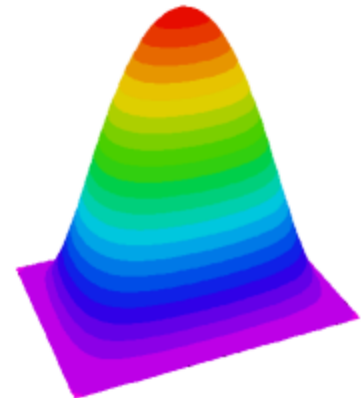

```

Monitors
  contour(U)

Plots
  contour (U) as "Displacement"
  elevation(U) from (0,yslab/2) to (xslab,yslab/2) as "Displacement"
  surface(U) as "Displacement"

End

```

5.1.11.8 free_plate

```

{ FREE_PLATE.PDE

  This example considers the bending of a thin rectangular plate under a
  distributed transverse load.

  For small displacements, the deflection U is described by the Biharmonic
  equation of plate flexure
  
$$\text{del2}(\text{del2}(U)) + Q/D = 0$$

  where
  Q is the load distribution,
   $D = E \cdot h^3 / (12 \cdot (1 - \nu^2))$ 
  E is Young's Modulus
  nu is Poisson's ratio
  and h is the plate thickness.

  The boundary conditions to be imposed depend on the way in which the
  plate is mounted. Here we consider the case of a simply supported
  boundary, for which the correct conditions are
   $U = 0$ 
   $M_n = 0$ 
  where  $M_n$  is the tangential component of the bending moment, which in turn
  is related to the curvature of the plate. An approximation to the second
  boundary condition is then
   $\text{del2}(U) = 0$ .

  FlexPDE cannot directly solve the fourth order equation, but if we
  define  $v = \text{del2}(U)$ , then the deflection equation becomes
   $\text{del2}(U) = v$ 
   $\text{del2}(v) + Q = 0$ 
  with the boundary conditions
   $U = 0$ 
   $v = 0$ .

  The particular problem addressed here is a plate of 16-gauge steel,
  8 x 11.2 inches, covering a vacuum chamber, with atmospheric pressure
  loading the plate. The edges are simply supported. Solutions to this
  problem are readily available, for example in Roark's Formulas for Stress
  & Strain, from which the maximum deflection is  $U_{\text{max}} = 0.746$ , as compared
  with the FlexPDE result of 0.750.

  (See FIXED\_PLATE.PDE465 for the solution with a clamped edge.)

  Note: Care must be exercised when extending this formulation to more complex
  problems. In particular, in the equation  $\text{del2}(U) = v$ , v acts as a source
  in the boundary-value equation for U. Imposing a value boundary condition
  on U does not enforce  $v = \text{del2}(U)$ .

}

Title " Plate Bending - simple support "

select
  ngrid=10          { increase initial gridding }
  cubic             { Use Cubic Basis }

Variables
  u(0.1)
  v(0.1)

Definitions
  xslab = 11.2
  yslab = 8
  h = 0.0598 {16 ga}

```

```

L = 1.0e6
E = 29e6
Q = 14.7
nu = .3
D = E*h^3/(12*(1-nu^2))

Initial Values
U = 0
V = 0

Equations
U: del2(U) = V
V: del2(V) = Q/D


Boundaries
Region 1
start (0,0)
value(U) = 0
value(V) = 0
line to (xslab,0)
to (xslab,yslab)
to (0,yslab)
to close

Monitors
contour(U)

Plots
contour (U) as "Displacement"
elevation(U) from (0,yslab/2) to (xslab,yslab/2) as "Displacement"
surface(U) as "Displacement"

End

```

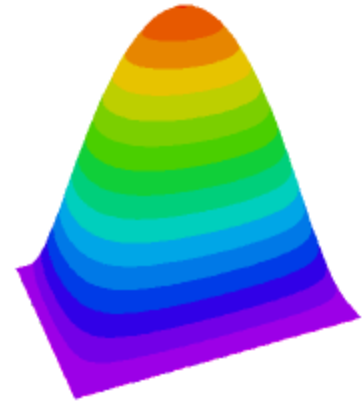

5.1.11.9 harmonic

```
{ HARMONIC.PDE
```

This example shows the use of FlexPDE in harmonic analysis of transient Stress problems.

The equations of Stress/Strain in a material medium can be given as

$$dx(S_x) + dy(T_{xy}) + F_x = 0$$

$$dx(T_{xy}) + dy(S_y) + F_y = 0$$

where S_x and S_y are the stresses in the x- and y- directions,

T_{xy} is the shear stress, and

F_x and F_y are the body forces in the x- and y- directions.

In a time-dependent problem, the material acceleration and viscous force act as body forces, and are included in a new body force term

$$F_{x1} = F_{x0} - \rho \cdot dt^2(U) + \mu \cdot del2(dt(U))$$

$$F_{y1} = F_{y0} - \rho \cdot dt^2(V) + \mu \cdot del2(dt(V))$$

where ρ is the material mass density, μ is the viscosity, and U and V are the material displacements in the x and y directions.

If we assume that the displacement is harmonic in time (all transients have died out), then we can assert

$$U(t) = U_0 \cdot \exp(-i \cdot \omega \cdot t)$$

$$V(t) = V_0 \cdot \exp(-i \cdot \omega \cdot t)$$

Here $U_0(x,y)$ and $V_0(x,y)$ are the complex amplitude distributions, and ω is the angular velocity of the oscillation.

Substituting this assumption into the stress equations and dividing out the common exponential factors, we get (implying U_0 by U and V_0 by V)

$$dx(S_x) + dy(T_{xy}) + F_{x0} + \rho \cdot \omega^2 \cdot U - i \cdot \omega \cdot \mu \cdot del2(U) = 0$$

$$dx(T_{xy}) + dy(S_y) + F_{y0} + \rho \cdot \omega^2 \cdot V - i \cdot \omega \cdot \mu \cdot del2(V) = 0$$

All the terms in this equation are now complex. Separating into real and imaginary parts gives

$$U = U_r + i \cdot U_i$$

$$S_x = S_{rx} + i \cdot S_{ix}$$

$$S_y = S_{ry} + i \cdot S_{iy}$$

etc...

Expressed in terms of the constitutive relations of the material,

$$S_{rx} = [C_{11} \cdot dx(U_r) + C_{12} \cdot dy(V_r)]$$

```

Sry = [C12*dx(Ur) + C22*dy(Vr)]
Trxy = C33*[dy(Ur) + dx(Vr)]
etc...

```

The final result is a set of four equations in U_r, V_r, U_i and V_i .

Notice that the stress-balance equation is the velocity equation, and it is to this equation that boundary loads must be applied.

In the problem considered here, we have an aluminum bar one meter long and 5 cm thick suspended on the left, and driven on the right by an oscillatory load. The load frequency is chosen to be near the resonant frequency of the bar.

We run the problem in three stages, first with no viscosity, then with increasing viscosities to show the mixing of real and imaginary components.

```

}
title "Harmonic Stress analysis"
variables { Recall that the declared variable range, if too large, will affect the
           { interpretation of error, and thus the timestep and solution accuracy }
           { Displacements }
           Ur
           Ui
           Vr
           Vi
definitions
L = 1 { the bar length, in Meters }
hL = L/2
w = 0.05 { the bar thickness, in Meters }
hw = w/2
eps = 0.01*L
nu = 0.3 { Poisson's Ratio }
E = 6.7e+10 { Young's Modulus for Aluminum (N/M^2) }
           { plane strain coefficients }
E1 = E/((1+nu)*(1-2*nu))
C11 = E1*(1-nu)
C12 = E1*nu
C22 = E1*(1-nu)
C33 = E1*(1-2*nu)/2
rho = 2700 { Kg/M^3 }
mu = staged(0,1e3,1e4) { Estimated viscosity Kg/M/sec }
cvel = sqrt(E/rho) { sound velocity, M/sec }
tau = L/cvel { transit time }
tone = 0.25/tau { approximate resonant frequency }
omega = 2*pi*tone { driving angular velocity }
amplitude=1e-8 { a guess for plot scaling }
mag=1/amplitude
force = 25 { loading force in Newtons (~1 pound force) }
           { distribute the force uniformly over the driven end: }
fdist = force/w
Um = sqrt(Ur^2+Ui^2) { X-displacement amplitude }
Vm = sqrt(Vr^2+Vi^2) { X-displacement amplitude }
Srx = (C11*dx(Ur) + C12*dy(Vr)) { Real Stresses }
Sry = (C12*dx(Ur) + C22*dy(Vr))
Trxy = C33*(dy(Ur) + dx(Vr))
Six = (C11*dx(Ui) + C12*dy(Vi)) { Imaginary Stresses }
Siy = (C12*dx(Ui) + C22*dy(Vi))
Tixy = C33*(dy(Ui) + dx(Vi))
Sxm = sqrt(Srx^2+Six^2)
Sym = sqrt(Sry^2+Siy^2)
Txym = sqrt(Trxy^2+Tixy^2)
equations { define the displacement equations }
Ur: dx(Srx) + dy(Trxy) + rho*omega^2*Ur + omega*mu*de12(Ui) = 0

```



```

Ui: dx(Six) + dy(Tixy) + rho*omega^2*Ui - omega*mu*del2(Ur) = 0
Vr: dx(Trxy) + dy(Sry) + rho*omega^2*Vr + omega*mu*del2(Vi) = 0
Vi: dx(Tixy) + dy(Siy) + rho*omega^2*Vi - omega*mu*del2(Vr) = 0

```

```

boundaries
  region 1
    start (0,-hw)

    load(Ur)=0          { free boundary on bottom, no normal stress }
    load(Ui)=0
    load(Vr)=0
    load(Vi)=0
    line to (L,-hw)

    load(Vr) = force   { Apply oscillatory vertical load on end. }
    line to (L,hw)

    load(Vr)=0         { free boundary on top, no normal stress }
    line to (0,hw)


    value(Ur) = 0      { clamp the left end }
    value(Ui) = 0
    value(Vr) = 0
    value(Vi) = 0
    line to close

monitors
  elevation(Vr,Vi) from(0,0) to (L,0)
  report(omega) report(mu)

plots
  grid(x+mag*Ur,y+mag*Vr) as "Real displacement" { show final deformed grid }
  report(omega) report(mu)
  grid(x+mag*Ui,y+mag*Vi) as "Imag
displacement"
  report(omega) report(mu)
  elevation(Vr,Vi) from(0,0) to (L,0)
  report(omega) report(mu)
  contour(Ur) as "Real X-displacement(M)"
  report(omega) report(mu)
  contour(Vr) as "Real Y-displacement(M)"
  report(omega) report(mu)
  contour(Ui) as "Imag X-displacement(M)"
  report(omega) report(mu)
  contour(Vi) as "Imag Y-displacement(M)"
  report(omega) report(mu)
  contour(Sxm) as "X-Stress amplitude"
  report(omega) report(mu)
  contour(Sym) as "Y-Stress amplitude"
  report(omega) report(mu)
  contour(Txym) as "Shear Stress amplitude"
  report(omega) report(mu)

end

```

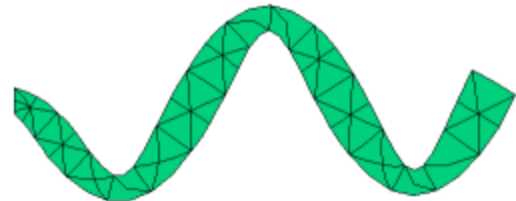

5.1.11.10 plasticity

```
{ PLASTICITY.PDE
```

```

This is a moving-mesh model of large displacement plasticity.
It uses a pseudo-time evolution to relax into its final configuration.
The "time" behavior is not intended to model the actual temporal behavior of such a
loaded bar.
The Elasticity is at first strongly diffused to avoid erratic hopping between elastic and
plastic states.
Once the shape is established, we decrease the diffusion to focus in on the transition
surface.
}

```

```
TITLE 'Beam, Shear-Loaded at End'
```

```

SELECT
regrid=off          ! Don't allow mesh refinement. It confuses the elasticity transition

```

```

prefer_stability ! allow Newton steps as necessary for convergence
order=2         ! use quadratic FEM interpolation

VARIABLES
  u(1e-4)
  v(1e-3)
  xm= move(x)
  ym= move(y)
  E(10e9)

DEFINITIONS
  L=1.0
  h=0.2
  mu=0.3
  s_pl=1e9      { Stress limit for elasticity }
  E0 =200e9

  C=E/(1-mu^2)   G=E/(2*(1+mu))
  uv=vector(u,v)   uvm=magnitude( uv)
  ex=dx(u)        ey=dy(v)        exy=dx(v)+ dy(u)

  !>> Mises for rest elasticity determines where the elasticity switches.
  C0=E0/(1-mu^2)   G0=E0/(2*(1+mu))
  sx0=(C0*(ex+ mu*ey))   sy0=(C0*(mu*ex+ ey))   sxy0=(G0*exy)
  ez0=-mu*(sx0+ sy0)/E0
  mises0=sqrt( 0.5*( (sx0-sy0)^2+ sx0^2+ sy0^2)+ 3*sxy0^2)
  ! E1 = SWAGE(mises0-s_pl, E0, E0/20, s_pl/10)
  E1 = if(mises0 < s_pl) then E0 else E0/20

  sx=C*(ex+ mu*ey)   sy=C*(mu*ex+ ey)   sxy=G*exy
  ez=-mu*(sx+ sy)/E
  p_ang=0.5* arctan( 2*sxy/(sx-sy) )      { Radians }
  sxp0=(sx+sy)/2+ (sx-sy)/2*cos(2*p_ang)+ sxy*sin(2*p_ang)
  syp0=(sx+sy)/2- (sx-sy)/2*cos(2*p_ang)- sxy*sin(2*p_ang)
  { Test for highest algebraic value: }
  p_ang1= if sxp0>syp0 then p_ang else p_ang+ pi/2
  sxp= if sxp0>syp0 then sxp0 else syp0   { sx' }
  syp= if sxp0>syp0 then syp0 else sxp0   { sy' }
  p_angle=p_ang1*180/pi                   { Degrees }
  mises=sqrt( 0.5*( (sx-sy)^2+ sx^2+ sy^2)+ 3*sxy^2)
  energy_d=(1/2)*( sx*ex+ sy*ey+ sxy*exy) { Energy density }

  ! report the plastic distribution
  plastic= if mises0>1e9 then 1 else 0

  ! start out with a heavily smeared distribution of E,
  ! then gradually narrow the transition by reducing the smear coefficient
  smear = (h/(t+2))^2

  endload = -6e7*min(t,1)
  endpoint = POINT(L,0)

INITIAL VALUES
  E=E0

EQUATIONS
  ! instantaneous evolution of displacement
  u: dx( sx)+ dy( sxy)=0
  v: dx( sxy)+ dy( sy)=0
  ! mesh motion follows displacement
  xm: dt(xm) = dt(u)
  ym: dt(ym) = dt(v)
  ! relax the effective elasticity towards the computed value
  E: dt(E) = smear*div(grad(E)) + 10*(E1 - E)

BOUNDARIES
region 'steel'
  mesh_spacing = h/20*(1+3*x) ! denser mesh near mount

start 'outer' (0,-h/2)

```

```

LABEL 'bottom'                ! label a piece of the boundary
load(u)=0    load(v)=0    line to (L,-h/2)
ENDLABEL 'bottom'

load(u)=0    load(v)=endload line to(endpoint) to (L,h/2)

LABEL 'top'                  ! label another piece of the boundary
load(u)=0    load(v)=0    line to (0,h/2)
ENDLABEL 'top'

value(u)=0    value(v)=0    velocity(xm)=0    velocity(ym)=0
mesh_spacing=h/40
line to close

FRONT (mises0-s_p1, s_p1/10)
resolve(E)

TIME 0 by 1e-5 to 5

MONITORS
for cycle=10
  contour(E) painted as "Effective Elasticity"
  contour(E1) painted as "Computed Elasticity"
  contour(mises0) painted
  contour(plastic) painted

PLOTS
for cycle=50
  grid( x, y)
  contour( u)    contour(dt(u))
  contour( v)    contour(dt(v))
  contour(E) painted as "Effective Elasticity"
  contour(E1) painted as "Computed Elasticity"
  contour(mises0) painted
  elevation(mises0) on 'top'
  contour( plastic) painted
  contour( sxy) painted
  elevation(y, h/2+v) on 'top' as "Validate Displacement (v::Y)" ! verify that mesh
and displacement agree
  elevation(y, -h/2+v) on 'bottom' as "Validate Displacement (v::Y)"
  history( sxy) at (endpoint)
  history( sxy) at (0,h/2)
  history(endload)
  history(dt(v)) at (endpoint)
  history(deltat) LOG
  history(smear)
END

```

5.1.11.11 prestube

```

{ PRESTUBE.PDE
  This example models the stress in a tube with an internal pressure.
  - from "Fields of Physics on the PC" by Gunnar Backstrom
}

```

```

title
  'Tube With Internal Pressure'

variables
  u
  v

definitions
  mm = 1e-3
  r1 = 3*mm
  r2 = 10*mm
  q21= r2/r1
  mu = 0.3
  E = 200e9      {Steel}
  c = E/(1-mu^2)
  G = E/2/(1+mu)
  dabs= sqrt(u^2+ v^2)
  ex= dx(u)
  ey= dy(v)
  exy= dx(v)+ dy(u)
  sx= c*(ex+ mu*ey)
  sy= c*(mu*ex+ ey)
  sxy= G*exy

  p1= 1e8      { the internal pressure }

  { Exact expressions }
  rad= sqrt(x^2+ y^2)
  sr_ex= -p1*((r2/rad)^2 - 1)/(q21^2 - 1)
  st_ex= p1*((r2/rad)^2 + 1)/(q21^2 - 1)
  dabs_ex= abs( rad/E*(st_ex- mu*sr_ex))

equations      { Constant temperature, no volume forces }
  u:  dx( c*(dx(u) + mu*dy(v)) ) + dy( G*(dx(v)+ dy(u)) )= 0
  v:  dx( G*( dx(v)+ dy(u)) )+ dy( c*(dy(v) + mu*dx(u)) )= 0


constraints      { Since all boundaries are free, it is necessary
                  to apply constraints to eliminate rigid-body motions }
  integral(u) = 0
  integral(v) = 0
  integral(dx(v)-dy(u)) = 0

boundaries
  region 1
  start (r2,0)
  load(u)= 0      { Outer boundary is free }
  load(v)= 0
  arc to (0,r2) to (-r2,0) to (0,-r2) to close
  start (r1,0)      { Cut-out }
  load(u)= p1*x/r1  { Normal component of x-stress }
  load(v)= p1*y/r1  { Normal component of y-stress }
  arc to (0,-r1) to (-r1,0) to (0,r1) to close

monitors
  contour(dabs)

plots
  grid(x+200*u, y+200*v)
  elevation(sx, sr_ex) from (r1,0) to (r2,0)
  elevation(sy, st_ex) from (r1,0) to (r2,0)
  contour(dabs)      contour((dabs-dabs_ex)/dabs_ex)
  contour(u)         contour(v)
  vector(u,v)        vector(u/dabs, v/dabs)
  contour(sx)        contour(sy)
  contour(sxy)
end

```

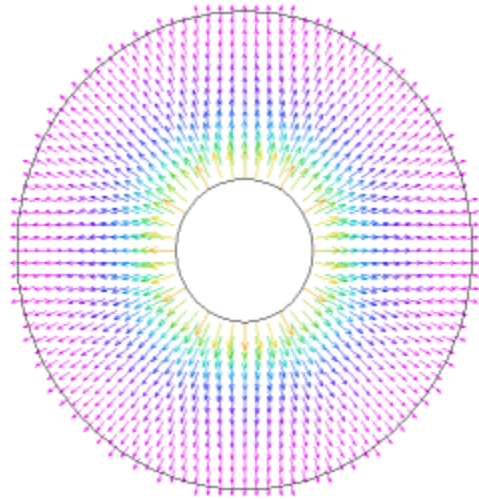

5.1.11.12 tension

```
{ TENSION.PDE
```

This example shows the deformation of a tension bar with a hole.

The equations of Stress/Strain arise from the balance of forces in a material medium, expressed as

$$\begin{aligned} dx(S_x) + dy(T_{xy}) + F_x &= 0 \\ dx(T_{xy}) + dy(S_y) + F_y &= 0 \end{aligned}$$

where S_x and S_y are the stresses in the x- and y- directions,
 T_{xy} is the shear stress, and
 F_x and F_y are the body forces in the x- and y- directions.

The deformation of the material is described by the displacements,
 U and V , from which the strains are defined as

$$\begin{aligned} e_x &= dx(U) \\ e_y &= dy(V) \\ g_{xy} &= dy(U) + dx(V). \end{aligned}$$

The eight quantities $U, V, e_x, e_y, g_{xy}, S_x, S_y$ and T_{xy} are related through the constitutive relations of the material. In general,

$$\begin{aligned} S_x &= C_{11}e_x + C_{12}e_y + C_{13}g_{xy} - b \cdot \text{Temp} \\ S_y &= C_{12}e_x + C_{22}e_y + C_{23}g_{xy} - b \cdot \text{Temp} \\ T_{xy} &= C_{13}e_x + C_{23}e_y + C_{33}g_{xy} \end{aligned}$$

In orthotropic solids, we may take $C_{13} = C_{23} = 0$.

Combining all these relations, we get the displacement equations:

$$\begin{aligned} dx[C_{11}dx(U) + C_{12}dy(V)] + dy[C_{33}(dy(U) + dx(V))] + F_x &= dx(b \cdot \text{Temp}) \\ dy[C_{12}dx(U) + C_{22}dy(V)] + dx[C_{33}(dy(U) + dx(V))] + F_y &= dy(b \cdot \text{Temp}) \end{aligned}$$

In the "Plane-Stress" approximation, appropriate for a flat, thin plate loaded by surface tractions and body forces IN THE PLANE of the plate, we may write

$$\begin{aligned} C_{11} &= G & C_{12} &= G \cdot \nu & C_{33} &= G \cdot (1 - \nu) / 2 \\ & & C_{22} &= G & & \end{aligned}$$

where $G = E / (1 - \nu^2)$

E is Young's Modulus

and ν is Poisson's Ratio.

The displacement form of the stress equations (for uniform temperature and no body forces) is then (dividing out G):

$$\begin{aligned} dx[dx(U) + \nu dy(V)] + 0.5(1 - \nu)dy[dy(U) + dx(V)] &= 0 \\ dy[\nu dx(U) + dy(V)] + 0.5(1 - \nu)dx[dy(U) + dx(V)] &= 0 \end{aligned}$$

In order to quantify the load boundary condition mechanism, consider the stress equations in their original form:

$$\begin{aligned} dx(S_x) + dy(T_{xy}) &= 0 \\ dx(T_{xy}) + dy(S_y) &= 0 \end{aligned}$$

These can be written as

$$\begin{aligned} \text{div}(P) &= 0 \\ \text{div}(Q) &= 0 \end{aligned}$$

where $P = [S_x, T_{xy}]$

and $Q = [T_{xy}, S_y]$

The "load" (or "natural") boundary condition for the U -equation defines the outward surface-normal component of P , while the load boundary condition for the V -equation defines the surface-normal component of Q . Thus, the load boundary conditions for the U - and V - equations together define the surface load vector.

On a free boundary, both of these vectors are zero, so a free boundary is simply specified by

$$\begin{aligned} \text{load}(U) &= 0 \\ \text{load}(V) &= 0. \end{aligned}$$

Here we consider a tension strip with a hole, subject to an x-load.

}

title 'Plane Stress tension strip with a hole'

select

`errlim = 1e-4` { increase accuracy to resolve stresses }
`plotted` { paint all contour plots }


variables

`U` { declare U and V to be the system variables }
`V`

definitions

`nu = 0.3` { define Poisson's Ratio }
`E = 21` { Young's Modulus x 10^{-11} }

```
G = E/(1-nu^2)
C11 = G
C12 = G*nu
C22 = G
C33 = G*(1-nu)/2
p1 = (1-nu)/2
```

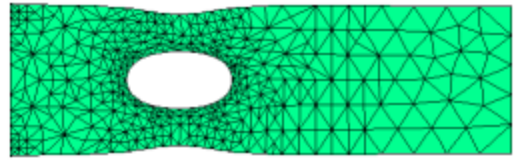

initial values

```
U = 1
V = 1
```

```
equations { define the Plane-Stress displacement equations }
U: dx(dx(U) + nu*dy(V)) + p1*dy(dy(U) + dx(V)) = 0
V: dy(dy(V) + nu*dx(U)) + p1*dx(dy(U) + dx(V)) = 0
```

boundaries

```
region 1
start (0,0)
load(U)=0 { free boundary, no normal stress }
load(V)=0
line to (3,0) { walk bottom }

load(U)=0.1 { define an x-stress of 0.1 unit on right edge}
load(V) = 0
line to (3,1)

load(U)=0 { free boundary top }
load(V)=0
line to (0,1)

value(U)=0 { fixed displacement on left edge }
value(V)=0
line to close

{ Cut out a hole }
load(U) = 0
load(V) = 0
start(1,0.25)
arc(center=1,0.5) angle=-360
```

```
monitors
grid(x+U,y+V) { show deformed grid as solution progresses }
```

```
plots { hardcopy at to close: }
grid(x+U,y+V) { show final deformed grid }
vector(U,V) as "Displacement" { show displacement field }
contour(U) as "X-Displacement"
contour(V) as "Y-Displacement"
contour((C11*dx(U) + C12*dy(V))) as "X-Stress"
contour((C12*dx(U) + C22*dy(V))) as "Y-Stress"
surface((C11*dx(U) + C12*dy(V))) as "X-Stress"
surface((C12*dx(U) + C22*dy(V))) as "Y-Stress"
```

```
end
```

5.1.11.13 vibrate

```
{ VIBRATE.PDE
```

This example shows the use of FlexPDE in transient Stress problems.

The equations of Stress/Strain in a material medium can be given as

$$\begin{aligned} dx(S_x) + dy(T_{xy}) + F_x &= 0 \\ dx(T_{xy}) + dy(S_y) + F_y &= 0 \end{aligned}$$

where S_x and S_y are the stresses in the x- and y- directions,

T_{xy} is the shear stress, and

F_x and F_y are the body forces in the x- and y- directions.

In a time-dependent problem, the material acceleration and viscous force act as body forces, and are included in a new body force term

$$\begin{aligned} F_{x1} &= F_{x0} - \rho \cdot dtt(U_x) + \mu \cdot del2(dt(U_x)) \\ F_{y1} &= F_{y0} - \rho \cdot dtt(U_y) + \mu \cdot del2(dt(U_y)) \end{aligned}$$

where ρ is the material mass density, μ is the viscosity, and U_x and U_y are the material displacements.

The second time derivative in the acceleration term cannot be modelled directly in FlexPDE, but the problem can still be solved.

Define V_x and V_y as the velocities in the x and y directions; then

$$V_x = dt(U_x) \\ \text{and } V_y = dt(U_y)$$

The body forces are then

$$F_{x1} = F_{x0} - \rho * dt(V_x) + \mu * del2(V_x) \\ F_{y1} = F_{y0} - \rho * dt(V_y) + \mu * del2(V_y)$$

This results in a set of four equations in U_x, U_y, V_x and V_y .

Notice that the stress-balance equation is the Velocity equation, and it is to this equation that boundary loads must be applied.

In the problem considered here, we have an aluminum bar one meter long and 5 cm thick suspended on the left, and driven on the right by an oscillatory load. The load frequency is chosen to be near the resonant frequency of the bar.

```

}
title "Transient Stress analysis"
select
  deltat=1.0e-7      { Start out at careful timestep, it will grow. }
  ngrid=21          { Grid a little more densely than default }

  regrid = off      { Cell splitting causes instantaneous changes in the
                    { effective material properties. These changes act
                    { like small earthquakes in the material, and propagate
                    { high-frequency noise. To avoid these effects, we
                    { suppress grid refinement. }

variables
  { Recall that the declared variable range, if too large,
  { will affect the interpretation of error, and thus the
  { timestep and solution accuracy }

  Ux (threshold=1e-7) { Displacements }
  Uy (threshold=1e-7)
  Vx (threshold=1e-5) { velocities }
  Vy (threshold=1e-5)

definitions
  L = 1              { the bar length, in Meters }
  hL = L/2          { the bar thickness, in Meters }
  w = 0.05
  hw = w/2
  eps = 0.01*L

  nu = 0.3          { Poisson's Ratio }
  E = 6.7e+10       { Young's Modulus for Aluminum (N/M^2) }

                    { plane strain coefficients }
  E1 = E/((1+nu)*(1-2*nu))
  C11 = E1*(1-nu)
  C12 = E1*nu
  C22 = E1*(1-nu)
  C33 = E1*(1-2*nu)/2

  rho = 2700        { Kg/M^3 }
  mu = 1e3          { Estimated viscosity Kg/M/sec }
  smoother = 1      { artificial diffusion to smooth results (M^2/sec) }

  cvel = sqrt(E/rho) { sound velocity, M/sec }
  tau = L/cvel      { transit time }
  tone = 0.25/tau   { approximate resonant frequency }
  freq = 1.1*tone   { driving frequency }
  period = 1/freq

  amplitude=1e-8    { a guess for plot scaling }
  mag=1/amplitude

  force = 25        { loading force in Newtons (~1 pound force) }
                    { distribute the force uniformly over the driven end: }
  fdist = force/w

```

```

                                { the driving force is sinusoidal in time: }
jiggle = force*sin(2*pi*freq*t)

Sx = (C11*dx(Ux) + C12*dy(Uy))      { Stresses }
Sy = (C12*dx(Ux) + C22*dy(Uy))
Txy = C33*(dy(Ux) + dx(Uy))

boundary conditions
'no load' : load(vx)=0 load(vy)=0
'Y load'  : load(vx)=0 load(vy)=jiggle
'freeze'  : value(Ux)=0 value(Uy)=0 value(vx)=0 value(vy)=0

initial values
Ux = 0          { start at rest }
Uy = 0
Vx = 0
Vy = 0

equations          { define the displacement equations }
Ux: Vx + smoother*div(grad(Ux)) = dt(Ux)
Uy: Vy + smoother*div(grad(Uy)) = dt(Uy)
Vx: dx(Sx) + dy(Txy) + mu*div(grad(Vx)) = rho*dt(vx)
Vy: dx(Txy) + dy(Sy) + mu*div(grad(Vy)) = rho*dt(vy)

boundaries
region 1
start (0,-hw)

use bc 'no load'      { free boundary on bottom, no normal stress }
line to (L,-hw)

use bc 'Y load'      { Apply oscillatory vertical load on end.
Note that this driving force must be applied to the
equation which contains the stress divergence. }
line to (L,hw)

use bc 'no load'      { free boundary on top, no normal stress }
line to (0,hw)

use bc 'freeze'      { freeze left end (both displacement and velocity) }
line to close

feature              { a "Gridding Feature" to force grid refinement near the mount }
start (hw/2,-hw) line to (hw/2,hw)
start (L-hw/2,-hw) line to (L-hw/2,hw)

time 0 to 4*period

monitors
for cycle=5
elevation(Uy) from(0,0) to (L,0) range=(-amplitude,amplitude)

plots
for t= period/2 by period/2 to endtime
grid(x+mag*Ux,y+mag*Uy) as "deformation"      { show final deformed grid }
vector(Ux,Uy) as "displacement"              { show displacement field }
vector(vx,vy) as "velocity"                  { show velocity field }
contour(Ux) as "X-displacement(M)"
contour(Uy) as "Y-displacement(M)"
contour(vx) as "X-velocity(M/s)"
contour(vy) as "Y-velocity(M/s)"
contour(Sx) as "X-Stress"
contour(Sy) as "Y-Stress"
contour(Txy) as "Shear Stress"

histories
history(Ux) at (L,0) (0.8*L,0) (hL,0) as "Horizontal Displacement(M)"
history(Vx) at (L,0) (0.8*L,0) (hL,0) as "Horizontal Velocity(M/s)"
history(Sx) at (eps,hw-eps) (eps,-hw+eps) (L-eps,hw-eps) (L-eps,-hw+eps)
as "Horizontal Stress"
history(Uy) at (L,0) (0.8*L,0) (hL,0) as "Vertical Displacement(M)"
history(Vy) at (L,0) (0.8*L,0) (hL,0) as "Vertical Velocity(M/s)"
history(Sy) at (eps,hw-eps) (eps,-hw+eps) (L-eps,hw-eps) (L-eps,-hw+eps)
as "Vertical Stress"

```



```

    history(Txy) at (eps,hw-eps) (eps,-hw+eps) (L-eps,hw-eps) (L-eps,-hw+eps)
    as "Shear Stress"
end

```

5.2 Usage

5.2.1 1D

5.2.1.1 1d_cylinder

```

{ 1D_CYLINDER.PDE
  This problem tests the implementation of 1D cylindrical coordinates in FlexPDE.
  A distributed source is applied to a heatflow equation. The source is chosen as
  the analytic derivative of an assumed Gaussian solution. The numerical solution
  is then compared to the analytical solution.
}
title '1D cylinder Test -- Gaussian'
coordinates
  cylinder1 { default coordinate name is 'R' }
variables
  u
definitions
  k = 1
  w=0.1
  { assume a gaussian solution }
  u0 = exp(-r^2/w^2)
  { apply the correct analytic source for cylindrical geometry (we could use
    div(k*grad(u0)) here, but that would not test the 1D Cylinder expansions) }
  s = -(4/w^2)*(r^2/w^2-1)*u0
  left=point(0)
  right=point(1/10)
equations
  U: div(K*grad(u)) +s = 0
boundaries
  region 1
    start left point value(u)=u0
    line to right point load(u)=(-2*k*r*u0/w^2)
monitors
  elevation(u) from left to right
plots
  elevation(u,u0) from left to right
  elevation(u-u0) from left to right as "Error"
  elevation(-div(grad(u)),s) from (0.01) to right
  elevation(-grad(u),-grad(u0)) from (0.01) to right
end

```

5.2.1.2 1d_cylinder_transient

```

{ 1D_CYLINDER_TRANSIENT.PDE
  This problem analyzes the diffusive loss of a solute from a solvent due to leakage
  across an outer boundary using 1D cylindrical coordinates.
}
title '1D time dependent diffusion in a cylinder'
coordinates
  cylinder1("R")
variables

```

```

C
definitions
  D = 1
  source = 0
  b = 1
  a = 2
  C0 = 10
  diss = 0.01      ! dissolution coefficient
  Cext = 0         ! external sink concentration
  Flux = -D*dr(C)

initial values
  C = C0

equations
  C: div(D*grad(C)) + source = dt(C)

boundaries
  region 1
    start (b) point load(C)=0
    line to (a) point load(C)=diss*(Cext-C) !outer leakage rate

time 0 to 10

monitors
  for cycle=1
    elevation(C) from (b) to (a)

plots
  for cycle=10
    elevation(C) from (b) to (a)
    elevation(Flux) from (b) to (a) range=(0,0.01) {minimum plot range}
    history(C) at (b) ((b+a)/2) (a)
    history(Flux) at (b) ((b+a)/2) (a)

end

```

5.2.1.3 1d_float_zone

```
{ 1D_FLOAT_ZONE.PDE
```

This is a version of the standard example ["Float_Zone.pde"](#)^[427] in 1D cartesian geometry.

```
}
```

```
title
  "Float Zone in 1D Cartesian geometry"
```

```
coordinates
  cartesian1
```

```
variables
  temp(threshold=100)
```

```
definitions
  k = 10          { thermal conductivity }
  cp = 1         { heat capacity }
  long = 18
  H = 0.4        { free convection boundary coupling }
  Ta = 25        { ambient temperature }
  A = 4500       { amplitude }
```

```
source = A*exp(-((x-1*t)/.5)^2)*(200/(t+199))
```

```
initial value
  temp = Ta
```

```
equations
  Temp: div(k*grad(temp)) + source -H*(temp - Ta) = cp*dt(temp)
```

```
boundaries
  region 1
    start(0) point value(temp) = Ta
    line to (long) point value(temp) = Ta
```

```

time -0.5 to 19 by 0.01

monitors
  for t = -0.5 by 0.5 to (long + 1)
    elevation(temp) from (0) to (long) range=(0,1800) as "Surface Temp"

plots
  for t = -0.5 by 0.5 to (long + 1)
    elevation(temp) from (0) to (long) range=(0,1800) as "Axis Temp"
    elevation(source) from(0) to (long)
    elevation(-k*grad(temp)) from(0) to (long)

histories
  history(temp) at (0) (1) (2) (3) (4) (5) (6) (7) (8)
                  (9) (10) (11) (12) (13) (14) (15) (16)
                  (17) (18)

end

```

5.2.1.4 1d_slab

```

{ 1D_SLAB.PDE
  This problem analyzes heat flow in a slab using 1D cartesian coordinates.
}

TITLE 'Heat flow through an Insulating layer in 1D'
COORDINATES
  Cartesian1 { default coordinate is 'x' }
VARIABLES
  Phi { the temperature }
DEFINITIONS
  K = 1 { default conductivity }
  R = 0.5 { insulator thickness }
EQUATIONS
  Phi: Div(-k*grad(phi)) = 0

BOUNDARIES
  REGION 1 { the total domain }
  START (-1) POINT VALUE(Phi)=0
  LINE TO (1) POINT VALUE(Phi)=1
  { note: no 'close'! }
  REGION 2 'blob' { the embedded layer }
  k = 0.001
  START (-R) LINE TO (R)
PLOTS
  ELEVATION(Phi) FROM (-1) to (1)
END

```

5.2.1.5 1d_sphere

```

{ 1D_SPHERE.PDE
  This problem demonstrates the use of 1D spherical coordinates.
}

title '1D Sphere Test -- Gaussian'

coordinates
  sphere1 { default coordinate name is "R" }

variables
  u

definitions
  k = 1
  w=0.1
  { assume a gaussian solution }
  u0 = exp(-r^2/w^2)
  { apply the correct analytic source for spherical geometry
    (we could use div(k*grad(u0)) here, but that would not test the 1D sphere
  expansions) }
  s = -(2/w^2)*(2*r^2/w^2-3)*u0

```

```

left=point(0)
right=point(1/10)

equations
  u: div(k*grad(u)) +s = 0

boundaries
  region 1
    start left      point value(u)=u0
    line to right   point load(u)=(-2*k*r*u0/w^2)

monitors
  elevation(u) from left to right

plots
  elevation(u,u0) from left to right
  elevation(u-u0) from left to right as "Error"
  elevation(-div(grad(u)),s) from (0.01) to right

end

```

5.2.2 3D_domains

5.2.2.1 2d_sphere_in_cylinder

```

{ 2D_SPHERE_IN_CYLINDER.PDE
  2D cylindrical (axi-symmetric) model of an empty sphere in a cylindrical box.
}

title '2D sphere in a can'

coordinates
  ycylinder("R","Z") { vertical coordinate is cylinder axis }

variables
  u

definitions
  k = 1
  R0 = 1
  box = 2*R0

equations
  u: div(k*grad(u)) = 0

boundaries
  region 1
    start(0,-box)
    value(u)=0 line to (box,-box)
    natural(u)=0 line to (box,box)
    value(u)=1 line to (0,box)
    natural(u)=0 line to (0,R0) { cylindrical axis }
    arc(center=0,0) angle=-180 { spherical cutout }
    line to close { cylindrical axis }

monitors
  grid(r,z)
  contour(u)

plots
  grid(r,z)
  contour(u)

end

```

5.2.2.2 3d_box_in_sphere

```

{ 3D_BOX_IN_SPHERE.PDE
  This problem demonstrates the construction of a box inside a sphere.
  We use two conical frustums to define an extrusion layer to contain the box.
  The flat surfaces define top and bottom of the box and the cones fall

```

to meet at the diameter of the sphere.

The box is then defined as a square section of the layer between the flat surfaces of the frustums.

Click "[Controls->Domain Review](#)" ¹⁰ to watch the domain construction process.

We solve a heat equation for demonstration purposes.

```

}
title '3D Box in a Sphere'
coordinates
  cartesian3

select
  regrid = off      { for quicker completion }
  ngrid = 16

variables
  u

definitions
  R0 = 1             { sphere radius }
  hbox = R0/4        { box half-size }
  { Make the box-bounding circle slightly bigger than box, or corner
    intersections will confuse the mesh generator. }
  Rbox = 1.1*sqrt(2)*hbox

  rho = sqrt(x^2+y^2)      { 2d radius - don't use 'R', it's 3D radius! }

  zsphere = SPHERE ((0,0,0),R0)  { hemisphere shape }
  zbottom = -zsphere             { bottom of sphere }
  ztop = zsphere                 { top of sphere }

  zboxbottom = -hbox { default box-bounding surfaces - patched later in outer sphere }

  zboxtop = hbox
  zcone = hbox*(R0-rho)/(R0-Rbox) { cone shape for bringing box top to sphere
diameter }

  K = 1                   { Define all parameter defaults for non-box volume}
  source = 0

equations
  U: div(K*grad(u)) + source = 0

extrusion
  surface z = zbottom      { the bottom hemisphere and plane }
  surface z = zboxbottom
  surface z = zboxtop
  surface z = ztop        { the top hemisphere and plane }

boundaries
  surface 1 value(u)=0    { for demonstration purposes }
  surface 4 value(u)=0

  region 1      { The sphere }
  zboxbottom = -zcone
  zboxtop = zcone
  start (R0,0)
  arc(center=0,0) angle=360 to close

  limited region 2 { smaller circle overlays sphere }
  layer 2          { ... and exists only in layer 2 }
  start(Rbox,0)
  arc(center=0,0) angle=360 to close

  limited region 3 { the box outline }
  layer 2          { box exists only in layer 2 }
  source = 1
  K = 0.1
  start(-hbox,-hbox) line to (hbox,-hbox) to (hbox,hbox) to (-hbox,hbox) to close

plots
  grid(x,y,z) as "outer sphere"
  grid(x,z) on y=0 nolines as "cross-section showing box"

```

```

grid(x,z) on y=0 paintregions nolines as "region and layer structure"
grid(x,y) on z=0 paintregions nolines as "region and layer structure"
contour(u) on y=0 as "temperature"
glcontour(u) on region 3 as "temperature"

```

```
end
```

5.2.2.3 3d_cocktail

```
{ 3D_COCKTAIL.PDE
```

This problem constructs a cocktail glass.
It is the geometric construction only, there are no variables or equations.
[LIMITED](#)²⁴⁸ regions are used to remove parts of the extruded shape.

Click ["Controls->Domain Review"](#)¹⁰⁷ to watch the mesh construction process.

```
}
```

```
TITLE 'Cocktail Glass'
```

```
COORDINATES cartesian3
```

```
DEFINITIONS
```

```

rad=sqrt( x^2+ y^2)
router = 0.3      { outer radius of glass }
zglass = 0.5      { glass height }
rbase = 0.2       { radius of the base }
zbase = 0.02      { thickness of the base and cone}
rstem = 0.02      { radius of the stem }
zstem = 0.3       { height of the stem }
zslope = (zglass-zstem)/(router-rstem){ slope of conic surface }
glassangle = arctan(zslope)           { slope of conic surface }
zcone = max(0,(rad-rstem)*zslope)     { conic surface of the glass }

```

```
EXTRUSION
```

```

surface 'bottom' z=0
  layer 'base layer'
surface 'stem1' z=zbase
  layer 'stem layer'
surface 'lower' z = zstem + zcone
  layer 'cone layer'
surface 'upper' z = zbase*cos(glassangle) + min(zglass, zstem + zcone)

```

```
BOUNDARIES
```

```

limited region 'outer'
  layer 'cone layer' { outer region exists only in cone }
  start (router,0) arc( center=0,0) angle=360

limited region 'base'
  layer 'base layer' { base region exists only in base }
  start(rbase,0) arc(center=0,0) angle=360

limited region 'stem'
  layer 'stem layer' { stem region exists in the stem and the bottom of the cone }
  layer 'cone layer'
  start(rstem,0) arc(center=0,0) angle=360

```

```
PLOTS
```

```

glcontour(z) as "example surface contour"
glcontour(z) on layer "stem layer" as "example surface contour"
grid(x,y,z) paintregions as "final mesh"
grid(y,z) on x=0 nolines paintregions as "Region Map"

```

```
END
```

5.2.2.4 3d_cylspec

```
{ 3D_CYLSPEC.PDE
```

This problem considers the construction of a cylindrical domain in 3D.

```
}
```

```

title '3D Cylinder Generator'

coordinates
  cartesian3

variables
  u

definitions
  K = 0.1           { thermal conductivity }
  R0 = 1            { radius of the cylinder }
  Heat = 1          { total heat generation }
  theta = 45        { axis direction in degrees }
  c = cos(theta degrees)
  s = sin(theta degrees)
  axis = vector(c,s) { the axis direction vector }
  len = 3           { cylinder length }
  x0 = -(len/2)*c   { beginning point of the cylinder axis }
  y0 = -(len/2)*s
  zoff = 10         { a z-direction offset for the entire figure }

  { the cylinder function constructs the top surface of a cylinder with axis
  along z=0.5. The positive and negative values of this surface will be
  separated by a distance of one unit at the diameter. }
  zs = cylinder((x0,y0,0.5), (x0+len*c,y0+len*s, 0.5), R0)

  flux = -k*grad(u) { heat flux vector }

equations
  U: div(K*grad(u)) + heat = 0

extrusion
  surface z = zoff-zs { the bottom half-surface }
  surface z = zoff+zs { the top half-surface }

boundaries
  surface 1 value(u) = 0 { fixed value on cylinder surfaces }
  surface 2 value(u) = 0
  region 1
    start (x0,y0)
    value(u)=0 { fixed value on sides and end planes }
    line to (x0+R0*c,y0-R0*s)
      to (x0+len*c+R0*c,y0+len*s-R0*s)
      to (x0+len*c-R0*c,y0+len*s+R0*s)
      to (x0-R0*c,y0+R0*s)
    to close

definitions
  s2 = sqrt(2)

plots
  grid(x,y,z)
  grid(y*s2,z) on x+y=s2
  contour(u) on x=0 as "U on X=0"
  contour(u) on x-y=0 as "U on vertical plane through cylinder axis"
  contour(u) on x+y=s2 as "U on plane normal to axis"
  vector(flux-DOT(flux,axis)*flux) on x=0 as "Flux in x=0 plane"
  contour(DOT(flux,axis)) on x+y=s2 as "Flux normal to cross-axis plane"
  contour(DOT(flux,axis)) on x+y=s2 zoom(0.6,11,0.3,0.3) as "Flux normal to cross-
axis plane"
  contour(magnitude(flux)) on x+y=s2 as "Total flux in cross-axis plane"
  glsurface(magnitude(flux)) on x+y=s2 as "Total flux in cross-axis plane"
  contour(magnitude(flux)) on y=0 as "Total flux in Y=0 plane"
  glcontour(magnitude(flux)) as "Total flux on surface"

end

```

5.2.2.5 3d_ellipsoid

```
{ 3D_ELLIPSOID.PDE

This problem constructs an ellipsoid.
It is the geometric construction only, there are no variables or equations.

}

title '3D Ellipsoid'

coordinates cartesian3

definitions
a=3 b=2 c=1 { x,y,z radii }
xc=1 yc=1 zc=1 { coordinates of ellipsoid center }

{ top half of ellipsoid surface :
the MAX function is used to ensure the surface is defined throughout all
x,y space - essentially placing an x=0 'skirt' on the ellipsoid surface }

ellipsoid = c*sqrt( max(0,1-(x-xc)^2/a^2-(y-yc)^2/b^2) )

extrusion
surface 'bottom' z = zc - ellipsoid
surface 'top' z = zc + ellipsoid

boundaries
region 'ellipse'
start(xc+a,yc)
arc(center=xc,yc) to (xc,yc+b) to (xc-a,yc) to (xc,yc-b) to close

plots
grid(x,y,z)
grid(x,y) on z=zc
grid(y,z) on x=xc
grid(x,z) on y=yc

end
```

5.2.2.6 3d_ellipsoid_shell

```
{ 3D_ELLIPSOID_SHELL.PDE

This problem constructs an elliptical shell.
It is the geometric construction only, there are no variables or equations.

}

title '3D Ellipsoid Shell'

coordinates cartesian3

definitions
ao=3.2 bo=2.2 co=1.2 { x,y,z radii - outer ellipse }
ai=3.0 bi=2.0 ci=1.0 { x,y,z radii - inner ellipse }
xc=1 yc=1 zc=1 { coordinates of ellipsoid center }

{ top half of ellipsoid surface :
the MAX function is used to ensure the surface is defined throughout all
x,y space - essentially placing a 'skirt' on the top ellipsoid surface }

outer_ellipsoid = co*sqrt( max(0,1-(x-xc)^2/ao^2-(y-yc)^2/bo^2) )
inner_ellipsoid = ci*sqrt( max(0,1-(x-xc)^2/ai^2-(y-yc)^2/bi^2) )

extrusion
surface 'outer bottom' z = zc - outer_ellipsoid
surface 'inner bottom' z = zc - inner_ellipsoid
surface 'inner top' z = zc + inner_ellipsoid
surface 'outer top' z = zc + outer_ellipsoid

boundaries
region 'outer ellipse'
start(xc+ao,yc)
```



```

    arc(center=xc,yc) to (xc,yc+bo) to (xc-ao,yc) to (xc,yc-bo) to close
  limited region 'inner ellipse'
  layer 2 void
  start(xc+ai,yc)
  arc(center=xc,yc) to (xc,yc+bi) to (xc-ai,yc) to (xc,yc-bi) to close
plots
  grid(x,y,z)
  grid(x,y) on z=zc paintregions
  grid(y,z) on x=xc paintregions
  grid(x,z) on y=yc paintregions
end

```

5.2.2.7 3d_extrusion_spec

```
{ 3D_EXTRUSION_SPEC.PDE
```

This descriptor is a demonstration of the grammar of 3D extrusions. It is a completion of the 3D specification example shown in ["Help | Technical Notes | Extrusions in 3D"](#)^[99]. It describes a strip capacitor fabricated as a sandwich of air | metal | glass | metal | air.

Click ["Controls->Domain Review"](#)^[10] to watch the domain construction process.


See the sample problem ["3D Capacitor"](#)^[379] for a somewhat more complicated and interesting version.

```
}
```

```

TITLE '3D Extrusion Spec'
SELECT regrid=off { for quicker solution }
COORDINATES CARTESIAN3
DEFINITIONS
  Kdiel= 6
  Kmetal=1e6
  Kair=1
  K = Kair      { default to Kair }
  V0 = 0
  V1 = 1
VARIABLES V
EQUATIONS
  V: DIV(K*GRAD(V)) = 0
EXTRUSION
  SURFACE "Bottom" Z=0
  LAYER "Bottom Air"
  SURFACE "Bottom Air - Metal" Z=0.9
  LAYER "Bottom Metal"
  SURFACE "Bottom Metal - Dielectric" Z=1
  LAYER "Dielectric"
  SURFACE "Top Metal - Dielectric" Z=2
  LAYER "Top Metal"
  SURFACE "Top Metal - Air" Z=2.1
  LAYER "Top Air"
  SURFACE "Top" Z=3
BOUNDARIES
  SURFACE "Bottom" VALUE(V)=0
  SURFACE "Top" VALUE(V)=1
  REGION 1 { this is the outer boundary of the system }
  LAYER "Dielectric" K = Kdiel { all other layers default to Kair }
  START(0,0)
  LINE TO (5,0) TO (5,5) TO(0,5) to close
  LIMITED REGION 2 { this region exists only in the "bottom metal" layer,
  and describes the larger plate }
  LAYER "Bottom Metal" K = Kmetal
  START(1,0)

```

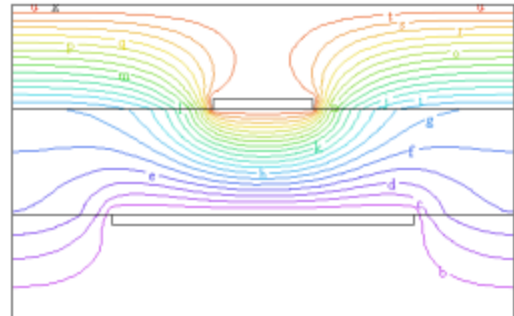

```

LAYER "Bottom Metal" VALUE(v)=v0
LINE TO (4,0)
LAYER "Bottom Metal" NATURAL(v)=0
LINE TO (4,5) TO (1,5) to close
LIMITED REGION 3 { this region exists only in layer "Top Metal",
                  and describes the smaller plate }
LAYER "Top Metal" K = kmeta1
START(2,0)
LINE TO (3,0) TO (3,5)
LAYER "Top Metal" VALUE(v)=v1
LINE TO (2,5)
LAYER "Top Metal" NATURAL(v)=0
LINE to close

SELECT painted
PLOTS
  CONTOUR(v) ON X=2.5 as "v on X-cut"
  CONTOUR(v) ON Y=2.5 as "v on Y-cut"
  CONTOUR(v) ON Z=1.5 as "v on Z-cut"
  GRID(x,z) ON Y=2.5 paintregions noline as "Region Map"
  GRID(x,z) ON Y=2.5 paintmaterials noline as "Material Map"
  GRID(x,y,z) ON LAYER 2 ON REGION 2 as "Bottom Plate"
  GRID(x,y,z) ON "Top Metal" ON REGION 3 as "Top Plate"

END

```

5.2.2.8 3d_fillet

```
{ 3D_FILLET.PDE
```

```

  This problem demonstrates the use of the FILLET[25] and BEVEL[25] commands.
  Both controls act in the 2D layout, and are extruded into the z dimension.
}

```

```

title 'fillet test'

coordinates
  cartesian3

variables
  u

definitions
  k = 1
  u0 = 1-x^2-y^2
  s = 2*3/4+5*2/4

equations
  u: div(K*grad(u)) +s = 0

extrusion z=0,1

boundaries
  region 1
    start(-1,-1)
    value(u)=u0 line to (1,-1)      FILLET(0.1)
                  to (-0.25,-0.25)  FILLET(0.1)
                  to (-1,1)         BEVEL(0.1)
                  to close

monitors
  grid(x,y,z)
  contour(u) on z=0.5

plots
  grid(x,y) on z=0.005
  grid(x,y) on z=0.5
  contour(u) on z=0.5
  contour(u) on z=0.5 zoom(0.6,-1, 0.2,0.2)
  contour(u) on z=0.5 zoom(-0.3,-0.3, 0.1,0.1)

end

```

5.2.2.9 3d_guitar

```

{ 3D_GUITAR.PDE
  This example shows the construction of a guitar by layered extrusion.
  It only constructs a domain. There are no variables or equations.
  It does demonstrate the use of the MATERIALS section.
}
TITLE "3D Guitar Body"

COORDINATES cartesian3

MATERIALS
  "Default" : d = 1.0 k = 1.0
  "Air" : d = 100 k = 0.07
  "Maple" : d = 0.9 k = 7
  "Spruce" : d = 0.7 k = 13
  "Plastic" : d = 10 k = 0.22
  "Composite" : d = 3 k = 1.3

DEFINITIONS
  {----- SIZE POSITION PARAMETERS -----}
  dface = 0.3, dback = 0.5, dbody = 10 ! some basic depths
  dside = 0.7, dsaddle = 0.4, dnut = 0.8 ! some basic depths
  slen = 11, swid = 3, spos = 19 ! saddle size and
  positions
  fpos = 50, fwid = 10, flen = 5 ! fretboard size and
  positions
  orad = 6, opos = 36 ! sound hole radius and
  position
  hrad = 0.7 ! string radius
  h6 = 5, h5 = 3, h4 = 1, h1 = -h6, h2 = -h5, h3 = -h4 ! saddle hole radius and
  positions

  {----- SPLINE POINTS -----}
  x0 = 0, x1 = 0, x2 = 18, x3 = 30, x4 = 40, x5 = 46, x6 = 60, x7 = 60
  y0 = 0, y1 = 1, y2 = 19, y3 = 15, y4 = 12, y5 = 14, y6 = 2, y7 = 0

  {----- LAYER DEPTHS -----}
  origin = 0
  inback = origin + dback
  inface = inback + dbody
  outface = inface + dface
  outtool = outface + dsaddle

EXTRUSION
  surface 'OUTSIDE BOTTOM' z = origin
  layer 'BOTTOM'
  surface 'INSIDE BOTTOM' z = inback
  layer 'BODY'
  surface 'INSIDE TOP' z = inface
  layer 'TOP'
  surface 'OUTSIDE TOP' z = outface
  layer 'TOOL'
  surface 'OUTSIDE TOOL' z = outtool

BOUNDARIES
  {----- OUTER BODY -----}
  limited region 'OUTER BODY'
  layer 'TOOL' VOID
  layer 'BOTTOM' use material "Maple"
  layer 'BODY' use material "Composite"
  layer 'TOP' use material "Spruce"
  start (x1,y0)
  spline to (x1, y1) to (x2, y2) ! NW arc
  to (x3, y3) to (x4, y4) ! N arc
  to (x5, y5) to (x6, y6) ! NE arc

  !to (x6, y6) to (x6+flen, y6) !top of fretboard
  to (x6, y7) ! top of neck
  !to (x6+flen,-y6) to (x6,-y6) !bott of fretboard

  to (x6, -y6) to (x5, -y5) ! SE arc
  to (x4, -y4) to (x3, -y3) ! S arc
  to (x2, -y2) to (x1, -y1) ! SW arc
  to close

```

```

{----- INNER BODY -----}
limited region "INNER BODY"
  layer 'BODY' VOID
  !use material "Air"
  start (x1+dside,y0)
  spline to (x1+dside, y1) to (x2, y2-dside) ! NW
         to (x3, y3-dside) to (x4, y4-dside) ! N
         to (x5, y5-dside) to (x6-dside, y6) ! NE
         to (x6-dside, y7) ! top of neck
         to (x6-dside, -y6) to (x5, dside-y5) ! SE
         to (x4, dside-y4) to (x3, dside-y3) ! S
         to (x2, dside-y2) to (x1+dside, -y1) ! SW
  to close

{----- SOUND HOLE -----}
limited region "SOUND HOLE"
  layer 'TOP' VOID
  !use material "Air"
  start (opos, orad)
  arc (center = opos, 0) angle=360

{----- SADDLE BASE-----}
limited region "Saddle Base"
  layer 'TOOL'
  use material "Plastic"
  start (spos+swid/2, slen/2)
  arc (center = spos, slen/2) angle=180
  line to (spos-swid/2, -slen/2)
  arc (center = spos, -slen/2) angle=180
  line to close

{----- SADDLE HOLES-----}
limited region "Saddle Holes"
  layer 'TOOL' VOID
  layer 'TOP'
  start (spos, h1-hrad) arc (center = spos, h1) angle=360
  start (spos, h2-hrad) arc (center = spos, h2) angle=360
  start (spos, h3-hrad) arc (center = spos, h3) angle=360
  start (spos, h4-hrad) arc (center = spos, h4) angle=360
  start (spos, h5-hrad) arc (center = spos, h5) angle=360
  start (spos, h6-hrad) arc (center = spos, h6) angle=360

{----- FRETBOARD -----}
limited region "Fret Board"
  layer 'TOOL'
  start (fpos, fwid/2)
  line to (fpos, -fwid/2) fillet 1
  line to (fpos+8, -fwid/2) fillet 1
  line to (fpos+8, fwid/2) fillet 1
  line to close fillet 1

PLOTS
  grid(x,y,z) paintmaterials
  glgrid(x,y,z) paintmaterials
  glgrid(x,y,z) on layer 'body'
  glgrid(x,y,z) on layer 'tool' on region 'saddle base'

END

```

5.2.2.10 3d_helix_layered

```
{ 3D_HELIX_LAYERED.PDE
```

This problem demonstrates the construction of a helix by layered half-turns.

Each half-turn of the helix is represented by two layers: a layer for the coil and a separating layer for the gap.

The top and bottom surfaces of the helix are formed as spiral ribbons :
 $z = \text{twist} * \text{angle} + \text{offset}$.

The turns of the helix are divided into half-turn layers by spiral ribbons of opposite twist :
 $z = \text{offset} - \text{cuttwist} * \text{angle}$.

The top surface of the lower half turn meets the bottom surface of the upper half turn in the region where the cut ribbon crosses the helix. Since these two surfaces must be separated by a "layer", there must be an empty layer between each pair of half-turns of the helix. This layer exists only in the region of contact between the two half turns, and in this region, the layer has zero thickness.

In this sample problem, we solve a heat conduction problem in the helix simply for demonstration purposes.

See ["3d_helix_wrapped.pde"](#)^[490] for a different approach to constructing a helix.

See ["Usage/CAD_Import/helix_OBJimport.pde"](#)^[543] for how to import a helix from an OBJ file.

```

}
title '3D layered helix'
coordinates
  cartesian3
variables
  Tp
definitions
  xwide = 1  { width of coil band }
  zhigh = 1  { height of coil band }
  zhaf = zhigh/2
  pitch = 2*zhigh { z rise per turn }
  x0 = 3      { center radius }
  xin = x0-xwide/2      { inner radius }
  xout = x0+xwide/2    { outer radius }

  { cut layers with reverse-helix. choose a steep cutpitch to avoid overlapping cut
regions: }
  cutpitch = 4*pitch      { z fall per turn of layer-cutting ribbon }
  { Compute the half-angle of the baseplane projection of the intersection between the
    helix ribbon and the cut ribbon. This determines the size of the Regions
necessary
  to describe the intersections. }
  thetai = 2*pi*zhaf/(pitch+cutpitch)
  ci = cos(thetai)
  si = sin(thetai)

  twist = pitch/(2*pi)    { z-offset per radian }
  cuttwist = cutpitch/(2*pi)  { " }

  { measure angles from positive x-axis for right arcs and from negative x-axis for
    left arcs, to avoid jumps in the atan2 function. NOTE: these definitions were
    changed between v6 and v7 due to changes in the atan2 function itself. }
  alphas = atan2(y,x)      ! angular position (-pi,pi) relative to positive x-axis
  alphas = atan2(-y,-x)    ! angular position (-pi,pi) relative to negative x-axis

  { calculate layer-cut surfaces for left and right arcs (relative to the arc center) }

  rlo = -(1/4)*pitch - cuttwist*(alphas+pi/2)    ! floor value for right arc
  rhi = (1/4)*pitch - cuttwist*(alphas-pi/2)     ! ceiling value for right arc
  llo = -(1/4)*pitch - cuttwist*(alpha+pi/2)     ! floor value for left arc
  lhi = (1/4)*pitch - cuttwist*(alpha-pi/2)      ! ceiling value for left arc

  {Define functions to generate the z position of turn n offset by h*zhaf : }
  zr(n,h) = max(rlo, min(rhi, twist*alpha + h*zhaf)) + n*pitch
  zl(n,h) = max(llo, min(lhi, twist*alpha + h*zhaf)) + n*pitch

  { Thermal source }
  Q = 10*exp(-x^2-(y-x0)^2-(z-pitch/4)^2)
  { Thermal conductivity }
  K = 1
initial values
  Tp = 0.
equations
  Tp:  div(k*grad(Tp)) + Q = 0

```

```

extrusion
surface z=zc(-2,-1)      { right arc bottom, turn -2 }
surface z=zc(-2,1)       { right arc top, turn -2 }
surface z=zl(-3/2,-1)   { left arc bottom, turn -2 }
surface z=zl(-3/2,1)    { left arc top, turn -2 }
surface z=zc(-1,-1)     { right arc bottom, turn -1 }
surface z=zc(-1,1)      { right arc top, turn -1 }
surface z=zl(-1/2,-1)   { left arc bottom, turn -1 }
surface z=zl(-1/2,1)    { left arc top, turn -1 }
surface z=zc(0,-1)      { right arc bottom, turn 0 }
surface z=zc(0,1)       { right arc top, turn 0 }
surface z=zl(1/2,-1)    { left arc bottom, turn 0 }
surface z=zl(1/2,1)     { left arc top, turn 0 }
surface z=zc(1,-1)      { right arc bottom, turn 1 }
surface z=zc(1,1)       { right arc top, turn 1 }
surface z=zl(3/2,-1)    { left arc bottom, turn 1 }
surface z=zl(3/2,1)     { left arc top, turn 1 }
surface z=zc(2,-1)      { right arc bottom, turn 2 }
surface z=zc(2,1)       { right arc top, turn 2 }
surface z=zl(5/2,-1)    { left arc bottom, turn 2 }
surface z=zl(5/2,1)     { left arc top, turn 2 }

```

```

boundaries
surface 1 value(Tp)=0
surface 20 value(Tp)=0

```

```

Limited Region 1 "lower cut "
layer 1          {skip layer 2}
layer 3 layer 4 layer 5 {skip layer 6}
layer 7 layer 8 layer 9 {skip layer 10}
layer 11 layer 12 layer 13 {skip layer 14}
layer 15 layer 16 layer 17 {skip layer 18}
layer 19
start(-xout*si,-xout*ci)
arc(center=0,0) to(xout*si,-xout*ci)
line to (xin*si,-xin*ci)
arc(center=0,0) to(-xin*si,-xin*ci)
line to close

```

```

Limited Region 2 " right arc "
layer 1          {skip layers 2,3,4}
layer 5          {skip layers 6,7,8}
layer 9          {skip layers 10,11,12}
layer 13         {skip layers 14,15,16}
layer 17
start(xout*si,-xout*ci)
arc(center=0,0) to(xout*si,xout*ci)
line to (xin*si,xin*ci)
arc(center=0,0) to(xin*si,-xin*ci)
line to close

```

```

Limited Region 3 "upper cut "
layer 1 layer 2 layer 3 {skip layer 4}
layer 5 layer 6 layer 7 {skip layer 8}
layer 9 layer 10 layer 11 {skip layer 12}
layer 13 layer 14 layer 15 {skip layer 16}
layer 17 layer 18 layer 19
start(xout*si,xout*ci)
arc(center=0,0) to(-xout*si,xout*ci)
line to (-xin*si,xin*ci)
arc(center=0,0) to(xin*si,xin*ci)
line to close

```

```

Limited Region 4 "left arc "
layer 3          {skip layers 4,5,6}
layer 7          {skip layers 8,9,10}
layer 11         {skip layers 12,13,14}
layer 15         {skip layers 16,17,18}
layer 19
start(-xout*si,xout*ci)
arc(center=0,0) to(-xout*si,-xout*ci)
line to (-xin*si,-xin*ci)
arc(center=0,0) to(-xin*si,xin*ci)
line to close

```

```

monitors

```

```

    grid(x,y,z)
plots
  grid(x,y,z) paintregions
  grid(x,y,z) on regions 1,2,3 on layer 1 paintregions as "first right arc"
  grid(x,y,z) on regions 3,4,1 on layer 3 paintregions as "first left arc"
  grid(x,y,z) on regions 1,2,3,4 on layers 1,3 paintregions as "first full arc"

  grid(x,z) on y=0
  contour(Tp) on x=0 as "ZY Temp" painted
  contour(Tp) on z=pitch/4 as "XY Temp" painted
end

```

5.2.2.11 3d_helix_wrapped

```
{ 3D_HELIX_WRAPPED.PDE
```

This problem shows the use of the function definition facility of FlexPDE to create a helix of square cross-section in 3D.

The mesh generation facility of FlexPDE extrudes a 2D figure along a straight path in Z, so that it is not possible to directly define a helical shape.

However, by defining a coordinate transformation, we can build a straight rod in 3D and interpret the coordinates in a rotating frame.

Define the twisting coordinates by the transformation

```

xt = x*cos(y/R);
yt = x*sin(y/R);
zt = z

```

In this transformation, x and y are the coordinates FlexPDE believes it is working with, and they are the coordinates that move with the twisting. xt and yt are the "lab coordinates" of the twisted figure.

The chain rule gives

$$dF/d(xt) = (dx/dxt)*(dF/dx) + (dy/dxt)*(dF/dy) + (dz/dxt)*(dF/dz)$$

with similar rules for yt and zt.

Some tedious algebra gives

```

dx/dxt = cos(y/R)   dy/dxt = -(R/x)*sin(y/R)   dz/dxt = 0
dx/dyt = sin(y/R)   dy/dyt = (R/x)*cos(y/R)   dz/dyt = 0
dx/dzt = dy/dzt = 0   dz/dzt = 1

```

These relations are defined in the definitions section, and used in the equations section, perhaps nested as in the heat equation shown here.

Notice that this formulation produces the upward motion by tilting the bar in the un-twisted space and wrapping the resulting figure around a cylinder.

We have added a cylindrical mounting pad at each end of the helix.

See ["3d_helix_layered.pde"](#)^[487] for a different approach to constructing a helix.

See ["Usage/CAD_Import/helix_OBJimport.pde"](#)^[543] for how to import a helix from an OBJ file.

```
title '3D Helix - transformation with no shear'
```

```
coordinates
  cartesian3
```

```
select
  ngrid=160 { generate enough mesh cells to resolve the twist }
```

```
variables
  Tp
```

```
definitions
  zlong = 60
  turns = 4
  pitch = zlong/turns { z rise per turn }

  xwide = 4.5
  zhigh = 4.5
  Rc = 22 - xwide/2 { center radius }
```

```

alpha = y/Rc
zstub = 5*zhigh      { rod pieces at each end }
sturn = Rc*2*pi      { arc length per turn }
yolap = pi*Rc*zhigh/pitch

slong = turns*sturn { arc length of spring }
stot = slong + 2*sturn { add one turn at each end for rod }

xin = Rc-xwide/2
xout = Rc+xwide/2
xbore = Rc/2

{ transformations }
rise = pitch/(2*pi)  { z-rise per radian }
c = cos(alpha)
s = sin(alpha)
xt = x*c
yt = x*s
zt = z-zlong/2

{ functional definition of derivatives }
dxt(f) = c*dx(f) - s*(Rc/x)*dy(f)
dyt(f) = s*dx(f) + c*(Rc/x)*dy(f)
dzt(f) = dz(f)

{ Thermal source }
Q = 10*exp(-(xt-Rc)^2-yt^2-zt^2)

z1 = -zstub
z2 = max( 0, min(zlong, pitch*y/sturn - zhigh/2))
z3 = max(0, min(zlong, pitch*y/sturn + zhigh/2))
z4 = zlong + zstub

```

initial values

```

Tp = 0.

```

equations

```

{ the heat equation using transformed derivative operators }
Tp: dxt(dxt(Tp)) + dyt(dyt(Tp)) + dzt(dzt(Tp)) + Q = 0

```

extrusion z = z1, z2, z3, z4

boundaries

```

Limited Region 1      { the spring }
  layer 2
  start(xin,yolap)
  line to (xout,yolap)
  line to (xout,slong-yolap)
  line to (xin,slong-yolap)
  line to close

Limited Region 2      { top rod overlap with coil }
  surface 4 value(Tp)=0 {cold at the end of the rod }
  layer 2 layer 3
  start(xbore,slong-yolap)
  line to (xout,slong-yolap) to (xout,slong+yolap) to (xbore,slong+yolap) to close

Limited Region 3      { top rod free of coil }
  surface 4 value(Tp)=0 {cold at the end of the rod }
  layer 2 layer 3
  start(xbore,slong+yolap)
  line to (xout,slong+yolap) to (xout,slong+sturn-yolap) to (xbore,slong+sturn-
yolap)
  to close

Limited Region 4      { bottom rod overlap with coil }
  surface 1 value(Tp)=0 {cold at the end of the rod }
  layer 1 layer 2
  start(xbore,-yolap)
  line to (xout,-yolap) to (xout,yolap) to (xbore,yolap) to close

Limited Region 5      { bottom rod free of coil }
  surface 1 value(Tp)=0 {cold at the end of the rod }
  layer 1 layer 2
  start(xbore,-sturn+yolap)

```



```

    line to (xout,-sturn+yolap) to (xout,-yolap) to (xbore,-yolap) to close
monitors
  grid(xt,yt,zt) paintregions { the twisted shape }
plots
  grid(xt,yt,zt) paintregions { the twisted shape again }
  { In the following, recall that x is really radius, and y is really azimuthal
  distance.
  It is not possible at present to construct a cut in the "lab" coordinates. }
  grid(x,z) on y=0
  contour(Tp) on y=0 as "ZX Temp"
  contour(Tp) on z=0 as "XY Temp"
  elevation(Tp) from(Rc,0,0) to (Rc,slong,zlong) { centerline of coil }
end

```

5.2.2.12 3d_lenses

```
{ 3D_LENSES.PDE
```

This problem considers the flow of heat in a lens-shaped body of square outline. It demonstrates the use of FlexPDE in problems with non-planar extrusion surfaces.

Layer 1 consists of a flat bottom with a paraboloidal top. Layer 2 is a paraboloidal sheet of uniform thickness.


Plots on various cut planes show the ability of FlexPDE to detect intersection surfaces.

```
}
```

```

title '3D Test - Lenses'
coordinates
  cartesian3
Variables
  u
definitions
  k = 0.1
  heat = 4
equations
  U: div(k*grad(u)) + heat = 0
extrusion
  surface z = 0
  surface z = 0.8-0.3*(x^2+y^2)
  surface z = 1.0-0.3*(x^2+y^2)
boundaries
  { implicit natural(u) = 0 on top and bottom faces }
  Region 1
    layer 2 k = 1 { layer specializations must follow regional defaults }
    start(-1,-1)
    value(u) = 0 { Fixed value on sides }
    line to (1,-1) to (1,1) to (-1,1) to close
select painted
plots
  contour(u) on x=0.51 as "YZ plane"
  contour(u) on y=0.51 as "XZ plane"
  contour(u) on z=0.51 as "XY plane cuts both layers and part of outline"
  contour(u) on z=0.75 as "XY plane cuts both layers, but not the outline"
  contour(u) on z=0.8 as "XY plane cuts only layer 2"
  contour(u) on z=0.95 as "XY plane cuts small patch of layer 2"
  contour(u) on z=0.95 zoom as "small cut patch, zoomed to fill frame"
  contour(u) on surface 1 as "on bottom surface"
  contour(u) on surface 2 as "on paraboloidal layer interface"
  contour(u) on x=y as "oblique plot plane"
  contour(u) on x+y=0 as "another oblique plot plane"

```

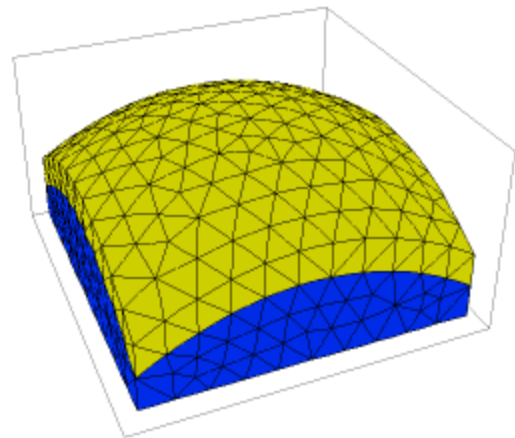

end

5.2.2.13 3d_limited_region

```
{ 3D_LIMITED_REGION.PDE
```

This example shows the use of [LIMITED REGIONS](#)^[248] in 3D applications.

The LIMITED qualifier applied to a REGION section tells FlexPDE to construct the region only in those layers or surfaces specifically referenced in the region definition.

In this problem, we have a heat equation with a small cubical heated box in the middle layer.

```
}
```

```
title '3D LIMITED REGION TEST'
```

```
coordinates
  cartesian3
```

```
select
  ngrid=1 { exaggerate cell size disparity }
```

```
variables
  u
```

```
definitions
  K = 0.1
  h=0
  Lx=3   Ly=3   Lz=3
  w = 0.15 { box size }
  x0=Lx/2-w  y0=Ly/2-w  z0=Lz/2-w { box coords }
  x1=Lx/2+w  y1=Ly/2+w  z1=Lz/2+w
```

```
materials 'insert' : K=9 h=1
```

```
equations
  U: div(K*grad(u)) + h = 0
```

```
extrusion z=0, z0, z1, Lz
```


```
boundaries
  Region 1
    start(0,y0)
    value(u)=0
    line to (Lx,y0) to (Lx,Ly) to (0,Ly) to close

    limited region 2 { insert exists only on layer 2 }
    layer 2 use material 'insert'
    start(x0,y0)
    line to (x1,y0) to (x1,y1) to (x0,y1) to close
```

```
monitors
  grid(x,z) on y=Ly/2
  contour(u) on z=Lz/2
```

```
plots
  grid(x,z) on y=Ly/2
  contour(u) on z=Lz/2 painted
  contour(u) on y=Ly/2 painted
```

```
end
```

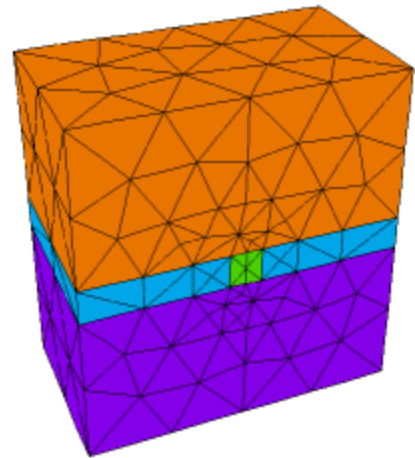

5.2.2.14 3d_pinchout

```

{ 3D_PINCHOUT.PDE

  This problem demonstrates the merging
  of extrusion surfaces and the
  'Pinch-Out' of a layer.
}

title '3D Layer Pinch-out Test'

coordinates
  cartesian3

variables
  Tp

select
  ngrid=5 { reduce mesh size for example }

definitions
  long = 1
  wide = 1
  K = 1 { thermal conductivity default -- other values supplied later: }
  Q = 10*exp(-x^2-y^2-z^2) { thermal source }
  z1 = 0
  z2 = 1 { surface will be defined later in each region: }
  z3 = 1

initial values
  Tp = 0.

equations
  Tp: div(k*grad(Tp)) + Q = 0 { the heat equation }

extrusion z = z1,z2,z3 { divide z into two layers }

boundaries
  surface 1 value(Tp)=0 { fix bottom surface temp }
  surface 3 value(Tp)=0 { fix top surface temp }

  Region 1 { define full domain boundary in base plane }
  z2 = 1 { surface 2 merges with surface 3 in this region }
  start(-wide,-wide)
  value(Tp) = 0 { fix all side temps }
  line to (wide,-wide) { walk outer boundary in base plane }
  to (wide,wide)
  to (-wide,wide)
  to close


  Region 2 { overlay a second region in left half.
  This region delimits the area in which surfaces 2 and 3 differ.
  Surfaces meet at the region boundary. }
  z2 = 1 + x/2
  layer 2 k=0.1 { redefine conductivity in layer 2 of region 2 }
  start(-wide,-wide)
  line to (0,-wide) { walk left half boundary in base plane }
  to (0,wide)
  to (-wide,wide)
  to close

monitors
  grid(x,z) on y=0

plots
  grid(x,z) on y=0
  contour(Tp) on y=0 as "ZX Temp"

end

```

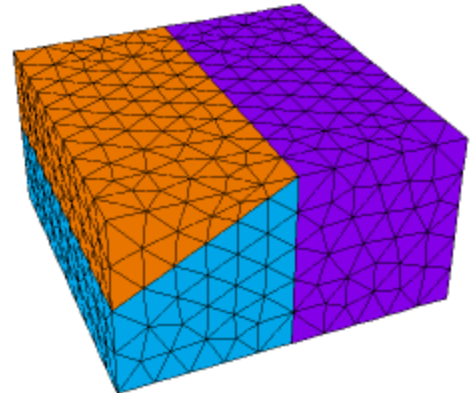


5.2.2.15 3d_pipes

```
{ 3D_PIPES.PDE
```

```
This problem constructs a lattice of interconnected pipes.
It is the geometric construction only, there are no variables or equations.
LIMITED regions are used to remove parts of the extruded shape.
```

```
} Click "Controls->Domain Review" to watch the mesh construction process.
```

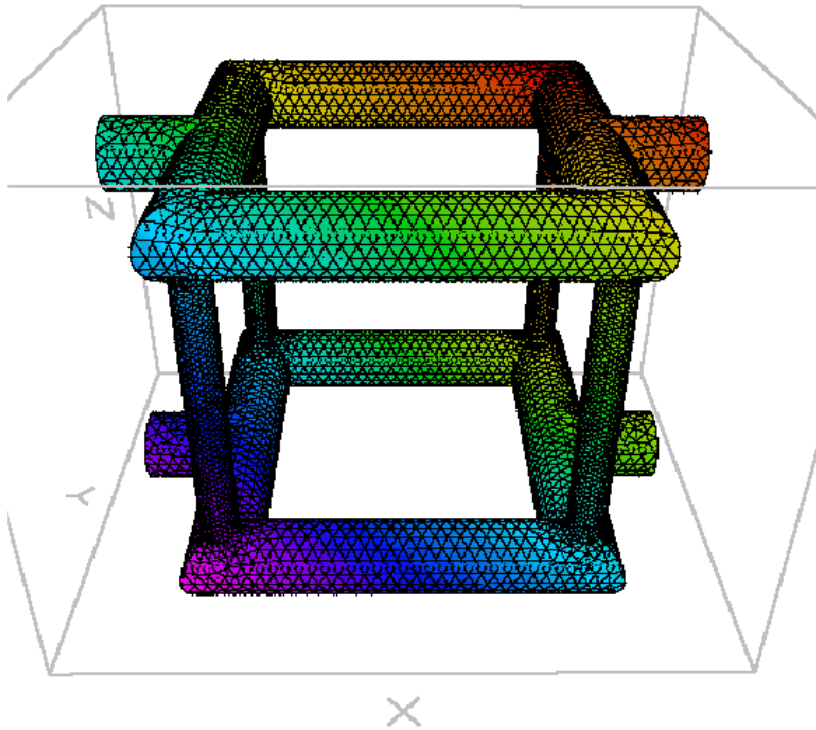

```
TITLE '3D_PIPES'
COORDINATES cartesian3
```

DEFINITIONS

```
box = 10           ! size of pipe 'box'
pipe = 6           ! length of in/out pipes
rad = 2            ! horizontal pipes radii
rads = 0.5*rad     ! vertical pipes radii
ars = rads*sin(pi/4) ! intersection point for horizontal and vertical bars
```

! horizontal pipe surface functions

```
leftbar = cylinder ((-box,0,0), (-box,1,0), rad)
rightbar = cylinder ((box,0,0), (box,1,0), rad)
frontbar = cylinder ((0,-box,0), (1,-box,0), rad)
backbar = cylinder ((0,box,0), (1,box,0), rad)
pipebar = cylinder ((0,0,0), (1,0,0), rad)
```

! default extrusion surface definitions - some will be regionally redefined

```
zb1 = -box
zb2 = box
z1 = -box - rad
z2 = -box + rad
z3 = box - rad
z4 = box + rad
```

EXTRUSION

```
SURFACE 'Bottom of Bottom Pipe' z = z1
LAYER 'botbar'
SURFACE 'Top of Bottom Pipe' z = z2
```

```

LAYER 'middle'
SURFACE 'Bottom of Top Pipe' z = z3
LAYER 'topbar'
SURFACE 'Top of Top Pipe' z = z4

```

BOUNDARIES

```

REGION 'leftbars'
mesh_spacing = rad/2
z1 = zb1 - leftbar
z2 = zb1 + leftbar
z3 = zb2 - leftbar
z4 = zb2 + leftbar
layer 'middle' void
START (-box-rad,-box-rad)
LINE TO (-box+rad,-box+rad) TO (-box+rad,box-rad) TO (-box-rad,box+rad)
TO (-box-rad,rad) TO (-box,0) TO (-box-rad,-rad)
TO CLOSE

```

```

LIMITED REGION 'leftcornerbars'
mesh_spacing = rad/2
z2 = zb1 + leftbar
z3 = zb2 - leftbar
layer 'middle'
START (-box-ars,box+ars)
ARC (center = -box,box) angle 180
LINE TO CLOSE
START (-box-ars,-box-ars)
ARC (center = -box,-box) angle = -180
LINE TO CLOSE

```

```

REGION 'rightbars'
mesh_spacing = rad/2
z1 = zb1 - rightbar
z2 = zb1 + rightbar
z3 = zb2 - rightbar
z4 = zb2 + rightbar
layer 'middle' void
START (box+rad,box+rad)
LINE TO (box-rad,box-rad) TO (box-rad,-box+rad) TO (box+rad,-box-rad)
TO (box+rad,-rad) TO (box,0) TO (box+rad,rad)
TO CLOSE

```

```

LIMITED REGION 'rightcornerbars'
mesh_spacing = rad/2
z2 = zb1 + rightbar
z3 = zb2 - rightbar
layer 'middle'
START (box+ars,box+ars)
ARC (center = box,box) angle -180
LINE TO CLOSE
START (box+ars,-box-ars)
ARC (center = box,-box) angle = 180
LINE TO CLOSE

```

```

REGION 'frontbars'
mesh_spacing = rad/2
z1 = zb1 - frontbar
z2 = zb1 + frontbar
z3 = zb2 - frontbar
z4 = zb2 + frontbar
layer 'middle' void
START (-box-rad,-box-rad)
LINE TO (-box+rad,-box+rad) TO (box-rad,-box+rad) TO (box+rad,-box-rad)
TO CLOSE

```

```

LIMITED REGION 'frontcornerbars'
mesh_spacing = rad/2
z2 = zb1 + frontbar
z3 = zb2 - frontbar
layer 'middle'
START (-box-ars,-box-ars)
ARC (center = -box,-box) angle = 180
LINE TO CLOSE

```

```

START (box+ars,-box-ars)
ARC (center = box,-box) angle = -180
LINE TO CLOSE

REGION 'backbars'
mesh_spacing = rad/2
z1 = zb1 - backbar
z2 = zb1 + backbar
z3 = zb2 - backbar
z4 = zb2 + backbar
layer 'middle' void
START (box+rad,box+rad)
LINE TO (box-rad,box-rad) TO (-box+rad,box-rad) TO (-box-rad,box+rad)
TO CLOSE

LIMITED REGION 'backcornerbars'
mesh_spacing = rad/2
z2 = zb1 + backbar
z3 = zb2 - backbar
layer 'middle'
START (-box-ars,box+ars)
ARC (center = -box,box) angle = -180
LINE TO CLOSE
START (box+ars,box+ars)
ARC (center = box,box) angle = 180
LINE TO CLOSE

REGION 'inlet'
mesh_spacing = rad/2
z1 = zb1 - pipebar
z2 = zb1 + pipebar
z3 = zb2 - pipebar
z4 = zb2 + pipebar
layer 'middle' void
START (-box-pipe,rad)
LINE TO (-box-pipe,-rad)
LINE TO (-box-rad,-rad)
LINE TO (-box,0) TO (-box-rad,rad)
LINE TO CLOSE

REGION 'outlet'
mesh_spacing = rad/2
z1 = zb1 - pipebar
z2 = zb1 + pipebar
z3 = zb2 - pipebar
z4 = zb2 + pipebar
layer 'middle' void
START (box+pipe,rad)
LINE TO (box+pipe,-rad)
LINE TO (box+rad,-rad)
LINE TO (box,0) TO (box+rad,rad)
LINE TO CLOSE

PLOTS
!grid (x,y,z) paintmaterials
glgrid (x,y,z) paintregions
glcontour(x+y+z)

END

```

5.2.2.16 3d_planespec

```
{ 3D_PLANESPEC.PDE
```

This problem demonstrates the use of the [PLANE^{\[239\]}](#) generating function in 3D domain specifications.

```
We construct a hexahedron using two PLANE\[239\] statements. One from explicit points and another from named points in the definitions section.
}
```

```
title 'PLANE surface generation'
```

```

coordinates
  cartesian3

variables
  Tp

select
  ngrid=5 { reduce mesh size for example }

definitions
  long = 1
  wide = 1
  K = 1
  Q = 10*exp(-x^2-y^2-z^2)

  { define three points in the plane surface }
  bll = point(-1,-1,0)
  blr = point(1,-1,0.2)
  bul = point(-1,1,0.3)

initial values
  Tp = 0.

equations
  Tp: div(k*grad(Tp)) + Q = 0

extrusion
  { bottom surface using named points }
  surface 'bottom' z = PLANE(bll,blr,bul)
  { top surface using explicit points }
  surface 'top' z = PLANE((-1,-1,1), (1,-1,1.2), (1,1,2))

boundaries
  surface 1 value(Tp)=0
  surface 2 value(Tp)=0

  Region 1
  start(-wide,-wide)
  value(Tp) = 0
  line to (wide,-wide)
  to (wide,wide)
  to (-wide,wide)
  to close

monitors
  grid(x,z) on y=0

plots
  grid(x,y,z) viewpoint(-7,-9,10)
  grid(x,z) on y=0
  contour(Tp) on y=0 as "ZX Temp"
  contour(Tp) on x=0 as "YZ Temp"

end

```

5.2.2.17 3d_pyramid

```
{ 3D_PYRAMID.PDE
```

This problem considers the flow of heat in a pyramid-shaped body. It demonstrates the use of FlexPDE in 3D problems with non-planar extrusion surfaces.

Note that [FEATURE](#)^[249] paths are used to delineate discontinuities in the extrusion surfaces.

The outer edge is used as a heat source, so it is clipped to form an edge wall.

```

}
title '3D Test - Pyramid'
coordinates
  cartesian3

select
  regrid=off
  ngrid=5 { reduce mesh size for example }

variables
  u

definitions
  k = 0.1
  heat = 4

equations
  u: div(k*grad(u)) + heat = 0

extrusion
  surface z = 0
  surface z = min(1.1- abs(x),1.1-abs(y))


boundaries
  { implicit natural(u) = 0 on top and bottom faces }
  Region 1
    start(-1,-1)
    value(u) = 0 { Fixed value on short vertical sides }
    line to (1,-1) to (1,1) to (-1,1) to close

  { Features delineate hidden discontinuities in surface slope.
    This forces gridding nodes along break lines. }
  feature start(-1,-1) line to (1,1)
  feature start(-1,1) line to (1,-1)

plots
  contour(u) on x=0 as "YZ plane intersects peak"
  contour(u) on y=0 as "XZ plane intersects peak"
  contour(u) on z=0.1 as "XY plane intersects full outline"
  contour(u) on x=0.51 as "YZ plane near midpoint of side slope"
  contour(u) on x+y=0.51 as "Oblique plane cuts corner"
  contour(u) on z=0.8 as "XY plane near tip"
  contour(u) on z=0.8 zoom as "XY plane near tip - zoomed"

end

```

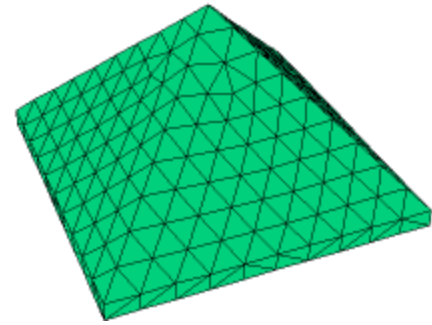

5.2.2.18 3d_shell

```

{ 3D_SHELL.PDE

  This problem considers heatflow in a
  spherical shell.


  We solve a heatflow equation with
  fixed temperatures on inner and outer
  shell surfaces.
}

title '3D Test - Shell'
coordinates
  cartesian3

variables
  u

definitions
  k = 10 { conductivity }
  heat = 6*k { internal heat source }
  rad=sqrt(x^2+y^2)
  R1 = 1

```

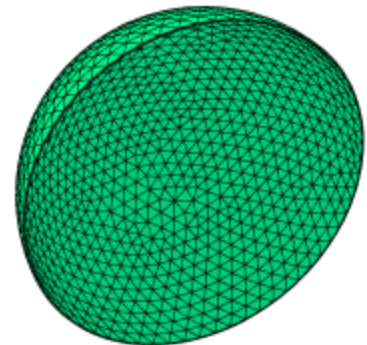


```

thick = staged(0.1,0.03,0.01)
R2 = R1-thick

equations
U: div(K*grad(u)) + heat = 0

extrusion
surface z = -SPHERE ((0,0,0),R1) { the bottom hemisphere }
surface z = -SPHERE ((0,0,0),R2)
surface z = SPHERE ((0,0,0),R2)
surface z = SPHERE ((0,0,0),R1) { the top hemisphere }

boundaries

surface 1 value(u) = 0 { fixed values on outer sphere surfaces }
surface 4 value(u) = 0

Region 1 { The outer boundary in the base projection }
layer 1 k=0.1 mesh_spacing=10*thick { force resolution of shell curve }
layer 2 k=0.1
layer 3 k=0.1 mesh_spacing=10*thick
start(R1,0)
value(u) = 0 { Fixed value on outer vertical sides }
arc(center=0,0) angle=180
natural(u)=0 line to close

Limited Region 2 { The inner cylinder shell boundary in the base projection }
surface 2 value(u) = 1 { fixed values on inner sphere surfaces }
surface 3 value(u) = 1
layer 2 void { empty center }
start(R2,0)
arc(center=0,0) angle=180
nobl(u) line to close

monitors
grid(x,y,z)
grid(x,z) on y=0
grid(rad,z) on x=y
contour(u) on x=0 { YZ plane through diameter }
contour(u) on y=0 { XZ plane through diameter }
contour(u) on z=0 { XY plane through diameter }
contour(u) on x=0.5 { YZ plane off center }
contour(u) on y=0.5 { XZ plane off center }

definitions
yp = 0.5
R0 = (R1+R2)/2
Rin = sqrt((R0-0.1)^2-yp^2)
Rout = sqrt((R0+0.1)^2-yp^2)
xin = Rin/sqrt(2)
xout = Rout/sqrt(2)

plots
grid(x,y,z)
grid(x,z) on y=0
grid(x,z) on y=yp
contour(u) on x=0 as "Temp on YZ plane through diameter"
contour(u) on y=0 as "Temp on XZ plane through diameter"
contour(u) on z=0 as "Temp on XY plane through diameter"
contour(u) on z=0.001 as "Temp on XY plane through diameter"
contour(u) on x=0.5 as "Temp on YZ plane off center"
contour(u) on y=0.5 as "Temp on XZ plane off center"
report(Rin,Rout,xin,xout)
contour(magnitude(grad(u))) on y=yp
zoom(xin,xin,xout-xin,xout-xin)
as "Flux on XZ plane off center"
report(yp)

end

```

5.2.2.19 3d_shells

```
{ 3D_SHELLS.PDE
```

```
This problem demonstrates the construction
of multiple nested spherical shells.
```

```
We solve a heatflow equation with fixed
temperatures on inner and outer
shell surfaces.
```

```
}
```

```
title 'Nested 3D Shells'
```

```
coordinates
  cartesian3
```

```
variables
  u
```

```
definitions
  k = 10
  heat = 6*k
  rad=sqrt(x^2+y^2)
  R1 = 1
  thick = 0.1
  R2 = R1-thick
  R3 = R2-thick
  R4 = R3-thick
  R5 = R4-thick
```

```
equations
  U: div(K*grad(u)) + heat = 0
```


```
extrusion
  surface 'SB1' z = -SPHERE ((0,0,0),R1)      { the bottom hemisphere }
  layer 'LB1'
  surface 'SB2' z = -SPHERE ((0,0,0),R2)
  layer 'LB2'
  surface 'SB3' z = -SPHERE ((0,0,0),R3)
  layer 'LB3'
  surface 'SB4' z = -SPHERE ((0,0,0),R4)
  layer 'LB4'
  surface 'SB5' z = -SPHERE ((0,0,0),R5)
  layer 'LB5'
  surface 'ST5' z = SPHERE ((0,0,0),R5)
  layer 'LT4'
  surface 'ST4' z = SPHERE ((0,0,0),R4)
  layer 'LT3'
  surface 'ST3' z = SPHERE ((0,0,0),R3)
  layer 'LT2'
  surface 'ST2' z = SPHERE ((0,0,0),R2)
  layer 'LT1'
  surface 'ST1' z = SPHERE ((0,0,0),R1)      { the top hemisphere }
```

```
boundaries
```

```
surface 'SB1' value(u) = 0      { fixed values on outer sphere surfaces }
surface 'ST1' value(u) = 0
```

```
Region 1
  layer 'LB1' k=1
  layer 'LT1' k=1
  start(R1,0)
  value(u) = 0
  arc(center=0,0) angle=180
  natural(u)=0 line to close
```

```
Limited Region 2
  layer 'LB2' k=2
  layer 'LT2' k=2
  ! include the region in all layers that must merge out:
  layer 'LB3' layer 'LB4' layer 'LB5' layer 'LT4' layer 'LT3'
  start(R2,0)
  arc(center=0,0) angle=180
  nobc(u) line to close
```

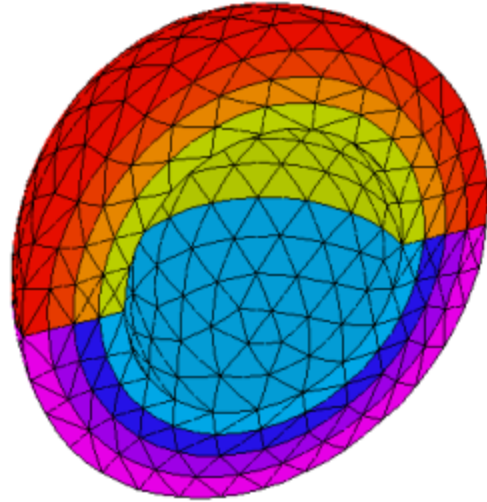

```

Limited Region 3
  layer 'LB3' k=3
  layer 'LT3' k=3
  ! include the region in all layers that must merge out:
  layer 'LB4' layer 'LB5' layer 'LT4'
  start(R3,0)
  arc(center=0,0) angle=180
  nobc(u) line to close

Limited Region 4
  layer 'LB4' k=4
  layer 'LT4' k=4
  ! include the region in all layers that must merge out:
  layer 'LB5'
  start(R4,0)
  arc(center=0,0) angle=180
  nobc(u) line to close

Limited Region 5
  surface 'SB5' value(u) = 1 { fixed values on inner sphere surfaces }
  surface 'ST5' value(u) = 1
  layer 'LB5' void { empty center }
  start(R5,0)
  arc(center=0,0) angle=180
  nobc(u) line to close

monitors
  grid(x,y,z)
  grid(x,z) on y=0
  grid(rad,z) on x=y
  contour(u) on x=0 { YZ plane through diameter }
  contour(u) on y=0 { XZ plane through diameter }
  contour(u) on z=0 { XY plane through diameter }
  contour(u) on x=0.5 { YZ plane off center }
  contour(u) on y=0.5 { XZ plane off center }

definitions
  yp = 0.5
  rp = sqrt(R2^2-yp^2)
  xp = rp/sqrt(2+thick)

plots
  grid(x,y,z)
  grid(x,z) on y=0
  contour(u) on x=0 as "Temp on YZ plane through diameter"
  contour(u) on y=0 as "Temp on XZ plane through diameter"
  contour(u) on z=0 as "Temp on XY plane through diameter"
  contour(u) on z=0.001 as "Temp on XY plane through diameter"
  contour(u) on x=0.5 as "Temp on YZ plane off center"
  contour(u) on y=0.5 as "Temp on XZ plane off center"
  contour(magnitude(grad(u))) on y=0.5 as "Flux on XZ plane off center"
  contour(magnitude(grad(u))) on y=yp
  zoom(xp,xp, thick*sqrt(2+thick),thick*sqrt(2+thick))
  as "Flux on XZ plane off center"

end

```

5.2.2.20 3d_sphere

```
{ 3D_SPHERE.PDE
```

This problem considers the construction of a spherical domain in 3D.

The heat equation is $\text{Div}(-K*\text{grad}(U)) = h$, with U the temperature and h the volume heat source.

A sphere with uniform heat source h will generate a total amount of heat $H = (4/3)*\pi*R^3*h$, from which $h = 3*H/(4*\pi*R^3)$.

The normal flux at the surface will be $F_{\text{normal}} = -K*\text{grad}(U) \cdot \text{Normal}$, where Normal is the surface-normal unit vector. On the sphere, the unit normal is $[x/R, y/R, z/R]$.

At the surface, the flux will be uniform, so the surface integral of flux is $\text{TOTAL} = 4*\pi*R^2*\text{normal}(-K*\text{grad}(U)) = H$ or $\text{normal}(-K*\text{grad}(u)) = H/(4*\pi*R^2) = R*h/3$.

```

In the following, we set R=1 and H = 1, from which
  h = 3/(4*pi)
  normal(-k*grad(u)) = 1/(4*pi)
}

title '3D Sphere'

coordinates
  cartesian3

variables
  u

definitions
  K = 0.1 { conductivity }
  R0 = 1 { radius }
  H0 = 1 { total heat }
  { volume heat source }
  heat = 3*H0/(4*pi*R0^3)

equations
  U: div(K*grad(u)) + heat = 0

extrusion
  surface z = -SPHERE ((0,0,0),R0) { the bottom hemisphere }
  surface z = SPHERE ((0,0,0),R0) { the top hemisphere }

boundaries
  surface 1 value(u) = 0 { fixed value on sphere surfaces }
  surface 2 value(u) = 0
  Region 1
    start(R0,0)
    arc(center=0,0) angle=360

plots
  grid(x,y,z)
  grid(x,z) on y=0
  contour(u) on x=0
  contour(4*pi*magnitude(k*grad(u))) on x=0
  contour(4*pi*magnitude(k*grad(u))) on y=0
  contour(-4*pi*k*(x*dx(u)+y*dy(u)+z*dz(u))/sqrt(x^2+y^2+z^2)) on x=0 as "normal flux"
  contour(-4*pi*k*(x*dx(u)+y*dy(u)+z*dz(u))/sqrt(x^2+y^2+z^2)) on y=0 as "normal flux"


  vector(-grad(u)) on x=0
  vector(-grad(u)) on y=0

  contour(4*pi*normal(-k*grad(u))) on surface 1 as "4*pi*Normal Flux=1" { bottom
surface }
  contour(4*pi*normal(-k*grad(u))) on surface 2 as "4*pi*Normal Flux=1" { top surface
}
  surface(4*pi*normal(-k*grad(u))) on surface 1 as "4*pi*Normal Flux=1" { bottom
surface }
  surface(4*pi*normal(-k*grad(u))) on surface 2 as "4*pi*Normal Flux=1" { top surface
}

summary
  report(sintegral(normal(-k*grad(u)),1)) as "Bottom current :: 0.5 "
  report(sintegral(normal(-k*grad(u)),2)) as "Top current :: 0.5 "
  report(vintegral(heat)) as "Total heat :: 1"
  report(sintegral(normal(-k*grad(u)))) as "Total Flux :: 1"

end

```



5.2.2.21 3d_spherebox

```

{ 3D_SPHEREBOX.PDE
  An empty 3D sphere inside a box.
}

title 'Empty 3D Sphere in a box'

coordinates
  cartesian3

```

```

variables
  u

definitions
  K = 0.1           { conductivity }
  R0 = 1            { radius }
  box = 2*R0

  zsphere = SPHERE ((0,0,0),R0) { hemisphere shape }

equations
  U: div(K*grad(u)) = 0

extrusion
  surface z=-box
  surface z = -zsphere { the bottom hemisphere and plane }
  surface z = zsphere  { the top hemisphere and plane }
  surface z=box

boundaries
  surface 1 value(u) = 0 { fixed value on box surfaces }
  surface 4 value(u) = 1

  Region 1 { the bounding box - defaults to insulating sidewalls }
  start(-box,-box)
  line to (box,-box) to (box,box) to (-box,box) to close

  Limited Region 2 { sphere exists only in region 2 }
  layer 2 void { ... and layer 2 }
  start (R0,0)
  arc(center=0,0) angle=360

plots
  grid(x,y,z)
  grid(x,z) on y=0
  contour(u) on x=0
  glcontour(u)

end

```

5.2.2.22 3d_spherespec

```
{ 3D_SPHERESPEC.PDE
```

This problem demonstrates the use of the [SPHERE](#)^[239] function for construction of a spherical domain in 3D. It is a modification of the example problem [3D_SPHERE.PDE](#)^[502].

```
}
```

```
title '3D Sphere'
```

```
coordinates
  cartesian3
```

```
variables
  u
```

```
definitions
  K = 0.1           { conductivity }
  R0 = 1            { radius }
  H0 = 1            { total heat input }

  heat = 3*H0/(4*pi*R0^3) { volume heat source }
  zs = sphere((0,0,0),R0) { the top hemisphere }
```

```
equations
  U: div(K*grad(u)) + heat = 0
```

```
extrusion
  surface z = -zs { the bottom hemisphere }
  surface z = zs  { the top hemisphere }
```

```
boundaries
  surface 1 value(u) = 0 { fixed value on sphere surfaces }
```

```

surface 2 value(u) = 0
Region 1
  start (R0,0)
  arc(center=0,0) angle=360

plots
  grid(x,y,z)
  grid(x,z) on y=0
  contour(u) on x=0
  contour(4*pi*magnitude(k*grad(u))) on x=0
  contour(4*pi*magnitude(k*grad(u))) on y=0
  contour(-4*pi*k*(x*dx(u)+y*dy(u)+z*dz(u))/sqrt(x^2+y^2+z^2)) on x=0 as "normal flux"
  contour(-4*pi*k*(x*dx(u)+y*dy(u)+z*dz(u))/sqrt(x^2+y^2+z^2)) on y=0 as "normal flux"

  vector(-grad(u)) on x=0
  vector(-grad(u)) on y=0

  contour(4*pi*normal(-k*grad(u))) on surface 1 as "4*pi*Normal Flux=1" { bottom
surface }
  contour(4*pi*normal(-k*grad(u))) on surface 2 as "4*pi*Normal Flux=1" { top surface }

  surface(4*pi*normal(-k*grad(u))) on surface 1 as "4*pi*Normal Flux=1" { bottom
surface }
  surface(4*pi*normal(-k*grad(u))) on surface 2 as "4*pi*Normal Flux=1" { top surface }

  summary
  report(sintegral(normal(-k*grad(u)),1)) as "Bottom current :: 0.5 "
  report(sintegral(normal(-k*grad(u)),2)) as "Top current :: 0.5 "
  report(vintegral(heat)) as "Total heat :: 1"
  report(sintegral(normal(-k*grad(u)))) as "Total Flux :: 1"

end

```

5.2.2.23 3d_spool

```
{ 3D_SPOOL.PDE
```

This example shows the use of [LIMITED REGIONS](#)^[248] to construct a spool in a box in 3D. The core of the spool has a section of low conductivity at the center.

The [LAYER](#)^[97] structure is as follows:

Layers 1 and 7 are the sections of the box above and below the spool

Layers 2 and 6 are the flanges of the spool and the box area surrounding the flanges.

Layers 3 and 5 are the high-conductivity portions of the core and the surrounding box area.

Layer 4 is the low-conductivity portion of the core and the surrounding box area.

Click ["Controls\Domain Review"](#)^[10] or the ["Domain Review"](#)^[13] tool to watch the mesh construction.

```
}
title '3D LIMITED REGION EXAMPLE'
```

```
coordinates
  cartesian3
```

```
Variables
  u
```

```
definitions
```

```

K
K1 = 1
K2 = 10
K3 = 0.01
Lx = 1 Ly = 1 Lz = 1
{extrusion values}
t = 0.25
m = 0.05
h = 0.25
z0 = t/2
z1 = t/2 + m
z2 = t/2 + m + h
z3 = t/2 + m + h + 2*m
z4 = t/2 + m + h + 2*m + h

```

```

z5 = t/2 + m + h + 2*m + h + m
{radii}
rad = 0.5 - h/2
rad1 = 0.5 - h/1

{boundary values}
U0 = 0
U1 = 1

equations
U: DIV(K*GRAD(U)) = 0

extrusion
surface "bottom of box" z=0
  layer "bottom gap"
surface "spool bottom" z=z0
  layer "bottom flange"
surface "top of bottom flange" z=z1
  layer "bottom core section"
surface "bottom of core insert" z=z2
  layer "core insert"
surface "top of core insert" z=z3
  layer "top core section"
surface "bottom of top flange" z=z4
  layer "top flange"
surface "top of spool" z=z5
  layer "top gap"
surface "top of box" z=1

boundaries
Surface 1 Value(U)=U0
Surface 8 Value(U)=U1

Region 1 "Box"
  K = K1
  start(0,0)
  line to (1,0) to (1,1) to (0,1) to close

limited region 2 "Flanges"
  layer 2      K =K2
  layer 6      K =K2

  START (1/2,rad1)
  ARC(CENTER=1/2,1/2) ANGLE=360
  TO CLOSE

limited Region 3 "Core"
  layer 3      K =K2
  layer 4      K =K3
  layer 5      K =K2

  START (1/2,rad)
  ARC(CENTER=1/2,1/2) ANGLE=360
  TO CLOSE

MONITORS
plots
grid(x,z) on y=0.5 paintregions
contour(U) on y=0.5
contour(U) on z=0.5
contour(K) on x=0.5 painted

end

```

5.2.2.24 3d_thermocouple

```
{ 3D_THERMOCOUPLE.PDE
```

This problem constructs a thermocouple inside a box.
It is the geometric construction only, there are no variables or equations.

Thermocouple rods are inserted exactly half way into the sphere. Rod tops are rounded.
Partial insertion is more difficult to generate the appropriate surfaces.

```
}
```

Title 'Thermocouple'

Coordinates Cartesian3

Definitions

```
len = 10 ! length of rods
rr = 1 ! radius of rods
rs = 3 ! radius of sphere
b = 1 ! box offset
d = 0.5 ! distance between rods

h = sqrt(rr^2 - (2*rs)^2) ! additional height from top of rod to center of sphere
c = len + h ! z value for center of sphere
xr = rr+d/2 ! x center for rods

zsphere = sphere((0,0,0),rs) ! top sphere surface at origin (untranslated)
rsphere1 = sphere((-xr,0,0),rr) ! rod1 sphere surface at z=0 (untranslated)
rsphere2 = sphere((xr,0,0),rr) ! rod2 sphere surface at z=0 (untranslated)

zrods = c ! regionally defined surface with default value of c
k = 1 ! regionally defined material property with default value of 1
```

Extrusion

```
Surface 'box bottom' z = -b
Surface 'rod bottom' z = 0
Surface 'sphere bottom' z = c - zsphere
Surface 'rod top' z = zrods
Surface 'sphere top' z = c + zsphere
Surface 'box top' z = c + rs + b
```

Boundaries

```
Region 'box'
start(b+rs,b+rs)
line to (-b-rs,b+rs) to (-b-rs,-b-rs) to (b+rs,-b-rs) to close

Limited Region 'sphere'
layer 3 k = 2
layer 4 k = 2
start(rs,0)
arc(center=0,0) angle = 360

Limited Region 'rod1'
zrods = c + rsphere1
layer 2 k = 3
layer 3 k = 3
start(-xr,rr)
arc(center=-xr,0) angle = 360

Limited Region 'rod2'
zrods = c + rsphere2
layer 2 k = 4
layer 3 k = 4
start(xr,rr)
arc(center=xr,0) angle = 360
```

Plots

```
glgrid(x,y,z) on region 'rod1' on region 'rod2'
glgrid(x,y,z) on region 'sphere' on region 'rod1' on region 'rod2'
grid(x,y,z) on region 'rod1' on region 'rod2'
grid(x,y,z) on region 'sphere' on region 'rod1' on region 'rod2'
grid(x,y,z)
grid(x,z) on y=0
```

End


5.2.2.25 3d_toggle

```
{ 3D_TOGGLE.PDE
```

This problem shows the use of curved extrusion surfaces and [VOID](#)²⁴⁹ layers to construct a transverse cylindrical hole in an upright cylinder.

The domain consists of three layers:
 1) the cylinder below the hole
 2) the hole
 3) the cylinder above the hole.
 Layer 2 has zero thickness outside the hole region, and is **VOID** (excluded from the mesh) inside the hole.

Click "[Controls->Domain Review](#)" to watch the domain construction process.

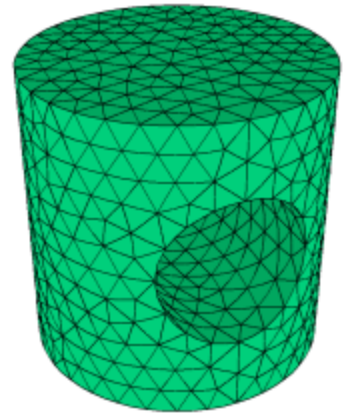

```

}
title '3D CYLINDRICAL VOID LAYER TEST'
coordinates
  cartesian3

select
  errlim = 0.005

variables
  u

definitions
  k = 0.1
  h = 1
  L = 1
  Ro = 1           { the cylinder radius }
  Ri = Ro/2        { the hole radius }
  { the base-plane Y-coordinate of the intersection of the hole projection with the
  cylinder projection: }
  Yc = sqrt(Ro^2-Ri^2)
  Z4 = L           { Z-height of the cylinder top }
  { the Z-shape function for the hole top (zero beyond +-Ri): }
  Z3 = CYLINDER ((0,1,0), (0,-1,0), Ri)
  { the Z-shape function for the hole bottom (zero beyond +-Ri): }
  Z2 = -Z3
  Z1 = -L         { Z-height of the cylinder bottom }

equations
  U: div(k*grad(u)) + h = 0      { a heat equation for demonstration purposes }

extrusion z=Z1,Z2,Z3,Z4      { short-form specification of the extrusion surfaces }

boundaries

  Region 1           { this region is the projection of the outer cylinder shape }
  start(Ro,0)
  value(u)=0         { Force u=0 on perimeter }
  arc(center=0,0) angle=360 to close

  limited region 2   { this region is the projection of the transverse hole }
  layer 2 void       { the region exists only in layer 2. Its bounding surfaces
  merge beyond the edges of the hole }
  start(Ri,Yc) arc(center=0,0) to (-Ri,Yc)
  line to (-Ri,-Yc)
  arc(center=0,0) to (Ri,-Yc)
  line to close

monitors
  grid(x,y,z)
  elevation(u) from (-Ro,0,0) to (Ro,0,0)
  contour(u) on z=0
  contour(u) on y=0

plots
  grid(x,y,z)
  elevation(u) from (-Ro,0,0) to (Ro,0,0)
  contour(u) on z=0
  contour(u) on y=0

end

```

5.2.2.26 3d_torus

```

{ 3D_TORUS.PDE
  This problem constructs a torus.
  The top surface and bottom surface meet along the diameter of the torus.
}

title '3D Torus'

coordinates
  cartesian3

select
  errlim = 0.005
  ngrid = 20    { get better mesh resolution of curved surfaces }
  painted

variables
  u

definitions
  Raxis = 4      { the radius of the toroid axis }
  Rtube = 1      { the radius of the toroid tube }
  Rad = sqrt(x^2+y^2) { cylindrical radius of point (x,y) }
  { the torus surface is the locus of points where (Rad-Raxis)^2+z^2 = Rtube^2 }
  ZTorus = sqrt(Rtube^2-(Rad-Raxis)^2)

equations
  u: del2(u) + 1 = 0

extrusion
  Surface "Bottom" z = -ZTorus
  Surface "Top" z = ZTorus

boundaries
  surface 1 value(u)=0
  surface 2 value(u) = 0


region 1
  start(Raxis+Rtube, 0)
  value(u) = 0
  arc(center=0,0) angle=360    { the outer boundary }
  start(Raxis-Rtube, 0)
  value(u) = 0
  arc(center=0,0) angle=360    { the inner boundary }

monitors
  grid(x,y,z)
  contour(u) on surface z=0
  contour(u) on surface y=0

plots
  grid(x,y,z)
  contour(u) on surface z=0
  contour(u) on surface y=0

end

```

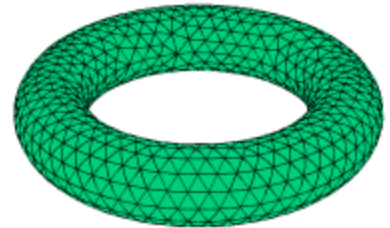

5.2.2.27 3d_torus_tube

```

{ 3D_TORUS_TUBE.PDE
  This problem constructs a "U" of pipe by connecting two cylindrical stubs to the
  ends of a 180-degree arc of a torus.

  There are three layers:
  1) the bottom half of the outer pipe
  2) the inner fluid
  3) the top half of the outer pipe.
  Layers 1 and 3 wrap around layer 3 and meet on the center plane.

  There are six regions, the inside and outside parts of the torus and the two stubs.
}

```

```

title '3D Torus Tube'

coordinates
  cartesian3

select
  errlim = 0.005
  painted

variables
  u

definitions
  Ra = 4           { the radius of the toroid axis }
  Rt = 1           { the radius of the outer toroid }
  Ri = 0.6         { the radius of the inner toroid }
  Len = 3         { the length of the side tubes }

  { Surface Definitions - Toroids and Tubes}
  Rad = sqrt(x^2+y^2)
  ZTorus1 = sqrt(Rt^2-(Rad-Ra)^2) ! outside toroid
  ZTorus2 = sqrt(Ri^2-(Rad-Ra)^2) ! inside toroid

  ZTube1a = CYLINDER ((Ra,0,0), (Ra,1,0), Rt)           ! outside tube A
  ZTube1b = CYLINDER ((-Ra,0,0), (-Ra,1,0), Rt)         ! outside tube B

  ZTube2a = CYLINDER ((Ra,0,0), (Ra,1,0), Ri)           ! inside tube A
  ZTube2b = CYLINDER ((-Ra,0,0), (-Ra,1,0), Ri)         ! inside tube B

  { Surface Definitions - default values for region 1 }
  z1 = -ZTorus1
  z2 = 0
  z3 = 0
  z4 = ZTorus1

  { heat source and conductivity }
  s = 1
  k = 1

equations
  u: div(k*grad(u)) + s = 0

extrusion
  Surface "Bottom1" z = z1
  Surface "Bottom2" z = z2
  Surface "Top2" z = z3
  Surface "Top1" z = z4

boundaries
  surface "Bottom1" value(u)=0
  surface "Top1" value(u) = 0

  region 1 "Outside Toroid"
  mesh_spacing = Rt/2
  layer 1 s = 1 k = 10
  layer 3 s = 1 k = 10
  start(Ra+Rt, 0)
  value(u) = 0
  arc(center=0,0) angle=180           { the outer boundary }
  natural(u) = 0
  line to (-Ra+Rt, 0)
  value(u) = 0
  arc(center=0,0) angle=-180        { the inner boundary }
  natural(u) = 0
  line to close

  limited region 2 "Inside Toroid"
  z2 = -ZTorus2
  z3 = ZTorus2
  mesh_spacing = Ri/2
  layer 2 s = 100 k = 1
  start(Ra+Ri, 0)
  arc(center=0,0) angle=180           { the outer boundary }
  line to (-Ra+Ri, 0)
  arc(center=0,0) angle=-180        { the inner boundary }
  line to close

```

```

region 3 "Outside TubeA"
z1 = -ZTube1a
z4 = ZTube1a
mesh_spacing = Rt/2
layer 1 s = 1 k = 10
layer 3 s = 1 k = 10
start (Ra+Rt,0)
  line to (Ra+Rt,-Len)
  line to (Ra-Rt,-Len)
  line to (Ra-Rt,0)
  line to close

limited region 4 "Inside TubeA"
z1 = -ZTube1a
z2 = -ZTube2a
z3 = ZTube2a
z4 = ZTube1a
mesh_spacing = Ri/2
layer 2 s = 100 k = 1
start (Ra+Ri,0)
  line to (Ra+Ri,-Len)
  line to (Ra-Ri,-Len)
  line to (Ra-Ri,0)
  line to close

region 5 "Outside TubeB"
z1 = -ZTube1b
z4 = ZTube1b
mesh_spacing = Rt/2
layer 1 s = 1 k = 10
layer 3 s = 1 k = 10
start (-Ra-Rt,0)
  line to (-Ra-Rt,-Len)
  line to (-Ra+Rt,-Len)
  line to (-Ra+Rt,0)
  line to close

limited region 6 "Inside TubeB"
z2 = -ZTube2b
z3 = ZTube2b
mesh_spacing = Ri/2
layer 2 s = 100 k = 1
start (-Ra-Ri,0)
  line to (-Ra-Ri,-Len)
  line to (-Ra+Ri,-Len)
  line to (-Ra+Ri,0)
  line to close

monitors
grid(x,y,z)
contour(u) on surface z=0
contour(u) on surface y=0

plots
grid(x,y,z)
contour(u) on surface z=0
contour(u) on surface y=0
glcontour(u) on layer 2

end

```

5.2.2.28 3d_twist

```
{ 3D_TWIST.PDE
```

This problem shows the use of the function definition facility of FlexPDE to create a twisted shaft in 3D.

The mesh generation facility of FlexPDE extrudes a 2D figure along a straight path in z , so that it is not possible to directly define a screw-thread shape.

However, by defining a coordinate transformation, we can build a straight rod in 3D and interpret the coordinates in a rotating frame.

```

Define the twisting coordinates by the transformation
xt = x*cos(a) - y*sin(a);    x = xt*cos(a) + yt*sin(a)
yt = x*sin(a) + y*cos(a);    y = yt*cos(a) - xt*sin(a)
zt = z
with
a = 2*pi*z/Length = twist*z    (for a total twist of 2*pi radians over the length )

```

In this transformation, x and y are the coordinates FlexPDE believes it is working with, and they are the coordinates that move with the twisting, so that the cross section is constant in x,y. xt and yt are the "lab coordinates" of the twisted figure.

```

The chain rule then gives
dF/d(xt) = (dx/dxt)*(dF/dx) + (dy/dxt)*(dF/dy) + (dz/dxt)*(dF/dz)
(with similar rules for yt and zt).
and dx/dzt = twist*[-xt*sin(a) + yt*cos(a)] = y*twist, etc.

```

```

In FlexPDE notation, this becomes
dxt(F) = cos(a)*dx(F) - sin(a)*dy(F)
dyt(F) = sin(a)*dx(F) + cos(a)*dy(F)
dzt(F) = twist*[y*dx(F) - x*dy(F)] + dz(F)

```

These relations are defined in the definitions section, and used in the equations section, perhaps nested as in the heat equation shown here.

```

}
title '3D Twisted Rod'
coordinates
  cartesian3
select
  ngrid=25    { use enough mesh cells to resolve the twist }
variables
  Tp
definitions
  long = 20
  wide = 1
  z1 = -long/2
  z2 = long/2

  { transformations }
  twist = 2*pi/long    { radians per unit length }
  c = cos(twist*z)
  s = sin(twist*z)
  xt = c*x-s*y
  yt = s*x+c*y

  { functional definition of derivatives }
  dxt(f) = c*dx(f) - s*dy(f)
  dyt(f) = s*dx(f) + c*dy(f)
  dzt(f) = twist*(y*dx(f) - x*dy(f)) + dz(f)

  { Thermal source }
  Q = 10*exp(-(xt+wide)^2-(yt+wide)^2-z^2)
initial values
  Tp = 0.
equations
  { the heat equation using transformed derivative operators }
  Tp: dxt(dxt(Tp)) + dyt(dyt(Tp)) + dzt(dzt(Tp)) + Q = 0
extrusion z = z1,z2
boundaries
  surface 1 value(Tp)=0    { fix bottom surface temp }
  surface 2 value(Tp)=0    { fix top surface temp }

  region 1
    start(-wide,-wide)    { default to insulating sides }
    line to (wide,-wide)
    to (wide,wide)

```



```

        to (-wide,wide)
        to close
monitors
  grid(xt,yt,z)           { the twisted shape }
plots
  grid(xt,yt,z)           { the twisted shape again }
  { In the following, recall that x and y are the coordinates which
    follow the twist. It is not possible at present to construct a
    cut in the "lab" coordinates. }
  grid(x,z) on y=0
  contour(Tp) on y=0 as "ZX Temp"
  contour(Tp) on z=0 as "XY Temp"
end

```

5.2.2.29 3d_void

```
{ 3D_VOID.PDE
```

This example shows the use of empty layers in 3D applications.

The `VOID`^[249] statement appears inside a `REGION`^[245] section, in the position of a layer parameter definition.

The syntax is:

```
LAYER number VOID
```

This statement causes the stated layer to be excluded from the problem domain in the current `REGION`. (Remember that a `REGION` refers to a partition of the 2D projection plane.)

Boundary conditions on the surface of the void are specified by the standard boundary condition facilities.

In this problem, we have a heat equation with an off-center void in an irregular figure. The Y faces held at zero, the Z-faces are insulated, and the sides of the void are held at 1.

```
}
```

```
title '3D VOID LAYER TEST'
```

```
coordinates
  cartesian3
```

```
select
  errlim = 0.005
```


```
variables
  u
```

```
definitions
  k = 0.1
  h=0
  x0=0.2  y0=-0.3
  x1=1  y1 = 0.3
```

```
equations
  U: div(K*grad(u)) + h = 0
```

```
extrusion z=0, 0.3, 0.7, 1
```

```
boundaries
  region 1
    start(-1,-1)
    value(u)=0           { Force U=0 on perimeter }
    line to (1,-1)
    arc(center=-1,0) to (1,1)
    line to (-1,1)
    arc(center= -3,0) to close
  limited region 2      { void exists only on layer 2 }
```

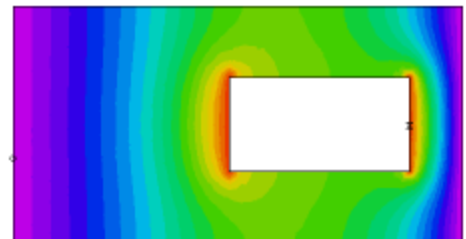

```

layer 2 VOID
start(x0,y0)
layer 2 value(u)=1
line to (x1,y0) to (x1,y1) to (x0,y1) to close

monitors
elevation(u) from (-0.8,0,0.5) to (1.25,0,0.5)
elevation(u) from (-0.8,0,0.8) to (1.25,0,0.8)
contour(u) on z=0
contour(u) on z=0.5
contour(u) on z=1
contour(u) on y=0

plots
elevation(u) from (-0.8,0,0.5) to (1.25,0,0.5)
elevation(u) from (-0.8,0,0.8) to (1.25,0,0.8)
contour(u) on z=0 painted
contour(u) on z=0.5 painted
contour(u) on z=0.499 painted
contour(u) on z=1 painted
contour(u) on y=0 painted

end

```

5.2.2.30 off_axis_disks_2

```

{ OFF_AXIS_DISKS_2.PDE
  This example demonstrates how to declare REGIONS properly in a 3D
  extrusion model when the desired device has overlapping components.
}
Coordinates cartesian3

Definitions
! material data
rho

! Circle data, c1 and c2
r1 = 5
r2 = 4.5
x1 = 0   y1 = 0
x2 = 1   y2 = 1

{ INTERSECTION OF TWO CIRCLES, A and B :
d = sqrt((xB-xA)^2+(yB-yA)^2)
K = (1/4)*sqrt(((rA+rB)^2-d^2)*(d^2-(rA-rB)^2))
x = (1/2)*(xB+xA) + (1/2)*(xB-xA)*(rA^2-rB^2)/d^2 ± 2*(yB-yA)*K/d^2
y = (1/2)*(yB+yA) + (1/2)*(yB-yA)*(rA^2-rB^2)/d^2 ± -2*(xB-xA)*K/d^2
}
! intersection between c1 and c2
d12 = sqrt((x2-x1)^2 + (y2-y1)^2)
k12 = sqrt(((r1+r2)^2-d12^2)*(d12^2-(r1-r2)^2))/4
x12a = (x2+x1)/2 + (x2-x1)*(r1^2-r2^2)/2/d12^2 + 2*(y2-y1)*k12/d12^2
x12b = (x2+x1)/2 + (x2-x1)*(r1^2-r2^2)/2/d12^2 - 2*(y2-y1)*k12/d12^2
y12a = (y2+y1)/2 + (y2-y1)*(r1^2-r2^2)/2/d12^2 - 2*(x2-x1)*k12/d12^2
y12b = (y2+y1)/2 + (y2-y1)*(r1^2-r2^2)/2/d12^2 + 2*(x2-x1)*k12/d12^2

Extrusion z = 0,1,2

Boundaries
{ define the regions based on XY projection }
limited region 'c1 only'
layer 1 rho = 1
start(x12a,y12a)
arc(center=x1,y1) to (x1,y1-r1) to (x12b,y12b)
arc(center=x2,y2) to (x2,y2-r2) to close

region "c1+c2 overlap"
layer 1 rho = 1
layer 2 rho = 2
start(x12a,y12a)
arc(center=x2,y2) to (x2,y2-r2) to (x12b,y12b)
arc(center=x1,y1) to (x1,y1+r1) to close

```

```

limited region 'c2 only'
layer 2 rho = 2
  start(x12a,y12a)
  arc(center=x2,y2) to (x2,y2+r2) to (x12b,y12b)
  arc(center=x1,y1) to (x1,y1+r1) to close

Plots
grid(x,y,z) as "Full device by material" paintmaterials viewpoint(20,-20,10)
grid(x,y,z) as "Full device by region" paintregions viewpoint(20,-20,10)

grid(x,y,z) on layer 1 as "Solenoid 1 by material" paintmaterials
grid(x,y,z) on layer 1 as "Solenoid 1 by region" paintregions

grid(x,y,z) on layer 2 as "Solenoid 2 by material" paintmaterials
grid(x,y,z) on layer 2 as "Solenoid 2 by region" paintregions

End

```

5.2.231 off_axis_disks_3

```

{ OFF_AXIS_DISKS_3.PDE
  This example demonstrates how to declare REGIONS properly in a 3D
  extrusion model when the desired device has overlapping components.
}
Coordinates cartesian3

Definitions
! material data
rho

! Circle data, c1 and c2
r1 = 5
r2 = 4.5
r3 = 5.1
x1 = 0    y1 = 0
x2 = 1    y2 = 1
x3 = -1   y3 = 1

{ INTERSECTION OF TWO CIRCLES, A and B :
d = sqrt((xB-xA)^2+(yB-yA)^2)
K = (1/4)sqrt(((rA+rB)^2-d^2)(d^2-(rA-rB)^2))
x = (1/2)(xB+xA) + (1/2)(xB-xA)(rA^2-rB^2)/d^2 ± 2(yB-yA)K/d^2
y = (1/2)(yB+yA) + (1/2)(yB-yA)(rA^2-rB^2)/d^2 ± -2(xB-xA)K/d^2
}
! intersection between c1 and c2
d12 = sqrt((x2-x1)^2 + (y2-y1)^2)
k12 = sqrt(((r1+r2)^2-d12^2)*(d12^2-(r1-r2)^2))/4
x12a = (x2+x1)/2 + (x2-x1)*(r1^2-r2^2)/2/d12^2 + 2*(y2-y1)*k12/d12^2
x12b = (x2+x1)/2 + (x2-x1)*(r1^2-r2^2)/2/d12^2 - 2*(y2-y1)*k12/d12^2
y12a = (y2+y1)/2 + (y2-y1)*(r1^2-r2^2)/2/d12^2 - 2*(x2-x1)*k12/d12^2
y12b = (y2+y1)/2 + (y2-y1)*(r1^2-r2^2)/2/d12^2 + 2*(x2-x1)*k12/d12^2

! intersection between c2 and c3
d23 = sqrt((x3-x2)^2 + (y3-y2)^2)
k23 = sqrt(((r2+r3)^2-d23^2)*(d23^2-(r2-r3)^2))/4
x23a = (x3+x2)/2 + (x3-x2)*(r2^2-r3^2)/2/d23^2 + 2*(y3-y2)*k23/d23^2
x23b = (x3+x2)/2 + (x3-x2)*(r2^2-r3^2)/2/d23^2 - 2*(y3-y2)*k23/d23^2
y23a = (y3+y2)/2 + (y3-y2)*(r2^2-r3^2)/2/d23^2 - 2*(x3-x2)*k23/d23^2
y23b = (y3+y2)/2 + (y3-y2)*(r2^2-r3^2)/2/d23^2 + 2*(x3-x2)*k23/d23^2

! intersection between c1 and c3
d13 = sqrt((x3-x1)^2 + (y3-y1)^2)
k13 = sqrt(((r1+r3)^2-d13^2)*(d13^2-(r1-r3)^2))/4
x13a = (x3+x1)/2 + (x3-x1)*(r1^2-r3^2)/2/d13^2 + 2*(y3-y1)*k13/d13^2
x13b = (x3+x1)/2 + (x3-x1)*(r1^2-r3^2)/2/d13^2 - 2*(y3-y1)*k13/d13^2
y13a = (y3+y1)/2 + (y3-y1)*(r1^2-r3^2)/2/d13^2 - 2*(x3-x1)*k13/d13^2
y13b = (y3+y1)/2 + (y3-y1)*(r1^2-r3^2)/2/d13^2 + 2*(x3-x1)*k13/d13^2

Extrusion z = 0,1,2,3

```



```

Boundaries
{ define the regions based on XY projection }
limited region 'C1 only'
layer 1 rho = 1
  start(x12a,y12a)
  arc(center=x1,y1) to (x13b,y13b)
  arc(center=x3,y3) to (x23b,y23b)
  arc(center=x2,y2) to close

limited region 'C2 only'
layer 2 rho = 2
  start(x12a,y12a)
  arc(center=x1,y1) to (x13a,y13a)
  arc(center=x3,y3) to (x23a,y23a)
  arc(center=x2,y2) to close

limited region 'C3 only'
layer 3 rho = 3
  start(x13b,y13b)
  arc(center=x1,y1) to (x12b,y12b)
  arc(center=x2,y2) to (x23a,y23a)
  arc(center=x3,y3) to close

limited region 'C1+C2 overlap'
layer 1 rho = 1
layer 2 rho = 2
  start(x12a,y12a)
  arc(center=x2,y2) to (x23b,y23b)
  arc(center=x3,y3) to (x13a,y13a)
  arc(center=x1,y1) to close

limited region 'C1+C3 overlap'
layer 1 rho = 1
layer 3 rho = 3
  start(x13b,y13b)
  arc(center=x1,y1) to (x12b,y12b)
  arc(center=x2,y2) to (x23b,y23b)
  arc(center=x3,y3) to close

limited region 'C2+C3 overlap'
layer 2 rho = 2
layer 3 rho = 3
  start(x12b,y12b)
  arc(center=x1,y1) to (x13a,y13a)
  arc(center=x3,y3) to (x23a,y23a)
  arc(center=x2,y2) to close

region 'C1+C2+C3 overlap'
layer 1 rho = 1
layer 2 rho = 2
layer 3 rho = 3
  start(x23b,y23b)
  arc(center=x2,y2) to (x12b,y12b)
  arc(center=x1,y1) to (x13a,y13a)
  arc(center=x3,y3) to close

Plots
grid(x,y,z) as "Full device by material" paintmaterials viewpoint(20,-20,10)
grid(x,y,z) as "Full device by region" paintregions viewpoint(20,-20,10)

grid(x,y,z) on layer 1 as "Solenoid 1 by material" paintmaterials
grid(x,y,z) on layer 1 as "Solenoid 1 by region" paintregions

grid(x,y,z) on layer 2 as "Solenoid 2 by material" paintmaterials
grid(x,y,z) on layer 2 as "Solenoid 2 by region" paintregions

grid(x,y,z) on layer 3 as "Solenoid 3 by material" paintmaterials
grid(x,y,z) on layer 3 as "Solenoid 3 by region" paintregions

End

```

5.2.2.32 regional_surfaces

```
{ REGIONAL_SURFACES.PDE
```

This problem demonstrates the use of regional definition of 3D extrusion surfaces.

There are three "REGIONS"^[245] defined, the cubical body of the domain, and two circular patches. The circular patches each exist only on a single surface, and in no volumes. The patch regions are used to define alternate extrusion surface shapes, and insert two parabolic depressions in the top and bottom faces of the cube.

Click "[Domain Review](#)"^[10] to watch the gridding process.

```
}
```

```
title 'Regional surface definition'
```

```
coordinates
  cartesian3
```

```
variables
  Tp
```

```
definitions
  long = 1           { domain size }
  wide = 1
  z1 = -1           { bottom surface default shape }

  z2 = 1           { top surface default shape }
  xc = wide/3      {some locating coordinates }
  yc = wide/3
  rc = wide/2
  h = 0.8
```

```
K = 1           { heat equation parameters }
Q = exp(-(x^2+y^2+z^2))
```

```
initial values
  Tp = 0.
```

```
equations
  Tp: div(k*grad(Tp)) + Q = 0
```

```
extrusion z = z1,z2
```

```
boundaries
  surface 1 value(Tp)=0
  surface 2 value(Tp)=0
```




```
{ define full domain boundary in base plane }
```

```
Region 1
  start(-wide,-wide)
  value(Tp) = 0
  line to (wide,-wide)
  to (wide,wide)
  to (-wide,wide)
  to close
```

```
Limited region 2
  { redefine bottom surface shape in region 2 }
  { note that this shape must meet the default shape at the edge of the region }
  z1 = -1+h*(1-((x+xc)^2+(y+yc)^2)/rc^2) { a parabolic dent }
  surface 1 { region exists only on surface 1 }
  start(-xc,-yc-rc) arc(center=-xc,-yc) angle=360
```

```
Limited region 3
  { redefine top surface shape in region 3 }
  { note that this shape must meet the default shape at the edge of the region }
  z2 = 1-h*(1-((x-xc)^2+(y-yc)^2)/rc^2)
  surface 2 { region exists only on surface 2 }
  start(xc,yc-rc) arc(center=xc,yc) angle=360
```

```
plots
  grid(x,y,z)
  contour(Tp) on x=y
```

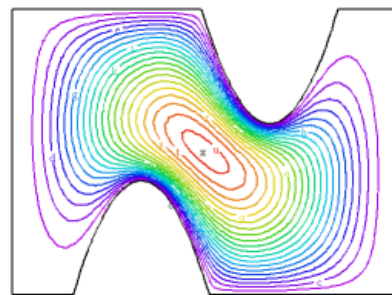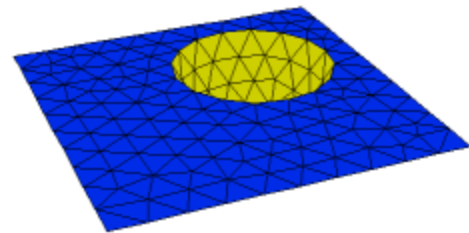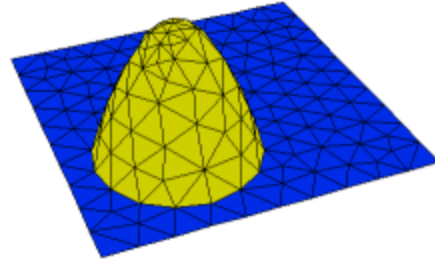

end

5.2.2.33 tabular_surfaces

```
{ TABULAR_SURFACES.PDE
```

This problem demonstrates the use of tabular input and regional definition for 3D extrusion surfaces.

The bottom surface of a brick is read from a table.

Note: Tables by default use bilinear interpolation. Mesh cell boundaries do NOT automatically follow table boundaries, and sharp slope breaks in table data can result in ragged surfaces. You should always make surface tables dense enough to avoid sharp breaks, or put domain boundaries or features along breaks in the table slope. You should also specify mesh density controls sufficiently dense to resolve table features.

The top surface is defined by different functions in two regions.

Note: the regional surface definitions must coincide at the region boundaries where they meet. Surfaces must be continuous and contain no jumps.

```
}
```

```
title 'tabular surface definition'
```

```
coordinates
  cartesian3
```

```
variables
  Tp
```

```
definitions
  long = 1
  wide = 1
  K = 1
  Q = 10*exp(-x^2-y^2-z^2)
```

```
{ read the table file for surface 1 definition: }
z1 = table('surf.tbl')
{ use regional parameters for surface 2
definition: }
z2
```

```
initial values
  Tp = 0.
```

```
equations
  Tp: div(k*grad(Tp)) + Q = 0
```

```
extrusion z = z1,z2 { define two surfaces from previously declared parameters }
```

```
boundaries
```

```
  surface 1 value(Tp)=0
  surface 2 value(Tp)=0
```

```
  Region 1
```


```
    z2 = 1 { default surface 2 over total domain }
    start(-wide,-wide)
    value(Tp) = 0
    line to (wide,-wide)
    to (wide,wide)
    to (-wide,wide)
    to close
```

```
  Region 2
```

```
    z2 = 1 + x/2 { override surface 2 definition in region 2 }
    start(-wide,-wide)
    line to (0,-wide)
    to (0,wide)
    to (-wide,wide)
    to close
```

```
monitors
```

```
  grid(x,z) on y=0
```

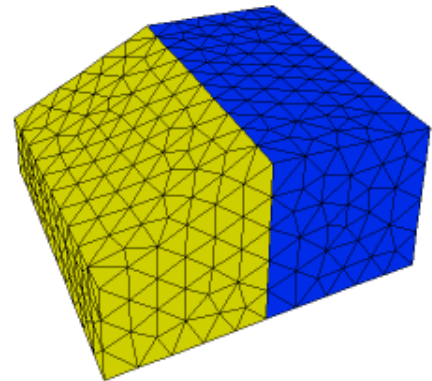

```

plots
  grid(x,z) on y=0
  contour(Tp) on y=0 as "ZX Temp"
  contour(Tp) on x=0 as "YZ Temp"
end

```

5.2.2.34 two_spheres

```
{ TWO_SPHERES.PDE
```

This problem constructs two spheres inside a box. The centers of the spheres lie on a single z-plane, which simplifies the domain construction.

The domain consists of three layers.

layer 1 is the space below the spheres

layer 2 contains the sphere bodies, and is of zero thickness outside the spheres

layer 3 is the space above the spheres

The sphere interiors are Void, and are thus excluded from analysis. They could just as well be filled with material if one wanted to model the insides.

The bounding surfaces of layer 2 are specified as a default, over-ridden by regional expressions within the (X,Y) extent of each sphere.

See [TWOZ_PLANAR.PDE](#)^[524], [TWOZ_DIRECT.PDE](#)^[520], [TWOZ_EXPORT.PDE](#)^[523] and [TWOZ_IMPORT.PDE](#)^[521] for methods of treating spheres with centers on differing Z coordinates.

```
}
```

```
title 'Two Spheres in 3D'
```

```
coordinates
  cartesian3
```

```
variables
  u
```

```
definitions
```

```

K = 1          { dielectric constant of box filler (vacuum?) }
box = 1       { bounding box size }

```

```

R1 = 0.25     { sphere 1 radius, center and voltage}
x1 = -0.5
y1 = -0.5
V1 = -1

```

```

R2 = 0.4     { sphere 2 radius, center and voltage}
x2 = 0.2
y2 = 0.2
V2 = 2

```

```

{ sphere shape functions }
sphere1_shape = SPHERE ((x1,y1,0),R1)
sphere2_shape = SPHERE ((x2,y2,0),R2)

```

```

{ default position of layer 2 surfaces }
zbottom = 0
ztop = 0

```

```
equations
```

```
U: div(K*grad(u)) = 0
```

```
extrusion
```

```

surface "box_bottom" z=-box
surface "sphere_bottoms" z = zbottom
surface "sphere_tops" z = ztop
surface "box_top" z=box

```

```
boundaries
```

```

surface "box_bottom" natural(u) = 0 {insulating boundaries top and bottom }
surface "box_top" natural(u) = 0

```

```

Region 1 { The bounding box }
start(-box,-box) line to (box,-box) to (box,box) to (-box,box) to close

```

```

limited region 2 { sphere 1 }
  mesh_spacing = R1/5 { force a dense mesh on the sphere }

```

```

zbottom = -sphere1_shape { shape of surface 2 in sphere 1 }
ztop = sphere1_shape { shape of surface 3 in sphere 1 }
layer 2 void
surface 2 value(u)=v1 { specify sphere1 voltage on top and bottom }
surface 3 value(u)=v1
start (x1+R1,y1)
    arc(center=x1,y1) angle=360

limited region 3 { sphere 2 }
mesh_spacing = R2/5 { force a dense mesh on the sphere }
zbottom = -sphere2_shape { shape of surface 2 in sphere 2 }
ztop = sphere2_shape { shape of surface 3 in sphere 2 }
layer 2 void
surface 2 value(u)=v2 { specify sphere2 voltage on top and bottom }
surface 3 value(u)=v2
start (x2+R2,y2)
    arc(center=x2,y2) angle=360

plots
grid(x,y,z)
grid(x,z) on y=y1 as "Grid on Y-cut at sphere 1 center"
contour(u) on y=y1 as "Solution on Y-cut at sphere 1 center"
grid(x,z) on y=y2 as "Grid on Y-cut at sphere 2 center"
contour(u) on y=y2 as "Solution on Y-cut at sphere 2 center"
{ sqrt(2) is needed to plot true distance along diagonal: }
grid(x*sqrt(2),z) on x-y=0 as "Grid on x=y diagonal"
contour(u) on x-y=0 as "Solution on x=y diagonal"

end

```

5.2.2.35 twoz_direct

```
{ TWOZ_DIRECT.PDE
```

This problem constructs two non-coplanar spheres inside a box by constructing a single dividing surface to delimit both spheres.

The domain consists of three layers.

layer 1 is the space below the spheres

layer 2 contains the sphere bodies, and is of zero thickness outside the spheres

layer 3 is the space above the spheres

The sphere interiors are void, and are thus excluded from analysis. You could just as well fill them with material if you wanted to model the insides.

The bounding surfaces of layer 2 are specified as a slope perpendicular to the centerline of the spheres and over-ridden by regional expressions within the (X,Y) extent of each sphere.

Click "[Controls->Domain Review](#)"^[10] to watch the mesh construction process.

See [TWOZ_PLANAR.PDE](#)^[524], [TWOZ_EXPORT.PDE](#)^[525] and [TWOZ_IMPORT.PDE](#)^[526] for other methods of treating spheres with centers on differing Z coordinates.

```
}
```

```
title 'Two Spheres in 3D - direct surface matching'
```

```
coordinates
    cartesian3
```

```
variables
    u
```

```
definitions
    K = 1 { dielectric constant of box filler (vacuum?) }
    box = 1 { bounding box size }
```

```
{ read sphere specs from file, to guarantee that they are the same as those in
```

```
surfgen }
#include "sphere_spec.inc"
```

```
{ sphere shape functions }
sphere1_shape = SPHERE ((x1,y1,0),R1)
sphere2_shape = SPHERE ((x2,y2,0),R2)
```

```
{ construct an extrusion surface running through both sphere diameters
```

```

    by building an embankment between the spheres }
RC = sqrt((x2-x1)^2+(y2-y1)^2)-R1-R2
RX = RC*(x2-x1)/RC/4
RY = RC*(y2-y1)/RC/4
xm = (x1+x2)/2
ym = (y1+y2)/2
xa = xm - RX
ya = ym - RY
xb = xm + RX
yb = ym + RY
xc = xm + RY
yc = ym - RX
slope = PLANE((xa,ya,z1), (xb,yb,z2), (xc,yc,0))
zbottom = min(z2,max(z1,slope))
ztop = zbottom

equations
U: div(K*grad(u)) = 0

extrusion
surface "box_bottom" z=-box
surface "sphere_bottoms" z = zbottom
surface "sphere_tops" z = ztop
surface "box_top" z=box

boundaries
surface "box_bottom" natural(u) = 0 {insulating boundaries top and bottom }
surface "box_top" natural(u) = 0

Region 1 { The bounding box }
start(-box,-box) line to (box,-box) to (box,box) to (-box,box) to close

limited region 2 { sphere 1 }
mesh_spacing = R1/5 { force a dense mesh on the sphere }
zbottom = z1-sphere1_shape { shape of surface 2 in sphere 1}
ztop = z1+sphere1_shape { shape of surface 3 in sphere 1}
layer 2 void
surface 2 value(u)=v1 { specify sphere1 voltage on top and bottom }
surface 3 value(u)=v1
start (x1+R1,y1)
arc(center=x1,y1) angle=360

limited region 3 { sphere 2 }
mesh_spacing = R2/5 { force a dense mesh on the sphere }
zbottom = z2-sphere2_shape { shape of surface 2 in sphere 2}
ztop = z2+sphere2_shape { shape of surface 3 in sphere 2}
layer 2 void
surface 2 value(u)=v2 { specify sphere2 voltage on top and bottom }
surface 3 value(u)=v2
start (x2+R2,y2)
arc(center=x2,y2) angle=360

plots
grid(x,y,z)
grid(x,z) on y=y1 paintregions as "Y-cut through lower sphere"
contour(u) on y=y1 as "Solution on Y-cut through lower sphere"
grid(x,z) on y=y2 paintregions as "Y-cut through upper sphere"
contour(u) on y=y2 as "Solution on Y-cut through upper sphere"
grid(x*sqrt(2),z) on x-y=0 paintregions as "Diagonal cut through both spheres"
contour(u) on x-y=0 as "Solution on Diagonal cut through both spheres"
glsurface(u) on x-y=0

end

```

5.2.2.36 twoz_import

```
{ TWOZ_IMPORT.PDE
```

This problem constructs two non-coplanar spheres inside a box using an extrusion surface generated by [TWOZ_EXPORT.PDE](#)^[523], which must be run before this problem.

The domain consists of three layers.

- layer 1 is the space below the spheres
- layer 2 contains the sphere bodies, and is of zero thickness outside the spheres
- layer 3 is the space above the spheres

The sphere interiors are Void, and are thus excluded from analysis. You could just as well fill them with material if you wanted to model the insides.
The bounding surfaces of layer 2 are specified as a default surface read from a [TRANSFER](#)^[227], over-ridden by regional expressions within the (X,Y) extent of each sphere.

Click ["Controls->Domain Review"](#)^[107] to watch the mesh construction process.

See [TWOZ_DIRECT.PDE](#)^[520] and [TWOZ_PLANAR.PDE](#)^[524] for other methods of treating spheres with centers on differing Z coordinates.

```
}

```

```
title 'Two Spheres in 3D'
```

```
coordinates
  cartesian3
```

```
variables
  u
```

```
definitions
  { dielectric constant of box filler (vacuum?) }
  K = 1
  box = 1 { bounding box size }

  { read sphere specs from file, to guarantee
    that they are the same as those in surfgen }
  #include "sphere_spec.inc"

  { sphere shape functions }
  sphere1_shape = SPHERE ((x1,y1,0),R1)
  sphere2_shape = SPHERE ((x2,y2,0),R2)
```

```
{ read dividing surface generated by surfgen
script }
TRANSFER
("twoz_export_output/two_sphere.xfr",zbottom)
ztop = zbottom
```

```
equations
  U: div(K*grad(u)) = 0
```



```
extrusion
  surface "box_bottom" z=-box
  surface "sphere_bottoms" z = zbottom
  surface "sphere_tops" z = ztop
  surface "box_top" z=box
```

```
boundaries
  {insulating boundaries top and bottom }
  surface "box_bottom" natural(u) = 0
  surface "box_top" natural(u) = 0
```

```
Region 1 { The bounding box }
  start(-box,-box) line to (box,-box) to (box,box) to (-box,box) to close
```

```
limited region 2 { sphere 1 }
  mesh_spacing = R1/5 { force a dense mesh on the sphere }
  zbottom = Z1-sphere1_shape { shape of surface 2 in sphere 1 }
  ztop = Z1+sphere1_shape { shape of surface 3 in sphere 1 }
  layer 2 void
  surface 2 value(u)=v1 { specify sphere1 voltage on top and bottom }
  surface 3 value(u)=v1
  start (x1+R1,y1)
  arc(center=x1,y1) angle=360
```

```
limited region 3 { sphere 2 }
  mesh_spacing = R2/5 { force a dense mesh on the sphere }
  zbottom = Z2-sphere2_shape { shape of surface 2 in sphere 2 }
  ztop = Z2+sphere2_shape { shape of surface 3 in sphere 2 }
  layer 2 void
  surface 2 value(u)=v2 { specify sphere2 voltage on top and bottom }
  surface 3 value(u)=v2
  start (x2+R2,y2)
  arc(center=x2,y2) angle=360
```

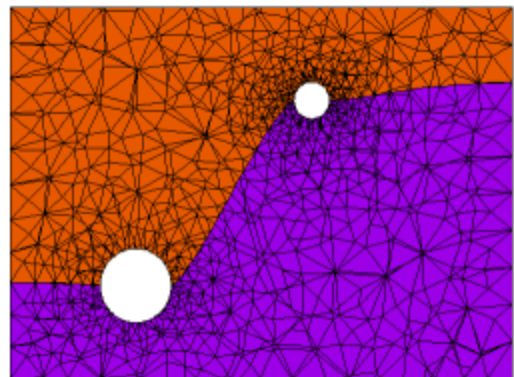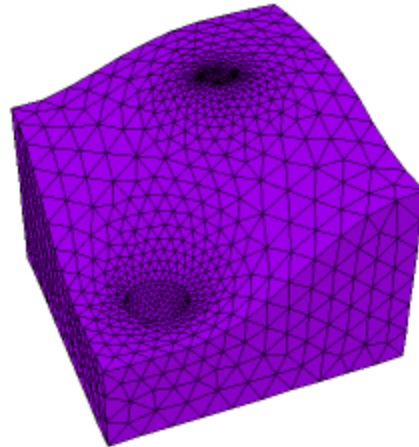

```

plots
  grid(x,y,z)
  grid(x,z) on y=y1 paintregions as "Y-cut through lower sphere"
  contour(u) on y=y1 as "Solution on Y-cut through lower sphere"
  grid(x,z) on y=y2 paintregions as "Y-cut through upper sphere"
  contour(u) on y=y2 as "Solution on Y-cut through upper sphere"
  grid(x*sqrt(2),z) on x-y=0 paintregions as "Diagonal cut through both spheres"
  contour(u) on x-y=0 as "Solution on Diagonal cut through both spheres"

end

```

5.2.2.37 twoz_export

```
{ TWOZ_EXPORT.PDE
```

This script uses plate-bending equations to generate a surface that passes through the waist of two spheres of differing Z-coordinates. The surface is exported with [TRANSFER](#)^[227] and read into 3D problem [TWOZ_IMPORT.PDE](#)^[527] as the layer-dividing surface. (See ["Samples | Applications | Stress | Fixed Plate.pde"](#)^[465] for notes on plate-bending equations.)

```
}
title 'Generating extrusion surfaces'
```

```
variables
  U,V
```

```
definitions
  box = 1 { bounding box size }

  { read sphere specs from file, to guarantee
    the same values as later including script }
  #include "sphere_spec.inc"

  ! penalty factor to force boundary compliance
  big = 1e6
  ztable = U
```

```
equations
  U: del2(U) = V
  V: del2(V) = 0
```

```
boundaries
  Region 1 { The bounding box }
  start(-box,-box)
  line to (box,-box) to (box,box) to (-box,box) to close

  Region 2 { sphere 1 }
  ztable = z1 { force a clean table value inside sphere }
  start (x1+1.01*R1,y1)
  mesh_spacing = R1/5 { force a dense mesh on the sphere }
  load(U) = 0 load(V) = big*(U-z1)
  arc(center=x1,y1) angle=360


  Region 3 { sphere 2 }
  ztable = z2
  start (x2+1.01*R2,y2)
  mesh_spacing = R2/5 { force a dense mesh on the sphere }
  load(U) = 0 load(V) = big*(U-z2)
  arc(center=x2,y2) angle=360
```

```
plots
  elevation(U) from(-box,-box) to (box,box)
  elevation(ztable) from(-box,-box) to (box,box)
  contour(U)
  surface(U)
  contour(ztable) zoom(x1-1.3*R1, y1-1.3*R1, 2.6*R1,2.6*R1)
  contour(ztable) zoom(x2-1.3*R2, y2-1.3*R2, 2.6*R2,2.6*R2)

  transfer(ztable) file = "two_sphere.xfr"

end

```

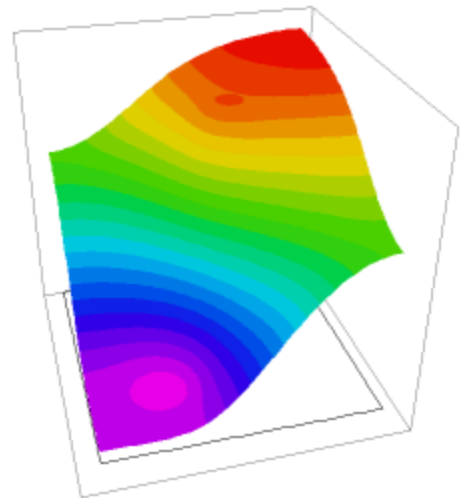

5.2.2.38 twoz_planar

```
{ TWOZ_PLANAR.PDE
```

This problem constructs two spheres inside a box by constructing multiple planar extrusion layers.

It presents an alternate method for comparison to that of [TWOZ_EXPORT.PDE](#)^[523] and [TWOZ_IMPORT.PDE](#)^[524].

The domain consists of five layers.

layer 1 is the space below the lower sphere

layer 2 contains the lower sphere body, and is of zero thickness outside the sphere

layer 3 is the space between the spheres

layer 4 contains the upper sphere body, and is of zero thickness outside the sphere

layer 5 is the space above the upper sphere

The sphere interiors are Void, and are thus excluded from analysis. You could just as well fill them with material if you wanted to model the insides.

The bounding surfaces of layers 2 and 4 are specified as planes at the level of the sphere center, over-ridden by regional expressions within the (X,Y) extent of each sphere.

Click "[Controls->Domain Review](#)"^[10] to watch the mesh construction process.

```
}
```

```
title 'Two Spheres in 3D - planar formulation'
```

```
coordinates
  cartesian3
```

```
variables
  u
```

```
definitions
```

```
  K = 1      { dielectric constant of box filler (vacuum?) }
  box = 1    { bounding box size }
```

```
  { read sphere specs from file, to guarantee that they are the same as those in
  surfgen }
```

```
  #include "sphere_spec.inc"
```

```
  { sphere shape functions }
```

```
  sphere1_shape = SPHERE ((x1,y1,0),R1)
```

```
  sphere2_shape = SPHERE ((x2,y2,0),R2)
```

```
  zbottom1 = z1
```

```
  ztop1 = z1
```

```
  zbottom2 = z2
```

```
  ztop2 = z2
```

```
equations
```

```
U: div(K*grad(u)) = 0
```

```
extrusion
```

```
  surface "box_bottom"      z = -box
  surface "sphere1_bottom"  z = zbottom1
  surface "sphere1_top"     z = ztop1
  surface "sphere2_bottom"  z = zbottom2
  surface "sphere2_top"     z = ztop2
  surface "box_top"        z = box
```

```
boundaries
```

```
  surface "box_bottom" natural(u) = 0 {insulating boundaries top and bottom }
  surface "box_top" natural(u) = 0
```

```
  Region 1 { The bounding box }
```

```
    start(-box,-box) line to (box,-box) to (box,box) to (-box,box) to close
```

```
  limited region 2 { sphere 1 }
```

```
    mesh_spacing = R1/5 { force a dense mesh on the sphere }
```

```
    zbottom1 = Z1-sphere1_shape { shape of surface 2 in sphere 1 }
```

```
    ztop1 = Z1+sphere1_shape { shape of surface 3 in sphere 1 }
```

```
    layer 2 void
```

```
    surface 2 value(u)=v1 { specify sphere1 voltage on top and bottom }
```

```
    surface 3 value(u)=v1
```

```
    start (x1+R1,y1)
```

```

        arc(center=x1,y1) angle=360
limited region 3 { sphere 2 }
  mesh_spacing = R2/5 { force a dense mesh on the sphere }
  zbottom2 = Z2-sphere2_shape { shape of surface 2 in sphere 2}
  ztop2 = Z2+sphere2_shape { shape of surface 3 in sphere 2}
  layer 4 void
  surface 4 value(u)=v2 { specify sphere2 voltage on top and bottom }
  surface 5 value(u)=v2
  start (x2+R2,y2)
        arc(center=x2,y2) angle=360

plots
  grid(x,y,z)
  grid(x,z) on y=y1 paintregions as "Y-cut through lower sphere"
  contour(u) on y=y1 as "Solution on Y-cut through lower sphere"
  grid(x,z) on y=y2 paintregions as "Y-cut through upper sphere"
  contour(u) on y=y2 as "Solution on Y-cut through upper sphere"
  grid(x*sqrt(2),z) on x-y=0 paintregions as "Diagonal cut through both spheres"
  contour(u) on x-y=0 as "Solution on Diagonal cut through both spheres"

end

```

5.2.3 3D_Rotations



5.2.3.1 Rotated_heat_ring

```
{ ROTATED_HEAT_RING.PDE
```

This example illustrates Extrusion in angle (Rotation), by which a 2D axisymmetric model may be easily converted to 3D.

A rod of conductive material of unit radius and "long" units length has an imbedded heated ring. The (x,y) layout is rotated 360 degrees in azimuthal angle, and the extrusion is divided into four segments (layers) with differing source values.

```
}
```

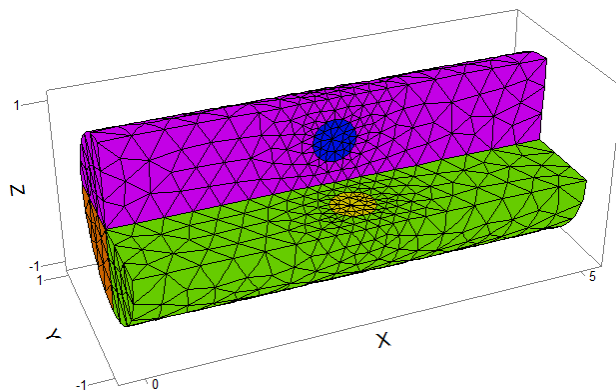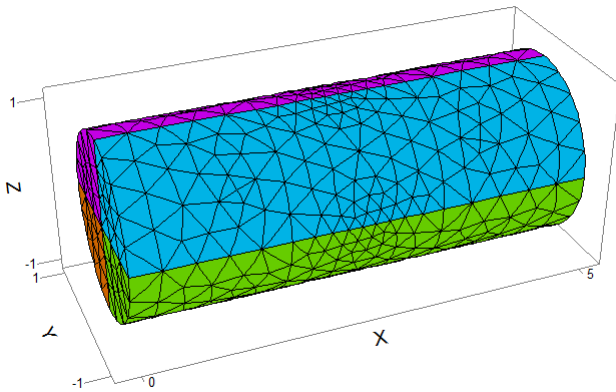

```

title
  "Rotated Heat Ring"

coordinates
  xcylinder3

select
  automesh= off
  ngrid=20
  painted
  errlim=1e-3

variables
  temp(threshold=10)

definitions
  k = 0.85      { thermal conductivity }
  cp = 1        { heat capacity }
  long = 5
  H = 2.0-sin(phi) ! 0.4      { free convection boundary coupling - ANGLE DEPENDENT }
  Ta = 25       { ambient temperature }
  A = 4500      { amplitude }
  phimax = 360 degrees

  source = A*r

initial value
  temp = Ta

equations
  temp : div(k*grad(temp)) + source = 0

```

```

Rotation
surface phi=0
layer "one"
surface phi=phimax/4
layer "two"
surface phi=phimax/2
layer "three"
surface phi=3*phimax/4
layer "four"
surface phi=phimax

boundaries
region 1
  A = 0 { no source in outer material }
  start(0,0)
  natural(temp) = 0 line to (long,0) { axis }
  value(temp) = Ta line to (long,1) { end plane }
  value(temp)=Ta line to (2*long/3,1) { fix surface temp at Ta on end third }
  natural(temp) = -H*(temp - Ta) line to (long/3,1) { convection cooling on center
third }
  value(temp)=Ta line to (0,1) { fix surface temp at Ta on first third }
  value(temp) = Ta line to close { end plane }

  { the heating ring }
  limited region 2
    layer 1 A=4500 { first quadrant source }
    layer 2 A=1000 { second quadrant source }
    layer 3 A=3000 { firthirdst quadrant source }
    layer 4 A=0 { fourth quadrant source }
  start(long/2,1/2-1/4) { ring has circular cross-section }
  arc(center=long/2,1/2) angle=360

plots
grid(x,y,z) on layers "one", "three", "four" paintregions
glgrid(x,y,z) on layers "one", "three", "four" paintregions
glcontour(temp) as "Rotatable surface temp"
glcontour(temp) on region 2 no lines as "Rotatable heat ring temp"
glcontour(temp) on region 2 on layer 2 as "Rotatable heat ring temp in second
quadrant"
glcontour(-H*(temp-Ta)) as "Surface Loss H*(Temp-Ta)" report("H = 2.0-sin(phi)")
elevation(temp) from (0,0) to (long,0) as "Axis Temp" { trace temp on axis }
contour(temp) on x=long/2 as "Temp cross-section"
contour(temp) on phi = phimax/3 as "Temp slice at phi=120"
contour(magnitude(grad(temp))) on x=long/2 as "Cartesian Gradient on cross-section"
contour(magnitude(vector(dx(temp),dr(temp),dphi(temp)/r))) on x=long/2 as "Polar-
Coordinate Gradient on cross-section"
contour(magnitude(grad(temp))) on phi=phimax/2 as "Gradient slice at phi=180"
contour(magnitude(grad(temp))) on phi=0 as "Gradient slice at phi=0"
contour(k*dr(temp)) on x=long/2 as "Radial flux"
contour(dr(temp)) on x=long/2 as "Radial derivative"
contour(drr(temp)) on x=long/2 as "Radial curvature"
contour(dphi(temp)/r) on x=long/2 as "Azimuthal derivative"
vector(-grad(temp)) on x=long/2 as "Cartesian gradient on cross-section"
contour(source) on x=long/2
grid(y,z) on x=long/2 paintregions as "Grid cross-section by region"
grid(y,z) on x=long/2 paintmaterials as "Grid cross-section by material"
grid(x,y) on phi=0 as "Grid on X,Y slice at phi=0"
grid(x,r) on phi=0 as "Grid on X,R slice at phi=0"
contour(source) on phi = pi/4
contour(source) on phi = 3*pi/4

summary
  report(integral(source))
  report(sintegral(-k*normal(grad(temp))))

end

```

5.2.4 Accuracy

5.2.4.1 forever

```
{ FOREVER.PDE
  This problem displays the behaviour of FlexPDE in time dependent problems.
  We posit a field with paraboloidal shape and with amplitude sinusoidal
  in time. We then derive the source function necessary to achieve this
  solution, and follow the integration for ten cycles, comparing the solution
  to the known analytic solution.
}
title 'A forever test'
variables
  Temp (threshold=0.1)
definitions
  K = 1
  eps = 0
  shape = (1-x^2-y^2)
  Texact = shape*sin(t)
  source = shape*cos(t) - div(K*grad(shape))*sin(t)
initial values
  Temp = Texact
equations
  Temp : div(K*grad(Temp)) + source = dt(Temp)
boundaries
  Region 1
    start(-1,-1)
    value(Temp)=Texact
    line to (1,-1) to (1,1) to (-1,1) to close
time 0 to 20*pi by 0.01
monitors
  for cycle=5
    contour(Temp) { show the Temperature during solution }
plots
  for t = pi/2 by pi to endtime { write these plots to the .PGX file }
    contour(Temp)
    surface(Temp)
    contour(Temp-Texact) as "Error"
    vector(-dx(Temp),-dy(Temp)) as "Heat Flow"
histories
  history(Temp) at (0,0) (0.5,0.5) integrate
  history(Temp-Texact) at (0,0) (0.5,0.5)
end
```

5.2.4.2 gaus1d

```
{ GAUS1D.PDE
  This test solves a 1D heat equation with a Gaussian solution and compares
  actual deviations from the exact solution with the error estimates made by
  FlexPDE.
  The problem runs a set of ERRLIM[200] levels and plots the history of the comparison.
}
title '1D Accuracy Test - Gaussian'
select
  ngrid=10
  errlim = staged(1e-2, 1e-3, 1e-4, 1e-5, 1e-6)
coordinates
```

```

cartesian1

Variables
u

definitions
k = 1
w=0.25
u0 = exp(-x^2/w^2)
s = -dxx(u0)
RMS_error = sqrt(integral((u-u0)^2)/sqrt(integral(u0^2)))

left=point(-1)
right=point(1)

equations
U: div(K*grad(u)) + s = 0

boundaries
Region 1
start left point value(u)=u0
line to right point value(u)=u0

monitors
elevation(u) from left to right

plots
elevation(u,u0) from left to right report(errlim)
elevation(u-u0) from left to right as "absolute error" report(errlim)
elevation(-div(grad(u)),s) from left to right report(errlim)

histories
history(RMS_error, errlim) log

end

```

5.2.4.3 gaus2d

```

{ GAUS2D.PDE

This test solves a 2D heat equation with a Gaussian solution and compares
actual deviations from the exact solution with the error estimates made by
FlexPDE.
The problem runs a set of ERRLIM[200] levels and plots the history of the comparison.
}

title '2D Accuracy Test - Gaussian'

variables
u

select
ngrid=5
errlim = staged(1e-2, 1e-3, 1e-4, 1e-5)

definitions
k = 1
h = 0.1
w = 0.2 ! gaussian width
u0 = exp(-(x^2+y^2)/w^2)
source = -(dxx(u0)+dyy(u0))
u0_exact = dxx(u0)
RMS_error = sqrt(integral((u-u0)^2)/sqrt(integral(u0^2)))
fx = -2*x*u0/w^2
fy = -2*y*u0/w^2

equations
U: div(K*grad(u)) + source = 0

boundaries
Region 1
start(-1,-1) natural(u)=-fy line to (1,-1)
value(u)=u0 line to (1,1)

```

```

    natural(u)=fy line to (-1,1)
    value(u) = u0 line to close

monitors
  grid(x,y)
  contour(u)

plots
  grid(x,y)
  contour(u)
  elevation(u,u0) from(-1,0) to (1,0)
  elevation(u-u0) from(-1,0) to (1,0)
  elevation(dxx(u),uxx_exact) from(-1,0) to (1,0)
  elevation(dxx(u)+dyy(u),-source) from(-1,0) to (1,0)
  contour(dxx(u)) contour(dxy(u)) contour(dyy(u))
  contour(space_error(u))
  contour(u-u0)

histories
  history(RMS_error, errlim) LOG

end

```

5.2.4.4 gaus3d

```

{ GAUS3D.PDE

  This test solves a 3D heat equation with a known Gaussian solution and compares
  actual deviations from the exact solution with the error estimates made by
  FlexPDE.
  The problem runs a set of ERRLIM(200) levels and plots the history of the comparison.

  The equation is solved in two forms, letting FlexPDE compute the correct source,
  and imposing analytic derivatives for the source.
}

title '3D Accuracy Test - Gaussian'

coordinates
  cartesian3

select
  ngrid = 5
  errlim = staged(1e-2, 1e-3, 1e-4, 1e-5)

variables
  u

definitions
  long = 1
  wide = 1
  z1 = -1
  z2 = 1
  w = 0.25 ! gaussian width
  uexact = exp(-(x^2+y^2+z^2)/w^2)
  source = -(dxx(uexact)+dyy(uexact)+dzz(uexact)) ! let FlexPDE do the differentials
  flux = -grad(u)
  RMS_error = sqrt(integral((u-uexact)^2)/sqrt(integral(uexact^2)))

initial values
  u = 0.

equations
  U: div(flux) = source

extrusion z = z1,z2

boundaries
  surface 1 value(u)=uexact { fix bottom surface temp }
  surface 2 value(u)=uexact { fix top surface temp }

  Region 1 { define full domain boundary in base plane }
    start(-wide,-wide)
    value(u) = uexact { fix all side temps }
    line to (wide,-wide) { walk outer boundary in base plane }

```

```

        to (wide,wide)
        to (-wide,wide)
        to close

monitors
  grid(x,z) on y=0
  contour(uexact) on y=0
  contour(u) on y=0
  contour(u-uexact) on y=0

plots
  grid(x,z) on y=0 as "Grid on X-Z cut"
  contour(uexact) on y=0 as "Exact Solution Uexact"
  contour(u) on y=0 as "Numerical Solution U"
  contour(u-uexact) on y=0 as "Actual error U-Uexact"
  elevation(u,uexact) from(-wide,0,0) to (wide,0,0)
  elevation(dx(u),dx(uexact)) from(-wide,0,0) to (wide,0,0)
  elevation(div(flux),source) from(-wide,0,0) to (wide,0,0)

summary
  report(errlim)
  report(RMS_error)

histories
  history(RMS_error, errlim) log

end

```

5.2.4.5 rotating_shape

```

{
  ROTATING_SHAPE.PDE

  This test rotates a sinusoidal shape around a center at a fixed timestep of one degree
  per timestep
  to demonstrate the degradation of the shape after one, two and three circuits.
}

title 'One Degree per Timestep'

select
  fixdt ! use a fixed timestep
  errlim=1e-4

variables
  u

definitions
  wide=1
  rad=sqrt((x+0.5)^2+y^2)

! define the initial shape as one pulse of (cos(ang)+1)
u0 = if(rad < 0.25) then 0.5*(cos(4*rad*pi)+1) else 0
vel = vector(-y,x)

initial values
  u = u0

equations
  dt(u) + dot(vel,grad(u)) = 0

boundaries
  ! define a square region to rotate in
  Region 1
  start(-wide,-wide) value(u)=0
  line to(wide,-wide) to(wide,wide) to(-wide,wide) to close

time=0 to 6*pi by pi/180 ! one degree per timestep

monitors

```



```

for t=0 by pi/4 to endtime
  grid(x,y)
  contour(u)

plots
for t=0 by 2*pi to endtime
  grid(x,y)
  contour(u)
  report(globalmax(u))
  report(globalmax_x(u))
  surface(u)
  contour(u-u0)
  contour(dxx(u)) contour(dxy(u)) contour(dyy(u))

for t=2*pi
  elevation(u, u0) from(-1,0) to (1,0)
for t=4*pi
  elevation(u, u0) from(-1,0) to (1,0)
for t=6*pi
  elevation(u, u0) from(-1,0) to (1,0)

end

```

5.2.4.6 sine1d

```

{ SINE1D.PDE
  This problem compares the solution accuracy for four different levels of ERRLIM[20].
}

title '1D Accuracy test - Sine'

select
  ngrid=10
  errlim = staged(1e-2, 1e-3, 1e-4, 1e-5)

coordinates
  cartesian1

variables
  u

definitions
  k = 1
  h = 0.1
  w=0.1
  rs = abs(x)/w
  u0 = sin(rs)/max(rs,1e-18)
  s = -dxx(u0)
  RMS_error = sqrt(integral((u-u0)^2)/sqrt(integral(u0^2)))

equations
  u: div(K*grad(u)) +s = 0

boundaries
  Region 1
  start(-1) point value(u)=u0
  line to (1) point value(u)=u0

monitors
  elevation(u) from (-1) to (1)

plots
  elevation(u,u0) from (-1) to (1)
  elevation(u-u0) from (-1) to (1)
  elevation(dx(u),dx(u0)) from (-1) to (1)
  elevation(-div(grad(u)),s) from (-1) to (1)

histories
  history(RMS_error,errlim) LOG

```

```
end
```

5.2.4.7 sine2d

```
{ SINE2D.PDE
  This problem compares the solution accuracy for four different levels of ERRLIM[200].
}
title '2D Accuracy Test - Sine'
select
  ngrid = 5
  errlim = staged(1e-2, 1e-3, 1e-4, 1e-5)
variables
  u
definitions
  k = 1
  h = 0.1
  w=0.1
  rs = r/w
  u0 = sin(rs)/rs
  s = -dxx(u0)-dyy(u0)
  RMS_error = sqrt(integral((u-u0)^2)/sqrt(integral(u0^2)))
equations
  U: div(K*grad(u)) +s = 0
boundaries
  Region 1
    start(-1,-1) value(u)=u0
    line to (1,-1) to (1,1) to (-1,1) to close
monitors
  grid(x,y)
  contour(u)
plots
  grid(x,y)
  contour(u)
  elevation(u,u0) from(-1,0) to (1,0)
  elevation(u-u0) from(-1,0) to (1,0)
  elevation(dx(u),dx(u0)) from(-1,0) to (1,0)
  elevation(dxx(u),dxx(u0)) from(-1,0) to (1,0)
  elevation(dxx(u)+dyy(u),-s) from(-1,0) to (1,0)
  contour(dxx(u)) contour(dxy(u)) contour(dyy(u))
histories
  history(RMS_error, errlim) LOG
end
```

5.2.4.8 sine3d

```
{ SINE3D.PDE
  This problem compares the solution accuracy for three different levels of ERRLIM[200].
}
title '3D Accuracy Test - Sine'
coordinates
  cartesian3
select
  ngrid = 5
  errlim = staged(1e-2, 3e-3, 1e-3, 3e-4, 1e-4)
```

```

variables
  u

definitions
  long = 1
  wide = 1
  z1 = -1
  z2 = 1
  w=0.1
  rs = r/w
  uex = sin(rs)/rs
  s = -(dxx(uex)+dyy(uex)+dzz(uex))
  RMS_error = sqrt(integral((u-uex)^2)/sqrt(integral(uex^2)))

equations
  U: div(grad(u)) + s = 0

extrusion z = z1,z2

boundaries
  surface 1 value(u)=uex { fix bottom surface temp }
  surface 2 value(u)=uex { fix top surface temp }

  region 1 { define full domain boundary in base plane }
    start(-wide,-wide)
    value(u) = uex { fix all side temps }
    line to (wide,-wide) { walk outer boundary in base plane }
    to (wide,wide)
    to (-wide,wide)
    to close

monitors
  grid(x,z) on y=0 as "Grid on X-Z cut"
  contour(uex) on y=0 as "Exact Solution Uex"
  contour(u) on y=0 as "Numerical Solution U"
  contour(u-uex) on y=0 as "Actual error U-Uex"

plots
  grid(x,z) on y=0 as "Grid on X-Z cut"
  contour(uex) on y=0 as "Exact Solution Uex"
  contour(u) on y=0 as "Numerical Solution U"
  contour(u-uex) on y=0 as "Actual error U-Uex"
  summary
    report(errlim) as "Requested error"
    report(RMS_error)

histories
  history(RMS_error, errlim) LOG

end

```

5.2.5 Arrays+Matrices

5.2.5.1 arrays

```

{ ARRAYS.PDE
  This example demonstrates a few uses of data ARRAYS[218].
}

title 'ARRAY test'

Variables
  u

definitions
  a = 1

  ! literal data specification
  v = array(0,1,2,3,4,5,6,7,8,9,10)
  ! literal data specification with incrementation
  w = array(0 by 0.1 to 10)

```

```

! functional definition
alpha =array for x(0 by 0.1 to 10) : sin(x)+1.1
! construction of a new array by arithmetic operations
beta = sin(w)+1.1 { this results in the same data as alpha }
gamma = sin(v)+0.1 { this array is sparsely defined }

rad = 0.1
s = 0

equations
u: div(a*grad(u)) + s = 0          { a heat equation }

boundaries
region 1
start(0,0)
value(u)=0
line to (2,0) to (2,2) to (0,2) to close

plots
elevation(alpha)
elevation(alpha,beta) vs w
elevation(gamma) vs v
summary
report(sizeof(w))

end

```

5.2.5.2 array_boundary

```

{ ARRAY_BOUNDARY.PDE

This problem demonstrates the use of data ARRAYS[215] in boundary definition.
Coordinate arrays are constructed by functional array definition
and joined in a spline fit to form the system boundary.
}

title 'ARRAY_BOUNDARY test'

variables
u

definitions
a = 1
rad = 1
! construct x and y coordinates on a semicircle
xb =array for ang(-pi/2 by pi/10 to pi/2) : rad*cos(ang)
yb =array for ang(-pi/2 by pi/10 to pi/2) : rad*sin(ang)
! multiplying an array by a constant
xba = 10*xb
yba = 10*yb
! adding a constant to an array
xbb = xba+11

s = 1

equations
u: div(a*grad(u)) + s = 0;          { a heatflow equation }

boundaries
region 1 { a half-circle built of line segments }
start(0,-10*rad)
value(u)=0
line list (xba, yba)
natural(u)=0
line to close
region 2 { a half-circle built of spline segments }
start(11,-10*rad)
value(u)=0
spline list (xbb, yba)
natural(u)=0
line to close

plots
grid(x,y)
contour(u) painted
surface(u)

```

end

5.2.5.3 matrices

```
{ MATRICES.PDE
```

```
  This example demonstrates a few uses of data MATRICES[21]
}
```

```
title 'MATRIX test'
```

```
definitions
```

```
{ -- literal matrix definition -- }
m1 = matrix((1,2,3),(4,5,6),(7,8,9))
```

```
{ -- functional matrix definition -- }
{ a 79x79 diagonal matrix of amplitude 10: }
m2 = matrix for x(0.1 by 0.1 to 5*pi/2)
      for y(0.1 by 0.1 to 5*pi/2)
      : if(x=y) then 10 else 0
```

```
{ a 79x79 matrix of sin products: }
m3 = matrix for x(0.1 by 0.1 to 5*pi/2)
      for y(0.1 by 0.1 to 5*pi/2)
      : sin(x)*sin(y) +1
```

```
{ -- literal array definition -- }
{ a 101-element array of constants: }
v = array [79] (0.1 by 0.1 to 5*pi/2)
```

```
! multiply v by matrix M3
p = m3**v
```

```
! multiply v by matrix M3, scale by 1e5 and take the sine of each entry
q = sin((m3**v)/100000)
```

```
rad = 0.1
s = 0
```

```
! solve m3*B = P
b = p // m3
```

```
{ no variables }
{ no equations }
```

```
boundaries
```

```
  region 1
    start(0,0)
    line to (2,0) to (2,2) to (0,2) to close
```

```
{ no monitors }
```

```
plots
```

```
elevation(q) vs v as "array vs array"
elevation(q) as "array vs index"
contour(m3) vs v vs v as "matrix vs two arrays"
contour(m3) vs v as "matrix vs array and index"
```

```
contour(m2) as "matrix vs indexes"
surface(m3*m2) as "element product"
surface(m3+m2) as "element sum"
surface(m3-m2) as "element difference"
surface(m3**m2) as "matrix product"
elevation(b,v) as "matrix inverse times array"
elevation(m3**b,p) as "matrix times array and array"
```

```
summary ("selected values")
```

```
report m3[1,1]
report m3[3,4]
report v[1]
report q[1]
```

end

5.2.5.4 matrix_boundary

```
{ MATRIX_BOUNDARY.PDE
```

This example demonstrates the use of a data [MATRIX](#)^[217] in boundary definition. Coordinates are constructed by functional matrix definition, rotated by multiplication by a rotation matrix and joined in a spline fit to form the system boundary.

```
}
```

```
title 'MATRIX_BOUNDARY test'
```

```
Variables
```

```
u
```

```
definitions
```

```
a = 1
rad = 1
! build a 2 x 21 matrix of x and y coordinates
mb =matrix for i(1,2)
      for ang(-pi/2 by pi/20 to pi/2)
      : if(i=1) then rad*cos(ang) else rad*sin(ang)
! build a 2 x 2 rotation matrix
rota=45
rot = matrix[2,2] ((cos(radians(rota)), -sin(radians(rota))),
                  (sin(radians(rota)), cos(radians(rota))))
! rotate the coordinate list
mbr = rot**mb

s = 1
```

```
equations
```

```
u: div(a*grad(u)) + s = 0;           { the heatflow equation }
```

```
boundaries
```

```
region 1
! start curve at first point of rotated coordinates
start(mbr[1,1], mbr[2,1])
value(u)=0
! spline fit the 21-point table
spline list (mbr)
natural(u)=0
line to close
```

```
plots
```

```
contour(u) painted
surface(u)
```

```
end
```

5.2.5.5 wave_boundary

```
{ WAVE_BOUNDARY.PDE
```

This problem demonstrates the use of data ARRAYS in boundary definition. Coordinate arrays are constructed by functional array definition and joined in a spline fit to form the system boundary.

```
}
```

```
title 'wave boundary'
```

```
definitions
```

```
base=2
ysine = array for p(0 by 0.1 to 10): sin(2*p)+base
xsine = array for p(0 by 0.1 to 10): p
```

```
boundaries
  Region 1
    start(0,0)
    line to (0,base)
    spline list(xsine,ysine)
    line to (10,0) to close

plots
  grid(x,y)

end
```

5.2.6 CAD_Import

5.2.6.1 arrow_OBJimport

```
{ ARROW_OBJIMPORT.PDE

  This sample demonstrates the import of a bounding mesh in OBJ file format.
  It uses the MATERIALS section to tie the name stated
  in the OBJ file to FlexPDE properties.

  The OBJ file contains :
  one object named 'arrow' that will be bound to a material property set.
}
title 'Import OBJ Arrow'

coordinates cartesian3

materials 'arrow' : k=1

boundaries import OBJ 'arrow.obj'

plots grid(x,y,z)

end
```

5.2.6.2 boxinbox_OBJimport

```
{ BOXINBOX_OBJIMPORT.PDE

  This sample demonstrates the import of a bounding mesh in OBJ file format.
  It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated
  in the OBJ file to FlexPDE properties.

  The OBJ file contains :
  one object named 'boxinbox' that will be bound to a material property set.
  two groups named 'inner' and 'outer' that will be bound to BC sets.
}

title 'Import OBJ box-in-box'

coordinates cartesian3

variables u

select regrid=off

materials
```

```

'boxinbox' : k=1

boundary conditions
'inner' : value(u)=1
'outer': value(u)=10

equations u: div(k*grad(u))=0

boundaries import OBJ 'boxinbox.obj'

plots
grid(x,y,z)
grid(y,z) on x=0
contour(u) on x=0

end

```

5.2.6.3 canincan_OBJimport

```

{ CANINCAN_OBJIMPORT.PDE

This sample demonstrates the import of a bounding mesh in OBJ file format.
It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated
in the OBJ file to FlexPDE properties.

The OBJ file contains :
one object named 'canincan' that will be bound to a material property set.
two groups named 'inside' and 'outside' that will be bound to BC sets.
}

title 'Import OBJ can-in-can'

coordinates cartesian3

variables u

select regrid=off

materials
'canincan' : k=1

boundary conditions
'inside' : value(u)=1
'outside': value(u)=10

equations u: div(k*grad(u))=0

boundaries import OBJ 'canincan.obj'

plots
grid(x,y,z)
grid(x,z) on y=0
contour(u) on y=0

end

```

5.2.6.4 cube_OBJimport

```

{ CUBE_OBJIMPORT.PDE

This sample demonstrates the import of a bounding mesh in OBJ file format.

```


It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated in the OBJ file to FlexPDE properties.

```

The OBJ file contains :
  one object named 'cube' that will be bound to a material property set.
  two groups named 'left' and 'right' that will be bound to BC sets.
}
title 'Import OBJ Cube'

coordinates cartesian3

variables u

materials 'cube' : k=1

boundary conditions
  'left' : value(u)=1
  'right' : value(u)=10

equations u: div(k*grad(u))=0

boundaries import OBJ 'cube.obj'

plots
  grid(x,y,z)
  grid(x,y) on z = 0.5
  contour(u) on z = 0.5
  elevation(u) from (0,0.5,0.5) to (1,0.5,0.5)

end

```

5.2.6.5 cube2_OBJimport

```
{ CUBE2_OBJIMPORT.PDE
```

This sample demonstrates the import of a bounding mesh in OBJ file format. It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated in the OBJ file to FlexPDE properties.

```

The OBJ file contains :
  two objects named 'cube1' and 'cube2' that will be bound to material sets.
  three groups named 'left', 'middle', and 'right' that will be bound to BC sets.
}
title 'Import OBJ Cube2'

coordinates cartesian3

variables u

materials
  'cube1' : k = 1
  'cube2' : k = 5

boundary conditions
  'left' : value(u) = 1
  'middle' : natural(u) = 0
  'right' : value(u) = 10

equations u: div(k*grad(u))=0

boundaries import OBJ 'cube2.obj'

plots
  grid(x,y,z)
  grid(x,y) on z = 0.5

```

```

contour(u) on z = 0.5
elevation(u) from (0,0.5,0.5) to (2,0.5,0.5)

end

```

5.2.6.6 cube2_validate

```

{ CUBE2_VALIDATE.PDE

  This sample validates the OBJ import script IMPORT_OBJ_CUBE2.PDE
  by showing that the same answer is obtained when constructing the
  domain within FlexPDE instead of importing the OBJ mesh.
}
title 'Validate Import OBJ Cube2'

coordinates cartesian3

variables u

select ngrid = 2

materials
  'cube1' : k = 1
  'cube2' : k = 5

boundary conditions
  'left' : value(u) = 1
  'right': value(u) = 10

equations u: div(k*grad(u))=0

extrusion z = 0,1

boundaries

region 1
  use material 'cube1'
  start(0,0)
  line to (1,0) to (1,1) to (0,1) use bc 'left'
  line to close

region 2
  use material 'cube2'
  start(2,1)
  line to (1,1) to (1,0) to (2,0) use bc 'right'
  line to close

plots
  grid(x,y,z)
  grid(x,y) on z = 0.5
  contour(u) on z = 0.5
  elevation(u) from (0,0.5,0.5) to (2,0.5,0.5)

end

```

5.2.6.7 cubes_bigsmall_OBJimport

```

{ CUBES_BIGSMALL_OBJIMPORT.PDE

  This sample demonstrates the import of a bounding mesh in OBJ file format.
  It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated
  in the OBJ file to FlexPDE properties.

```

```

    The OBJ file contains :
    two objects named 'big' and 'small' that will be bound to material sets.
    three groups named 'left', 'middle', and 'right' that will be bound to BC sets.
}
title 'Import OBJ Cubes Bigsmall'

coordinates cartesian3

variables u

select
regrid=off
refineobj=off ! do not refine the initial OBJ mesh

materials
  'small': k=1
  'big'  : k=2

boundary conditions
  'bottom' : value(u)=1
  'middle' : contact(u)=jump(u)/0.5
  'top'    : value(u)=10

equations u: div(k*grad(u))=0

boundaries import OBJ 'cubes_bigsmall.obj'

plots
  grid(x,y,z)
  grid(y,z) on x=4
  grid(x,z) on y=3
  contour(u) on x=4
  contour(u) on y=3
end

```

5.2.6.8 cubes_bigsmall_validate

```

{ CUBES_BIGSMALL_VALIDATE.PDE

  This sample validates the OBJ import script IMPORT_OBJ_CUBES_BIGSMALL.PDE
  by showing that the same answer is obtained when constructing the
  domain within FlexPDE instead of importing the OBJ mesh.

  Note : the figure was turned on end only to make the construction easier.
}
title 'Validate Import OBJ Cubes Bigsmall'

coordinates cartesian3

variables u

select regrid=off ngrid=2

materials
  'small': k=1
  'big'  : k=2

boundary conditions
  'left'  : value(u)=1
  'middle': contact(u)=jump(u)/0.5
  'right' : value(u)=10

equations u: div(k*grad(u))=0

```

```

extrusion z=0,5,7

boundaries

limited region 1
  surface 1 use bc 'left'
  layer 1 use material 'big'
  start(0,0)
  line to (5,0) to (5,5) to (0,5) to close

limited region 2
  surface 2 use bc 'middle'
  surface 3 use bc 'right'
  layer 2 use material 'small'
  start(3,2)
  line to (5,2) to (5,4) to (3,4) to close

plots
  grid(x,y,z)
  grid(y,z) on x=4
  grid(x,z) on y=3
  contour(u) on x=4
  contour(u) on y=3
end

```

5.2.6.9 gourd_OBJimport

```

{ GOURD_OBJIMPORT.PDE

  This sample demonstrates the import of a bounding mesh in OBJ file format.

  The OBJ file contains :
    mesh vertices and faces with no named objects or groups.
}
title 'Import OBJ Gourd'

coordinates cartesian3

boundaries import OBJ 'gourd.obj'

plots grid(x,y,z)

end

```

5.2.6.10 helix_OBJimport

```

{ HELIX_OBJIMPORT.PDE

  This sample demonstrates the import of a bounding mesh in OBJ file format.
  It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated
  in the OBJ file to FlexPDE properties.

  The OBJ file contains :
    one object named 'helix' that will be bound to a material property set.
    two groups named 'top', and 'bottom' that will be bound to BC sets.
}
title 'Import OBJ Helix'

coordinates cartesian3

select order=2

variables U V W

```

definitions

```

E      { Young's Modulus }
nu = 0.3 { Poisson's Ratio }

{ define the constitutive relations }
G = E/((1+nu)*(1-2*nu))
C11 = G*(1-nu)
C12 = G*nu
C13 = G*nu
C22 = G*(1-nu)
C23 = G*nu
C33 = G*(1-nu)
C44 = G*(1-2*nu)/2

{ Strains }
ex = dx(U)
ey = dy(V)
ez = dz(W)
gxy = dy(U) + dx(V)
gyz = dz(V) + dy(W)
gzx = dx(W) + dz(U)

{ Stresses }
Sx = C11*ex + C12*ey + C13*ez
Sy = C12*ex + C22*ey + C23*ez
Sz = C13*ex + C23*ey + C33*ez
Txy = C44*gxy
Tyz = C44*gyz
Tzx = C44*gzx

{ find mean translation and rotation }
Vol = Integral(1)
Tx = integral(U)/Vol      { X-motion }
Ty = integral(V)/Vol      { Y-motion }
Tz = integral(W)/Vol      { Z-motion }
Rz = 0.5*integral(dx(V) - dy(U))/Vol { Z-rotation }
Rx = 0.5*integral(dy(W) - dz(V))/Vol { X-rotation }
Ry = 0.5*integral(dz(U) - dx(W))/Vol { Y-rotation }

{ displacements with translation and rotation removed }
{ This is necessary only if all boundaries are free }
Up = U - Tx + Rz*y - Ry*z
Vp = V - Ty + Rx*z - Rz*x
Wp = W - Tz + Ry*x - Rx*y

{ scaling factors for displacement plots }
Mx = 0.1*globalmax(magnitude(y,z))/globalmax(magnitude(Vp,Wp))
My = 0.1*globalmax(magnitude(x,z))/globalmax(magnitude(Up,Wp))
Mz = 0.1*globalmax(magnitude(x,y))/globalmax(magnitude(Up,Vp))
Mt = 0.2*globalmax(magnitude(x,y,z))/globalmax(magnitude(Up,Vp,Wp))

```

equations

```

U: dx(Sx) + dy(Txy) + dz(Tzx) = 0 { the U-displacement equation }
V: dx(Txy) + dy(Sy) + dz(Tyz) = 0 { the V-displacement equation }
W: dx(Tzx) + dy(Tyz) + dz(Sz) = 0 { the W-displacement equation }

```

```

materials 'helix' : E = 2.0e11 { Young's Modulus for Steel (N/M^2) }

```

boundary conditions

```

'top' : natural(w) = -1e-3
'bottom' : natural(w) = 1e-3

```

```

boundaries import OBJ 'helix.obj'

```

plots

```

contour(Up) on y=0 as "X-displacement"
contour(Vp) on x=0 as "Y-displacement"
contour(Wp) on y=0 as "Z-displacement"
grid(x+Mt*Up,y+Mt*Vp,z+Mt*Wp) as "Shape"
grid(x+My*Up,z+My*Wp) on y=0 as "XZ Shape"
grid(y+Mx*Vp,z+Mx*Wp) on x=0 as "YZ Shape"

```

```

contour(Sx) on y=0 as "X-stress"
contour(Sy) on y=0 as "Y-stress"
contour(Sz) on y=0 as "Z-stress"
contour(Txy) on y=0 as "XY Shear stress"
contour(Tyz) on y=0 as "YZ Shear stress"
contour(Tzx) on y=0 as "ZX Shear stress"

```

```
end
```

5.2.6.11 horn_OBJimport

```
{ HORN_OBJIMPORT.PDE
```

This sample demonstrates the import of a bounding mesh in OBJ file format. It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated in the OBJ file to FlexPDE properties.

The OBJ file contains :
 one object named 'horn' that will be bound to a material property set.
 four groups named 'tip1', 'tip2', 'tip3', and 'base' that will be bound to BC sets.

```

}
title 'Import OBJ Horn'

coordinates cartesian3

variables u

materials 'horn' : k = 10

boundary conditions
'tip1' : value(u) = 1
'tip2' : value(u) = 10
'tip3' : value(u) = 100
'base' : natural(u) = -10

equations u: div(k*grad(u))=0

boundaries import OBJ 'horn.obj'

plots
grid(x,y,z)
grid(x,z) on y=0
contour(u) on y=0

end

```

5.2.6.12 torus_OBJimport

```
{ TORUS_OBJIMPORT.PDE
```

This sample demonstrates the import of a bounding mesh in OBJ file format. It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated in the OBJ file to FlexPDE properties.

The OBJ file contains :
 one object named 'torus' that will be bound to a material property set.
 two groups named 'patch1' and 'patch2' that will be bound to BC sets.

```

}
title 'Import OBJ Torus'

coordinates cartesian3

select regrid=off

```

```

variables u

boundary conditions
'patch1' : value(u) = 1
'patch2' : value(u) = 10

materials 'torus' : k=1

equations u: div(k*grad(u))=0

boundaries import OBJ 'torus.obj'

plots
grid(x,y,z)
grid(x,z) on y = 0
contour(u) on x = -y
contour(u) on z = 0

end

```

5.2.6.13 tubefaces_OBJimport

```
{ TUBEFACES_OBJIMPORT.PDE
```

This sample demonstrates the import of a bounding mesh in OBJ file format. It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated in the OBJ file to FlexPDE properties.

The OBJ file contains :
 one object named 'tube' that will be bound to a material property set.
 two groups named 'top' and 'bottom' that will be bound to BC sets.

This mesh has some square cells on the sides that FlexPDE will automatically split into triangular cells during the mesh import.

```

}
title 'Import OBJ Tubefaces'

coordinates cartesian3

variables u

boundary conditions
'bottom' : value(u) = 1
'top' : value(u) = 10

materials 'tube' : k=1

equations u: div(k*grad(u))=0

boundaries import OBJ 'tube_faces.obj'

plots
grid(x,y,z)
grid(x,z) on y=0
contour(u) on y=0

end

```

5.2.6.14 wineglass_OBJimport

```
{ WINEGLASS_OBJIMPORT.PDE

This sample demonstrates the import of a bounding mesh in OBJ file format.
It uses the MATERIALS and BOUNDARY CONDITIONS sections to tie names stated
in the OBJ file to FlexPDE properties.

The OBJ file contains :
  one object named 'glass' that will be bound to a material property set.
  two groups named 'inside' and 'bottom' that will be bound to BC sets.
}
title 'Import OBJ Wineglass'

coordinates cartesian3

variables u

select
  order=2      ! select quadratic variable interpolation.
  refineobj=off

materials 'glass' : k=1

boundary conditions
  'inside' : value(u) = 1
  'bottom' : value(u) = 10

initial values
  u = 1

equations u: div(k*grad(u))=0

boundaries import OBJ 'wineglass.obj'

monitors
  grid(x,y,z)
  grid(x,z) on y=0
  contour(u) on y=0
plots
  grid(x,y,z)
  grid(x,z) on y=0
  contour(u) on y=0

end
```

5.2.7 Constraints

5.2.7.1 3d_constraint

```
{ 3D_CONSTRAINT.PDE

This problem demonstrates the specification of region-specific CONSTRAINTS[238] in 3D.
This is a modification of problem 3D\_BRICKS.PDE[424].
We apply a constraint on the integral of temperature in a single region/layer
compartment.
For validation, we define a check function that has nonzero value only in the selected
compartment and compare its integral to the region-selection form of the integral
statement.
Value boundary conditions are applied, so the solution is unique, so the constraint
acts as a source or sink to maintain the constrained value, we report
the energy lost to the constraining mechanism.

}
```



```

title '3D constraint'

coordinates
  cartesian3

variables
  Tp

definitions
  long = 1
  wide = 1
  K
  Q = 10*exp(-x^2-y^2-z^2)          { Thermal source }

  flag22=0   { build a test function for region 2, layer 2 }
  check22 = if flag22>0 then Tp else 0

initial values
  Tp = 0.

equations
  Tp: div(k*grad(Tp)) + Q = 0

constraints
  { constrain temperature integral in region 2 of layer 2 }
  integral(Tp,2,2) = 1

extrusion
  surface "bottom" z = -long
  layer 'lower'
  surface "middle" z=0
  layer 'upper'
  surface 'top' z= long

boundaries
  surface 1 value(Tp)=0   { fix bottom surface temp }
  surface 3 value(Tp)=0   { fix top surface temp }

  Region 1
  layer 1 k=1             { define full domain boundary in base plane }
  layer 2 k=0.1          { bottom right brick }
                        { top right brick }
  start(-wide,-wide)
  value(Tp) = 0          { fix all side temps }
  line to (wide,-wide)  { walk outer boundary in base plane }
  to (wide,wide)
  to (-wide,wide)
  to close

  Region 2 "Left"
  layer 1 k=0.2          { overlay a second region in left half }
  layer 2 k=0.4 flag22=1 { bottom left brick }
                        { top left brick }
  start(-wide,-wide)
  line to (0,-wide)     { walk left half boundary in base plane }
  to (0,wide)
  to (-wide,wide)
  to close

monitors
  contour(Tp) on surface z=0 as "XY Temp"
  contour(Tp) on surface x=0 as "YZ Temp"
  contour(Tp) on surface y=0 as "ZX Temp"
  elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
  elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
  elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp"

plots
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "ZX Temp"

summary
  report("Compare integral forms in region 2 of layer 2 (should be 1.00):")
  report(integral(Tp,"Left","Upper"))
  report(integral(check22))
  report("-----")
  report "Constraint acts as an energy sink:"
  report(integral(Q) as "Source Integral ")

```

```

    report(sintegral(normal(-k*grad(Tp)))) as "Surface integral on total outer surface
    report(integral(Q)-sintegral(normal(-k*grad(Tp)))) as "Energy lost to constraint "
end

```

5.2.7.2 3d_surf_constraint

```
{ 3D_SURF_CONSTRAINT.PDE
```

This problem demonstrates the use of [CONSTRAINTS](#)²³⁸ on surface integrals in 3D. This is a modification of problem [3D_BRICKS.PDE](#)⁴²⁴. We apply the constraint that the total flux leaving the figure must be 1.0. The constraint acts as an auxiliary energy sink, so we report the amount of energy lost to the constraint.

See the problems in the APPLICATIONS | CONTROL folder for methods that control the input power to achieve the same kind of goal.

```
}
```

```
title '3D Surface Constraint'
```

```
select
```

```
  regrid=off { use fixed grid to speed up demonstration }
```

```
coordinates
```

```
  cartesian3
```

```
variables
```

```
  Tp
```

```
definitions
```

```
  long = 1
```

```
  wide = 1
```

```
  K { thermal conductivity -- values supplied later }
```

```
  Q = 10*exp(-x^2-y^2-z^2) { Thermal source }
```

```
initial values
```

```
  Tp = 0.
```

```
equations
```

```
  Tp: div(k*grad(Tp)) + Q = 0 { the heat equation }
```

```
constraints
```

```
  sintegral(normal(k*grad(Tp))) = 1 { force total surface integral to 1 }
```

```
extrusion
```

```
  surface "bottom" z = -long
```

```
    layer 'lower'
```

```
  surface "middle" z=0
```

```
    layer 'upper'
```

```
  surface 'top' z= long { divide z into two layers }
```

```
boundaries
```

```
  surface 1 value(Tp)=0 { fix bottom surface temp }
```

```
  surface 3 value(Tp)=0 { fix top surface temp }
```

```
Region 1
```

```
  layer 1 k=1 { define full domain boundary in base plane }
```

```
  layer 2 k=0.1 { bottom right brick }
```

```
  layer 3 k=0.1 { top right brick }
```

```
  start(-wide,-wide)
```

```
    value(Tp) = 0 { fix all side temps }
```

```
    line to (wide,-wide) { walk outer boundary in base plane }
```

```
    to (wide,wide)
```

```
    to (-wide,wide)
```

```
    to close
```

```
Region 2 "Left" { overlay a second region in left half }
```

```
  layer 1 k=0.2 { bottom left brick }
```

```
  layer 2 k=0.4 { top left brick }
```

```
  start(-wide,-wide)
```

```
    line to (0,-wide) { walk left half boundary in base plane }
```

```
    to (0,wide)
```

```
    to (-wide,wide)
```

```
    to close
```

```

monitors
  contour(Tp) on surface z=0 as "XY Temp"
  contour(Tp) on surface x=0 as "YZ Temp"
  contour(Tp) on surface y=0 as "ZX Temp"
  elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
  elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
  elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp"

plots
  contour(Tp) on surface z=0 as "XY Temp"
  contour(Tp) on surface x=0 as "YZ Temp"
  contour(Tp) on surface y=0 as "ZX Temp"

  summary
  report("Constraint Validation:")
  report(sintegral(normal(k*grad(Tp)))) as "Constrained surface integral on total
outer surface"
  report(integral(Q)) as "Total interior source"
  report(integral(Q) - sintegral(normal(k*grad(Tp)))) as "Energy lost to constraint"

end

```

5.2.7.3 boundary_constraint

```
{ BOUNDARY_CONSTRAINT.PDE
```

This problem demonstrates the use of boundary-integral [CONSTRAINTS](#)²³⁸.

A heat equation is solved subject to the constraint that the average temperature on the outer boundary must be 1.0.

Only natural (derivative) boundary conditions are applied, so the solution is underdetermined subject to an arbitrary additive constant.

The constraint provides the additional information necessary to make the solution unique.

```
}
```

```
title 'Boundary Constraint Test'
```

```
variables
```

```
  u
```

```
equations
```

```
  u: div(grad(u)) + x = 0;
```

```
constraints
```

```
  { force the average boundary value to 1 }
  bintegral(u,"outer") = bintegral(1,"outer")
```

```
boundaries
```

```
  Region 1
  start "outer" (-1,-1)
  natural(u) = 0 line to (1,-1) to (1,1) to (-1,1) to close
```

```
monitors
```

```
  contour(u) report(bintegral(u,"outer"))
```

```
plots
```

```
  contour(u) surface(u)
  elevation(u) on "outer" report(bintegral(u,"outer")/bintegral(1,"outer")) as
```

```
"Average"
```

```
  summary
```

```
  report("Constraint Validation:")
  report(bintegral(u,"outer")/bintegral(1,"outer")) as "Average boundary value"
```

```
end
```

5.2.7.4 constraint

```

{ CONSTRAINT.PDE

  This problem shows the use of CONSTRAINTS[238] to resolve an ill-posed problem.
  There are no value boundary conditions in any of the three equations, so
  there are infinitely many solutions that satisfy the PDE's. The constraints
  select from the family of solutions those which have a mean value of 1.

}

title 'Constraint Test'

variables
  u1 u2 u3

equations
  u1: div(grad(u1)) +x = 0
  u2: div(grad(u2)) +x+y = 0
  u3: div(grad(u3)) +y = 0

constraints
  integral(u1) = integral(1)
  integral(u2) = integral(1)
  integral(u3) = integral(1)

boundaries
  Region 1
  start(-1,-1) line to (1,-1) to (1,1) to (-1,1) to close

monitors
  contour(u1)
  contour(u2)
  contour(u3)

plots
  contour(u1) report(integral(u1)/integral(1)) as "Average"
  contour(u2) report(integral(u2)/integral(1)) as "Average"
  contour(u3) report(integral(u3)/integral(1)) as "Average"
  surface(u1) report(integral(u1)/integral(1)) as "Average"
  surface(u2) report(integral(u2)/integral(1)) as "Average"
  surface(u3) report(integral(u3)/integral(1)) as "Average"

end

```

5.2.8 Contact_Boundaries

5.2.8.1 3d_contact

```

{ 3D_CONTACT.PDE

  This problem shows the use of a contact resistance boundary between layers in 3D.
  The resistance model is applied to the entire boundary surface.

  See 3D\_CONTACT\_REGION.PDE[552] for restriction of the resistance model to a single
  region.
  (This is a modification of problem 3D\_BRICKS.PDE[424]).

```

```

e = 0.01                                { 'epsilon' offset to avoid plotting on discontinuities }

initial values
  Tp = 0.

equations
  Tp : div(k*grad(Tp)) + Q = 0 { the heat equation }

extrusion z = -long,0,long              { divide Z into two layers }

boundaries
  surface 1 value(Tp)=0                  { fix bottom surface temp }
  surface 2 contact(tp)=jump(tp)/10     { THE CONTACT RESISTANCE }
  surface 3 value(Tp)=0                  { fix top surface temp }

  Region 1                                { define full domain boundary in base plane }
  layer 1 k=1                             { bottom right brick }
  layer 2 k=0.1                           { top right brick }
  start(-wide,-wide)
  value(Tp) = 0                           { fix all side temps }
  line to (wide,-wide)                    { walk outer boundary in base plane }
  to (wide,wide)
  to (-wide,wide)
  to close

  Region 2                                { overlay a second region in left half }
  layer 1 k=0.2                             { bottom left brick }
  layer 2 k=0.4                             { top left brick }
  start(-wide,-wide)
  line to (0,-wide)                       { walk left half boundary in base plane }
  to (0,wide)
  to (-wide,wide)
  to close

monitors
  contour(Tp) on z=e as "XY Temp - Upper"
  contour(Tp) on z=-e as "XY Temp - Lower"
  contour(Tp) on x=e as "YZ Temp"
  contour(Tp) on y=e as "ZX Temp"
  elevation(Tp) from (-wide,e,e) to (wide,e,e) as "X-Axis Temp"
  elevation(Tp) from (e,-wide,e) to (e,wide,e) as "Y-Axis Temp"
  elevation(Tp) from (e,e,-long) to (e,e,long) as "Z-Axis Temp"

plots
  contour(Tp) on z=e as "XY Temp - Upper"
  contour(Tp) on z=-e as "XY Temp - Lower"
  contour(Tp) on x=e as "YZ Temp"
  contour(Tp) on y=e as "ZX Temp"
  surface(Tp) on y=e as "ZX Temp"
  elevation(Tp) from (-wide,e,e) to (wide,e,e) as "X-Axis Temp"
  elevation(Tp) from (e,-wide,e) to (e,wide,e) as "Y-Axis Temp"
  elevation(Tp) from (e,e,-long) to (e,e,long) as "Z-Axis Temp"

end

```

5.2.8.2 3d_contact_region

```
{ 3D_CONTACT_REGION.PDE
```

This problem shows the use of a contact resistance boundary between layers. The resistance model is applied only to one region of the boundary surface. (This is a modification of problem [3D_CONTACT.PDE](#)^[554]).

```
}
```

```
title 'steady-state 3D heat conduction with Contact Resistance'
```

```
select
  regrid=off { use fixed grid }
```

```
coordinates
  cartesian3
```

```
variables
  Tp
```

```

definitions
  long = 1
  wide = 1
  K { thermal conductivity -- values supplied later }
  Q = 10*exp(-x^2-y^2-z^2) { Thermal source }

initial values
  Tp = 0.

equations
  Tp : div(k*grad(Tp)) + Q = 0 { the heat equation }

extrusion z = -long,0,long { divide z into two layers }

boundaries
  surface 1 value(Tp)=0 { fix bottom surface temp }
  surface 3 value(Tp)=0 { fix top surface temp }

  Region 1 { define full domain boundary in base plane }
  layer 1 k=1 { bottom right brick }
  layer 2 k=0.1 { top right brick }
  start(-wide,-wide)
  value(Tp) = 0 { fix all side temps }
  line to (wide,-wide) { walk outer boundary in base plane }
  to (wide,wide)
  to (-wide,wide)
  to close

  Region 2 { overlay a second region in left half }
  { CONTACT RESISTANCE IN REGION 2 ONLY: }
  surface 2 contact(tp)=jump(tp)/10
  layer 1 k=0.2 { bottom left brick }
  layer 2 k=0.4 { top left brick }
  start(-wide,-wide)
  line to (0,-wide) { walk left half boundary in base plane }
  to (0,wide)
  to (-wide,wide)
  to close

monitors
  contour(Tp) on z=0.01 as "XY Temp - Upper"
  contour(Tp) on z=-0.01 as "XY Temp - Lower"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "ZX Temp"
  elevation(Tp) from (-wide/2,0,-long) to (wide/2,0,long) as "Left Side Temp"

plots
  contour(Tp) on z=0.01 as "XY Temp - Upper"
  contour(Tp) on z=-0.01 as "XY Temp - Lower"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "ZX Temp"
  elevation(Tp) from (-wide/2,0,-long) to (-wide/2,0,long) as "Left Side Temp"
  surface(Tp) on y=0 as "ZX Temp" Viewpoint(-3.5,8.2,31)

end

```

5.2.8.3 contact_resistance_heating

```
{ CONTACT_RESISTANCE_HEATING.PDE
```

Contact resistance is modeled using the keywords [JUMP](#)^[25b] and [CONTACT](#)^[30h].

[JUMP](#)^[25b] represents the "jump" in the value of a variable across an interface (outer value minus inner value, as seen from each cell), and is meaningful only in boundary condition statements.

[CONTACT](#)^[30h] is a special form of [NATURAL](#)^[25h], which requests that the boundary should support a discontinuous value of the variable.

The model is one of "contact resistance", where the outward current across an interface is given by

$$R \cdot I = -\text{Jump}(V) [= (V_{\text{inner}} - V_{\text{outer}})],$$

and R is the contact resistance.

Since CONTACT, like NATURAL, represents the outward normal component of the argument of the divergence operator, the contact resistance condition

for this problem is represented as
 $\text{CONTACT}(V) = \text{JUMP}(\text{Temp})/R$


In this problem, we have two variables, voltage and temperature.
 There is an electrical contact resistance of 2 units at the interface between
 two halves, causing a jump in the voltage across the interface.

The current through the contact is a source of heat in the temperature equation,
 of value $P = R \cdot I^2 = \text{Jump}(V)^2/R$

```

}
title "contact resistance heating"
variables
  V
  Temp
definitions
  Kt      { thermal conductivity }
  Heat = 0
  Rc = 2   { Electrical contact resistance }
  rho = 1  { bulk resistivity }
  sigma = 1/rho { bulk conductivity,
I=sigma*grad(V) }
  temp0=0
  size = 3
  V1 = 1
  totR = size*rho+Rc
  cur = V1/totR
  jdrop = cur*Rc
initial values
  Temp = temp0
equations
  V:      div(sigma*grad(V)) = 0
  Temp:   div(Kt*grad(Temp)) + Heat =0
boundaries
  Region "R1"
  Kt=5
  start 'box' (0,0)
  natural(V)=0 natural(temp)=0 line to (size,0)
  value(V)=V1 value(temp)=0 line to (size,size)
  natural(V)=0 natural(temp)=0 line to (0,size)
  value(V)=0 value(temp)=0 line to close
  Region "R2"
  Kt=1
  start (0,0)
  line to (size/2,0)
  contact(V) = (1/Rc)*JUMP(V) { resistance jump }
  natural(temp) = JUMP(V)^2/Rc { heat generation }
  line to(size/2,size)
  natural(V)=0
  natural(Temp)=0
  line to (0,size) to close
  Feature 'interface' start (size/2,0) line to (size/2,size)
monitors
  contour(Temp)
plots
  grid(x,y)
  contour(V) painted
  contour(Temp) painted
  surface(Temp)
  contour(Kt*dx(temp)) painted
  contour(Kt*dx(temp)) painted
  elevation(V) from(0,1.5) to (3,1.5)
  elevation(temp) from(0,1.5) to (3,1.5)
  elevation(dx(V)) from(0,1.5) to (3,1.5)
  elevation(Kt*dx(temp)) from(0,1.5) to (3,1.5)

```

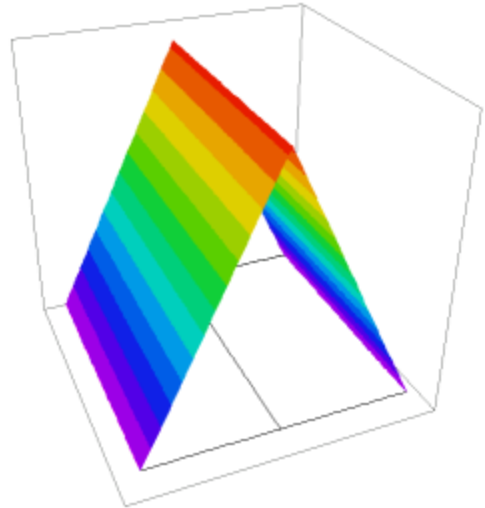

```

summary
report(sintegral(v,'interface','R1')/size) ! find average interface voltage in
region 1
report(sintegral(v,'interface','R2')/size) ! find average interface voltage in
region 2
report(sintegral(jump(v)^2/rc,'interface')) as "contact source"
report(sintegral(normal(kt*grad(temp)),'box')) as "outer loss"
report(size*(jdrop)^2/Rc) as "true heat"

end

```

5.2.8.4 thermal_contact_resistance

```
{ THERMAL_CONTACT_RESISTANCE.PDE
```

This sample demonstrates the application of FlexPDE to heatflow problems with contact resistance between materials.

We define a square region of material with a conductivity of 5. Imbedded in this square is a diamond-shaped region of material with a uniform heat source of 1, and a conductivity of 1.

There is a contact resistance of 1/2 unit between the materials.

Contact resistance is modeled using the keywords [JUMP](#)^[25b] and [CONTACT](#)^[30h].

[JUMP](#)^[25b] represents the "jump" in the value of a variable across an interface (outer value minus inner value, as seen from each cell), and is meaningful only in boundary condition statements.

[CONTACT](#)^[30h] is a special form of [NATURAL](#)^[25h], which requests that the boundary should support a discontinuous value of the variable.

The model is one of "contact resistance", where the flux across an interface is given by $\text{flux}(\text{Temp}) = -\text{Jump}(\text{Temp})/R$, and R is the contact resistance.


Since [CONTACT](#), like [NATURAL](#), represents the outward normal component of the argument of the divergence operator, the contact resistance condition is represented as

$$\text{CONTACT}(\text{Temp}) = -\text{JUMP}(\text{Temp})/R$$

```

}
title "Thermal Contact Resistance"
variables
Temp
definitions
{ thermal conductivity - values given in regions:
}
K
Heat { Heat source }
Flux = -K*grad(Temp)
Rc = 1/2 { contact resistance }
initial values
Temp = 0
equations
Temp: div(Flux) = Heat
boundaries
Region 1 { the outer boundary }
K=5
Heat=0
start "Outer" (0,0)
value(Temp)=0 { cold boundary }
line to (3,0) to (3,3) to (0,3) to close
Region 2 { an imbedded diamond }
K=1
Heat=1 { heat source in the inner diamond }

```

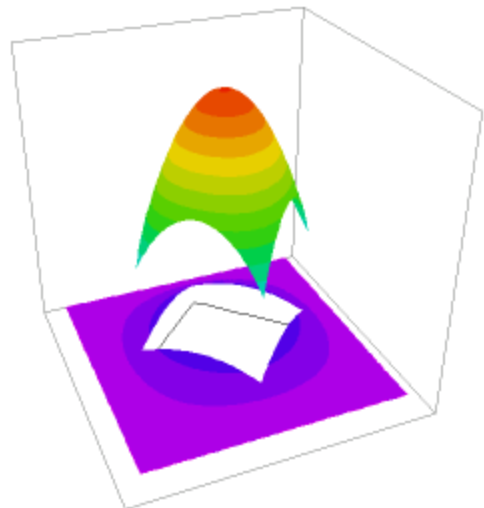


```

    start "Inner" (1.5,0.5)
    contact(Temp) = -JUMP(Temp)/Rc { the contact flux }
    line to (2.5,1.5) to (1.5,2.5) to (0.5,1.5) to close
monitors
  contour(Temp)
plots
  grid(x,y)
  contour(Temp) as "Temperature"
  contour(magnitude(grad(temp))) points=5 as "Flux"

  contour(Temp) zoom(2,1,1,1) as "Temperature Zoom"
  elevation(Temp) from (0,0) to (3,3)

  surface(Temp)
  surface(Temp) zoom(2,1,1,1)
  vector(-dx(Temp),-dy(Temp)) as "Heat Flow"

  elevation(normal(flux)) on "Outer"
  elevation(normal(flux)) on "Inner"
end

```

5.2.8.5 transient_contact_resistance_heating

```
{ TRANSIENT_CONTACT_RESISTANCE_HEATING.PDE
```

This is a time-dependent version of the example [CONTACT_RESISTANCE_HEATING.PDE](#) ⁵⁵³

An electrical current passes through a material with an electrical contact resistance on the center plane. The resistance heating at the contact drives a time-dependent heat equation.

```
}
```

```
title "transient contact resistance heating"
```

```
variables
```

```
V
Temp(0.001)
```

```
definitions
```

```
Kt { thermal conductivity }
Heat =0
Rc = 2 { Electrical contact resistance }
```

```
rho = 1 { bulk resistivity }
sigma = 1/rho { bulk conductivity,
I=sigma*grad(V) }
```

```
Initial values
```

```
V = x/3 { a reasonable guess }
Temp = 0
```

```
equations
```

```
V: div(sigma*grad(V)) = 0
Temp: div(Kt*grad(Temp)) + Heat = dt(Temp)
```


```
boundaries
```

```
Region 1
```

```
Kt=15
start (0,0)
natural(V)=0 natural(temp)=0 line to (3,0)
value(V)=1 value(temp)=0 line to (3,3)
natural(V)=0 natural(temp)=0 line to (0,3)
value(V)=0 value(temp)=0 line to close
```

```
Region 2
```

```
Kt=5
start (0,0) line to (1.5,0)
contact(V) = (1/rc)*JUMP(V) { resistance jump }
natural(temp) = JUMP(V)^2/Rc { heat generation }
line to(1.5,3)
```

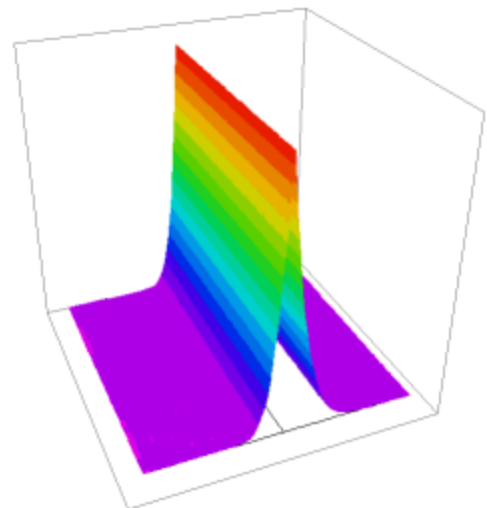

```

        natural(v)=0  natural(Temp)=0
        line to (0,3) to close

time 0 to 5 by 1e-6

monitors
  for cycle=5
    contour(Temp)

plots
  for cycle=20
    grid(x,y)
    contour(v)      painted
    contour(Temp)   painted
    surface(Temp)
    contour(kt*dx(temp))  painted
    contour(kt*dx(temp))  painted
    elevation(v) from(0,1.5) to (3,1.5)
    elevation(temp) from(0,1.5) to (3,1.5)
    elevation(dx(v)) from(0,1.5) to (3,1.5)
    elevation(kt*dx(temp)) from(0,1.5) to (3,1.5)
  histories
    history(Temp) at (0.5,1.5) (1.0,1.5) (1.5,1.5) (2.0,1.5) (2.5,1.5)

end

```

5.2.9 Coordinate_Scaling

5.2.9.1 scaled_z

```
{ SCALED_Z.PDE
```

This example applies a 10:1 expansion to the z coordinate in a single imbedded layer. Compare solution to [UNSCALED_Z.PDE](#)^[559], which does not scale the z-coordinate.

See "[Help->Technical Notes->Coordinate Scaling](#)"^[360] for a discussion of the techniques used in this example.

```
}
```

```
title 'Scaled z-coordinate'
```

```
coordinates
  cartesian3
```

```
variables
```

```
  Tp
  Zs
```

```
definitions
```

```
  long = 1/2      { thickness of the upper and lower layers }
  wide = 1
  w=0.01         { half-thickness of the imbedded slab }
  zscale=1       { The global Z-scaling factor, defaulted to 1 for top and bottom
```

```
layers }
```

```
  zscale2=20     { The desired Z-scaling factor for the center layer }
  ws = w*zscale2 { the scaled half-thickness of the slab }
```

```
  K =0.1         { thermal conductivity -- modified later by layer }
  Q = 0           { Thermal source - modified later by layer }
  T0 = 0
```

```
initial values
```

```
  Tp = 0.
```

```
equations
```

```
{ equations are written using the global scaling factor name.
  Layer-specific values will be assigned during evaluation }
  Tp: dx(k*dx(Tp))/zscale + dy(k*dy(Tp))/zscale + dz(k*zscale*dz(Tp)) + Q/zscale = 0
```

```
then
```

```
  Zs: dz(Zs) = 1/zscale
```

```
extrusion
```

```
  surface 'bottom' z = -long-ws
  layer 'under'
```

```

surface 'slab_bottom' z = -ws
layer 'slab'
surface 'slab_top' z= ws
layer 'over'
surface 'top' z= long+ws

boundaries
surface 'bottom' load(Tp)=0.1*(T0-Tp) value(Zs)=0
surface 'top' load(Tp)=0.1*(T0-Tp)

Region 1
layer 2
Q = 100*exp(-x^2-y^2) { a heat source in the slab layer only }
zscale = zscale2 { redefine the Z-scaling factor in layer 2 }
k = 1 { redefine conductivity in layer 2 }
start 'sidewall' (-wide,-wide)
load(Tp) = 0
layer 2 load(Tp)=0.1*(T0-Tp)/zscale2
line to (wide,-wide)
to (wide,wide)
to (-wide,wide)
to close

monitors
contour(Tp) on z=0 as "XY Temp"
contour(Tp) on x=0 as "YZ Temp unscaled"
contour(Tp) on y=0 as "ZX Temp unscaled"
contour(Tp) on grid(y,zs) on x=0 as "YZ Temp scaled"
contour(Tp) on grid(x,zs) on y=0 as "ZX Temp scaled"

plots
contour(Zs) on x=0 !temp
contour(Tp) on z=0 as "XY Temp"
contour(Tp) on x=0 as "YZ Temp unscaled"
contour(Tp) on y=0 as "ZX Temp unscaled"
contour(Tp) on grid(y,zs) on x=0 as "YZ Temp scaled"
contour(Tp) on grid(x,zs) on y=0 as "ZX Temp scaled"
elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
elevation(Tp) from (0,0,-long-ws) to (0,0,long+ws) as "Z-Axis Temp"
vector(-k*dx(Tp),-k*dz(Tp)) on y=0 as "Flux on Y=0"
vector(-k*dx(Tp),-k*dy(Tp)) on z=0 as "Flux on Z=0"
{ since "k" refers to energy passing a through unit surface area in the unscaled
system,
it's value is unmodified: }
elevation(k*dx(Tp)) from (-wide,0,0) to (wide,0,0) as "Center X-Flux"
{ since differentiation with respect to z involves a scaling, the flux must be
multiplied by
the scale factor: }
elevation(k*dz(Tp)*zscale) from (0,0,-(long+ws)) to (0,0,(long+ws)) as "Center Z-
Flux"

SUMMARY
{ form some integrals for comparison with Unscaled_Z: }
{ the Z flux derivative must be multiplied by the scale factor, but the area of
integration
is in true coordinates }
{ flux leaving the slab, evaluated in the slab: }
report(sintegral(-k*zscale2*dz(Tp),'slab_top','slab'))
{ flux leaving the slab, evaluated in the upper layer: }
report(sintegral(-k*1*dz(Tp),'slab_top','over'))
report("--")
{ The transverse fluxes are in the correct units, but the area integration must
be
corrected by dividing by the scale factor (notice that "zscale" will evaluate
to
"zscale2" in the slab)}
report(sintegral(-normal(k*grad(Tp))/zscale,'sidewall','slab'))

end

```

5.2.9.2 unscaled_z

```

{ UNSCALED_Z.PDE
  This is a reference problem for SCALED\_Z.PDE[557].
  It solves for heatflow in a sandwich.
}

title 'Unscaled Z coordinate'

coordinates
  cartesian3

variables
  Tp

definitions
  long = 1/2 { thickness of the upper and lower layers }
  wide = 1
  w=0.01 { half-thickness of the imbedded slab }

  K =0.1 { thermal conductivity -- modified later by layer }
  Q = 0 { Thermal source - modified later by layer }
  T0 = 0

initial values
  Tp = 0.

equations { the heat equation }
  Tp: dx(k*dx(Tp)) + dy(k*dy(Tp)) + dz(k*dz(Tp)) + Q = 0

extrusion
  surface 'bottom' z = -long-w
  layer 'under'
  surface 'slab_bottom' z = -w
  layer 'slab'
  surface 'slab_top' z= w
  layer 'over'
  surface 'top' z= long+w

boundaries
  surface 'bottom' load(Tp)=0.1*(T0-Tp)
  surface 'top' load(Tp)=0.1*(T0-Tp)

Region 1
  layer 2
  Q = 100*exp(-x^2-y^2) { a heat source in the slab layer only }
  k = 1 { redefine conductivity in layer 2 }
  start 'sidewall' (-wide,-wide)
  load(Tp) = 0
  layer 2 load(Tp) = 0.1*(T0-Tp)
  line to (wide,-wide)
  to (wide,wide)
  to (-wide,wide)
  to close

monitors
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "ZX Temp"

plots
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "ZX Temp"
  elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
  elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
  elevation(Tp) from (0,0,-long-w) to (0,0,long+w) as "Z-Axis Temp"
  vector(-k*dx(Tp),-k*dz(Tp)) on y=0 as "Flux on Y=0"
  vector(-k*dx(Tp),-k*dy(Tp)) on z=0 as "Flux on Z=0"
  elevation(k*dx(Tp)) from (-wide,0,0) to (wide,0,0) as "Center X-Flux"
  elevation(k*dz(Tp)) from (0,0,-(long+w)) to (0,0,(long+w)) as "Center Z-Flux"
SUMMARY
  { form some integrals for comparison with scaled_z: }
  report(sintegral(-k*dz(Tp),'slab_top','slab'))
  report(sintegral(-k*dz(Tp),'slab_top','over'))

```

```

report("--")
report(sintegral(-normal(k*grad(Tp)), 'sidewall', 'slab'))
end

```

5.2.10 Eigenvalues

5.2.10.1 3d_oildrum

```

{ 3D_OILDRUM.PDE
*****
This example illustrates the use of FlexPDE in Eigenvalue problems, or
Modal Analysis.
*****

In this problem, we determine the four lowest-energy vibrational modes of
a circular cylinder, or "oil drum", clamped on the periphery.

What we see as results are the pressure distributions of the air inside the
drum.

The three-dimensional initial-boundary value problem associated with the
scalar wave equation for sound speed "c" can be written as

$$c^2 \text{del}^2(u) - \text{dtt}(u) = 0,$$

with accompanying initial values and boundary conditions:

$$u = f(s,t) \quad \text{on some part } S1 \text{ of the boundary}$$


$$\text{dn}(u) + a*u = g(s,t) \quad \text{on the remainder } S2 \text{ of the boundary.}$$


If we assume that solutions have the form

$$u(x,y,z,t) = \exp(i*w*t)*v(x,y,z)$$

(where "w" is a frequency) then the equation becomes

$$\text{del}^2(v) + \text{lambda}*v = 0$$

with  $\text{lambda} = (w/c)^2$ , and with boundary conditions

$$v = 0 \quad \text{on } S1$$


$$\text{dn}(v) + a*v = 0 \quad \text{on } S2.$$


The values of lambda for which this system has a non-trivial solution
are known as the eigenvalues of the system, and the corresponding solutions
are known as the eigenfunctions or vibration modes of the system.

}

title "Vibrational modes of an Oil Drum"
coordinates cartesian3
select
  modes=4 { Define the number of vibrational modes desired.
            The appearance of this selector tells FlexPDE
            to perform an eigenvalue calculation, and to
            define the name LAMBDA to represent the eigenvalues }
  ngrid=6 { reduced mesh density for demo }
  cell_limit = 3000 { keep problem small for demo }

Variables
  u


equations { the eigenvalue equation }
  u: div(grad(u)) + lambda*u = 0

{ define the bounding z-surfaces }
extrusion z = -1,1

boundaries
{ clamp the bottom and top faces }
surface 1 value(u) = 0
surface 2 value(u) = 0
{ define circular sidewall }
Region 1
  start(0,-1)
  value(u) = 0 { clamp the sides }
  arc(center=0,0) angle 360

monitors { repeated for all modes }

```

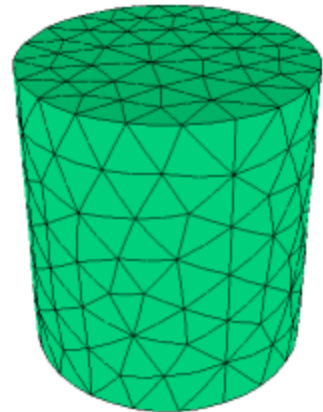

```

contour(u) on x=0
contour(u) on y=0
contour(u) on z=1/2

plots
contour(u) on x=0 { repeated for all modes }
contour(u) on y=0 surface(u) on x=0
contour(u) on z=1/2 surface(u) on y=0
contour(u) on z=1/2 surface(u) on z=1/2
end

```



5.2.10.2 3d_plate

```
{ 3D_PLATE.PDE
```

```

This problem considers the oscillation modes of a glass plate in space
( no mountings to constrain motion ).
-- Submitted by John Trenholme, Lawrence Livermore Nat'l Lab.

```

```
}
```

```
TITLE 'Oscillation of a Glass Plate'
```

```
COORDINATES
cartesian3
```

```
SELECT
modes = 5
ngrid=10
errlim = 0.01 { 1 percent is good enough }
```

```
VARIABLES
U { X displacement }
V { Y displacement }
W { Z displacement }
```

```
DEFINITIONS
cm = 0.01 { converts centimeters to meters }
```

```

long = 20*cm { length of plate along Y axis }
wide = 10*cm { width of plate along X axis }
thick = 1.2*cm { thickness of plate along Z
axis }
```

```

E = 50e9 { Youngs modulus in Pascals }
nu = 0.256 { Poisson's ratio }
rho = 2500 { density in kg/m^3 =
1000*[g/cc] }
```

```
{ constitutive relations - isotropic material }
```

```

G = E/((1+nu)*(1-2*nu))
C11 = G*(1-nu) C12 = G*nu C13 = G*nu
C22 = G*(1-nu) C23 = G*nu C33 = G*(1-nu)
C44 = G*(1-2*nu)/2

```

```
{ Strains }
```

```

ex = dx(U) ey = dy(V) ez = dz(W)
gxy = dy(U) + dx(V) gyz = dz(V) + dy(W) gzx = dx(W) + dz(U)


```

```
{ Stresses }
```

```

Sx = C11*ex + C12*ey + C13*ez
Sy = C12*ex + C22*ey + C23*ez
Sz = C13*ex + C23*ey + C33*ez
Txy = C44*gxy Tyz = C44*gyz Tzx = C44*gzx

```

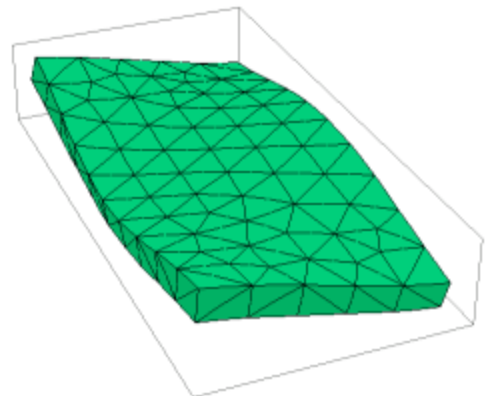

```

{ find mean Y and Z translation and X rotation }
Vol = Integral(1)

{ scaling factor for displacement plots }
Mt =0.1*globalmax(magnitude(x,y,z))/globalmax(magnitude(U,v,w))

INITIAL VALUES
U = 1.0e-5    V = 1.0e-5    W = 1.0e-5

EQUATIONS
{ we assume sinusoidal oscillation at angular frequency omega =sqrt(lambda) }
U: dx(Sx) + dy(Txy) + dz(Tzx) + lambda*rho*U = 0 { X-displacement equation }
V: dx(Txy) + dy(Sy) + dz(Tyz) + lambda*rho*V = 0 { Y-displacement equation }
W: dx(Tzx) + dy(Tyz) + dz(Sz) + lambda*rho*W = 0 { Z-displacement equation }

CONSTRAINTS
integral(U)=0 { eliminate translations }
integral(V)=0
integral(W)=0
integral(dx(V)-dy(U)) = 0 { eliminate rotations }
integral(dy(W) - dz(V)) = 0
integral(dz(U) - dx(W)) = 0

EXTRUSION
surface "bottom" z = -thick / 2
layer "plate"
surface "top" z = thick / 2

BOUNDARIES
region 1 { all sides, and top and bottom, are free }
start( -wide/2, -long/2 )
line to ( wide/2, -long/2 )
line to ( wide/2, long/2 )
line to ( -wide/2, long/2 )
line to close

MONITORS
grid(x+Mt*U,y+Mt*V,z+Mt*W) as "Shape"
report sqrt(lambda)/(2*pi) as "Frequency in Hz"

PLOTS
contour( W ) on z = 0 as "Mid-plane Displacement"
report sqrt(lambda)/(2*pi) as "Frequency in Hz"
grid(x+Mt*U,y+Mt*V,z+Mt*W) as "Shape"
report sqrt(lambda)/(2*pi) as "Frequency in Hz"

summary
report lambda
report sqrt(lambda)/(2*pi) as "Frequency in Hz"

END

```

5.2.10.3 drumhead

```

{ DRUMHEAD.PDE
*****
This example illustrates the use of FlexPDE in Eigenvalue problems, or
Modal Analysis.
*****

The two-dimensional initial-boundary value problem associated with the
scalar wave equation can be written as

$$c^2 \text{del}^2(u) - \text{dtt}(u) = 0$$

with accompanying initial values and boundary conditions

$$u = f(s,t) \quad \text{on } S1$$


$$\text{dn}(u) + a*u = g(s,t) \quad \text{on } S2.$$


If we assume that solutions have the form

$$u(x,y,t) = \exp(i*w*t)*v(x,y)$$

then the equation becomes

$$\text{del}^2(v) + \text{lambda}*v = 0$$

with  $\text{lambda} = (w/c)^2$ , and with boundary conditions

$$v = 0 \quad \text{on } S1$$


$$\text{dn}(v) + a*v = 0 \quad \text{on } S2.$$


```

The values of lambda for which this system has a non-trivial solution are known as the eigenvalues of the system, and the corresponding solutions are known as the eigenfunctions or vibration modes of the system.

In this problem, we determine the eight lowest-energy vibrational modes of a circular drumhead, clamped on the periphery.

This problem can be solved analytically. The solutions are of the form

$$v = J_n(r*j_{nm}) * \exp(i*n*\theta),$$
 where J_n is the Bessel function of order n ,
 j_{nm} is the m -th root of J_n .

The eigenvalues are then just the sequence of j_{nm}^2 . In increasing order :
 5.783186, 14.68197, 14.68197, 26.37459, 26.37459, 30.471262, 40.70644, 40.70644

With default errlim, FlexPDE in the current test gives results within 0.01%
 }

title "Vibrational modes of a drumhead"

```
select
  { Define the number of vibrational modes desired.
    The appearance of this selector tells FlexPDE
    to perform an eigenvalue calculation }
  modes=8
```

Definitions

```
ecorrect = ARRAY(5.783186, 14.68197, 14.68197, 26.37459, 26.37459, 30.471262,
40.70644, 40.70644)
```

Variables

u

```
equations { the eigenvalue equation }
u: div(grad(u)) + lambda*u = 0
```

boundaries

```
Region 1
  start(0,-1)
  value(u) = 0
  arc(center=0,0) angle 360
```


```
monitors { repeated for all modes }
  contour(u)
```

```
plots { repeated for all modes }
```

```
  contour(u)
  surface(u)
  summary
  report(lambda) report(ecorrect[mode]) as "
```

true"

end

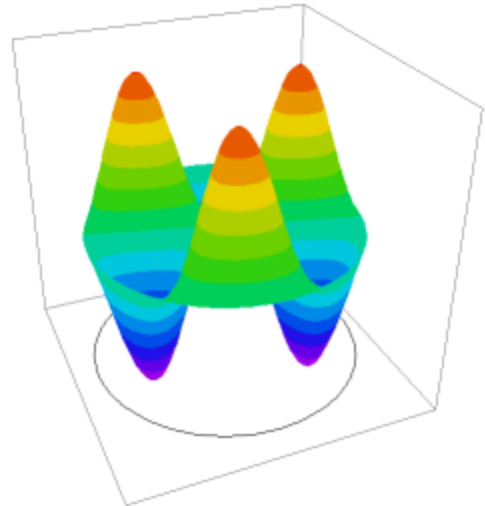

5.2.10.4 drumhole

```
{ DRUMHOLE.PDE
```

```
*****
This example is a modification of DRUMHEAD.PDE562, in which
the vibrating membrane has a circular hole.
*****
```

```
}
```

title "Vibrational modes of a drumhead with a hole"

```
select
  modes=8 { Define the number of vibrational modes desired.
            The appearance of this selector tells FlexPDE
            to perform an eigenvalue calculation }
```



```

Definitions
  enohole = ARRAY(5.783186, 14.68197, 14.68197, 26.37459, 26.37459, 30.471262,
40.70644, 40.70644)

variables
  u

equations
  { the eigenvalue equation }
  u: div(grad(u)) + lambda*u = 0

boundaries
  Region 1
    start(0,-1)
    value(u) = 0
    arc(center=0,0) angle 360
    start(0,-0.4)
    natural(u)=0
    arc(center=0,-0.2) angle=360

monitors
  { repeated for all modes }
  contour(u)

plots
  { repeated for all modes }
  contour(u)
  surface(u)
  transfer(lambda,u) file="ur"

  summary
    report(lambda) report(enohole[mode]) as " No Hole"

end

```

5.2.10.5 drumhole_animate

```

{ DRUMHOLE_ANIMATE.PDE

  *****
  This example reads the stored output from Drumhole.pde
  and shows the time-dependent oscillation of the first six modes.
  The output .PG8 file can then be opened to export the desired plots using the "View-
  >Export Movie" command.
  These plots can be imported to a utility like APNGASM_GUI to create an animated PNG
  file.
  *****
}
title "Vibrational modes of a drumhead with a hole"

definitions
! read the transfer files from drumhole.pde
transfer("drumhole_output\ur_mode1",f1,ur1)
transfer("drumhole_output\ur_mode2",f2,ur2)
transfer("drumhole_output\ur_mode3",f3,ur3)
transfer("drumhole_output\ur_mode4",f4,ur4)
transfer("drumhole_output\ur_mode5",f5,ur5)
transfer("drumhole_output\ur_mode6",f6,ur6)

! find the lowest frequency
fmin = min(min(f1,f2,f3),min(f4,f5,f6))

! set the run length and time interval
! Here we have created 50 plots of each mode, spanning one full cycle at the lowest
frequency.
t0 = 0
tlast = 2*pi/fmin
tdelt = (tlast-t0)/50

boundaries
! build the plot domain
Region 1
  start(0,-1)
  arc(center=0,0) angle 360

```

```

        start(0,-0.4)
        arc(center=0,-0.2) angle=360

! define the time range
time t0 by tdelt to tlast

! plot the oscillating drum membranes
plots
  for cycle=1
    surface(ur1*cos(f1*t)) fixed range(-1,1) report(f1) as "frequency"
    surface(ur2*cos(f2*t)) fixed range(-1,1) report(f2) as "frequency"
    surface(ur3*cos(f3*t)) fixed range(-1,1) report(f3) as "frequency"
    surface(ur4*cos(f4*t)) fixed range(-1,1) report(f4) as "frequency"
    surface(ur5*cos(f5*t)) fixed range(-1,1) report(f5) as "frequency"
    surface(ur6*cos(f6*t)) fixed range(-1,1) report(f6) as "frequency"
    ! plot the combined mode 1 and mode 6 oscillation
    surface(0.5*ur1*cos(f1*t)+0.5*ur6*cos(f6*t)) fixed range(-1,1) as "Mode1 + Mode6"
  end "

```

5.2.10.6 filledguide

```

{ FILLEDGUIDE.PDE

  This problem models an inhomogeneously filled waveguide.
  See discussion in Help section "Electromagnetic Applications | Waveguides"[338].

  This problem is taken from Fernandez and Lu,
  "Microwave and Optical Waveguide Analysis by the Finite Element Method" page 138.
}

title "Filled waveguide"

select
  modes = 5      { This is the number of Eigenvalues desired. }
  ngrid = 30
  overshoot = 1e-9 { request very tight Conjugate Gradient convergence }

variables
  Hx(0.01)      ! some eigenfunctions are zero, so apply a threshold
  Hy(0.01)      ! ... to avoid infinite regrid

definitions
  cm = 0.01      ! conversion from cm to meters
  b = 1*cm      ! box height
  L = 2*b        ! box width
  epsr          ! values will be given by region
  epsr1=1
  epsr2=1.5
  eps0 = 8.85e-12
  mu0 = 4e-7*pi
  c = 1/sqrt(mu0*eps0) ! light speed
  k0b = 4        ! normalized driving frequency
  k0 = k0b/b
  k02 = k0^2     ! k0^2=omega^2*mu0*eps0

! terms used in equations and BC's
curlh = dx(Hy)-dy(Hx)
divh = dx(Hx)+dy(Hy)

! the solution generates some negative eigenvalues, so we shift the eigenvalues to a
range where only the
! positive values appear
shift = 200000
shifted_lambda=lambda+shift

! extract the propagation wave number kz
kz = if(shifted_lambda>0)then sqrt(shifted_lambda) else -sqrt(abs(shifted_lambda))

```

```

equations
! Hx equation multiplied by epsr to enforce continuity of Hz
Hx: dx(divh) - dy(curlh) + k02*Hx*epsr - (lambda+shift)*Hx = 0
Hy: dx(curlh/epsr) + dy(divh)/epsr + k02*Hy - (lambda+shift)*Hy/epsr = 0

boundaries
region 1 epsr=epsr1
start(0,0)
natural(Hx) = 0 value(Hy)=0
line to (L,0)
value(Hx) = 0 value(Hy)=0 natural(Hy)=0
line to (L,b)
natural(Hx) = 0 value(Hy)=0
line to (0,b)
value(Hx) = 0 natural(Hy)=0
line to close

region 2 epsr=epsr2
start(b,b)
line to (0,b) to (0,0) to (b,0)
line to close

monitors
contour(Hx) range=(-1,1)
contour(Hy) range=(-1,1)

plots
contour(Hx) range=(-1,1) report(k0) report(kz)
surface(Hx) range=(-1,1) report(k0) report(kz)
contour(Hy) range=(-1,1) report(k0) report(kz)
surface(Hy) range=(-1,1) report(k0) report(kz)
surface(divh) range=(-1,1) as "Hz" report(k0) report(kz)
surface(curlh/epsr) range=(-1,1) as "Ez" report(k0) report(kz)

summary export
font=50 ! lines per page
report lambda
report shift
report shifted_lambda as "Shifted"
report(k0)
report(kz)
report(kz/k0)

end

```

5.2.10.7 shiftguide

```

{ SHIFTGUIDE.PDE

This problem demonstrates the technique of eigenvalue shifting to select
an eigenvalue band for analysis. Compare these results to the problem
waveguide20, and you will see that the negative modes here correspond to
the modes below the shift value, while the positive modes here correspond
to the modes above the shift value. The result modes in the shifted calculation
comprise a complete range of the unshifted modes. (The correspondence is
1:9, 2:8, 3:10, 4:11, 5:12, 6:13, 7:7, 8:6).

The solution algorithm used in FlexPDE finds the eigenvalues of lowest
magnitude, so you will always see a band of positive and negative values
centered on the shift value.

}

title "TE waveguide - eigenvalue shifting"

```

```

select
  modes = 8
  ngrid=20

variables
  hz

definitions
  L = 2
  h = 0.5      ! half box height
  g = 0.01    ! half-guage of wall
  s = 0.3*L   ! septum depth
  tang = 0.1  ! half-width of tang
  Hx = -dx(Hz)
  Hy = -dy(Hz)
  Ex = Hy
  Ey = -Hx

  shift = 40  ! PERFORM AN EIGENVALUE SHIFT

equations
  Hz: del2(Hz) + lambda*Hz + shift*Hz = 0

constraints
  integral(Hz) = 0 { since Hz has only natural boundary conditions,
                    we need an additional constraint to make
                    the solution unique }

boundaries
  region 1
  start(0,0)
  natural(Hz) = 0      line to (L,0) to (L,1) to (0,1) to (0,h+g)
  natural(Hz) = 0
  line to (s-g,h+g) to (s-g,h+g+tang) to (s+g,h+g+tang)
  to (s+g,h-g-tang) to (s-g,h-g-tang) to (s-g,h-g) to (0,h-g)
  line to close


monitors
  contour(Hz)

plots
  contour(Hz) painted report (lambda+shift) as "Shifted Lambda"

summary ("compare Shifted Lambda to output of waveguide20.pde")
  report lambda
  report (lambda+shift) as "Shifted Lambda"

end

```

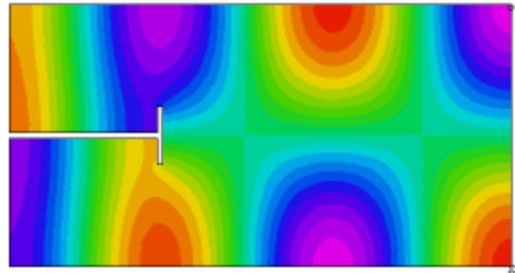

5.2.10.8 vibar

```
{ VIBAR.PDE
```

This problem analyzes the standing-wave vibrational modes of an elastic bar.

The equations of Stress/Strain in a material medium can be given as

$$\begin{aligned} dx(S_x) + dy(T_{xy}) + F_x &= 0 \\ dx(T_{xy}) + dy(S_y) + F_y &= 0 \end{aligned}$$

where S_x and S_y are the stresses in the x- and y- directions, T_{xy} is the shear stress, and F_x and F_y are the body forces in the x- and y- directions.

In a time-dependent problem, the material acceleration and viscous force act as body forces, and are included in a new body force term

$$\begin{aligned} F_{x1} &= F_{x0} - \rho \cdot dt^2(U) + \mu \cdot del2(dt(U)) \\ F_{y1} &= F_{y0} - \rho \cdot dt^2(V) + \mu \cdot del2(dt(V)) \end{aligned}$$

where ρ is the material mass density, μ is the viscosity, and U and V are the material displacements in the x and y directions.

If we assume that the displacement is harmonic in time (all transients have died out), then we can assert

$$\begin{aligned} U(t) &= U_0 \cdot \exp(-i \cdot \omega \cdot t) \\ V(t) &= V_0 \cdot \exp(-i \cdot \omega \cdot t) \end{aligned}$$

Here $U_0(x,y)$ and $V_0(x,y)$ are the complex amplitude distributions, and ω is the angular velocity of the oscillation.

Substituting this assumption into the stress equations and dividing out the common exponential factors, we get (implying U_0 by U and V_0 by V)

$$\begin{aligned} dx(S_x) + dy(T_{xy}) + F_x + \rho \omega^2 U - i \omega \mu \Delta U &= 0 \\ dx(T_{xy}) + dy(S_y) + F_y + \rho \omega^2 V - i \omega \mu \Delta V &= 0 \end{aligned}$$

All the terms in this equation are now complex. Separating into real and imaginary parts gives

$$\begin{aligned} U &= U_r + i U_i \\ S_x &= S_{rx} + i S_{ix} \\ S_y &= S_{ry} + i S_{iy} \\ \text{etc...} \end{aligned}$$

Expressed in terms of the (assumed real) constitutive relations of the material,

$$\begin{aligned} S_{rx} &= [C_{11} dx(U_r) + C_{12} dy(V_r)] \\ S_{ry} &= [C_{12} dx(U_r) + C_{22} dy(V_r)] \\ T_{rxy} &= C_{33} [dy(U_r) + dx(V_r)] \\ \text{etc...} \end{aligned}$$

The final result is a set of four equations in U_r, V_r, U_i and V_i .

$$\begin{aligned} U_r: dx(S_{rx}) + dy(T_{rxy}) + \rho \omega^2 U_r + \omega \mu \Delta U_i &= 0 \\ U_i: dx(S_{ix}) + dy(T_{ixy}) + \rho \omega^2 U_i - \omega \mu \Delta U_r &= 0 \\ V_r: dx(T_{rxy}) + dy(S_{ry}) + \rho \omega^2 V_r + \omega \mu \Delta V_i &= 0 \\ V_i: dx(T_{ixy}) + dy(S_{iy}) + \rho \omega^2 V_i - \omega \mu \Delta V_r &= 0 \end{aligned}$$

In the absence of viscous effects, these equations separate, with no imaginary terms appearing in the real equations, and vice versa.

We can therefore solve only for the real components U_r and V_r , which we will continue to refer to as U and V .

Solving the eigenvalue system

$$\begin{aligned} U: dx(S_x) + dy(T_{xy}) + \lambda \rho U &= 0 \\ V: dx(T_{xy}) + dy(S_y) + \lambda \rho V &= 0 \end{aligned}$$

we find the resonant frequencies $\lambda = \omega^2$ together with the corresponding spatial amplitude distributions U and V .

In order to quantify the "natural" (or "load") boundary condition mechanism, we can write the equations as

$$\begin{aligned} U: \text{div}(P) + \lambda \rho U &= 0 \\ V: \text{div}(Q) + \lambda \rho V &= 0 \end{aligned}$$

where $P = [S_x, T_{xy}]$
and $Q = [T_{xy}, S_y]$

The natural (or "load") boundary condition for the U -equation defines the outward surface-normal component of P , while the natural boundary condition for the V -equation defines the surface-normal component of Q . Thus, the natural boundary conditions for the U - and V - equations together define the surface load vector.

On a free boundary, both of these vectors are zero, so a free boundary is simply specified by

$$\begin{aligned} \text{load}(U) &= 0 \\ \text{load}(V) &= 0. \end{aligned}$$


}

title "Vibrating Bar - Modal Analysis"

select
modes=8

variables
U { X-displacement }
V { Y-displacement }

definitions
L = 1 { Bar length }
hL = L/2
w = 0.1 { Bar thickness }
hw = w/2
nu = 0.3 { Poisson's Ratio }
E = 20 { Young's Modulus for Steel x10¹¹(dynes/cm²) }
G = 0.5*E/(1+nu)

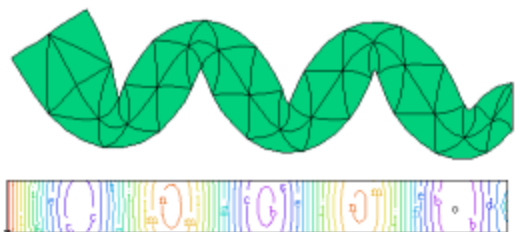

```

rho = 7.8          { Density (g/cm^3) }

{ plane strain coefficients }
E1 = E/((1+nu)*(1-2*nu))
C11 = E1*(1-nu)
C12 = E1*nu
C22 = E1*(1-nu)
C33 = E1*(1-2*nu)/2

{ Stresses }
Sx = (C11*dx(U) + C12*dy(V))
Sy = (C12*dx(U) + C22*dy(V))
Txy = C33*(dy(U) + dx(V))

mag=0.05

initial values
U = 0
V = 0

equations          { define the displacement equations }
U: dx(Sx) + dy(Txy) + lambda*rho*U = 0
V: dx(Txy) + dy(Sy) + lambda*rho*V = 0

constraints
line_integral(v,"mount")=0  { constrain the net right end y-motion to be zero }

boundaries
region 1
start (0,-hw)

{ free boundary on bottom, no normal stress }
load(U)=0 load(V)=0 line to (L,-hw)

{ clamp the right end x-motion }
label 'mount'
value(U) = 0 line to (L,hw)
endlabel 'mount'

{ free boundary on top, no normal stress }
load(U)=0 load(V)=0 line to (0,hw)

load(U) = 0 load(V) = 0 line to close

monitors
grid(x+mag*U,y+mag*V) as "deformation" { show final deformed grid }
plots
grid(x+mag*U,y+mag*V) as "deformation" { show final deformed grid }
contour(U) as "X-Displacement(M)"
contour(V) as "Y-Displacement(M)"

end

```

5.2.10.9 waveguide

```
{ WAVEGUIDE.PDE
```

This problem solves for the Transverse-Electric modes of a T-septate rectangular waveguide.

Assuming that Z is the propagation direction, we can write

$$E(x,y,z) = E(x,y)*\exp(i*(\omega t - kz*z))$$

$$H(x,y,z) = H(x,y)*\exp(i*(\omega t - kz*z))$$

where ω is the angular frequency and kz denotes the propagation constant.

In a Transverse-Electric waveguide, the electric field component in the propagation direction is zero, or $E_z = 0$.

Substituting these equations into the source-free Maxwell's equations and rearranging, we can write

$$E_y = -(\omega*\mu/kz)*H_x$$

$$E_x = (\omega*\mu/kz)*H_y$$

$$H_x = -i*dx(Hz)*kz/kt$$

$$H_y = i*dy(Hz)*kz/kt$$

```

with kt = [omega^2*eps*mu - kz^2]

It can also be shown that in this case Hz satisfies the homogeneous Helmholtz equation
dxx(Hz) + dyy(Hz) + kt^2*Hz = 0
together with the homogeneous Neumann boundary condition on the conducting wall
dn(Hz) = 0

In order to avoid clutter in this example script, we will suppress the proportionality
factors.
(The leading "i" in the definition of Hx and Hy is merely a phase shift.)
----- From J. Jin, "The Finite Element Method in Electromagnetics", p. 197
}

title "TE waveguide"

select
  modes = 4      { This is the number of Eigenvalues desired. }

variables
  hz

definitions
  L = 2
  h = 0.5        ! half box height
  g = 0.01       ! half-guage of wall
  s = 0.3*L      ! septum depth
  tang = 0.1     ! half-width of tang
  Hx = -dx(Hz)
  Hy = dy(Hz)
  Ex = Hy
  Ey = -Hx

equations
  Hz: del2(Hz) + lambda*Hz = 0      { lambda = kt^2 }

constraints
  integral(Hz) = 0 { since Hz has only natural boundary conditions,
                    we need an additional constraint to make
                    the solution unique }

boundaries
  region 1
  start(0,0)
  natural(Hz) = 0 ! this condition applies to all subsequent segments
  ! walk the box body
  line to (L,0) to (L,1) to (0,1) to (0,h+g)
  ! walk the T-septum
  to (s-g,h+g) to (s-g,h+g+tang) fillet(g/2) to (s+g,h+g+tang) fillet(g/2)
  to (s+g,h-g-tang) fillet(g/2) to (s-g,h-g-tang) fillet(g/2) to (s-g,h-g)
to (0,h-g)
  line to close

monitors
  contour(Hz)

plots
  contour(Hz) painted
  vector(Hx,Hy) as "Transverse H" norm
  contour(magnitude(Hx,Hy))
  contour(magnitude(Hx,Hy)) zoom(0.5,0.5,0.2,0.2)
  vector(Ex,Ey) as "Transverse E" norm
  contour(magnitude(Ex,Ey))
  contour(magnitude(Ex,Ey)) zoom(0.5,0.5,0.2,0.2)

end

```



5.2.10.10 waveguide20

```

{ WAVEGUIDE20.PDE

  This problem solves for the Transverse-Electric modes of a T-septate
  rectangular waveguide. It is a copy of WAVEGUIDE.PDE[569] with more modes.
}

title "TE waveguide"

```

```

select
  modes = 20           { This is the number of Eigenvalues desired. }
  ngrid=20            { we need enough density to resolve higher modes }

variables
  hz

definitions
  L = 2
  h = 0.5             ! half box height
  g = 0.01           ! half-gauge of wall
  s = 0.3*L          ! septum depth
  tang = 0.1         ! half-width of tang
  Hx = -dx(Hz)
  Hy = -dy(Hz)
  Ex = Hy
  Ey = -Hx

equations
  Hz: del2(Hz) + lambda*Hz = 0

constraints
  integral(Hz) = 0 { since Hz has only natural boundary conditions,
                    we need to constrain the answer }

boundaries
  region 1
  start(0,0)
  natural(Hz) = 0    line to (L,0) to (L,1) to (0,1) to (0,h+g)
  natural(Hz) = 0    line to (s-g,h+g) to (s-g,h+g+tang) to (s+g,h+g+tang)
                    to (s+g,h-g-tang) to (s-g,h-g-tang) to (s-g,h-g) to (0,h-g)
  line to close

monitors
  contour(Hz)

plots
  contour(Hz) painted

end

```

5.2.11 Functions

5.2.11.1 complex_functions

```

{ COMPLEX_FUNCTIONS.PDE }

TITLE 'complex function test'

COORDINATES cartesian2

VARIABLES          { this test uses no variables, it is a plotting test only }

SELECT  ngrid=40

DEFINITIONS
! sample complex
a=9
b=4
! explicit root computation
z = complex(a,b)
r = sqrt(a^2+b^2)
d = z+r
dabs = sqrt((a+r)^2+b^2)
zscale = sqrt(r)/dabs
zroot = zscale*complex(a+r,b)
! reference value
c = 9+sqrt(97)
xd = sqrt(2*c)
zr = c/xd
zi = 4/xd

```



```

! expanded code
zrootf = sqrt(CABS(z))*CEXP(0,0.5*atan2(b,a))

BOUNDARIES
REGION 1
START(-1,-1)
LINE TO (1,-1) TO (1,1) TO (-1,1) TO CLOSE

feature start(-1,0) line to (1,0)
feature start(0,-1) line to (0,1)

PLOTS
contour(atan2(y,x))
contour(CARG(x,y))
contour(CABS(x,y))
contour(CEXP(x,y))
contour(CLOG(x,y))
contour(CSQRT(x,y))
contour(CARG(complex(x,y)))
contour(CABS(complex(x,y)))
contour(CEXP(complex(x,y)))
contour(CLOG(complex(x,y)))
contour(CSQRT(complex(x,y)))

SUMMARY
report("Z=A+i*B")
report(a) as "A"
report(b) as "B"
report(zr) as "test real"
report(REAL(zroot))
report(REAL(CSQRT(z))) ! test new function
report(REAL(zrootf))
report(REAL(CSQRT(z)*CSQRT(z)))
report("")
report(zi) as "test imag"
report(IMAG(zroot))
report(IMAG(CSQRT(z))) ! test new function
report(IMAG(zrootf))
report(IMAG(CSQRT(z)*CSQRT(z)))
report("")
report(r) as "test cabs(z)"
report(CABS(z)) ! test new function
report("")
report(sqrt(zr^2+zi^2)) as "test cabs(zroot)"
report(CABS(zroot)) ! test new function
report(CABS(zrootf)) ! test new function
report("")
report(REAL(CLOG(z))) report(IMAG(CLOG(z)))
report(REAL(CEXP(CLOG(z)))) report(IMAG(CEXP(CLOG(z))))

END



```

5.2.11.2 floor_ceiling

```

{ FLOOR_CEILING.PDE
  This script demonstrates the FLOOR and CEILING[174] functions.
  This are provided as alternatives to the MIN and MAX[174] functions that have continuous
  derivatives.
}

```

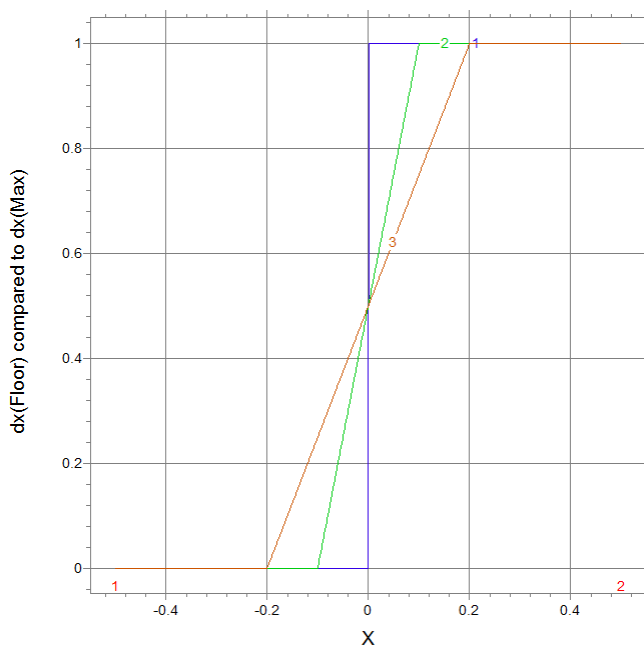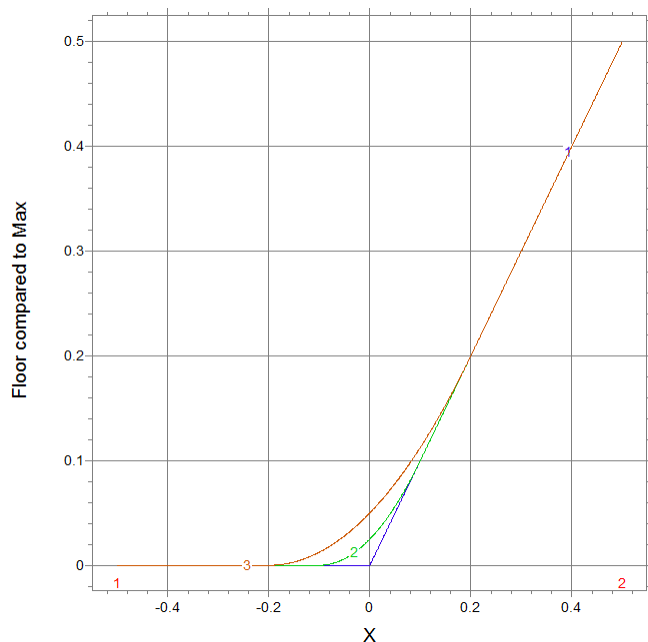

TITLE "FLOOR and CEILING Functions"

{ No variables, no equations }

DEFINITIONS

```
! floor
fmax = max(x, 0)
floor1 = floor(x, 0, 0.1)
floor2 = floor(x, 0, 0.2)
```

```
! ceiling
cmin = min(x, 0)
ceill1 = ceiling(x, 0, 0.1)
ceill2 = ceiling(x, 0, 0.2)
```

{ We need a plot domain even if no system variables : }

```

BOUNDARIES
  region 1
    start(-1,-0.1) line to (1,-0.1) to (1,0.1) to (-1,0.1) to close
PLOTS
  elevation(fmax, floor1, floor2) from(-0.5, 0) to (0.5, 0) as "Floor compared to Max"
  elevation(dx(fmax), dx(floor1), dx(floor2)) from(-0.5, 0) to (0.5, 0) as "dx(Floor)
compared to dx(Max)"

  elevation(cmin, ceill, ceil2) from(-0.5, 0) to (0.5, 0) as "Ceiling compared to Min"
  elevation(dx(cmin), dx(ceill), dx(ceil2)) from(-0.5, 0) to (0.5,0) as "dx(Ceiling)
compared to dx(Min)"

END

```

5.2.11.3 function_definition

```

{ FUNCTION_DEFINITION.PDE
  This example demonstrates the use of functional parameter definitions[220].
}

title 'Functional Parameter Definition test'

Variables
  u

definitions
  { Declare "Sq" a function of argument "A".
    "A" is a dummy name that represents the actual argument passed
    by an invocation. }
  Sq(a) = a*a
  { Define two functions for use in domain layout.
    The "n" argument rotates by 90 degree increments.}
  xx(n) = cos(n*pi/2)
  yy(n) = sin(n*pi/2)

equations
  { invoke the "Sq" function as a component of the equation. This makes
    the system nonlinear }
  u: div(grad(u)) + 80*Sq(u)*dx(u) +4 = 0

boundaries
  region 1
    start(xx(0),yy(0))
    value(u)=0
    line to (xx(1),yy(1)) { definition evaluates corners of a diamond }
      to (xx(2),yy(2))
      to (xx(3),yy(3))
    to close

monitors
  contour(u)

plots
  surface(u)
  contour(u)

end

```

5.2.11.4 error_reporting

```

{ ERROR_reporting.PDE
  This sample shows the use of the TIME\_ERROR[174] and SPACE\_ERROR[174] functions.
  It is a copy of the sample CHEMBURN.PDE[374].
}

title
  'Open Tube Chemical Reactor with Strip Heater'

```

```

select
  painted      { make color-filled contour plots }

variables
  Temp(threshold=0.1)
  C(threshold=0.1)

definitions
  LZ = 1
  r1=1
  heat=0
  gamma = 16
  beta = 0.2
  betap = 0.3
  BI = 1
  T0 = 1
  TW = 0.92
  RC = (1-C)*exp(gamma-gamma/Temp) { the very nasty reaction rate }
  xev=0.96      { some plot points }
  yev=0.25

initial values
  Temp=T0
  C=0

equations
  Temp:      div(grad(Temp)) + heat + betap*RC = dt(Temp)
  C:         div(grad(C)) + beta*RC = dt(C)

boundaries
  region 1
    start (0,0)

    { a mirror plane on X-axis }
    natural(Temp) = 0
    natural(C) = 0
    line to (r1,0)

    { "Strip Heater" at fixed temperature }
    { ramp the boundary temp in time, because discontinuity is costly to diffuse }
    value(Temp)=T0 + 0.2*uramp(t,t-0.05)

    natural(C)=0          { no mass flow on strip heater }
    arc(center=0,0) angle 5

    { convective cooling and no mass flow on outer arc }
    natural(Temp)=BI*(TW-Temp)
    natural(C)=0
    arc(center=0,0) angle 85

    { a mirror plane on Y-axis }
    natural(Temp) = 0
    natural(C) = 0
    line to (0,0) to close

time 0 to 1

plots
  for cycle=10          { watch the fast events by cycle }
    grid(x,y)
    contour(Temp) fixed range (0.9,2.5)
    contour(C) as "Completion" fixed range(0,1.1)
    contour(space_error())
    contour(space_error(Temp))

  for t= 0.1 by 0.05 to 0.2 by 0.01 to 0.3 0.5 endtime { show some surfaces during burn }
    contour(Temp) fixed range (0.9,2.5)
    surface(Temp) fixed range (0.9,2.5)
    contour(C) as "Completion" fixed range(0,1.1)
    surface(C) as "Completion" fixed range(0,1.1)

```

```

histories
history(Temp) at (0,0) (xev/2,yev/2) (xev,yev) (yev/2,xev/2) (yev,yev)
history(C) at (0,0) (xev/2,yev/2) (xev,yev) (yev/2,xev/2) (yev,yev) as "completion"
history(time_error(Temp),time_error(C),time_error())
history(time_error(Temp),time_error(C))

end

```

5.2.11.5 globalmax

```
{ GLOBALMAX.PDE
```

This sample demonstrates the use of the [GLOBALMAX](#)^[174] function and its variants in 2D. It is a copy of the example [THERMAL_CONTACT_RESISTANCE.PDE](#)^[558].

```

title "Thermal Contact Resistance"

variables
Temp

definitions
K { thermal conductivity - values given in regions }
Heat { Heat source }
Flux = -K*grad(Temp)
Rc = 1/2 { contact resistance }

initial values
Temp = 0

equations
Temp: div(Flux) = Heat

boundaries
Region 1 "Outer" { the outer boundary }
K=5
Heat=0
start "Outer" (0,0)
value(Temp)=0 { cold boundary }
line to (3,0) to (3,3) to (0,3) to close

Region 2 "Inner" { an imbedded diamond }
K=1
Heat=1 { heat source in the inner diamond }
start "Inner" (1.5,0.5)
contact(Temp) = -JUMP(Temp)/Rc { the contact flux }
line to (2.5,1.5) to (1.5,2.5) to (0.5,1.5) to close

monitors
contour(Temp)

plots
grid(x,y)
contour(Temp) as "Temperature"
contour(magnitude(grad(temp))) points=5 as "Flux"
contour(Temp) zoom(2,1,1,1) as "Temperature Zoom"
elevation(Temp) from (0,0) to (3,3)
surface(Temp)
surface(Temp) zoom(2,1,1,1)
vector(-dx(Temp),-dy(Temp)) as "Heat Flow"
elevation(normal(flux)) on "Outer"
elevation(normal(flux)) on "Inner"

summary
report(globalmax(Temp),globalmax_x(Temp),globalmax_y(Temp)) as "Global Maximum"
report(" ")

```

```

    report(globalmax(Temp,"Inner"),globalmax_x(Temp,"Inner"),globalmax_y(Temp,"Inner")) as
    "Inner Maximum"
    report(globalmax(Temp,"Outer"),globalmax_x(Temp,"Outer"),globalmax_y(Temp,"Outer")) as
    "Outer Maximum"
    report(" ")
    report(globalmax(Temp,1),globalmax_x(Temp,1),globalmax_y(Temp,1)) as "Region 1 Maximum"
    report(globalmax(Temp,2),globalmax_x(Temp,2),globalmax_y(Temp,2)) as "Region 2 Maximum"

end

```

5.2.11.6 globalmax_3d

```
{ GLOBALMAX_3D.PDE
```

This sample demonstrates the use of the [GLOBALMAX](#)^[174] function and its variants in 3D. It is a copy of the example [3D_BRICKS+TIME.PDE](#)^[425].

```

title 'steady-state 3D heat conduction'

select
    regrid=off { use fixed grid }

coordinates
    cartesian3

variables
    Tp

definitions
    long = 1
    wide = 1
    K { thermal conductivity -- values supplied later }
    Q = 10*exp(-x^2-y^2-z^2) { thermal source }

initial values
    Tp = 0.

equations
    Tp : div(k*grad(Tp)) + Q = 0 { the heat equation }

extrusion { divide Z into two layers }
    surface z = -long
        layer "lower"
    surface z = 0
        layer "upper"
    surface z = long

boundaries
    Surface 1 value(Tp)=0 { fix bottom surface temp }
    Surface 3 value(Tp)=0 { fix top surface temp }

    Region 1 "right" { define full domain boundary in base plane }
        layer 1 k = 1 { bottom right brick }
        layer 2 k = 0.1 { top right brick }
        start(-wide,-wide)
            value(Tp) = 0 { fix all side temps }
            line to (wide,-wide) { walk outer boundary in base plane }
                to (wide,wide)
                to (-wide,wide)
            to close

    Region 2 "left" { overlay a second region in left half }
        layer 1 k = 0.2 { bottom left brick }
        layer 2 k = 0.4 { top left brick }
        start(-wide,-wide)
            line to (0,-wide) { walk left half boundary in base plane }

```

```

to (0,wide)
to (-wide,wide)
to close

monitors
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "XZ Temp"
  elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
  elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
  elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp"

plots
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "XZ Temp"
  contour(Tp) on x=globalmax_x(Tp) as "YZ Temp at max" report(globalmax_x(Tp)) as
"x_max"
  elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
  elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
  elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp"

summary
  report("Maxima (value, xposition, yposition, zposition)")
  report(" ")
  report(globalmax(Tp), globalmax_x(Tp), globalmax_y(Tp), globalmax_z(Tp)) as "Global
Maximum"
  report(globalmax(Tp, "left"), globalmax_x(Tp, "left"), globalmax_y(Tp, "left"),
globalmax_z(Tp, "left")) as "Left Maximum"
  report(globalmax(Tp, "right"), globalmax_x(Tp, "right"), globalmax_y(Tp, "right"),
globalmax_z(Tp, "right")) as "Right Maximum"
  report(globalmax(Tp, "lower"), globalmax_x(Tp, "lower"), globalmax_y(Tp, "lower"),
globalmax_z(Tp, "lower")) as "Lower Maximum"
  report(globalmax(Tp, "upper"), globalmax_x(Tp, "upper"), globalmax_y(Tp, "upper"),
globalmax_z(Tp, "upper")) as "Upper Maximum"
  report(globalmax(Tp, "right", "lower"), globalmax_x(Tp, "right", "lower"),
globalmax_y(Tp, "right", "lower"), globalmax_z(Tp, "right", "lower")) as "Right Lower
Maximum"
  report(globalmax(Tp, "left", "upper"), globalmax_x(Tp, "left", "upper"),
globalmax_y(Tp, "left", "upper"), globalmax_z(Tp, "left", "upper")) as "Left Upper
Maximum"
end

```

5.2.11.7 standard_functions

```
{ STANDARD_FUNCTIONS.PDE
```

This example illustrates available [mathematical functions](#)^[173] in FlexPDE.
It also shows the use of FlexPDE as a plot utility.

```

}
title "Test Standard Functions"
coordinates cartesian1
{ -- No variables, no equations -- }
{ -- Definitions can be included, if desired -- }
{ -- We need a plot domain: -- }
boundaries
  region 1
  start(-1) line to (1)

plots
  elevation(sqrt(x)) from (0) to (1)
  elevation(dx(sqrt(x)),0.5/sqrt(x)) from (0.01) to (1)

  elevation(sin(pi*x)) from (-1) to (1)
  elevation(dx(sin(pi*x)),pi*cos(pi*x)) from (-1) to (1)

  elevation(cos(pi*x)) from (-1) to (1)
  elevation(dx(cos(pi*x)),-pi*sin(pi*x)) from (-1) to (1)

```

```

elevation(tan(pi*x)) from (-0.499) to (0.499)
elevation(dx(tan(pi*x)),pi/cos(pi*x)^2) from (-0.499) to (0.499)

elevation(exp(x)) from (-1) to (1)
elevation(dx(exp(x)),exp(x)) from (-1) to (1)

elevation(ln(x)) from (0.01) to (1)
elevation(dx(ln(x)),1/x) from (0.01) to (1)

elevation(log10(x)) from (0.01) to (1)
elevation(dx(log10(x)),1/(x*ln(10))) from (0.01) to (1)

elevation(arcsin(x)) from (-1) to (1)
elevation(dx(arcsin(x)),1/sqrt(1-x^2)) from (-0.999) to (0.999)

elevation(arccos(x)) from (-1) to (1)
elevation(dx(arccos(x)),-1/sqrt(1-x^2)) from (-0.999) to (0.999)

elevation(arctan(x)) from (-1) to (1)
elevation(dx(arctan(x)),1/(1+x^2)) from (-1) to (1)

elevation(abs(x)) from (-1) to (1)
elevation(dx(abs(x))) from (-1) to (1)

elevation(sinh(x)) from (-1) to (1)
elevation(dx(sinh(x)),cosh(x)) from (-1) to (1)

elevation(cosh(x)) from (-1) to (1)
elevation(dx(cosh(x)),sinh(x)) from (-1) to (1)

elevation(tanh(x)) from (-1) to (1)
elevation(dx(tanh(x)),1/cosh(x)^2) from (-1) to (1)

elevation(sech(x)) from (-1) to (1)
elevation(dx(sech(x)),-sinh(x)/cosh(x)^2) from (-1) to (1)

elevation(coth(x)) from (-1) to (1) fixed range(-10,10)
elevation(dx(coth(x)),-1.0/sinh(x)^2) from (-1) to (1) fixed range(-20,0)

elevation(csch(x)) from (-1) to (1) fixed range(-10,10)
elevation(dx(csch(x)),-cosh(x)/sinh(x)^2) from (-1) to (1) fixed range(-20,0)

elevation(erf(x)) from (-1) to (1)
elevation(dx(erf(x)),2*exp(-x^2)/sqrt(pi)) from (-1) to (1)

elevation(erfc(x)) from (-1) to (1)
elevation(dx(erfc(x)),-2*exp(-x^2)/sqrt(pi)) from (-1) to (1)

elevation(sign(x)) from (-1) to (1)
elevation(dx(sign(x))) from (-1) to (1)

elevation(x^(-4)) from (0.01) to (0.1)
elevation(dx(x^(-4)),-4*x^(-5)) from (0.01) to (0.1)

elevation(x^(2*x)) from (0.001) to (1)
elevation(dx(x^(2*x)),2*x^(2*x)*(1+ln(x))) from (0.001) to (1)

elevation(bessj(0,20*x),bessj(1,20*x),bessj(2,20*x)) from (0) to (1) as "Bessel
J0,J1,J2"
elevation(bessy(0,20*x),bessy(1,20*x),bessy(2,20*x)) from (0.05) to (1) as "Bessel
Y0,Y1,Y2"
elevation(dx(bessj(0,20*x)),-20*bessj(1,20*x)) from (0) to (1) as "dx(J0)"
elevation(dx(bessj(1,20*x)),20*(bessj(1,20*x)/(20*x)-bessj(2,20*x))) from (0.001) to
(1) as "dx(J1)"

elevation(expint(1,2*x),expint(2*x)) from (0.001) to (1)
elevation(1/gammaf(1,2*x),1/gammaf(2*x)) from (0.001) to (1)

end

```


5.2.11.8 sum

```
{ SUM.PDE
```

This example demonstrates the use of the [SUM](#)^[180] function. It poses a heatflow problem with a heat source made up of four gaussians. The source is composed by a SUM over gaussians referenced to arrays of center coordinates.

```
}
```

```
title 'sum test'
```

```
Variables
```

```
u
```

```
definitions
```

```
k = 1
```

```
u0 = 1-x^2-y^2 { boundary forced to parabolic values }
```

```
xc = array(-0.5,0.5,0.5,-0.5) { arrays of source spot coordinates }
```

```
yc = array(-0.5,-0.5,0.5,0.5)
```

```
s = sum( i, 1, 4, exp(-10*((x-xc[i])^2+(y-yc[i])^2)) ) { summed Gaussian
```

```
source }
```

```
equations
```

```
U: div(K*grad(u)) + s = 0
```

```
boundaries
```

```
region 1
```

```
start(-1,-1)
```

```
value(u)=u0
```

```
line to (1,-1)
```

```
to (1,1)
```

```
to (-1,1)
```

```
to close
```

```
monitors
```

```
grid(x,y)
```

```
contour(u)
```

```
contour(s)
```


```
plots
```

```
grid(x,y)
```

```
contour(u)
```

```
contour(s)
```

```
end
```

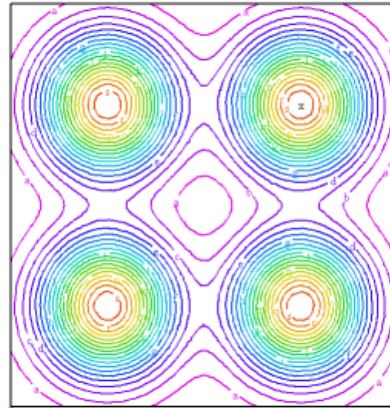

5.2.11.9 swage_pulse

```
{ SWAGE_PULSE.PDE
```

A pulse can be made by two ifs:

```
r1 = IF x<x1 THEN 0 ELSE 1
```

```
r2 = IF x<x2 THEN 1 ELSE 0
```

```
pulse = r1*r2
```

This can be directly translated in to [SWAGE](#)^[184] or [RAMP](#)^[179] statements with width w:

```
spulse = SWAGE(x-x1,0,1,w) * SWAGE(x-x2,1,0,w)
```

```
rpulse = RAMP(x-x1,0,1,w) * RAMP(x-x2,1,0,w)
```

```
}
```

```
title "SWAGE and RAMP Pulses"
```

```
select
```

```
elevationgrid=2000
```

```
{ -- No variables, no equations -- }
```

```
definitions
```

```
x1 = -0.5
```

```
x2 = 0.5
```

```

w = 0.05
swage_pulse = SWAGE(x-x1,0,1,w) * SWAGE(x-x2,1,0,w)
ramp_pulse = RAMP(x-x1,0,1,w) * RAMP(x-x2,1,0,w)

boundaries
  region 1
  start(-1,-0.1) line to (1,-0.1) to (1,0.1) to (-1,0.1) to close

plots
  elevation(swage_pulse) from (-1,0) to (1,0)
  elevation(ramp_pulse) from (-1,0) to (1,0)

end

```

5.2.11.10 swage_test

```
{ SWAGE_TEST.PDE
```

This example illustrates the use of the [SWAGE](#)^[18] and [RAMP](#)^[17] functions to generate smoother alternatives to the [IF..THEN](#)^[19] construct.

IF..THEN is frequently used to turn sources on and off, to define discontinuous initial conditions and the like.

But in an adaptive system like FlexPDE, discontinuities can be very troublesome. They create very high frequency transients which can cause intense regridding and tiny timesteps. When they occur in equation coefficients, they can cause convergence failure in Newton's method iterations.

The SWAGE and RAMP functions are an attempt to give users an alternative to the IF..THEN for defining transitions. These functions, particularly SWAGE, allow FlexPDE to sense the presence of a transition and follow it in the iterative solver.

In the plots created by this problem, we show both the values generated by the functions, and their derivatives. By contrast, an IF..THEN has an infinite (ie, undefined) derivative which is impossible to accurately represent numerically.

```

title "SWAGE and RAMP Functions"

select
  elevationgrid=2000

{ -- No variables, no equations -- }

{ -- Definitions can be included, if desired -- }

{ -- we need a plot domain: -- }
boundaries
  region 1
  start(-1,-0.1) line to (1,-0.1)
  to (1,0.1) to (-1,0.1) to close


plots
  elevation(ramp(x,-1,1,0.1), swage(x,-1,1,0.1))
  from (-0.5,0) to (0.5,0) as "Functions"

  elevation(dx(ramp(x,-1,1,0.1)), dx(swage(x,-
  1,1,0.1)))
  from (-0.5,0) to (0.5,0) as "Derivatives"

  elevation(dxx(ramp(x,-1,1,0.1)), dxx(swage(x,-
  1,1,0.1)))
  from (-0.5,0) to (0.5,0) as "Curvature"

end

```

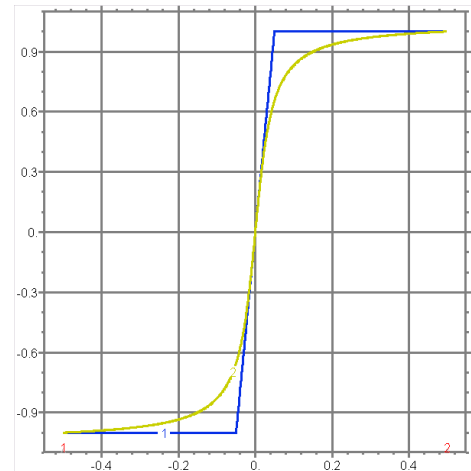

5.2.11.11 unit_functions

```
{ UNIT_FUNCTIONS.PDE

This example illustrates the unit step, unit pulse,
and unit ramp functions ustep(arg1), upulse(arg1,arg2),
and uramp(arg1,arg2) See Unit Functions[176].

}

title
  "unit functions"

select
  elevationgrid=500

{no variables}

definitions
  x1 = 0.2
  x2 = 0.4

{no equations}

{plot domain -- required}
boundaries
  region 1
    start (-1,0)
    line to (1,0) to (1,1) to (-1,1) to close

plots
  elevation(ustep(x-x1)) from (0,0) to (1,0)
  elevation(dx(ustep(x-x1))) from (0,0) to (1,0)
  elevation(upulse(x-x1,x-x2)) from (0,0) to (1,0)
  elevation(dx(upulse(x-x1,x-x2))) from (0,0) to (1,0)
  elevation(uramp(x-x1,x-x2)) from (0,0) to (1,0)
  elevation(dx(uramp(x-x1,x-x2))) from (0,0) to (1,0)
  ! generating a square wave by clipping a cosine
  elevation(ustep(cos(4*pi*x))) from (-1,0) to (1,0)
  ! the duty cycle can be controlled by offsetting the cosine from zero
  elevation(ustep(cos(4*pi*x)-0.3)) from (-1,0) to (1,0)

end
```

5.2.11.12 vector_functions

```
{ VECTOR_FUNCTIONS.PDE

This example illustrates the vector functions[190]

VECTOR
MAGNITUDE
DOT
CROSS
NORMAL
TANGENTIAL

}

title
  "vector functions"

select
  elevationgrid=500

{no variables}

definitions
  u= exp(-x^2+ y)
  f= grad(u)
  df= div(f)
  cf= curl(f)
  vx= -sin(y)   vy= 2*sin(x)
  v= vector(vx,vy)

  { A scalar potential, perhaps }
  { F = grad(u) is a vector }
  { Divergence of F is a scalar }
  { Curl of F is a new vector }
  { vector components }
  { Another vector }
```

```

mv= magnitude(v)           { Magnitude of v }
cv= curl(v)
ccv= curl(curl(v))
tvv = v*v { v*v is a tensor }
divtx = 2*vx*dx(vx)+vx*dy(vy)+vy*dy(vx)  {x-component of div(t) }
divty = vx*dx(vy)+vy*dx(vx)+2*vy*dy(vy)  {y-component of div(t) }
divt = vector(divtx,divty)

{no equations}

{plot domain -- required}
boundaries
  region 1
    start "Outer" (-1,0)
    line to (1,0) to (1,1) to (-1,1) to close

    feature
      start "inner" (-1/2,1/2) line to (1/2,1/2)

plots
vector(f) as "f = grad(-x^2+y)"
elevation(normal(f)) on "Outer"
elevation(tangential(f)) on "inner"
contour(df) as "Div F"
vector(v) as "V = (-sin(y), 2*sin(x))"
contour(mv) as "Magnitude V"
contour(dot(v,vector(x,0)))
contour(zcomp(cross(f,v)))
contour(zcomp(cv)) as "Zcomp(Curl v)"
vector(ccv) as "Curl Curl v"
vector(div(v*v)) as "Div(V*V) inline"
vector(divt) as "Div(V*V) expanded"
vector(div(tvv)) as "Div(V*V) tensor parameter"
end

```

5.2.12 Implicit_Curves

5.2.12.1 implicit_curve_boundary

```

{ IMPLICIT_CURVE_BOUNDARY.PDE

This example creates a polynomial boundary segment using the
implicit ADAPT\_CURVE[243] descriptor. With ADAPT, FlexPDE finds the
solution to the given expression that goes through the current
point and tracks the curve in the direction specified (+Y).
}
Title 'Implicit Curve Boundary'
Coordinates cartesian2
Variables u

Definitions
  k = 1
  u0 = 1-x^2-y^2
  s = 2*3/4+5*2/4

Initial Values u = 1

Equations
U: div(k*grad(u)) + s = 0

Boundaries
  region 1
    start(-0.1, 0.004) value(u)=u0
    line to (0.1,0.004)
    { create a boundary segment that follows the expression
      (x^2+y^2)^2 - 3*x^2*y - y^3 = A, where A is calculated using
      the current point, and start moving in the +Y direction. }
    adapt curve ((x^2+y^2)^2 - 3*x^2*y - y^3) by (+y) to close

Plots
  contour(u)

```

```
surface(u)
```

```
End
```

5.2.12.2 implicit_curve_surface

```
{ IMPLICIT_CURVE_SURFACE.PDE
```

```
This example shows how FlexPDE can be used to plot polynomial
expressions and their derivatives. This can be helpful in many
different scenarios, but is presented here because expression
F3 is used in the example IMPLICIT\_CURVE\_BOUNDARY.PDE[585].
```

```
}
Title 'Example Surfaces'
Coordinates cartesian2
Select contours=50
```

```
Definitions
```

```
f1 = (x^2+y^2)^3-4*x^2*y^2
f2 = (x^2+y^2)^2-4*x*y
f3 = (x^2+y^2)^2 - 3*x^2*y - y^3
```

```
Boundaries
```

```
region 1
start(-2,-1)
line to (2,-1) to(2,2) to (-2,2) to close
```

```
Plots
```

```
contour(F1)
contour(F1) zoom(-1,0, 2,1)
contour(dx(F1)) zoom(-1,0, 2,1)
contour(dy(F1)) zoom(-1,0, 2,1)
elevation(dx(F1),dy(F1)) from (-1,0) to (1,0)
```

```
contour(F2)
contour(F2) zoom(-1,0, 2,1)
contour(dx(F2)) zoom(-1,0, 2,1)
contour(dy(F2)) zoom(-1,0, 2,1)
elevation(dx(F2),dy(F2)) from (-1,0) to (1,0)
```

```
contour(F3)
contour(F3) zoom(-1,0, 2,1)
contour(dx(F3)) zoom(-1,0, 2,1)
contour(dy(F3)) zoom(-1,0, 2,1)
elevation(dx(F3),dy(F3)) from (-1,0) to (1,0.0)
```

```
End
```

5.2.12.3 sine_boundary

```
{ SINE_BOUNDARY.PDE
```

```
This example creates a sinusoidal boundary segment using
the implicit CURVE[243] descriptor. FlexPDE follows the given
equation exactly, so the current point and the ending point
must satisfy the equation or an error is issued. It starts
tracking the curve in the direction specified (-X).
```

```
}
title 'Sine Boundary'
coordinates cartesian2
variables u
```

```
definitions
```

```
k = 1
bottom = -1
```

```

initial values u=1

equations
  U: div(k*grad(u)) + 4 = 0

boundaries
  Region 1
  start(-1,bottom)
  value(u)=0
  line to (10,bottom)
  natural(u)=0
  line to (10,2)
  value(u)=1
  { create a boundary segment that follows the equation
    y = cos(pi*x)+1, and start moving in the -x direction. }
  curve (y = cos(pi*x)+1) by (-x) to (-1,0)
  natural(u)=0
  line to close

plots
  contour(u)
  elevation(u) from(-1,0) to (1,0)

end

```

5.2.12.4 sine_boundary_3d

```

{ SINE_BOUNDARY_3D.PDE

  This example is a modification of SINE\_BOUNDARY.PDE584 into 3D.
}
title 'Sine Boundary 3D'
coordinates cartesian3
variables u

definitions
  k = 1
  bottom = -1

initial values u=1

equations
  U: div(k*grad(u)) + 4 = 0

extrusion z = 0,1

boundaries
  Region 1
  start(-1,bottom)
  value(u)=0
  line to (10,bottom)
  natural(u)=0
  line to (10,2)
  value(u)=1
  { create a boundary segment that follows the equation
    y = cos(pi*x)+1, and start moving in the -x direction. }
  curve (y = cos(pi*x)+1) by (-x) to (-1,0)
  natural(u)=0
  line to close

plots
  grid(x,y) on z=1/2
  contour(u) on z=1/2
  surface(u) on z=1/2
  elevation(u) from(-1,0,1/2) to (1,0,1/2)

```

end

5.2.13 Import_Export

5.2.13.1 3d_mesh_export

```
{ 3D_MESH_EXPORT.PDE
```

This example shows the use of the [TRANSFER](#)^[227] command to export problem data and mesh structure in 3D problems.

The accompanying test [3D_MESH_IMPORT.PDE](#)^[587] reads the transfer file produced here.

(The framework of the problem is a version of [3D_ANTIPERIODIC.PDE](#)^[658].)

```
}
```

```
title '3D MESH TRANSFER TEST'
```

```
coordinates cartesian3
```

```
variables
```

```
u
```

```
definitions
```

```
k = 1
```

```
an = pi/4
```

```
crot = cos(an) { this is the angular size of the repeated segment }
```

```
srot = sin(an) { the sine and cosine needed in the transformation }
```

```
H = 0
```

```
xc = 1.5
```

```
yc = 0.2
```

```
rc = 0.1
```

```
equations
```

```
U: div(K*grad(u)) + H = 0
```

```
extrusion z=0,0.4,0.6,1
```

```
boundaries
```

```
Region 1
```

```
start(1,0) line to (2,0)
```

```
value(u) = 0 arc(center=0,0) to (2*crot,2*srot)
```

```
antiperiodic(x*crot+y*srot, -x*srot+y*crot)  
line to (crot,srot)
```

```
value(u)=0
```

```
arc(center= 0,0) to close
```

```
Limited Region 2
```

```
layer 2 H=1
```

```
start(xc-rc,0) line to (xc+rc,0) to (xc+rc,rc) to (xc-rc,rc) to close
```

```
Limited Region 3
```

```
layer 2 H=-1
```

```
start((xc-rc)*crot,(xc-rc)*srot)
```

```
line to ((xc+rc)*crot,(xc+rc)*srot)
```

```
to ((xc+rc)*crot+rc*srot,(xc+rc)*srot-rc*crot)
```

```
to ((xc-rc)*crot+rc*srot,(xc-rc)*srot-rc*crot) to close
```

```
plots
```

```
contour(u) on z=0.5 paint
```

```
grid(x,y,z)
```

```
transfer(u) file="mesh3u.xfr" ! Export mesh and data
```

```
transfer() file="mesh3.xfr" ! Export mesh only
```

```
end
```

5.2.13.2 3d_mesh_import

```
{ 3D_MESH_IMPORT.PDE
```

This example shows the use of the [TRANSFERMESH](#)^[227] command to import a 3D Mesh. The mesh file is created by running [3D_MESH_EXPORT.PDE](#)^[588].

Note that the domain structure must exactly match that of the exporting problem. Periodicity conditions must also be the same, except that periodic and antiperiodic may be exchanged.

(The framework of this problem is [3D_ANTIPERIODIC.PDE](#)^[658].)

```
}
```

```
title '3D MESH IMPORT TEST'
```

```
coordinates cartesian3
```

```
variables
```

```
u
```

```
definitions
```

```
k = 1
{ angular size of the repeated segment: }
an = pi/4
{ sine and cosine needed in transformation }
crot = cos(an)
srot = sin(an)
H = 0
xc = 1.5
yc = 0.2
rc = 0.1
```

```
transfermesh
```

```
("3d_mesh_export_output/mesh3.xfr")      ! << read the
mesh file
```

```
equations
```

```
U: div(K*grad(u)) + H = 0
```

```
extrusion z=0,0.4,0.6,1
```

```
boundaries
```

```
Region 1
```

```
start(1,0) line to (2,0)
value(u) = 0 arc(center=0,0) to (2*crot,2*srot)
```

```
antiperiodic(x*crot+y*srot, -x*srot+y*crot)
line to (crot,srot)
```

```
natural(u)=x-2.4*y      ! BC changed from exporting problem
arc(center= 0,0) to close
```

```
Limited Region 2
```

```
layer 2 H = 1
start(xc-rc,0) line to (xc+rc,0) to (xc+rc,rc) to (xc-rc,rc) to close
```


```
Limited Region 3
```

```
layer 2 H = -1
start((xc-rc)*crot,(xc-rc)*srot)
line to ((xc+rc)*crot,(xc+rc)*srot)
to ((xc+rc)*crot+rc*srot,(xc+rc)*srot-rc*crot)
to ((xc-rc)*crot+rc*srot,(xc-rc)*srot-rc*crot) to close
```

```
plots
```

```
contour(u) on z=0.5 paint
grid(x,y,z)
```

```
end
```

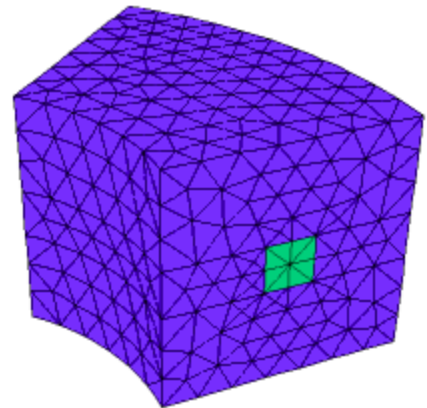

5.2.13.3 3d_post_processing

```
{ 3D_POST_PROCESSING.PDE
```

This example demonstrates the use of the [TRANSFERMESH](#)^[227] facility to import both data and mesh structure from [3D_MESH_EXPORT.PDE](#)^[588] and perform post-processing without gridding or solving any equations.

This is easily accomplished in a step-wise process:

- 1) make a copy of the script that generated the exported data
- 2) remove the VARIABLES and EQUATIONS sections
- 3) remove any boundary conditions stated in the BOUNDARIES section
- 4) add the TRANSFERMESH statement in the DEFINITIONS section
- 5) add any new plots that you desire

Note that the domain structure must exactly match that of the exporting problem.

[3D_MESH_EXPORT.PDE](#)^[588] must be run before running this problem.

```
}
title 'Using TRANSFERMESH for post-processing'
coordinates cartesian3
definitions
  k = 1
  an = pi/4          { this is the angular size of the repeated segment }
  crot = cos(an)     { the sine and cosine needed in the transformation }
  srot = sin(an)
  H = 0
  xc = 1.5
  yc = 0.2
  rc = 0.1
  transfermesh("3d_mesh_export_output/mesh3u.xfr",U)
extrusion z=0,0.4,0.6,1
boundaries
  Region 1
    start(1,0) line to (2,0)
    arc(center=0,0) to (2*crot,2*srot)
    line to (crot,srot)
    arc(center= 0,0) to close
  Limited Region 2
    layer 2 H=1
    start(xc-rc,0) line to (xc+rc,0) to (xc+rc,rc) to (xc-rc,rc) to close
  Limited Region 3
    layer 2 H=-1
    start((xc-rc)*crot,(xc-rc)*srot)
    line to ((xc+rc)*crot,(xc+rc)*srot)
    to ((xc+rc)*crot+rc*srot,(xc+rc)*srot-rc*crot)
    to ((xc-rc)*crot+rc*srot,(xc-rc)*srot-rc*crot) to close
plots
  grid(x,y,z)
  grid(x,y) on z=0.5
  contour(u) on z=0.5 zoom(1.3,0,0.4,0.4)
  contour(u) on z=0.5 zoom(1.4,0,0.2,0.2) paint
end
```

5.2.13.4 3d_surf_export

```
{ 3D_SURF_EXPORT.PDE
```

This problem shows data export on an extrusion surface in 3D.

Values are exported on a cut plane in default text format, and on a cut plane and an extrusion surface in user-specified columnar format.

(See "[Format 'string'](#)"^[266] in the Help Index for formatting rules.)

The output files will be given the default names "3d_surf_export.p02", "...p03" and "...p04", corresponding to the second, third and fourth plot specifications.

The problem is a modification of [3D_SPHERE.PDE](#)^[502].

```

}
title '3D Export Test - Sphere'
coordinates
  cartesian3
variables
  u
definitions
  k = 0.1                { conductivity }
  heat =6*k              { internal heat source }
  u0 = exp(-x^2-y^2)
equations
  u: div(K*grad(u)) + heat = 0
extrusion
  surface z = -sqrt(1-(x^2+y^2)) { the bottom hemisphere }
  surface z = sqrt(1-(x^2+y^2))  { the top hemisphere }
boundaries
  surface 1 value(u) = u0      { fixed value on sphere surfaces }
  surface 2 value(u) = u0
  region 1
    start(1,0) arc(center=0,0) angle=360
plots
  grid(x,y,z)
  contour(u) on x=0           { YZ plane through diameter }
  export
  contour(u) on z=0.5        { XY plane above center }
  export format "#x#b#y#b#z#b#1"
  contour(u) on surface 2    { top surface }
  export format "#x#b#y#b#z#b#1"
end

```

5.2.13.5 blocktable

```
{ BLOCKTABLE.PDE
```

This example shows the use of the [BLOCK](#)^[224] modifier in reading [TABLE](#)^[224] data.

The [BLOCK](#)^[224] modifier allows table data to be interpreted in Histogram profile. The default interpretation imposes a 10% rise width on the histogram blocks, to avoid dramatic timestep cuts when data are used as driving profiles in time-dependent problems.

The [BLOCK\(rise\)](#)^[224] qualifier allows the specification of a rise width as a fraction of block width.

```

}
title '1D BLOCK table'
select
  regrid=off
{ No Variables are necessary }
definitions
  { single value format with default 10% rise width: }
  u = block table("table1.tbl")
  { assignment list format with 50% rise width: }
  block(0.5) tabledef("table1.tbl",v)
  { single value format with un-blocked interpretation: }
  w = table("table1.tbl")

```

```

boundaries
  Region 1
    start(0,0)
    line to (10,0) to (10,1) to (0,1) to close

plots
  contour(u) as "10% rise"
  contour(v) as "50% rise"
  contour(w) as "Unblocked"
  elevation(u) as "10% rise" from(0,0.5) to (10,0.5)
  elevation(v) as "50% rise" from(0,0.5) to (10,0.5)
  elevation(w) as "Unblocked" from(0,0.5) to (10,0.5)
  elevation(u, v, w) from(0,0.5) to (10,0.5)

end

```

5.2.13.6 export

```
{ EXPORT.PDE
```

This sample demonstrates the use of several forms of data export selectors. All exports use the default file naming conventions, which append modifiers to the problem name.

A heat flow problem is solved on a square for example purposes.

```
}
```

```
title "Demonstrate forms of export"
```

```
variables
```

```
  Temp
```

```
definitions
```

```
  K = 1
  source = 4
  Texact = 1-x^2-y^2
  flux=magnitude(K*grad(Temp))
```

```
Initial values
```

```
  Temp = 0
```

```
equations
```

```
  Temp: div(K*grad(Temp)) + source = 0
```

```
boundaries
```

```
  Region 1
    start "BDRY" (-1,-1)
    value(Temp)=Texact
    line to (1,-1)
      to (1,1)
      to (-1,1)
    to close
```

```
monitors
```

```
  contour(Temp)
```

```
plots
```

```
  { this contour plot exports graphic images in five formats: }
  contour(Temp) EMF EPS SVG PNG JPEG
  { export temperature and flux in NetCDF format }
  cdf(temp,flux)
  { export FlexPDE TABLE format }
  table(temp)
  { export temperature and flux in TecPlot format }
  tecplot(temp,flux)
  { export temperature and flux in linearized VTK format }
  vtklin(temp,flux)
```

```
end
```

5.2.13.7 export_format

```
{ EXPORT_FORMAT.PDE
  This problem demonstrates a few variations on the use of the
  FORMAT[266] modifier in data export.
}
Title 'Test FORMATTED export'
Variables
  u(1.0)
Equations
  U: dxx(u) + dyy(u) = -4
Boundaries
  region 1
    start(0.5,1)
    value(u)=0 { the cold outer boundary }
    line to (2.5,1) to (2.5,2) to (0.5,2) to close

    start(1,1.2)
    natural(u) = 0
    line to (1,1.8) to (2,1.8)
    line to (1.52,1.52) to (1,1.52) to (1,1.48) to (1.52,1.48)
      to (2,1.2) to close
Monitors
  contour(u)
Plots
  { An ELEVATION plot prints a tag-delimited data list to the file "PTABLE.TXT":}
  elevation(u) from (1.5,1) to (1.5,2) export format "#y#b#1" file="ptable.txt"

  { A CONTOUR plot prints a tab-delimited table of values in the default
    file "export_format.p02": }
  contour(u^2) export format "#x#b#y#b#1"

  { A VECTOR plot prints a table of vectors delimited by commas and parentheses
    in the file "VECTOR.TXT": }
  vector(-dx(u),-dy(u)) zoom(1.9,1.7,0.2,0.2) export format "(#x,#y)=(#1,#2)"
  file "vectors.txt"

  { A TABLE output without graphics writes a 10x10 table of FIXED POINT gridding
    statements suitable for inclusion in another PDE descriptor
    (in the default file "export_format_01.tbl"): }
  table(u) format "fixed point (#x,#y) point load(u)=(#1-u)" points=10

  { A TABLE output without graphics writes a 12x10 table of gaussian source
    statements suitable for inclusion in another PDE descriptor
    (in the default file "export_format_02.tbl"): }
  table(u) format "+a*exp(-(x-#x)/c)^2-((y-#y)/c)^2)*(#1-u)" points=(12,10)
End
```

5.2.13.8 export_history

```
{ EXPORT_HISTORY.PDE
  This example illustrates use of the FORMAT[266] modifier in the export of a
  HISTORY[266] plot.
  The repeat (#R[266]) construct is used to create a comma-delimited data list.
  The problem is the same as FLOAT\_ZONE.PDE[427].
}
title
  "FORMATTED HISTORY EXPORT"
coordinates
```

```

xycylinder('Z','R')

select
  cubic          { Use Cubic Basis }

variables
  temp (threshold=100)

definitions
  k = 0.85      { thermal conductivity}
  cp = 1        { heat capacity }
  long = 18
  H = 0.4       { free convection boundary coupling }
  Ta = 25       { ambient temperature }
  A = 4500      { amplitude }

  source = A*exp(-((z-1*t)/.5)^2)*(200/(t+199))

initial value
  temp = Ta

equations
  Temp: div(k*grad(temp)) + source = cp*dt(temp)

boundaries
  region 1
    start(0,0)
    natural(temp) = 0 line to (long,0)
    value(temp) = Ta line to (long,1)
    natural(temp) = -H*(temp - Ta) line to (0,1)
    value(temp) = Ta line to close
  feature
    start(0.01*long,0) line to (0.01*long,1)

time -0.5 to 19 by 0.01

monitors
  for t = -0.5 by 0.5 to (long + 1)
    elevation(temp) from (0,1) to (long,1) range=(0,1800) as "Surface Temp"
    contour(temp)

plots
  for t = -0.5 by 0.5 to (long + 1)
    elevation(temp) from (0,0) to (long,0) range=(0,1800) as "Axis Temp"

histories
  { EXPORT a formatted HISTORY file: }
  history(temp) at (0,0) (1,0) (2,0) (3,0) (4,0) (5,0) (6,0) (7,0) (8,0)
                  (9,0) (10,0) (11,0) (12,0) (13,0) (14,0) (15,0) (16,0)
                  (17,0) (18,0) export format "#t#r,#i"

end

```

5.2.13.9 mesh_export

```
{ MESH_EXPORT.PDE
```

This example uses a modification of the sample problem [HEAT_BOUNDARY.PDE](#)^[428] to illustrate the use of the [TRANSFER](#)^[277] output function.

Both the temperatures calculated here and the final mesh structure are transferred as input to the stress calculation [MESH_IMPORT.PDE](#)^[503]

```
}
```

```
title "Test TRANSFER output"
```

```
variables
  Temp
```

```
definitions
  K = 1
  source = 4
  Tzero = 0
  flux = -K*grad(Temp)
```

```

equations
  Temp: div(k*grad(Temp)) + source = 0

boundaries
  Region 1
    start "OUTER" (0,0)
    natural(Temp)=0    line to(1,0)

    natural(Temp)=0    arc (center=0,0) to (0,1)

    natural(Temp)=0    line to close

    start "INNER" (0.4,0.2)
    natural(Temp)=Tzero-Temp
    arc (center=0.4,0.4)
      to (0.6,0.4)
      to (0.4,0.6)
      to (0.2,0.4)
    to close

monitors
  contour(Temp)

plots
  grid(x,y)
  contour(Temp)
  surface(Temp)
  vector(-k*dx(Temp), -k*dy(Temp)) as "Heat Flow"
  contour(source)
  elevation(normal(flux)) on "outer" range(-0.08,0.08)
    report(bintegral(normal(flux),"outer")) as "bintegral"
  elevation(normal(flux)) on "inner" range(1.95,2.3)
    report(bintegral(normal(flux),"inner")) as "bintegral"

  { HERE IS THE TRANSFER OUTPUT COMMAND: }
  transfer(Temp,source) file="transferm.xfr"

end

```

5.2.13.10 mesh_import

```
{ MESH_IMPORT.PDE
```

This problem demonstrates the use of the [TRANSFERMESH](#)^[262] facility to import both data and mesh structure from [MESH_EXPORT.PDE](#)^[592].

[MESH_EXPORT.PDE](#)^[592] must be run before running this problem.

```
}
```

```
title 'Testing the TRANSFERMESH statement'
```

```
select
  painted          { paint all contour plots }
```

```
variables
```

```
  U
  V
```

```
definitions
```

```

  nu = 0.3          { define Poisson's Ratio }
  E  = 21           { Young's Modulus x 10-11 }
  G  = E/(1-nu^2)
  C11 = G
  C12 = G*nu
  C22 = G
  C33 = G*(1-nu)/2

```

```

  alpha = 1e-3
  b = G*alpha*(1+nu)

```

```

{ HERE IS THE TRANSFERMESH INPUT FUNCTION: }
transfermesh('mesh_export_output/transferm.xfr',Temp)

```

```

Sxx = C11*dx(U) + C12*dy(V) - b*Temp
Syy = C12*dx(U) + C22*dy(V) - b*temp

```

```

Sxy = C33*(dy(U) + dx(V))

initial values
  U = 0
  V = 0

equations
  U: dx(Sxx) + dy(Sxy) = 0
  V: dy(Syy) + dx(Sxy) = 0

boundaries
  Region 1
    start "OUTER" (0,0)
    natural(U)=0 value(V)=0           { no y-motion on x-axis }
    line to(1,0)
    natural(U)=0 natural(V)=0       { free outer boundary }
    arc (center=0,0) to (0,1)
    value(U)=0 natural(V)=0        { no x-motion on y-axis }
    line to close

    natural(U)=0 natural(V)=0       { free inner boundary }
    start "INNER" (0.4,0.2)
    arc (center=0.4,0.4)
      to (0.6,0.4)
      to (0.4,0.6)
      to (0.2,0.4)
    to close

monitors
  grid(x+100*U,y+100*V)

plots
  contour(Temp)
  grid(x+100*U,y+100*V)
  vector(U,V) as "Displacement"
  contour(U) as "X-Displacement"
  contour(V) as "Y-Displacement"
  contour(Sxx) as "X-Stress"
  contour(Syy) as "Y-Stress"
  surface(Sxx) as "X-Stress"
  surface(Syy) as "Y-Stress"

end

```

5.2.13.11 post_processing

```
{ POST_PROCESSING.PDE
```

This example demonstrates the use of the [TRANSFERMESH](#)^[22] facility to import both data and mesh structure from [MESH_EXPORT.PDE](#)^[592] and perform post-processing without gridding or solving any equations.

This is easily accomplished in a step-wise process:

- 1) make a copy of the script that generated the exported data
- 2) remove the VARIABLES and EQUATIONS sections
- 3) remove any boundary conditions stated in the BOUNDARIES section
- 4) add the TRANSFERMESH statement in the DEFINITIONS section
- 5) add any new plots that you desire

Note that the domain structure must exactly match that of the exporting problem.

[MESH_EXPORT.PDE](#)^[592] must be run before running this problem.

```

}

title "Using TRANSFERMESH for post-processing"

definitions
  K = 1
  transfermesh('mesh_export_output/transferm.xfr',Temp)

boundaries
  Region 1

```

```

start "OUTER" (0,0)
line to(1,0)
arc (center=0,0) to (0,1)
line to close

start "INNER" (0.4,0.2)
arc (center=0.4,0.4)
to (0.6,0.4)
to (0.4,0.6)
to (0.2,0.4)
to close

plots
grid(x,y)
contour(Temp)
contour(Temp) zoom(0.2,0.2,0.1,0.1)
surface(Temp)
vector(-K*dx(Temp),-K*dy(Temp)) as "Heat Flow"

end

```

5.2.13.12 smoothtable

```
{ SMOOTHTABLE.PDE
```

This example shows the use of the [SMOOTH](#) ^[224] modifier for data tables.

No PDE system is solved in this example, it is purely a display of TABLE data.

```

}
title 'Smooth Table Input Test'

definitions
size=10
ts = table('table_s.tbl')
tsx = smooth(1,0) table('table_s.tbl')
tsy = smooth(0,1) table('table_s.tbl')
tsxy = smooth(1,1) table('table_s.tbl')

boundaries
region 1
start(0,size)
line to (0,0) to (size,0) to (size,size) to close

plots
grid(x,y)
surface(ts) as 'Table'
surface(tsx) as 'X-smooth'
surface(tsy) as 'Y-smooth'
surface(tsxy) as 'XY-smooth'
elevation(ts,tsx) from(0,size/2) to (size,size/2) as 'X-smooth'
elevation(ts,tsy) from(size/2,0) to (size/2,size) as 'Y-smooth'
elevation(ts,tsxy) from(size/2,0) to (size/2,size) as 'XY-smooth'

end

```

5.2.13.13 splinetable

```
{ SPLINETABLE.PDE
```

This example solves the same system as [TABLE.PDE](#) ^[594], using a Spline interpretation of the

data in the table file 'TABLE.TBL'.

The file format is the same for [TABLE](#) ^[224] or [SPLINE TABLE](#) ^[224] input.

The SPLINE TABLE operator can be used to build spline tables of one or two dimensions.

The resulting interpolation is third order in the coordinates, with continuous values and derivatives. First or second derivatives of the interpolated function may be computed.

Here the table is used as source and diffusivity in a fictitious heat equation, merely to show the use of the table variable.

The SAVE function is used to construct a Finite Element interpolation of the data from the spline table, for comparison of derivatives. Cubic FEM basis is used so that the second derivative is meaningful.

```

}
title 'Spline Table Input Test'

select
  regrid=off

variables
  u

definitions
  alpha = spline table('table.tbl') ! construct spline fit of table:
  beta = 1/alpha
  femalpha = save(alpha)           ! save a FEM interpolation of table:


equations
  U: div(alpha*grad(u)) + beta = 0

boundaries
  region 1
    start(0,10)
    value(u) = 0
    line to (0,0) to (10,0) to (10,10) to close
  monitors
    contour(u)

plots
  grid(x,y)
  contour(alpha) as 'table'
  contour(dx(alpha)) as 'dx(table)'
  contour(dy(alpha)) as 'dy(table)'
  vector(grad(alpha)) as 'grad(table)'
  surface(alpha) as 'table'
  contour(dxx(alpha)) as 'dxx(table)'
  contour(dxy(alpha)) as 'dxy(table)'
  contour(dyy(alpha)) as 'dyy(table)'
  contour(dxx(alpha)+dyy(alpha)) as "Table Curvature"
  contour(div(grad(femalpha))) as "FEM Curvature"
  surface(beta) as "table reciprocal"
  contour(u) as "temperature solution"
  surface(u) as "temperature solution"

end

```

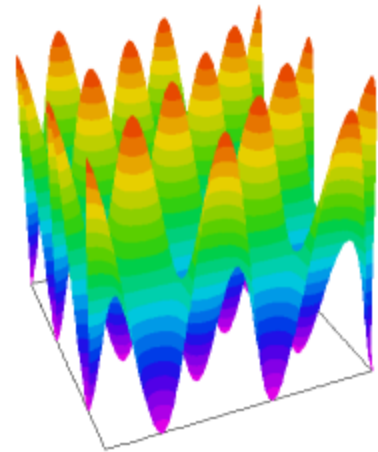

5.2.13.14 table

```

{ TABLE.PDE

  This problem demonstrates the use of tabular data.
  It reads the file "TABLE.TBL", uses the data in a heat equation,
  and displays the table data.

}
title 'Table Input Test'

select
  errlim = 0.0005

variables
  u

definitions
  alpha = table('table.tbl')
  beta = 1/alpha

equations
  U: div(alpha*grad(u)) + beta = 0

```

```

boundaries
  region 1
    start(0,10)
    value(u) = 0
    line to (0,0) to (10,0) to (10,10) to close

monitors
  contour(u)

plots
  grid(x,y)
  contour(alpha) as "Conductivity (Table data)"
  surface(alpha) as 'Conductivity (Table data)'
  vector(grad(alpha)) as 'grad(table)'
  surface(beta) as "Source (Table Reciprocal)"
  contour(u) as "Temperature solution"
  surface(u) as "Temperature solution"

end

```

5.2.13.15 tabledef

```
{ TABLEDEF.PDE
```

This problem illustrates the use of the [TABLEDEF](#)^[224] function to define several parameters from an imported table named TABLEDEF.TBL

Note that the [TABLEDEF](#)^[224] function has the same syntax as the [TRANSFER](#)^[227] function. The difference is that [TABLEDEF](#)^[224] uses a rectangular grid of data values, while [TRANSFER](#)^[227] uses an unstructured triangular finite element mesh created by a prior FlexPDE run.

```

}
title 'Table Input Test'

select
  errlim = 0.0005

variables
  u

definitions
  tabledef('tabledef.tbl',alpha,beta)

equations
  U: div(alpha *grad(u)) + beta = 0

boundaries
  region 1
    start(0,10)
    value(u) = 0
    line to (0,0) to (10,0) to (10,10) to close

monitors
  contour(u)

plots
  grid(x,y)
  contour(u)
  surface(u)
  contour(alpha) surface(alpha)
  contour(beta) surface(beta)
  vector(grad(alpha))

end

```

5.2.13.16 table_export

```
{ TABLE_EXPORT.PDE
```

This example shows the use of FlexPDE as a generator of data tables in proper format to be read in by other FlexPDE problems.

We define a domain which is the domain of the table coordinates, and compute and export the table.

No variables or equations are declared.

This example exports both a 1D and a 2D table of a Gaussian in the table files "GAUS1.TBL" and "GAUS2.TBL".

The output is in default format, suitable for [TABLE](#)^[222] input to other FlexPDE runs. See "FORMAT 'string'" in the Help Index for formatting controls.

See [TABLE_IMPORT.PDE](#)^[598] for an example of reading the [TABLE](#)^[222] created here.

```

}
title 'TABLE generation'
select
  regrid=off
definitions
  u = exp(-16*(x^2+y^2))
boundaries
  Region 1
    start(-1,-1)
    line to (1,-1) to (1,1) to (-1,1) to close
plots
  contour(u)
  surface(u)
  ! 2D table
  table(u) points=51 file='gauss2.tbl'
  ! 1D table
  elevation(u) from(-1,0) to (1,0) export file='gauss1.tbl'
end

```

5.2.13.17 table_import

```

{ TABLE_IMPORT.PDE

  This example reads a 1D table created by TABLE\_EXPORT.PDE[597] and fits
  the data with a cubic spline. It then compares derivatives with
  analytic values.

}
title '1D Spline table import'
select
  regrid=off
definitions
  u = spline table("table_export_output/gauss1.tbl")
  gu = exp(-16*x^2)
boundaries
  Region 1
    start(-1,-1)
    line to (1,-1) to (1,1) to (-1,1) to close
plots
  contour(u) as "imported data"
  contour(dx(u)) as "X-derivative of imported data"
  contour(dxx(u)) as "XX-derivative of imported data"
  elevation(u, gu) from(-1,0) to (1,0) as "Imported data and exact function"
  elevation(dx(u), dx(gu)) from(-1,0) to (1,0) as "Imported X-derivative and exact
function"
  elevation(dxx(u), dxx(gu)) from(-1,0) to (1,0) as "Imported XX-derivative and exact
function"
end

```

5.2.13.18 transfer_export

```

{ TRANSFER_EXPORT.PDE

  This example uses a modification of the sample problem
  HEAT\_BOUNDARY.PDE[428] to illustrate the use of the TRANSFER[227] output
  function. Temperatures calculated here are transferred as
  input to the stress calculation TRANSFER\_IMPORT.PDE[599]

}

title "TRANSFER export test"

variables
  Temp (threshold=0.1)

definitions
  K = 1
  source = 4
  Tzero = 0
  flux = -K*grad(Temp)

equations
  Temp: div(K*grad(Temp)) + source = 0

boundaries
  Region 1
    start "OUTER" (0,0)
    natural(Temp)=0      line to(1,0)

    natural(Temp)=0      arc (center=0,0) to (0,1)

    natural(Temp)=0      line to close

    start "INNER" (0.4,0.2)
    natural(Temp)=Tzero-Temp
    arc (center=0.4,0.4)
      to (0.6,0.4)
      to (0.4,0.6)
      to (0.2,0.4)
      to close

monitors
  contour(Temp)

plots
  grid(x,y)
  contour(Temp)
  surface(Temp)
  vector(-K*dx(Temp),-K*dy(Temp)) as "Heat Flow"
  contour(source)
  elevation(normal(flux)) on "outer" range(-0.08,0.08)
    report(bintegral(normal(flux),"outer")) as "bintegral"
  elevation(normal(flux)) on "inner" range(1.95,2.3)
    report(bintegral(normal(flux),"inner")) as "bintegral"

  { HERE IS THE TRANSFER OUTPUT COMMAND: }
  transfer(Temp,K) file="transfer.xfr"

end

```

5.2.13.19 transfer_import

```

{ TRANSFER_IMPORT.PDE

  This problem demonstrates the use of the TRANSFER[227] facility to import
  temperatures from TRANSFER\_EXPORT.PDE[599] as the source of thermal expansion
  driving a stress calculation.

  TRANSFER\_EXPORT.PDE[599] must be run before running this problem.

}

title 'Testing the TRANSFER input function'

```

```

select
  painted          { paint all contour plots }

variables
  U
  V

definitions
  nu = 0.3          { define Poisson's Ratio }
  E  = 21           { Young's Modulus x 10^11 }
  G  = E/(1-nu^2)
  C11 = G
  C12 = G*nu
  C22 = G
  C33 = G*(1-nu)/2

  alpha = 1e-3
  b = G*alpha*(1+nu)

  { HERE IS THE TRANSFER INPUT FUNCTION: }
  transfer('transfer_export_output/transfer.xfr',Temp,Kxfer)

  Sxx = C11*dx(U) + C12*dy(V) - b*Temp
  Syy = C12*dx(U) + C22*dy(V) - b*temp
  Sxy = C33*(dy(U) + dx(V))

initial values
  U = 0
  V = 0

equations
  U: dx(Sxx) + dy(Sxy) = 0
  V: dy(Syy) + dx(Sxy) = 0

constraints
  integral(u) = 0
  integral(v) = 0
  integral(dx(v)-dy(u)) = 0

boundaries
  Region 1
  start "OUTER" (0,0)

  natural(U)=0 value(V)=0      line to(1,0)
  natural(U)=0 natural(V)=0
  arc (center=0,0) to (0,1) { free outer boundary }
  value(U)=0 natural(V)=0     line to close

  { free inner boundary }
  start "INNER" (0.4,0.2)
  natural(U)=0 natural(V)=0
  arc (center=0.4,0.4)
    to (0.6,0.4)
    to (0.4,0.6)
    to (0.2,0.4)
  to close

monitors
  grid(x+100*U,y+100*V)

plots
  contour(Temp) report(Kxfer)
  grid(x+100*U,y+100*V)
  vector(U,V) as "Displacement"
  contour(U) as "X-Displacement"
  contour(V) as "Y-Displacement"
  contour(Sxx) as "X-Stress"
  contour(Syy) as "Y-Stress"
  surface(Sxx) as "X-Stress"
  surface(Syy) as "Y-Stress"

end

```

5.2.14 Integrals

5.2.14.1 2d_integrals

```

{ 2D_INTEGRALS.PDE
  This problem demonstrates the specification of various integrals in 2D.
}

title '2D Integrals'

coordinates
  ycylinder

variables
  Tp

select errlim=1e-4

definitions
  R0 = 0.1
  R1 = 0.4
  R2 = 0.6
  Long = 1.0
  K = { thermal conductivity -- values supplied later }
  Q = 10*max(1-((r-R1)^2+z^2),0) { Thermal source }

  { This definition shows the use of a selector to force integration of Tp only in
inner region }
  flag2=0
  temp2 = if flag2>0 then Tp else 0

initial values
  Tp = 0.

equations
  Tp: div(k*grad(Tp)) + Q = 0 { the heat equation }

boundaries

  Region 1 { define full domain boundary }
  K = 1
  start "outside" (R0,-Long/2)
  value(Tp) = 0 { fix all side temps }
  line to (R2,-Long/2)
  to (R2,Long/2)
  to (R0,Long/2)
  to close

  Region 2 "Inner Region"
  flag2=1
  k=0.2
  start "Inner Boundary" (R0,-Long/2)
  line to (R1,-Long/2)
  to (R1,Long/2)
  to (R0,Long/2)
  to close

monitors
  contour(Tp)

plots
  contour(Tp)
  contour(k*dz(Tp))
  contour(q)

summary
  report("Compare various forms for integrating over region 2")
  report(integral(Tp,2))
  report(integral(Tp,"Inner Region"))
  report(integral(temp2)) { integrates over full volume, but temp2 is zero in
region 1 }
  report '-----'

  report("Compare various forms for integrating over total volume")
  report(integral(Tp,"ALL"))
  report(integral(Tp))

```

```

report '-----'

report("Compare various forms for integrating over surface of region 2")
report(sintegral(normal(-k*grad(Tp)),2))
report(sintegral(normal(-k*grad(Tp)),'Inner Boundary'))
report '-----'

report("Compare surface flux on region 2 to internal divergence integral")
report(sintegral(normal(-k*grad(Tp)),'Inner Boundary'))
report(integral(Q,'Inner Region'))
report '-----'

report("Compare surface flux on total volume to internal divergence integral")
report(sintegral(normal(-k*grad(Tp))))
report(integral(Q))
report '-----'

end

```

5.2.14.2 3d_integrals

```

{ 3D_INTEGRALS.PDE
  This problem demonstrates the specification of various integrals in 3D.
  ( This is a modification of problem 3D\_BRICKS.PDE [424] )
}

title '3D Integrals'

coordinates
  cartesian3

variables
  Tp

definitions
  long = 1
  wide = 1
  K = { thermal conductivity -- values supplied later }
  Q = 10*max(1-x^2-y^2-z^2,0) { Thermal source }

  { These definitions create a selector that supresses evaluation
    of Tp except in region 2 of layer 2 }
  flag22=0
  check22 = if flag22>0 then Tp else 0

  { These definitions create a selector that supresses evaluation
    of Tp except in region 2 of all layers }
  flag20=0
  check20 = if flag20>0 then Tp else 0

initial values
  Tp = 0.

equations
  Tp: div(k*grad(Tp)) + Q = 0 { the heat equation }

extrusion
  surface "bottom" z = -long
  layer 'bottom layer'
  surface "middle" z=0
  layer 'top layer'
  surface 'top' z= long { divide Z into two layers }

boundaries
  surface 1 value(Tp)=0 { fix bottom surface temp }
  surface 3 value(Tp)=0 { fix top surface temp }

  Region 1 { define full domain boundary in base plane }
  layer 1 k=1 { bottom right brick }
  layer 2 k=0.1 { top right brick }
  start "outside" (-wide,-wide)
  value(Tp) = 0 { fix all side temps }
  line to (wide,-wide) { walk outer boundary in base plane }
  to (wide,wide)
  to (-wide,wide)

```

```

        to close
Region 2 "Left"      { overlay a second region in left half }
  flag20=1
  layer 1 k=0.2      { bottom left brick }
  layer 2 k=0.4 flag22=1 { top left brick }
  start(-wide,-wide)
    line to (0,-wide)      { walk left half boundary in base plane }
        to (0,wide)
        to (-wide,wide)
    to close

monitors
  contour(Tp) on surface z=0 as "XY Temp"
  contour(Tp) on surface x=0 as "YZ Temp"
  contour(Tp) on surface y=0 as "ZX Temp"
  elevation(Tp) from (-wide,0,0) to (wide,0,0) as "X-Axis Temp"
  elevation(Tp) from (0,-wide,0) to (0,wide,0) as "Y-Axis Temp"
  elevation(Tp) from (0,0,-long) to (0,0,long) as "Z-Axis Temp"

plots
  contour(Tp) on z=0 as "XY Temp"
  contour(Tp) on x=0 as "YZ Temp"
  contour(Tp) on y=0 as "ZX Temp"
  contour(k*dz(Tp)) on z=-0.001 as "Low Middle Z-Flux"
  contour(k*dz(Tp)) on z=0.001 as "High Middle Z-Flux"

summary
  report("Compare various forms for integrating over region 2 of layer 2")
  report(integral(Tp,"Left","Top Layer"))
  report(integral(check22))
  report '-----'

  report("Compare various forms for integrating over region 2 in all layers")
  report(integral(Tp,"Left"))
  report(integral(Tp,"Left","All"))
  report(integral(check20))
  report '-----'

  report("Compare various forms for integrating over total volume")
  report(integral(Tp))
  report(integral(Tp,"ALL","ALL"))
  report '-----'

  report("Compare various forms for integrating over surface 'middle'")
  report(sintegral(normal(-k*grad(Tp)),'Middle'))
  report(sintegral(-k*dz(Tp),2))
  report '-----'

  report("Compare various forms for integrating over surfaces")
  report(sintegral(normal(-k*grad(Tp)),'bottom')) as "Bottom Flux"
  report(sintegral(normal(-k*grad(Tp)),3)) as "Top Flux"
  report(sintegral(normal(-k*grad(Tp)),'outside')) as "Side Flux"
  report(sintegral(normal(-k*grad(Tp)),1)+sintegral(normal(-k*grad(Tp)),3)
    +sintegral(normal(-k*grad(Tp)),'outside')) as "Bottom+Top+Side Flux"
  report(sintegral(normal(-k*grad(Tp)))) { surface integral on total outer surface }

}

  report(integral(Q) ) as "Source Integral"
  report(sintegral(normal(-k*grad(Tp)),'outside')
    +sintegral(normal(-k*grad(Tp)),'Bottom')+sintegral(normal(-k*grad(Tp)),'Top')
    -integral(Q) ) as "Energy Error"
  report(integral(div(-k*grad(Tp))) ) as "Divergence Integral"
  report '-----'

  report("Compare surface flux on region 2 of layer 2 to internal divergence
integral")
  { surface integral over outer surface of region 2, layer 2 }
  report(sintegral(normal(-k*grad(Tp)),'Left',"Top Layer"))
  report(integral(Q,"Left","Top Layer"))
  report '-----'

end

```


5.2.14.3 time_integral

```

{ TIME_INTEGRAL.PDE
  This example illustrates use of the TIME\_INTEGRAL186 function in time-dependent
  problems.
}

title
  "Float Zone"

coordinates
  xcylinder('Z','R')

variables
  temp (threshold=100)

definitions
  k = 0.85           {thermal conductivity}
  cp = 1             { heat capacity }
  long = 18
  H = 0.4           {free convection boundary coupling}
  Ta = 25           {ambient temperature}
  A = 4500          {amplitude}

  source = A*exp(-((z-1*t)/.5)^2)*(200/(t+199))
  tsource = time_integral(vol_integral(source))

initial value
  temp = Ta

equations
  temp: div(k*grad(temp)) + source = cp*dt(temp)

boundaries
  region 1
    start(0,0)
    natural(temp) = 0 line to (long,0)
    value(temp) = Ta line to (long,1)
    natural(temp) = -H*(temp - Ta) line to (0,1)
    value(temp) = Ta line to close
  feature
    start(0.01*long,0) line to (0.01*long,1)

time -0.5 to 19

monitors
  for t = -0.5 by 0.5 to (long + 1)
    elevation(temp) from (0,1) to (long,1) range=(0,1800) as "Surface Temp"
    contour(temp)
    contour(dt(temp))

plots
  for t = -0.5 by 0.5 to (long + 1)
    elevation(temp) from (0,0) to (long,0) range=(0,1800) as "Axis Temp"

histories
  history(temp,dt(temp)) at (0,0) (1,0) (2,0) (3,0) (4,0) (5,0) (6,0) (7,0) (8,0)
                        (9,0) (10,0) (11,0) (12,0) (13,0) (14,0) (15,0) (16,0)
                        (17,0) (18,0)
  history(tsource) as "Total Source"

end

```

5.2.15 Mesh_Control

5.2.15.1 3d_curvature

```

{ 3D_CURVATURE.PDE

  This problem demonstrates automatic mesh densification due to curvature and
  proximity to small features.

  The example consists of a three-layer heatflow problem. The bottom layer contains

```

a hidden rise, or "dimple", that rises close to the base of the adjoining layer.

FlexPDE detects this dimple and automatically refines the computation mesh to resolve the curvature of the tip.

It also detects the proximity of the dimple peak to the adjoining layer and refines the mesh in that layer as well.

```
}

```

```
title '3D Layer curvature resolution Test'
```

```
coordinates
  cartesian3
```

```
select
  paintregions
```

```
variables
  Tp
```

```
definitions
  long = 1
  wide = 1
  K = 1
  Q = 0
  narrow = 0.2
  z1 = 0
  z2 = 0.1+0.3*exp(-(x^2+y^2)/narrow^2)
  z3 = 0.5
  z4 = 1
```

```
initial values
  Tp = 0.
```

```
equations
  Tp: div(k*grad(Tp)) + Q = 0
```

```
extrusion z = z1,z2,z3,z4
```



```
boundaries
  surface 1 value (Tp)=0
  surface 4 value (Tp)=1
```

```
Region 1
  layer 1 k=10
  layer 3 k=5
  start (-wide,-wide)
  line to (wide,-wide) to (wide,wide) to (-wide,wide) to close
```

```
monitors
  grid (x,z) on y=0
  contour (Tp) on z=0.38 painted
```

```
plots
  grid(x,y,z) on layer 1
  grid (x,z) on y=0
  grid(x,y) on surface 2
  contour (Tp) on y=0 as "ZX Temp"
  contour (Tp) on z=0.38 painted
```

```
end
```

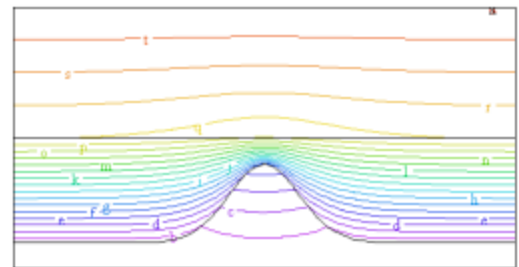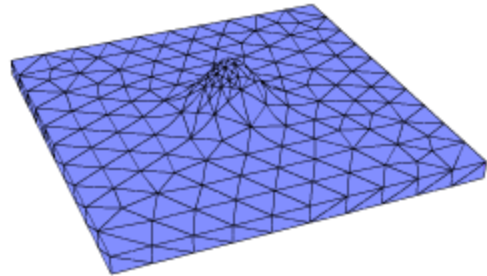

5.2.15.2 boundary_density

```
{ BOUNDARY_DENSITY.PDE
```

This problem demonstrates the use of the [MESH_DENSITY](#) ^[228] parameter to control mesh density along a boundary.

The boundary of the inner region is forced to a grid spacing of 0.02

```

}
title 'Cell size control'
variables
  u
definitions
  k = 1
  u0 = 1-x^2-y^2
  s = 2*3/4+5*2/4
  b = 0.1
  c = 0.02
equations
  U: div(K*grad(u)) +s = 0
boundaries
  Region 1
  start(-1,-1)
  value(u)=u0
  line to (1,-1) to (1,1) to (-1,1) to close
  Region 2
  start(-b,-b)
  mesh_density = 1/c { command inside the boundary path }
  line to (b,-b) to (b,b) to (-b,b) to close
plots
  grid(x,y)
  contour(u) on region 2
end

```

5.2.15.3 boundary_spacing

```
{ BOUNDARY_SPACING.PDE
```

This problem demonstrates the use of the [MESH_SPACING](#)^[228] parameter to control mesh density along a boundary.


The boundary of the inner region is forced to a grid spacing of 0.02

```
}
```

```

title 'Cell size control'
variables
  u
definitions
  k = 1
  u0 = 1-x^2-y^2
  s = 2*3/4+5*2/4
  b = 0.1
  c = 0.02
equations
  U: div(K*grad(u)) +s = 0
boundaries
  Region 1
  start(-1,-1)
  value(u)=u0
  line to (1,-1) to (1,1) to (-1,1) to close
  Region 2
  start(-b,-b)
  mesh_spacing=c { command placed inside the boundary path }
  line to (b,-b) to (b,b) to (-b,b) to close
plots
  grid(x,y)
  contour(u) on region 2
end

```

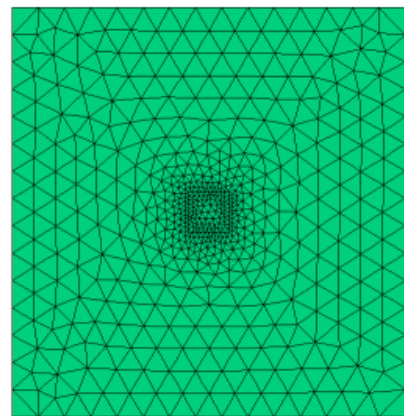

5.2.15.4 front

```
{ FRONT.PDE
```

This example demonstrates the use of the [FRONT](#)^[258] statement to create a dense mesh at a moving front.

The [FRONT](#)^[258] command is used to force mesh refinement wherever the concentration variable passes through a value of 0.5.

The problem is the same as [CHEMBURN.PDE](#)^[374].

```
}
```

```
title
'FRONT statement in Chemical Reactor'
```

```
select
  painted      { make color-filled contour plots }
```

```
variables
  Temp (threshold=1)
  C (threshold=1)
```

```
definitions
  LZ = 1
  r1=1
  heat=0
  gamma = 16
  beta = 0.2
  betap = 0.3
  BI = 1
  T0 = 1
  TW = 0.92
  { the very nasty reaction rate: }
  RC = (1-C)*exp(gamma-gamma/Temp)
  xev=0.96  { some plot points }
  yev=0.25
```

```
initial value
  Temp=T0
  C=0
```

```
equations
  Temp: div(grad(Temp)) + heat + betap*RC = dt(Temp)
  C: div(grad(C)) + beta*RC = dt(C)
```

```
boundaries
  region 1
    start (0,0)

    { a mirror plane on X-axis }
    natural(Temp) = 0
    natural(C) = 0
    line to (r1,0)


    { "Strip Heater" at fixed temperature }
    { ramp the boundary temp in time, because discontinuity is costly to diffuse }
    value(Temp)=T0 + 0.2*uramp(t,t-0.05)
    natural(C)=0      { no mass flow on strip heater }
    arc(center=0,0) angle 5

    { convective cooling and no mass flow on outer arc }
    natural(Temp)=BI*(TW-Temp)
    natural(C)=0
    arc(center=0,0) angle 85

    { a mirror plane on Y-axis }
    natural(Temp) = 0
    natural(C) = 0
    line to (0,0) to close
```

```
time 0 to 1
```

```
{ FORCE CELLS TO SPAN NO MORE THAN 0.1 ACROSS C=0.5 }
```

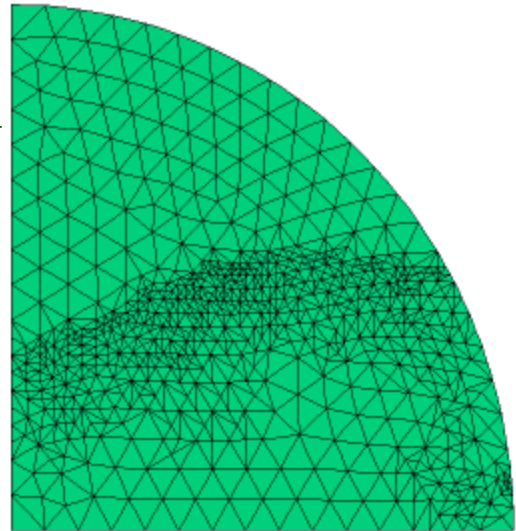

```

front(c-0.5, 0.1)
plots
  for cycle=10                                { watch the fast events by cycle }
  grid(x,y)
  contour(Temp)
  contour(c) as "Completion"

  for t= 0.2 by 0.05 to 0.3                    { show some surfaces during burn }
  surface(Temp)
  surface(c) as "Completion"

histories
  history(Temp,c) at (0,0) (xev/2,yev/2) (xev,yev) (yev/2,xev/2) (yev,yev)
end

```

5.2.15.5 mesh_density

```
{ MESH_DENSITY.PDE
```

This example demonstrates the use of the [MESH_DENSITY](#) ^[228] parameter to control mesh density.

A global density function is defined as a Gaussian distribution returning 1 cell-per-unit density at the center, rising to 54.6 cell-per-unit density at the corners.

This global distribution is overridden by a regional definition of 50 cell-per-unit density in a central region.

```

}
title 'cell size control'
variables
  u
definitions
  k = 1
  u0 = 1-x^2-y^2
  s = 2*3/4+5*2/4
  mesh_density = exp(2*(x^2+y^2))
  box = 0.1
equations
  u : div(k*grad(u)) +s = 0
boundaries
  region 1
    start(-1,-1)
    value(u)=u0
    line to (1,-1) to (1,1) to (-1,1) to close
  region 2
    mesh_density = 50
    start(-box,-box)
    line to (box,-box) to (box,box) to (-box,box) to close
plots
  grid(x,y)
  contour(u)
end

```

5.2.15.6 mesh_spacing

```
{ MESH_SPACING.PDE
```

This example demonstrates the use of the [MESH_SPACING](#) ^[228] parameter to control mesh density.


A global density function is defined as a Gaussian distribution returning 1 unit mesh spacing at the center, falling to 0.018 at the corners.

This global distribution is overridden by a regional definition of 0.02 mesh spacing in a central region.

```

}
title 'Cell Size Control'
variables
  u
definitions
  k = 1
  u0 = 1-x^2-y^2
  s = 2*3/4+5*2/4
  mesh_spacing = exp(-2*(x^2+y^2))
  b = 0.1
  c = 0.02
equations
  u : div(k*grad(u)) +s = 0
boundaries
  Region 1
  start(-1,-1)
  value(u)=u0
  line to (1,-1) to (1,1) to (-1,1) to close
  Region 2
  mesh_spacing = c
  start(-b,-b)
  line to (b,-b) to (b,b) to (-b,b) to close
plots
  grid(x,y)
  contour(u)
end

```

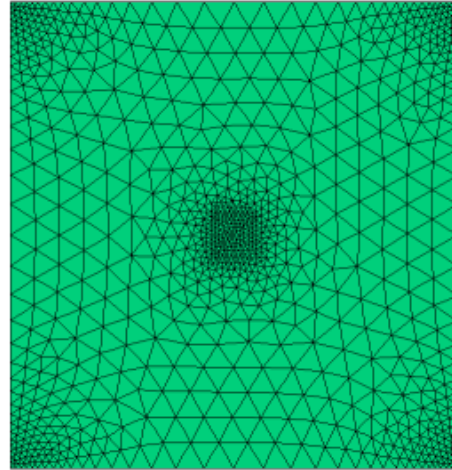

5.2.15.7 resolve

```

{ RESOLVE.PDE
  This is a test problem from Timoshenko: Theory of Elasticity, p41
  The RESOLVE[259] statement has been added to force regridder to resolve the
  shear stress.
}
title "RESOLVE shear stress in bent bar"
select
  elevationgrid=500
  cubic
variables
  U { X-displacement }
  V { Y-displacement }
definitions
  L = 1           { Bar length }
  hL = L/2
  w = 0.1        { Bar thickness }
  hw = w/2
  eps = 0.01*L
  I = 2*hw^3/3   { Moment of inertia }
  nu = 0.3       { Poisson's Ratio }
  E = 2.0e11     { Young's Modulus for Steel (N/M^2) }
  { plane stress coefficients }
  G = E/(1-nu^2)
  C11 = G
  C12 = G*nu

```

```

C22 = G
C33 = G*(1-nu)/2

amplitude=1e-6      { a guess for grid-plot scaling }
mag=0.1/amplitude

force = 250         { total loading force in Newtons (~10 pound force) }
dist = 0.5*force*(hw^2-y^2)/I      { Distributed load }

Sx = (C11*dx(U) + C12*dy(V))      { Stresses }
Sy = (C12*dx(U) + C22*dy(V))
Txy = C33*(dy(U) + dx(V))

Vexact = (force/(6*E*I))*((L-x)^2*(2*L+x) + 3*nu*x*y^2)
Uexact = (force/(6*E*I))*(3*y*(L^2-x^2) + (2+nu)*y^3 - 6*(1+nu)*hw^2*y)
Sxexact = -force*x*y/I
Txyexact = -0.5*force*(hw^2-y^2)/I

small = 1e-5

initial values
U = 0
V = 0

equations { define the displacement equations }
U: dx(C11*dx(U) + C12*dy(V)) + dy(C33*(dy(U) + dx(V))) = 0
V: dx(C33*(dy(U) + dx(V))) + dy(C12*dx(U) + C22*dy(V)) = 0

{ force regridder to resolve the shear stress.
  Avoid the ends, where the stress is extreme. }
resolve (Txy, 100*(x/L)*(1-x/L))

boundaries
region 1
start (0,-hw)

{ free boundary on bottom, no normal stress }
load(U)=0 load(V)=0 line to (L,-hw)

{ clamp the right end }
value(U) = Uexact line to (L,0) point value(V) = 0
line to (L,hw)

{ free boundary on top, no normal stress }
load(U)=0 load(V)=0 line to (0,hw)

{ apply distributed load to Y-displacement equation }
load(U)=0 load(V)=dist line to close

plots
grid(x+mag*U,y+mag*V) as "deformation" { show final deformed grid }
elevation(V,Vexact) from(0,0) to (L,0) as "Center Y-Displacement(M)"
elevation(V,Vexact) from(0,hw) to (L,hw) as "Top Y-Displacement(M)"
elevation(U,Uexact) from(0,hw) to (L,hw) as "Top X-Displacement(M)"
elevation(Sx,Sxexact) from(0,hw) to (L,hw) as "Top X-Stress"
elevation(Sx,Sxexact) from(0,0) to (L,0) as "Center X-Stress"
elevation(Txy,Txyexact) from(0,hw) to (L,hw) as "Top Shear Stress"
elevation(Txy,Txyexact) from(0,0) to (L,0) as "Center Shear Stress"
elevation(Txy,Txyexact) from(hL,-hw) to (hL,hw) as "Center Shear Stress"

end

```

5.2.16 Misc

5.2.16.1 askuser

```

{ ASKUSER.PDE

  This example demonstrates the use of the ASK USER command to take input from the user
  at run time.
  The problem is a copy of FILLET.PDE[614].

}

title 'ASK USER test'

```

```

Variables
  u

select
  ngrid=ask user("What do yo want to use for NGRID?")

definitions
  k = 1
  u0 = 1-x^2-y^2
  s = ask user("what source do you want to use?",2*3/4+5*2/4)

equations
  u: div(k*grad(u)) +s = 0

boundaries
  Region 1
  start(-1,-1)
  value(u)=u0 line to (1,-1) FILLET(0.1)
  to (-0.25,-0.25) FILLET(0.1)
  to (-1,1) BEVEL(0.1)
  to close

plots
  grid(x,y)
  contour(u) points=200
  grid(x,y) zoom(0.6,-1, 0.2,0.2)
  contour(u) zoom(0.6,-1, 0.2,0.2) as "Convex Fillet Closeup"
  grid(x,y) zoom(-0.35,-0.35, 0.2,0.2)
  contour(u) zoom(-0.35,-0.35, 0.2,0.2) as "Concave Fillet Closeup"

end

```

5.2.16.2 bc_sets

```

{ BC_SETS.PDE
  This example shows the basic use of boundary condition sets.
}

```

```
TITLE 'BC Sets'
```

```
COORDINATES cartesian2
```

```
VARIABLES u v
```

```
BOUNDARY CONDITIONS
'inlet' : value(u)=1 natural(v)=1
'outlet': natural(u)=1 value(v)=10
'side' : natural(u)=0 natural(v)=0

```

```
EQUATIONS
u: div(grad(u))=0
v: div(grad(v))=0

```

```
BOUNDARIES
Region 1
start(0,0) use bc 'side'
line to (5,0) use bc 'outlet'
line to (5,1) use bc 'side'
line to (0,1) use bc 'inlet'
line to close

```

```
PLOTS
contour(u)
contour(v)

```


END

5.2.16.3 bc_switching

```
{ BC_SWITCHING.PDE
```

This script demonstrates a technique for switching a boundary condition from NATURAL to VALUE. FlexPDE does not allow this switch directly, but it can be mimicked by using a NATURAL condition that is equivalent to the VALUE condition.

To achieve this, one can apply a flux that drives the boundary to the desired value. The flux is a "large" penalty term multiplied by the difference of the desired value (U0) and the actual value :

```
NATURAL(U) = penalty*(U0-U)
```

The size of the penalty term will dictate how rigorously the value is tracked.

Now the switching boundary condition can be implemented in an IF statement:

```
NATURAL(U) = IF condition THEN penalty*(U0-U) ELSE otherflux
```

```
}
```

```
title "Boundary Condition Switching"
```

```
variables Temp
```

```
definitions
```

```
penalty = 300 { penalty for value bc }
Temp0 = 15 { ambient temperature }
heater = 315 { heater temperature }
h = 1 { block size }
k = 0.85 { thermal conductivity }
cp = 1 { heat capacity }
rt = 0.5 { heater ramp time }
```

```
delta = h/4 + URAMP(t-1,t-5)*h/2 { moving point for BC switch }
```

```
equations
```

```
Temp : div(k*grad(Temp)) = cp*dt(Temp)
```

```
initial values
```

```
Temp = Temp0
```

```
boundaries
```

```
region 1
start(0,0)
line to (h,0)
natural(Temp) = if (y > delta) then penalty*(Temp0-Temp) else 0
line to (h,h)
nobl(Temp)
line to (0,h)
value(Temp) = RAMP(t-rt,Temp0,heater,2*rt)
line to close
```

```
time 0 to 6 by 1e-4
```

```
monitors
```

```
for cycle = 10
contour(Temp)
elevation(Temp) from(h,0) to (h,h)
```

```
plots
```

```

for t = 1 by 1 to 6
  contour(Temp)
  elevation(Temp) from(h,0) to (h,h)

histories
  history(Temp) at (0,h/2), (h,h/5), (h,4*h/5)

end

```

5.2.16.4 data_fitting

```
{ DATA_FITTING.PDE
```

This example uses GLOBAL VARIABLES to form a least-squares fit to a Gaussian data distribution, and then follows the fit as the Gaussian diffuses out.

The basic process of least-squares fitting seeks to minimize the integral of the square of the difference between the given data and the analytic fit function:

```

minimize G = Integral (( F - P)^2 * dV)
where F is the analytic fit and P is the array of given data.

```

The technique is to find a stationary point in the derivatives of G with respect to the fit parameters.

In our case, we choose $F(x,y) = A \cdot \exp(-R^2/W^2)$, where A is the amplitude and W is the half-width of the fitted Gaussian, and R is the radius $\sqrt{x^2+y^2}$, (a pre-defined name in FlexPDE).

```

with this definition, we can define the fit equations
dG/dA = Integral(2*(F-P)*dF/dA) = 0
dG/dw = Integral(2*(F-P)*dF/dw) = 0

```

We start by solving the fit equations in an INITIAL EQUATIONS section, then proceed to solve the fit equations simultaneously with the diffusion of the data field.

```
title 'Least-Squares Data Fitting'
```

```
coordinates cartesian2
```

```
variables p(Threshold = 0.001) ! the raw data field
```

```
global variables
```

```

A(Threshold = 0.001) ! The Fit amplitude
w(Threshold=0.001) ! The Fit half-width

```

```
definitions
```

```

box = 1.5 ! The Domain Size
wdata = 0.1 ! The half-width of the data Gaussian
k = 0.1 ! the diffusivity of the data equation

```

```

! Force denser mesh at the peak of the data
mesh_den = 50
mesh_density = mesh_den*exp(-(x^2+y^2)/wdata^2)

```

```

! The Gaussian fit equation terms
fitf = A*exp(-r^2/w^2)
dfdk = fitf/A
dfdw = fitf * (2*r^2/w^3)
fitg = fitf - p

```

```
initial equations
```

```

A : integral(2*fitg*dfdk) = 0
w: integral(2*fitg*dfdw) = 0

```

```

equations
  p : dt(p) =div(k*grad(p))
  A : integral(2*fitg*dfdk) =0
  w:  integral(2*fitg*dfdw) =0

boundaries
  region 1
  start(-box,-box)
  line to (box,-box) to (box,box) to (-box,box) to close

initial values
  p = exp(-(x^2 + y^2)/wdata^2)
  A = 0.9 ! slightly erroneous first guess amplitude
  w= 1.1*wdata ! slightly erroneous first guess half-width

time 0 to 1

plots
for cycle=1
  elevation(fitf,p) from (-box,0) to (box,0)
  report(A) report(integral(2*fitg*dfdk))
  contour(fitf)
  contour(p)
  contour(fitg) as "Fit Error"
  contour(dfdk)
  contour(dfdw)
  history(A)
  history(w)

end

```

5.2.16.5 edge_distance

```

{ EDGE_DISTANCE.PDE
  This script demonstrates the EDGE_DISTANCE function by constructing a
  gaussian curve based on the distance along the boundary path 'outer'.
}
Title 'Edge Distance'

Variables u

Definitions
  wide=1
  w = wide/2

  ! Define a Gaussian on the outer boundary, centered at half the perimeter
  ! (this depends on the boundary being defined in a single path!)
  gaus1 = exp( -(edge_distance("outer")-4*wide)^2 / w^2 )

  ! form the integral of the Gaussian over the boundary
  lint = surf_integral(gaus1,"outer")

Equations
  div(grad(u)) = 0

Boundaries
  Region 1
  start "outer" (-wide,-wide)
  line to(wide,-wide) to(wide,wide) to(-wide,wide) to close

Plots
  grid(x,y)


  ! display the Gaussian and compare the explicit integral to the automatic plot
integral
  elevation(gaus1) on "outer" report lint

```

end


5.2.16.6 fillet

```
{ FILLET.PDE
  This example demonstrates the use of the FILLET[25] and BEVEL[25] commands
}
title 'fillet test'
variables
  u
definitions
  k = 1
  u0 = 1-x^2-y^2
  s = 2*3/4+5*2/4
equations
  U: div(k*grad(u)) +s = 0
boundaries
  Region 1
    start(-1,-1)
    value(u)=u0
    line to (1,-1) FILLET(0.1)
        to (-0.25,-0.25) FILLET(0.1)
        to (-1,1) BEVEL(0.1)
    to close
monitors
  grid(x,y)
  contour(u)
plots
  grid(x,y)
  contour(u)
  contour(u) zoom(0.6,-1, 0.2,0.2) as "Convex Fillet Closeup"
  contour(u) zoom(-0.3,-0.3, 0.1,0.1) as "Concave Fillet Closeup"
end
```

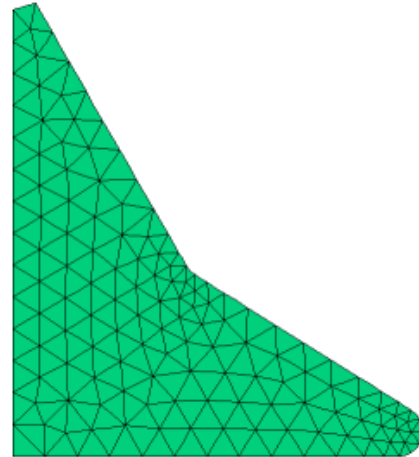

5.2.16.7 fit+weight

```
{ FIT+WEIGHT.PDE
  This test shows the use of spatially-varying weights in the FIT[178] function.
  There are no variables or equations here, just a domain and some tabular
  data which is FIT in different ways.
  The weight declared in the FIT statement is effectively the square of the
  spatial distance over which variations are smoothed.
}
title 'Test variable-weight FIT'
definitions
  u = table('table.tbl')
boundaries
  region 1
    start(0,10)
    line to (0,0) to (10,0) to (10,10) to close
plots
  grid(x,y)
  surface(u)
  contour(u)
  contour(fit(u)) as 'unweighted'
  contour(fit(u,0.2)) as 'constant weight'
```

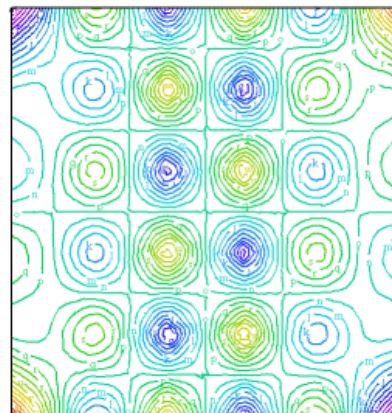

```

contour(fit(u,0.2*(x-5)^2)) as 'side-weights'
contour(fit(u,0.5*x)) as 'right-side weight'

contour(dx(u))
surface(dx(u))
contour(fit(dx(u)))
contour(fit(dx(u),0.5))
surface(fit(dx(u),0.5))

end

```

5.2.16.8 ifthen

```
{ IFTHEN.PDE
```

This example demonstrates the use of ["IF...THEN"](#)^[194] conditionals in arithmetic statements.

We solve a heat equation in which the conductivity is defined by a conditional (IF..THEN) expression.

Caveat:

IF..THEN can be dangerous if used improperly. Equation coefficients that are discontinuous functions of the system variables can cause convergence failure or tiny timesteps and slow execution. See [SWAGETEST.PDE](#)^[587].

```
}
```

```
title 'Nonlinear heatflow, conditional conductivity'
```

```
Variables
```

```
u
```

```
definitions
```

```

a = IF (u<0.5) and (x<100)
    THEN IF u < 0.2
        THEN 1.4
        ELSE 1+2*abs(u)
    ELSE 2

```

```
Initial values
```

```
u = 1 - (x-1)^2 - (y-1)^2
```

```
equations
```

```
u: div(a*grad(u)) + 4 = 0;
```

```
boundaries
```

```

Region 1
start(0,0)
value(u)=0
line to (2,0) to (2,2) to (0,2) to close

```

```
monitors
```

```
contour(u)
```

```
plots
```

```

surface(u)
contour(u)
contour(a) as "Conditional Conductivity"
elevation(a,u) from (0,1) to (2,1) as "Conductivity and Solution"

```

```
end
```

5.2.16.9 lump

```
{ LUMP.PDE
```

This example illustrates use of the [LUMP](#)^[176] function.

LUMP(F) saves an averaged value of F in each mesh cell, and returns the same value for any position within the cell.

Notice that LUMP(F) is NOT the same as the "lumped parameters" frequently referred to in finite element literature.

[LUMP\(f\)](#)^[178] is syntactically like [SAVE\(f\)](#)^[180], in that it stores a representation of its argument for later use.

```

}
title 'LUMP test'

select
  contourgrid=400 { use a very dense plot grid to show lump structure }
  threads=1

Variables
  u

definitions
  k = 2
  u0 = 1+x^2+y^2
  s = u0 - 4*k
  lumps = lump(s)          { Used in a definition }

Initial values
  u = 1

equations
  U: u - div(k*grad(u)) = s

boundaries
  Region 1
    start(-1,-1)
    value(u)=u0
    line to (1,-1) to (1,1) to (-1,1) to close

monitors
  contour(u)

plots
  grid(x,y)
  contour(u)
  contour(s)
  contour(lump(s)) as "Lumped Source - Direct Reference"
  contour(lumps) as "Lumped Source - Defined Parameter"

end

```

5.2.16.10 material_sets

```
{ MATERIAL_SETS.PDE
```

```
  This example shows the basic use of MATERIALS[228] for grouping parameter values.
  There are no variables or equations.
}
```

```
Title 'Material Sets - Bricks'
```

```
Coordinates cartesian3
```

```
select ngrid = 1 { grid coarsely for plotting example }
```

```
Materials { These values are arbitrary and not intended to reflect the actual physical
values for these materials }
  'iron' : K = 4 J = 1
  'aluminum' : K = 3 J = 2
  'plastic' : K = 2 J = 3
  'wood' : K = 1 J = 4
```

```
Extrusion z = 0, 1, 2, 3, 4
```

```
Boundaries
```

```

Region 1
  Layer 1 use material 'iron'
  Layer 2 use material 'aluminum'
  Layer 3 use material 'plastic'
  Layer 4 use material 'wood'
  start(0,0) line to (1,0) to (1,1) to (0,1) to close

Region 2
  use material 'iron'
  start(0,1) line to (1,1) to (1,2) to (0,2) to close
Plots
  contour(K) on x=0.5 painted range(0,5)
  contour(J) on x=0.5 painted range(0,5)

End

```

5.2.16.11 moving_source

```

{ MOVING_SOURCE.PDE

  This script uses the EDGE_DISTANCE function to create a moving Gaussian boundary
  source.
}
Title 'Moving source'

Variables u
Global Variables m(1)

Select
  initgridlimit=1 ! don't regrid at initial discontinuity
  fixdt = 0.05
  debug(treemods)

Definitions
  wide=1
  ! the width of the gaussian is .25
  w = wide/4
  ! move the center of the source from 0.5 at a velocity of 1.0
  d = t+0.5
  ! the gaussian function
  gaust = exp( -(edge_distance("wall")-d)^2 / w^2 )
  ! integrate the gaussian over the wall distance
  lint = surf_integral(gaust,"wall")

Initial Equations
  u: div(grad(u)) = 0

Equations
  u: div(grad(u)) = 0
  m: dt(m)=1

Boundaries
  Region 1
  ! define the "wall" to be the right side and top, and apply the source
  start (wide,-wide)
    label "wall" value(u)=gaust
  line to(wide,wide) to(-wide,wide)
  endlabel "wall" natural(u)=0
  ! define a natural bc over the left side and bottom
  line to(-wide,-wide) natural(u)=0
  line to close

! run long enough that the source climbs the right wall and crosses the top
Time = 0 to 3

Plots
  for cycle=1
  grid(x,y)
  contour(u)

```

```

surface(u)
elevation(gaust) on "wall" report lint
history(lint, integral(u))
End

```

5.2.16.12 point_load

```

{ POINT_LOAD.PDE

  This example demonstrates the use of the POINT LOAD bc.
  It is a modification of the example POLAR\_COORDINATES.PDE[619].
}

title 'Point Load'

Variables
  u

definitions
  k = 1
  u0 = 1-r^2
  s = 4
  dr(f) = (x/r)*dx(f) + (y/r)*dy(f)      { functional definition of polar
derivatives... }
  dphi(f) = (-y)*dx(f) + x*dy(f)        {... in cartesian coordinates }
  pload = staged (0, 2)

equations { equation expressed in polar coordinates }
  { (Multiplied by r^2 to clear the r=0 singularity) }
  u: r*dr(r*dr(u)) + dphi(dphi(u)) + r*r*s = 0

boundaries
  Region 1
  start(0,0) point load(u)=pload
  natural(u) = 0 line to (1,0)
  value(u)=u0 arc(center=0,0) angle=90
  natural(u)=0 line to close

monitors
  grid(x,y) as "Computation Mesh"
  contour(u) as "Solution"
  contour(u-u0) as "Error (u-u0)"

plots
  grid(x,y) as "Computation Mesh"
  contour(u) as "Solution"
  contour(u-u0) as "Error (u-u0)"

end

```

5.2.16.13 polar_coordinates

```

{ POLAR_COORDINATES.PDE

  This example demonstrates the use of functional parameter definitions
  to pose equations in polar-coordinate form. The function definitions
  expand polar derivatives in cartesian (XY) geometry.
}

title 'Polar Coordinates'

Variables
  u

definitions
  k = 1

```



```

u0 = 1-r^2
s = 4
dr(f) = (x/r)*dx(f) + (y/r)*dy(f) { functional definition of polar derivatives... }
dphi(f) = (-y)*dx(f) + x*dy(f) {... in cartesian coordinates }
equations { equation expressed in polar coordinates
           (Multiplied by r^2 to clear the r=0 singularity) }
u: r*dr(r*dr(u)) + dphi(dphi(u)) + r*r*s = 0

boundaries
  Region 1
    start(0,0)
    natural(u) = 0 line to (1,0)
    value(u)=u0 arc(center=0,0) angle=90
    natural(u)=0 line to close

monitors
  grid(x,y) as "Computation Mesh"
  contour(u) as "Solution"
  contour(u-u0) as "Error (u-u0)"

plots
  grid(x,y) as "Computation Mesh"
  contour(u) as "Solution"
  contour(u-u0) as "Error (u-u0)"
end

```

5.2.16.14 regional_equations

```
{ REGIONAL_EQUATIONS.PDE
```

This sample shows how to apply different equations in different regions.

In this sample, the equations are essentially the same and the differing conductivities could be dealt with by regionally defined parameters, but this methodology can be used to apply different equations in the regions. FlexPDE will assume flux continuity at the material boundary. Care should be taken that this is correct for the application.

```
}
```

```
Title 'Regional Equations'
```

```
Variables Temp
```

```
Definitions
```

```

A = 0
B = 0
kA = 1
kB = 10
eqnA = div(kA*grad(Temp))
eqnB = div(kB*grad(Temp))

```

```
Equations
```

```
Temp: A*eqnA + B*eqnB = 0
```

```
Boundaries
```

```

Region 'A'
  A = 1
  start(0,0) line to (1,0) to (1,1) to (0,1)
  value(Temp) = 100
  line to close

```

```

Region 'B'
  B = 1
  start(2,0) line to (1,0) to (1,1) to (2,1)
  value(Temp) = 0
  line to close

```

```
Plots
```

```
Contour(Temp) painted
```

End

5.2.16.15 repeat

```
{ REPEAT.PDE
```

This example illustrates the use of the [REPEAT](#)^[195] statement to generate repetitive structures, and the string facility for creating labels.

```
}
title 'REPEAT and $string test'

Variables
u

definitions
a = 1
{ a list of X-coordinates: }
xc=array(1/3, 2/3, 3/3, 4/3, 5/3)
{ a list of Y-coordinates: }
yc=array(1/3, 2/3, 3/3, 4/3, 5/3)

rad = 0.1 { radius of circular dots }
s = 0


equations
U: div(a*grad(u)) + s = 0;

boundaries
region 1
start(0,0)
value(u)=0
line to (2,0) to (2,2) to (0,2) to close
region 2
a = 0.05
s = 4*magnitude(x-1,y-1)
repeat i=1 to 5 { an indexed loop on X-position }
repeat j=1 to 5 { an indexed loop on Y-position }
{ an array of circular dots at the tabulated coordinates }
start "Loop"+$i+$j (xc[i]+rad,yc[j]) {construct loop name using string
conversion }
arc(center=xc[i],yc[j]) angle=360
endrepeat
endrepeat

monitors
contour(u)

plots
contour(u) painted
surface(u)
surface(s) as "Source"
repeat i=1 to 5
repeat j=1 to 5
elevation(u) on 'loop'+$i+$j
endrepeat
endrepeat

end
```

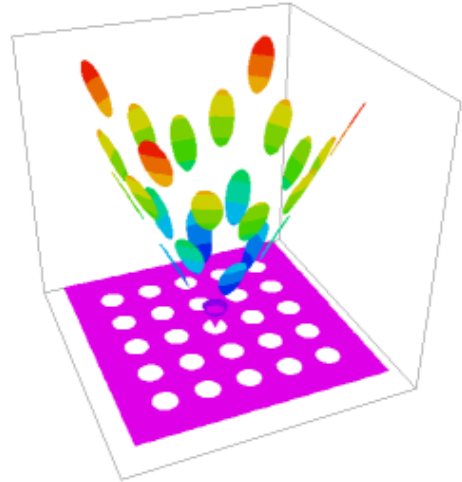

5.2.16.16 rotated_ellipse

```
{ ROTATED_ELLIPSE.PDE
```

This example shows the use of [ROTATE](#)^[242] to create a rotated ellipse. The selector [MERGEDIST](#)^[198] is used to allow fewer digits of accuracy in the positions of the points on the ellipse.

```
}
```

```

TITLE 'Electrostatic Potential and Electric Field'

VARIABLES v Q

SELECT mergedist = 0.01 ! merge imprecise points in ellipse

DEFINITIONS eps = 1

EQUATIONS
  v: div(eps*grad(v)) = 0          {potential equation}
  Q: div(grad(Q)/eps) = 0         {adjoint equation}

BOUNDARIES
  REGION 1
    start(0,0)
    value(v) = 0 natural(Q) = tangential(grad(v))
    line to (3,0)
    natural(v)=0
    line to (3, 2.5)
    value(v) = 100 natural(Q) = tangential(grad(v))
    arc(center = 1.5, 2.5) angle= 180.
    natural(v)=0
    line to close
    ! embedded path will become an EXCLUDE :
    start( 2.08, 2.08)
    natural(v) = 0 natural(Q) = tangential(grad(v))
    arc(center = 1.5, 1.5 rotate= 45.) to ( 1.22, 1.78)
    arc(center = 1.5, 1.5 rotate= 45.) to ( 0.92, 0.92)
    arc(center = 1.5, 1.5 rotate= 45.) to ( 1.78, 1.22)
    arc(center = 1.5, 1.5 rotate= 45.) to ( 2.08, 2.08)

PLOTS
  grid(x,y)
  contour(v) as 'Potential'
  surface(v) as 'Potential'
  contour(Q) as 'Field Lines'
  vector(-dx(v), -dy(v)) as 'Electric Field'

END

```

5.2.16.17 save

```
{ SAVE.PDE
```

This example illustrates use of the [SAVE](#)^[180] function.

SAVE(F) computes the value of F at each mesh node, and returns interpolated values for any position within a cell.
 If F is very expensive to compute, the use of SAVE can reduce the overall cost of a simulation.
 SAVE also hides the complexity of F from differentiation in forming the coupling matrix, and may therefore avoid numerical difficulties encountered in computing the derivatives of pathological functions.

```

}
title 'SAVE test'

select
  ngrid=20
  contourgrid=100 { use a very dense plot grid to show data structure }

Variables
  u,v

definitions
  k = 2
  u0 = 1+x^2+y^2
  s = cos(20*x)*cos(20*y)
  save_s = save(s)      { Used in a definition }

Initial values

```

```

u = 1
equations
  U: u - div(K*grad(u)) = s
  V: v - div(K*grad(v)) = save_s
boundaries
  region 1
    start(-1,-1)
    value(u)=u0 value(v)=u0
    line to (1,-1) to (1,1) to (-1,1) to close
  region 2
    k=4
    start(-1,-1) line to (0,-1) to (0,0) to (-1,0) to close
plots
  grid(x,y)
  contour(u)
  contour(v)
  contour(s)
  contour(save_s)
  elevation(s, save_s) from(-1,0) to (1,0)
end

```

5.2.16.18 spacetime1

```
{ SPACETIME1.PDE
```

This example illustrates the use of FlexPDE to solve an initial value problem of 1-D transient heatflow as a 2D boundary-value problem.

Here the spatial coordinate is represented by X, the time coordinate by Y, and the temperature by u(x,y).

With these symbols, the transient heatflow equation is:

```

dy(u) = D*dxx(u),
where D is the diffusivity, given by
      D = K/s*rho,
      K   is the conductivity,
      s   is the specific heat,
and rho is the density.

```

The problem domain is taken to be the unit square.

We specify the initial value of u(x,0) along y=0, as well as the time history along the sides x=0 and x=1.

The value of u is thus assigned everywhere on the boundary except along the segment y=1, 0<x<1. Along that boundary, we use the natural boundary condition,

```

natural(u) = 0,

```

since this corresponds to the application of no boundary sources on this boundary segment and hence implies a free segment. This builds in the assumption that y = 1 (and hence t = 1) is sufficiently large for steady state to have been reached. [Note that since the only y-derivative term is first order, the default procedure of FlexPDE does not integrate this term by parts, and the Natural(u) BC does not correspond to a surface flux, functioning only as a source or sink.]

This problem can be solved analytically, so we can plot the deviation of the FlexPDE solution from the exact answer.

```
}
```

```
title "1-D Transient Heatflow as a Boundary-Value problem"
```

```
select
  alias(x) "distance"
  alias(y) "time"
```

```
variables
  u
```

```
definitions
  diffusivity = 0.06      { pick a diffusivity that gives a nice graph }
  frequency = 2          { frequency of initial sinusoid }
```

```

    fpi = frequency*pi
    ut0 = sin(fpi*x)      { define initial distribution of temperature }
    u0 = exp(-fpi^2 *diffusivity*y)*ut0  { define exact solution }

Initial values
    u = ut0                { initialize all time to t=0 value }

equations
    u: dy(u) = diffusivity*dxx(u) { define the heatflow equation }

boundaries
    Region 1
        start(0,0)
        value(u)=ut0      { set the t=0 temperature }
        line to (1,0)

        value(u) = 0      { always cold at x=1 }
        line to (1,1)

        natural(u) = 0    { no sources at t=1 }
        line to (0,1)


        value(u) = 0      { always cold at x=0 }
        line to close

monitors
    contour(u)

plots
    contour(u)
    surface(u)
    contour(u-u0) as "error"

end

```

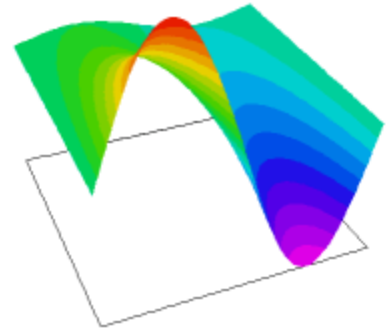

5.2.16.19 spacetime2

```
{ SPACETIME2.PDE
```

This example is a modification of [SPACETIME1.PDE](#)^[623], showing the solution of one-dimensional transient heatflow with differing material properties, cast as a boundary-value problem.

The time variable is represented by Y , and the temperature by $u(x,y)$.

We specify two regions of differing conductivity, KX .

The initial Temperature is given as a truncated parabola along $y=0$.

We specify reflective boundary conditions in x ($\text{natural}(u)=0$) along the sides $x=0$ and $x=1$.

The value of u is thus assigned everywhere on the boundary except along the segment $y=1$, $0 < x < 1$. Along that boundary, we use the natural boundary condition, $\text{natural}(u) = 0$, since this corresponds to the application of no boundary sources.

```
}
```

```
title "1-D Transient Heatflow as a Boundary-Value Problem"
```

```
Variables
```

```
    u                { define U as the system variable }
```

```
definitions
```

```
    kx                { declare KX as a parameter, but leave the value for later }
```

```
Initial values
```

```
    u = 0             { unimportant, since this problem is masquerading
                       as a linear boundary-value problem }
```

```
equations
```

```
    u: dy(u) = dx(kx*dx(u)) { define the heatflow equation }
```

```

boundaries
  region 1
    kx = 0.1           { conductivity = 0.1 in region 1 }

    start(0,0)
    value(u)=2.025-10*x^2 { define the temperature at t=0, x<=0.45 }
    line to (0.45,0)

    value(u) = 0       { force zero temperature for t=0, x>0.45 }
    line to (1,0) to (1,1)

    natural(u) = 0     { no flux across x=1 boundary }
    line to (1,1)

    natural(u) = 0     { no sources on t=1 boundary }
    line to (0,1)

    natural(u) = 0     { no flux across x=0 boundary }
    line to close

  region 2
    kx = 0.01          { low conductivity in region 2 }
    start(0.45,0)      { lay region 2 over center strip of region 1 }
    line to (0.55,0)
    to (0.55,1)
    to (0.45,1)
    to close

monitors
  contour(u)

plots
  contour(u)
  surface(u)

end

```

5.2.16.20 spline_boundary

```
{ SPLINE_BDRY.PDE
```

This example shows the use of the [SPLINE](#) ^[224] statement in constructing boundary curves.

A circular arc is approximated by five spline segments.

The end segments are made very short to establish the proper slope at the ends.

The problem solves a heatflow equation on a quarter circle and compares the solution with the analytic value.

```
}
```

```
title 'Spline Boundary'
```

```
Variables
```

```
u
```

```
definitions
```

```
k = 1
u0 = 1-r^2
s = 4
```

```
equations
```

```
U: div(k*grad(u)) + s = 0
```

```
boundaries
```

```
Region 1
```

```
start(0,0)
natural(u) = 0 line to (1,0)
value(u)=0
spline to(0.99985,0.01745) ! short initial interval to establish slope
to (0.866,0.5)
to(0.5,0.866)
to (0.01745,0.99985) ! short final interval to establish slope
to (0,1)
natural(u)=0 line to close
```

```

monitors
  grid(x,y)
  contour(u)
  contour(u-u0)
plots
  grid(x,y)
  contour(u)
  contour(u-u0)
end

```

5.2.16.21 staged_geometry

```

{ STAGED_GEOMETRY.PDE
  This problem shows the use of staging to solve a problem for a range
  of geometries.
}
title 'Staged Geometry'
select
  stages=3
  autostage=off { pause after each stage }
definitions
  width = 2*stage
variables
  u
equations
  u: div(grad(u)) + 4 = 0;
boundaries
  region 1
    start(0,0)
    value(u)=0
    line to (width,0) to (width,2) to (0,2) to close
monitors
  contour(u)
plots
  grid(x,y)
  surface(u)
  contour(u)
histories
  history(integral(u)) vs width as "Integral vs width"
end

```

5.2.16.22 stages

```

{ STAGES.PDE
  This example demonstrates the use of staging to solve a problem for a range of
  parameters.
  We stage both the equation parameters and the solution ERRLIM[200].
  The problem is a nonlinear test, which solves a modified steady-state Burgers
  equation.
}
title 'Staged Problem'
select
  stages = 3 { run only the first three of the listed stages }
  errlim = staged(0.01, 0.001, 0.0005)
variables

```

```

u
definitions
  scale = staged(1, 2, 4, 8)    { extra value ignored }
  a = 1/scale
Initial values
  u = 1 - (x-1)^2 - (y-1)^2
equations
  U: div(a*grad(u)) + scale*u*dx(u) +4 = 0;
boundaries
  region 1
    start(0,0)
    value(u)=0
    line to (2,0) to (2,2) to (0,2) to close
monitors
  contour(u)
plots
  surface(u) report scale as "Scale"
  contour(u) report scale as "Scale"
histories
  history(integral(u)) vs scale as "Integral vs scale"
end

```

5.2.16.23 tabulate

```
{ TABULATE.PDE
```

This problem tabulates an arithmetic expression into a data table.

The structure of the inline tabulate command is:

```
TABULATE <range_controls> : <expression>
```

The <range_control> clause is

```
VERSUS <name> ( <list_specification> )
```

or

```
FOR <name> ( <list_specification> )
```

A <list_specification> may be the name of an array or a list of values, possibly including "BY <step> TO <last>" clauses.

A [TABULATE](#)^[228] command can be preceded by [SPLINE](#)^[224] to request spline interpolation rather than the default linear interpolation.

[TABLES](#)^[224] may be constructed with one, two or three coordinates.

The constructed tables are exported in various forms, to show the use of [TABULATE](#)^[228] to create tables for other FlexPDE applications to use.

```

}
title 'Tabulation Test'
select
  regrid=off
variables
  u
definitions
  alpha =tabulate versus x(0 by 0.1 to 10)
           versus y(0 by 0.1 to 10)
           : sin(x)*sin(y)+1.1
  xar =array (0 by 0.1 to 10)
  beta =spline tabulate for x(xar)
           for y(0 by 0.1 to 10)
           : sin(x)*sin(y)+1.1
  p = x
  q = p+y
  s = y^2*(p+q)

```



```

equations
  U:  div(beta*grad(u)) + alpha = 0

boundaries
  region 1
    start(0,10)
    value(u) = 0
    line to (0,0) to (10,0) to (10,10) to close

monitors
  contour(u)

plots
  grid(x,y) as "computation mesh"
  contour(u) as "solution"
  surface(u) as "solution"
  contour(alpha) as "tabulated data" export file='alpha.tbl'
  contour(beta) as "spline-tabulated data"
  contour(alpha-beta) as "linear-spline difference"
  vector(grad(alpha)) as "table gradient"
  vector(grad(beta)) as "spline gradient"
  surface(alpha) as "tabulated data"
  surface(beta) as "spline data"
  table(alpha)
  table(s)
  vtk(beta)

contour(space_error())

end

```

5.2.16.24 tensors

```

{ TENSORS.PDE

  This example illustrates tensor manipulations. There are no variables or equations,
  just definitions and plots. A boundaries section IS needed even though it is not used.
}

Title
  "vector functions"

Definitions

  v1 = vector(1,2,3)
  v2 = vector(3,2,1)
  vv = v1*v2 ! vector product

  t1 = tensor((1,2,3),(4,5,6),(7,8,9))
  t2 = tensor((1,4,7),(2,5,8),(3,6,9))
  t12 = t1**t2 ! dot product

  dot12 = dot(t1,t2)
  dot1v = dot(t1,v1)
  dotv1 = dot(v1,t1)
  dotv2 = dot(v1,t2)
  dot12v = dot(dot12,v1)

Boundaries { plot domain always required }
  region "dummy"
    start (-1,0) line to (1,0) to (1,1) to (-1,1) to close

Plots
  summary ("OPERATIONS WITH A TENSOR RESULT :")
  report ""
  report "Vector product v1 * v2"
  report "(1,2,3) * (3,2,1) = ((3,2,1), (6,4,2), (9,6,3))"
  report ""
  report (xxcomp(vv), xycomp(vv), xzcomp(vv)) as "VV xx,xy,xz "
  report (yxcomp(vv), yycomp(vv), yzcomp(vv)) as "VV yx,yy,yz "
  report (zxcomp(vv), zycomp(vv), zzcomp(vv)) as "VV zx,zy,zz "

```

```

report ""
report "Tensor dot product T1 ** T2"
report "((1,2,3), (4,5,6), (7,8,9)) ** ((1,4,7), (2,5,8), (3,6,9))"
report "= ((14,32,50), (32,77,122), (50,122,194))"
report (xxcomp(t12), xycomp(t12), xzcomp(t12)) as "T12 xx,xy,xz "
report (yxcomp(t12), yycomp(t12), yzcomp(t12)) as "T12 yx,yy,yz "
report (zxcomp(t12), zycomp(t12), zzcomp(t12)) as "T12 zx,zy,zz "
report ""
report "Tensor dot product DOT( T1, T2 )"
report "((1,2,3), (4,5,6), (7,8,9)) ** ((1,4,7), (2,5,8), (3,6,9))"
report "= ((14,32,50), (32,77,122), (50,122,194))"
report ""
report (xxcomp(dot12), xycomp(dot12), xzcomp(dot12)) as "DOT12 xx,xy,xz "
report (yxcomp(dot12), yycomp(dot12), yzcomp(dot12)) as "DOT12 yx,yy,yz "
report (zxcomp(dot12), zycomp(dot12), zzcomp(dot12)) as "DOT12 zx,zy,zz "
report "Alternatively :"
report (xcomp(xcomp(dot12)), ycomp(xcomp(dot12)), zcomp(xcomp(dot12))) as "DOT12
x(x),x(y),x(z) "
report (xcomp(ycomp(dot12)), ycomp(ycomp(dot12)), zcomp(ycomp(dot12))) as "DOT12
y(x),y(y),y(z) "
report (xcomp(zcomp(dot12)), ycomp(zcomp(dot12)), zcomp(zcomp(dot12))) as "DOT12
z(x),z(y),z(z) "

summary ("OPERATIONS WITH A VECTOR RESULT :")
report ""
report "Vector Tensor dot product DOT( V1, T1 )"
report "DOT( (1,2,3), ((1,2,3), (4,5,6), (7,8,9)) ) = (30,36,42)"
report (xcomp(dotv1), ycomp(dotv1), zcomp(dotv1)) as "DOTV1 "
report ""
report "Vector Tensor dot product DOT( V1, T2 )"
report "DOT( (1,2,3), ((1,4,7), (2,5,8), (3,6,9)) ) = (14,32,50)"
report (xcomp(dotv2), ycomp(dotv2), zcomp(dotv2)) as "DOTV2 "
report ""
report "Tensor Vector dot product DOT( T1, V1 )"
report "DOT( ((1,2,3), (4,5,6), (7,8,9)), (1,2,3) ) = (14,32,50)"
report (xcomp(dot1v), ycomp(dot1v), zcomp(dot1v)) as "DOT1V "
report ""
report "Tensor Vector dot product DOT( DOT12, V1 )"
report "DOT( ((14,32,50), (32,77,122), (50,122,194)), (1,2,3) ) = (228,552,876)"
report (xcomp(dot12v), ycomp(dot12v), zcomp(dot12v)) as "DOT12V "

End

```

5.2.16.25 two_histories

```
{ TWO_HISTORIES.PDE
```

This example illustrates use of multiple arguments in a [HISTORY](#)^[286] plot. It also shows the use of the WINDOW plot qualifier on a [HISTORY](#)^[286] plot. The problem is the same as [FLOAT_ZONE.PDE](#)^[427].

```
}
```

```
title
```

```
"Multiple HISTORY functions"
```

```
coordinates
```

```
xcylinder('z','r')
```

```
select
```

```
cubic { Use Cubic Basis }
```

```
variables
```

```
temp (threshold=100)
```

```
definitions
```

```
k = 0.85 {thermal conductivity}
cp = 1 { heat capacity }
long = 18
H = 0.4 {free convection boundary coupling}
Ta = 25 {ambient temperature}
A = 4500 {amplitude}
```

```
source = A*exp(-((z-1*t)/.5)^2)*(200/(t+199))
```

```

initial value
temp = Ta

equations
temp: div(k*grad(temp)) + source = cp*dt(temp)

boundaries
region 1
start(0,0)
natural(temp) = 0 line to (long,0)
value(temp) = Ta line to (long,1)
natural(temp) = -H*(temp - Ta) line to (0,1)
value(temp) = Ta line to close
feature
start(0.01*long,0) line to (0.01*long,1)

time -0.5 to 19 by 0.01

monitors
for t = -0.5 by 0.5 to (long + 1)
elevation(temp) from (0,1) to (long,1) range=(0,1800) as "Surface Temp"
contour(temp)

plots
for t = -0.5 by 0.5 to (long + 1)
elevation(temp) from (0,0) to (long,0) range=(0,1800) as "Axis Temp"

histories
history(temp,dt(temp)) at (5,0) (10,0) (15,0)
history(temp,dt(temp)) at (5,0) (10,0) (15,0) window = 5 ! moving window
history(temp,dt(temp)) at (5,0) (10,0) (15,0) window(3,8) ! fixed window
history(integral(temp),integral(dt(temp)))

end

```

5.2.17 Moving_Mesh

5.2.17.1 1d_stretch_x

```

{ 1D_STRETCH_X.PDE

This example demonstrates moving meshes in 1D.
A Gaussian distribution is defined on a 1D mesh.
The mesh is then stretched to twice its initial size,
while the Gaussian remains fixed in space.

Mesh motion is imposed by explicit positions of the endpoints.
}
TITLE "stretching line"

COORDINATES
cartesian1

VARIABLES
u
xm = move(x)

DEFINITIONS
H1 = 1
gwid = 0.15
u0 = exp(-x^2/gwid^2)
lmove = H1 + t
vx = dt(xm)

INITIAL VALUES
u = u0
dt(xm) = x/H1

EULERIAN EQUATIONS
u: dt(u)=0
xm: div(grad(vx))=0

```

```

BOUNDARIES
REGION 1
{ In 1D, "point" boundary conditions must FOLLOW the point at which
  they are to be applied: }
START(-H1) point value(u)=0 point value(xm)= -lmove
Line to (H1) point value(u)=0 point value(xm)= lmove

TIME 0 TO 0.5 by 0.01

MONITORS
for cycle=1
  elevation(u,u0) from(-10*H1) to (10*H1) range (0,1)
  elevation(vx) from(-10*H1) to (10*H1) range (0,1)

PLOTS
for time=0.1 by 0.1 to endtime
  elevation(u,u0) from(-10*H1) to (10*H1) range (0,1)
  elevation(vx) from(-10*H1) to (10*H1) range (0,1)

END

```

5.2.17.2 2d_blob_position

```
{ 2D_BLOB_POSITION.PDE
```

This problem illustrates moving meshes in 2D.
 A circular boundary shrinks and grows sinusoidally in time.
 The mesh coordinates are solved directly, without a mesh velocity variable.

See [2D_BLOB_VELOCITY.PDE](#)^[632] for a version that uses mesh velocity variables.

```
}
TITLE 'Pulsating circle in 2D - position specification'
```

```
COORDINATES
cartesian2
```

```
VARIABLES
Phi { the temperature }
Xm = MOVE(x) { surrogate X }
Ym = MOVE(y) { surrogate Y }
```

```
DEFINITIONS
K = 1 { default conductivity }
R0 = 0.75 { initial blob radius }
Um = dt(Xm)
Vm = dt(Ym)
```

```
INITIAL VALUES
Phi = (y+1)/2
```

```
EULERIAN EQUATIONS
Phi: Div(-k*grad(phi)) = 0
Xm: div(grad(Xm)) = 0
Ym: div(grad(Ym)) = 0
```

```
BOUNDARIES
REGION 1 'box'
START(-1,-1)
VALUE(Phi)=0
VELOCITY(Xm)=0 VELOCITY(Ym)=0
LINE TO (1,-1)
NATURAL(Phi)=0
LINE TO (1,1)
VALUE(Phi)=1
LINE TO (-1,1)
NATURAL(Phi)=0
LINE TO CLOSE
REGION 2 'blob' { the embedded blob }
```

```

k = 0.001
START 'ring' (R0,0)
  VELOCITY(Xm) = -0.25*sin(t)*x/r
  VELOCITY(Ym) = -0.25*sin(t)*y/r
  ARC(CENTER=0,0) ANGLE=360 TO CLOSE

TIME 0 TO 2*pi

MONITORS
  for cycle=1
    grid(x,y)
    contour(phi)
PLOTS
  FOR T = 0 BY pi/20 TO 2*pi
    GRID(x,y)
    CONTOUR(Phi) notags nominmax
    VECTOR(-k*grad(Phi))
    CONTOUR(magnitude(Um,Vm))
    VECTOR(Um,Vm) fixed range(0,0.25)
    ELEVATION(Phi) FROM (0,-1) to (0,1)
    ELEVATION(Normal(-k*grad(Phi))) ON 'ring'
  END

```

5.2.17.3 2d_blob_velocity

```
{ 2D_BLOB_VELOCITY.PDE
```

This problem illustrates moving meshes in 2D.
A circular boundary shrinks and grows sinusoidally in time.
The mesh coordinates are solved by reference to a mesh velocity variable.

See [2D_BLOB_POSITION.PDE](#)^[63h] for a version that uses no mesh velocity variables.

```

}
TITLE 'Pulsating circle in 2D - velocity specification'

COORDINATES
  cartesian2

VARIABLES
  Phi           { the temperature }
  Xm = MOVE(x)  { surrogate X }
  Ym = MOVE(y)  { surrogate Y }
  Um(0.1)       { mesh x-velocity }
  Vm(0.1)       { mesh y-velocity }

DEFINITIONS
  K = 1         { default conductivity }
  R0 = 0.75     { initial blob radius }

INITIAL VALUES
  Phi = (y+1)/2

EULERIAN EQUATIONS
  Phi: Div(-k*grad(phi)) = 0
  Xm: dt(Xm) = Um
  Ym: dt(Ym) = Vm
  Um: div(grad(Um)) = 0
  Vm: div(grad(Vm)) = 0

BOUNDARIES
  REGION 1 'box'
  START(-1,-1)
  VALUE(Phi)=0
  VELOCITY(Xm)=0 VELOCITY(Ym)=0
  VALUE(Um)=0 VALUE(Vm)=0
  LINE TO (1,-1)
  NATURAL(Phi)=0
  LINE TO (1,1)
  VALUE(Phi)=1
  LINE TO (-1,1)
  NATURAL(Phi)=0

```

```

LINE TO CLOSE
REGION 2 'blob' { the embedded blob }
k = 0.001
START 'ring' (R0,0)
  VELOCITY(Xm) = Um
  VELOCITY(Ym) = Vm
  VALUE(Um) = -0.25*sin(t)*x/r
  VALUE(Vm) = -0.25*sin(t)*y/r
ARC(CENTER=0,0) ANGLE=360 TO CLOSE

TIME 0 TO 2*pi

MONITORS
for cycle=1
  grid(x,y)
  contour(phi)

PLOTS
FOR T = 0 BY pi/20 TO 2*pi
  GRID(x,y)
  CONTOUR(Phi) notags nominmax
  VECTOR(-k*grad(Phi))
  CONTOUR(magnitude(Um,Vm))
  VECTOR(Um,Vm) fixed range(0,0.25)
  ELEVATION(Phi) FROM (0,-1) to (0,1)
  ELEVATION(Normal(-k*grad(Phi))) ON 'ring'

END

```

5.2.17.4 2d_bubble_reconnect

```

{ 2D_BUBBLE_RECONNECT.PDE
  Moving bubble with mesh reconnection.
}

TITLE "2d bubble with mesh reconnection"
SELECT
  reconnect(on)

VARIABLES
  phi(0.1)
  xm=move(x)
  ym(1e-4)=move(y)

DEFINITIONS
  tlen = 2 ! length of the tube
  twid = 0.25 ! half-width of the tube

  u0=0.01 ! the bubble velocity
  {
  turnon = 0.1
  u0t = u0 ! *uramp(t,t-turnon)
  }
  bx = 0.1 ! initial position of the bubble center
  brad = 0.05 ! the bubble radius
  k=0.01 ! thermal conductivity of the tube
  penalty=10

! declare the front node of the bubble to be a movable point
Tip = Movable Point (bx+brad,0)

! define the mesh velocities for convenience
um = dt(xm)
vm = dt(ym)
! the velocity divergence
divv = dx(um) + dy(vm)

EQUATIONS

```

```

phi:  div(k*grad(phi))=0           ! a diffusion equation for example
xm:  div(grad(dt(xm))) = penalty*um ! diffuse the mesh velocities
ym:  div(grad(dt(ym))) = penalty*vm

BOUNDARIES
! the tube
REGION 1
START(0,-twid)
value(phi) = 0
dt(xm)=0           ! lock the tube so it doesn't move
dt(ym)=0
  line to (tlen,-twid) to (tlen,twid) to (0,twid) to close

! the bubble
region 2
start(Tip)
  dt(xm)=u0         ! impose the velocity of the bubble boundary
  dt(ym)=0
  value(phi)=1     ! force the dummy diffusion to be 1.0 on the surface of the bubble
  mesh_spacing = 0.02 ! request fine meshing on the bubble
  arc(center=bx,0) angle=360
  to close

TIME 0 TO (tlen-bx-2*brad)/u0

PLOTS
for cycle=1
  grid(x,y)
  contour(phi)
  contour(dt(phi))
  contour(um) as "Mesh Velocity"
  elevation(um) from(0,0) to (tlen,0) as "Mesh Velocity"
  vector(um-u0,vm)
  contour(space_error(phi))
history(deltat)

END

```

5.2.17.5 2d_lagrangian_shock

```
{ 2D_LAGRANGIAN_SHOCK.PDE
```

This example demonstrates moving meshes in 2D by solving Sod's shock tube problem (a 1D problem) on a 2D moving mesh.

Mesh nodes are given the local fluid velocity, so the model is fully Lagrangian.

Ref: G.A. Sod, "A Survey of Several Finite Difference Methods for Systems of Nonlinear Hyperbolic Conservation Laws", J. Comp. Phys. 27, 1-31 (1978)

See also Kershaw, Prasad and Shaw, "3D Unstructured ALE Hydrodynamics with the Upwind Discontinuous Finite Element Method", UCRL-JC-122104, Sept 1995.

Other versions of this problem can be found in the ["Applications | Fluids"](#) folder.

```
}
```

```
TITLE "Sod's Shock Tube Problem - 2D Lagrangian"
```

```
SELECT
  ngrid= 100
  regrid=off
```

```
VARIABLES
  rho(1)
  u(1)
  P(1)
  xm=move(x)
```

```
DEFINITIONS
```

```

len = 1
wid = 0.01
gamma = 1.4
{ define a damping term to kill unwanted oscillations }
eps = 0.001

v = 0
rho0 = 1.0 - 0.875*uramp(x-0.49, x-0.51)
p0 = 1.0 - 0.9*uramp(x-0.49, x-0.51)

INITIAL VALUES
rho = rho0
u = 0
P = p0

EULERIAN EQUATIONS
{ equations are stated as appropriate to the Eulerian (lab) frame.
  FlexPDE will add motion terms to convert to Lagrangian form for moving mesh }
{ since the equation is really in x only, we add dyy(.) terms with natural(.)=0
  on the sidewalls to impose uniformity across the fictitious y coordinate }
rho: dt(rho) + u*dx(rho) + rho*dx(u) = dyy(rho) + eps*dxx(rho)
u: dt(u) + u*dx(u) + dx(P)/rho = dyy(u) + eps*dxx(u)
P: dt(P) + u*dx(P) + gamma*P*dx(u) = dyy(P) + eps*dxx(P)
xm: dt(xm) = u

BOUNDARIES
REGION 1
{ we must impose the same equivalence dt(xm)=u on the side boundaries
  as in the body equations: }
START(0,0)
natural(u)=0 dt(xm)=u line to (len,0)
value(xm)=len value(u)=0 line to (len,wid)
dt(xm)=u natural(u)=0 line to (0,wid)
value(xm)=0 value(u)=0 line to close

TIME 0 TO 0.375

MONITORS
for cycle=5
  grid(x,10*y)
  elevation(rho) from(0,wid/2) to (len,wid/2) range (0,1)
  elevation(u) from(0,wid/2) to (len,wid/2) range (0,1)
  elevation(P) from(0,wid/2) to (len,wid/2) range (0,1)

PLOTS
for t=0 by 0.02 to 0.143, 0.16 by 0.02 to 0.375
  grid(x,10*y)
  elevation(rho) from(0,wid/2) to (len,wid/2) range (0,1)
  elevation(u) from(0,wid/2) to (len,wid/2) range (0,1)
  elevation(P) from(0,wid/2) to (len,wid/2) range (0,1)

END

```

5.2.17.6 2d_movepoint

```
{ 2D_MOVEPOINT.PDE
```

This example is a variation of [2D_STRETCH_XY.PDE](#)^[638] demonstrating the use of moving and non-moving point declarations.

A point defined by name as a [MOVABLE_POINT](#)^[222] and used in the definition of the domain will move with the mesh.

Any point declared explicitly or not used in the domain definition will remain fixed.

```
}
TITLE "stretching brick"
```

```
SELECT
  regrid=off
```


VARIABLES

```

u
xm = move(x)
ym = move(y)

```

DEFINITIONS

```

H1 = 1/2
gwid = 0.15
u0 = exp(-(x^2+y^2)/gwid^2)
lmove = H1 + t
ms = gwid^2/u0
vx = dt(xm)
vy = dt(ym)
P = movable point(H1,H1)
Q = movable point(0.1,0)
R = point(-0.2,-0.2)

```

INITIAL VALUES

```

u = u0
dt(xm) = x/H1
dt(ym) = y/H1

```

EQUATIONS

```

U: dt(u)=0
Xm: div(grad(vx))=0
Ym: div(grad(vy))=0

```

BOUNDARIES

```

REGION 1
mesh_spacing = ms
START(-H1,-H1)
value(u) = 0 nobc(xm) value(ym)=-lmove
Line to (H1,-H1)
value(u)=0 value(xm)=lmove nobc(ym)
line to P
value(u)=0 nobc(xm) value(ym) = lmove
line to (-H1,H1)
value(u)=0 value(xm)=-lmove nobc(ym)
line to close

```

NODE POINT Q

```

TIME 0 TO 0.5 by 0.01! 10

```

MONITORS

```

for cycle=1
grid(x,y) zoom(-H1-1/2,-H1-1/2, 2*H1+1,2*H1+1)
grid(x,y) zoom(-0.6,0.4, 0.2,0.2)
contour(vx) zoom(-0.6,0.4, 0.2,0.2)
contour(vy) zoom(-0.6,0.4, 0.2,0.2)
contour(u)
elevation(u,u0) from(-10*H1,0) to (10*H1,0) range (0,1)
elevation(u,u0) from(0,-10*H1) to (0,10*H1) range (0,1)

```

PLOTS

```

for time=0.1 by 0.1 to endtime
grid(x,y) zoom(-H1-1/2,-H1-1/2, 2*H1+1,2*H1+1)
report(distance(P,(0.2,0)))
contour(u)
contour(u-u0) as "True Total Error"
contour(space_error()) as "Estimated Step Error" painted
elevation(u,u0) from(-10*H1,0) to (10*H1,0) range (0,1)
elevation(vx) from(-10*H1,0) to (10*H1,0) range (0,1)
elevation(u,u0) from(0,-10*H1) to (0,10*H1) range (0,1)
elevation(vy) from(0,-10*H1) to (0,10*H1) range (0,1)

```

```

History(u) at P,Q, (0.2,0) as "Points a(P) and b(Q) move with the mesh, c(0.2,0) is
fixed in space"

```

```

History(u,u0) at R,(-0.2,-0.2) as "both points are fixed in space"

```

```

History(distance(P,R)) ! both are movable points, so the distance changes as the mesh
moves

```

```

at P,R ! name the points to get markers on the domain

```

```
History(time_error())
```

```
END
```

5.2.17.7 2d_stretch_x

```
{ 2D_STRETCH_X.PDE
```

This example demonstrates moving meshes in 2D.

A 1D Gaussian distribution is defined on a 2D mesh.
The mesh is then stretched to twice its initial x size,
while the Gaussian remains fixed in space.

Elevation displays show that the Gaussian retains its correct
shape as it moves through the mesh.

Mesh motion is imposed by explicit positions of the endpoints.

```
}
```

```
TITLE "2D brick stretching in x"
```

```
VARIABLES
```

```
u
xm = move(x)
```

```
DEFINITIONS
```

```
H1 = 1/2
wid = 0.01
gwid = 0.15
u0 = exp(-x^2/gwid^2)
lmove = H1 + t
vx = dt(xm)
```

```
INITIAL VALUES
```

```
u = u0
dt(xm) = x/H1
```

```
EULERIAN EQUATIONS
```

```
u: dt(u)=0
xm: div(grad(vx)) = 0
```

```
BOUNDARIES
```

```
REGION 1
```

```
START(-H1,0) line to (H1,0)
value(u)=0 value(xm)=lmove line to (H1,wid)
natural(u)=0 nobc(xm) line to (-H1,wid)
value(u)=0 value(xm)=-lmove line to close
```

```
TIME 0 TO 0.5 by 0.01
```

```
MONITORS
```

```
for time=0
grid(x,10*y) as "Initial mesh"
contour(vx)
```

```
for cycle=1
```

```
grid(x,10*y)
contour(u) zoom(-2*H1,0, 4*H1,2*wid)
contour(vx) zoom(-2*H1,0, 4*H1,2*wid)
contour(dt(xm)) zoom(-2*H1,0, 4*H1,2*wid)
elevation(u,u0) from(-10*H1,wid/2) to (10*H1,wid/2) range (0,1)
elevation(vx) from(-10*H1,wid/2) to (10*H1,wid/2) range (0,1)
elevation(dt(xm)) from(-10*H1,wid/2) to (10*H1,wid/2) range (0,1)
```

```
PLOTS
```

```
for time=0.1 by 0.1 to endtime
grid(x,10*y)
contour(u) zoom(-2*H1,0, 4*H1,2*wid)
contour(vx) zoom(-2*H1,0, 4*H1,2*wid)
contour(dt(xm)) zoom(-2*H1,0, 4*H1,2*wid)
```

```
elevation(u,u0) from(-10*H1,wid/2) to (10*H1,wid/2) range (0,1)
END
```

5.2.17.8 2d_stretch_xy

```
{ 2D_STRETCH_XY.PDE
```

```
This example demonstrates moving meshes in 2D.
A Gaussian distribution is defined on a 2D mesh.
The mesh is then stretched to twice its initial size,
while the Gaussian remains fixed in space.
```

```
Output plots show that the Gaussian has retained its shape as
it moves through the mesh.
```

```
Mesh motion is imposed by explicit positions of the endpoints.
```

```
}
```

```
TITLE "stretching brick"
```

```
SELECT
  regrid=off
```

```
VARIABLES
```

```
  u
  xm = move(x)
  ym = move(y)
```

```
DEFINITIONS
```

```
  H1 = 1/2
  gwid = 0.15
  u0 = exp(-(x^2+y^2)/gwid^2)
  lmove = H1 + t
  ms = gwid^2/u0
  vx = dt(xm)
  vy = dt(ym)
```

```
INITIAL VALUES
```

```
  u = u0
  dt(xm) = x/H1
  dt(ym) = y/H1
```

```
EULERIAN EQUATIONS
```

```
  U: dt(u)=0
  Xm: div(grad(vx))=0
  Ym: div(grad(vy))=0
```

```
BOUNDARIES
```

```
  REGION 1
    mesh_spacing = ms
    START(-H1,-H1)
    value(u)=0 nobc(xm) value(ym)=-lmove
    line to (H1,-H1)
    value(u)=0 value(xm)=lmove nobc(ym)
    line to (H1,H1)
    value(u)=0 nobc(xm) value(ym)=lmove
    line to (-H1,H1)
    value(u)=0 value(xm)=-lmove nobc(ym)
    line to close
```

```
TIME 0 TO 0.5 by 0.01! 10
```

```
MONITORS
```

```
  for cycle=1
    grid(x,y) zoom(-H1-1/2,-H1-1/2, 2*H1+1,2*H1+1)
    contour(u)
    elevation(u,u0) from(-10*H1,0) to (10*H1,0) range (0,1)
```

```
elevation(u,u0) from(0,-10*H1) to (0,10*H1) range (0,1)
```

PLOTS

```
for time=0.1 by 0.1 to endtime
  grid(x,y) zoom(-H1-1/2,-H1-1/2, 2*H1+1,2*H1+1)
  contour(u)
  contour(u-u0) as "True Total Error"
  contour(space_error()) as "Estimated Step Error"
  elevation(u,u0) from(-10*H1,0) to (10*H1,0) range (0,1)
  elevation(vx) from(-10*H1,0) to (10*H1,0) range (0,1)
  elevation(u,u0) from(0,-10*H1) to (0,10*H1) range (0,1)
  elevation(vy) from(0,-10*H1) to (0,10*H1) range (0,1)
```

END

5.2.17.9 3d_blob_position

```
{ 3D_BLOB_POSITION.PDE
```

This problem illustrates moving meshes in 3D.
A spherical boundary shrinks and grows sinusoidally in time.
The mesh coordinates are solved directly, without a mesh velocity variable.

See [3D_BLOB_VELOCITY.PDE](#)^[64b] for a version that uses mesh velocity variables.

```
}
```

```
TITLE 'Pulsating circle in 3D - position specification'
```

```
COORDINATES
  cartesian3
```

VARIABLES

```
Phi { the temperature }
Xm = MOVE(x) { surrogate X }
Ym = MOVE(y) { surrogate Y }
Zm = MOVE(z) { surrogate Z }
```

DEFINITIONS

```
K = 1 { default conductivity }
R0 = 0.75 { initial blob radius }
```

```
zsphere = SPHERE ((0,0,0),R0)
z1, z2
Um = dt(Xm)
Vm = dt(Ym)
Wm = dt(Zm)
```

INITIAL VALUES

```
Phi = (z+1)/2
```

EULERIAN EQUATIONS

```
Phi: div(-k*grad(phi)) = 0
Xm: div(grad(Xm)) = 0
Ym: div(grad(Ym)) = 0
Zm: div(grad(Zm)) = 0
```

EXTRUSION

```
SURFACE 'Bottom' z = -1
SURFACE 'Sphere Bottom' z=z1
SURFACE 'Sphere Top' z=z2
SURFACE 'Top' z=1
```

BOUNDARIES

```
SURFACE 1
  VALUE(Phi)=0 VELOCITY(Xm)=0 VELOCITY(Ym)=0 VELOCITY(Zm)=0
SURFACE 4
  VALUE(Phi)=1 VELOCITY(Xm)=0 VELOCITY(Ym)=0 VELOCITY(Zm)=0
```

REGION 1 'box'

```
z1=0 z2=0
START(-1,-1)
```

```

    NATURAL(Phi)=0 VELOCITY(Xm)=0 VELOCITY(Ym)=0 VELOCITY(Zm)=0
    LINE TO (1,-1) TO (1,1) TO (-1,1) TO CLOSE

LIMITED REGION 2 'blob' { the embedded blob }
z1 = -zsphere
z2 = zsphere
layer 2 k = 0.001
SURFACE 2
    VELOCITY(Xm) = -0.25*sin(t)*x/r
    VELOCITY(Ym) = -0.25*sin(t)*y/r
    VELOCITY(Zm) = -0.25*sin(t)*z/r
SURFACE 3
    VELOCITY(Xm) = -0.25*sin(t)*x/r
    VELOCITY(Ym) = -0.25*sin(t)*y/r
    VELOCITY(Zm) = -0.25*sin(t)*z/r
START 'ring' (R0,0)
ARC(CENTER=0,0) ANGLE=360 TO CLOSE

TIME 0 TO 2*pi by pi/20

MONITORS
FOR cycle=1
    GRID(x,y,z) ON 'blob' ON LAYER 2
    CONTOUR(phi) ON y=0
PLOTS
FOR T = 0 BY pi/20 TO 2*pi
    GRID(x,y,z) ON 'blob' ON LAYER 2 FRAME(-R0,-R0,-R0, 2*R0,2*R0,2*R0)
    CONTOUR(Phi) notags nminmax ON y=0
    VECTOR(-k*grad(Phi)) ON y=0
    CONTOUR(magnitude(Um,Vm,Wm)) ON y=0
    VECTOR(Um,Wm) ON y=0 FIXED RANGE(0,0.25)
    ELEVATION(Phi) FROM (0,0,-1) TO (0,0,1)
    ELEVATION(magnitude(Um,Vm,Wm)) FROM (0,0,-1) TO (0,0,1)

END

```

5.2.17.10 3d_blob_velocity

```
{ 3D_BLOB_VELOCITY.PDE
```

This problem illustrates moving meshes in 3D.
A spherical boundary shrinks and grows sinusoidally in time.
The mesh coordinates are solved by reference to a mesh velocity variable.

see [3D_BLOB_POSITION.PDE](#)^[639] for a version that uses no mesh velocity variables.

```
}
TITLE 'Pulsating circle in 3D - velocity specification'
```

```
COORDINATES
    cartesian3
```

```
VARIABLES
    Phi { the temperature }
    Xm = MOVE(x) { surrogate X }
    Ym = MOVE(y) { surrogate Y }
    Zm = MOVE(z) { surrogate Z }
    Um(0.1) { mesh x-velocity }
    Vm(0.1) { mesh y-velocity }
    Wm(0.1) { mesh z-velocity }
```

```
DEFINITIONS
    K = 1 { default conductivity }
    R0 = 0.75 { initial blob radius }
```

```
zsphere = SPHERE ((0,0,0),R0)
z1, z2
```

```
INITIAL VALUES
    Phi = (z+1)/2
```

EULERIAN EQUATIONS

```
Phi: Div(-k*grad(phi)) = 0
Xm: dt(Xm) = Um
Ym: dt(Ym) = Vm
Zm: dt(Zm) = Wm
Um: div(grad(Um)) = 0
Vm: div(grad(Vm)) = 0
Wm: div(grad(Wm)) = 0
```

EXTRUSION

```
SURFACE 'Bottom'      z = -1
SURFACE 'Sphere Bottom' z=z1
SURFACE 'Sphere Top'  z=z2
SURFACE 'Top'         z=1
```

BOUNDARIES

```
SURFACE 1
VALUE(Phi)=0 VELOCITY(Xm)=0 VELOCITY(Ym)=0 VELOCITY(Zm)=0
VALUE(Um)=0 VALUE(Vm)=0 VALUE(Wm)=0
SURFACE 4
VALUE(Phi)=1 VELOCITY(Xm)=0 VELOCITY(Ym)=0 VELOCITY(Zm)=0
VALUE(Um)=0 VALUE(Vm)=0 VALUE(Wm)=0
```

REGION 1 'box'

```
z1=0 z2=0
START(-1,-1)
NATURAL(Phi)=0
VELOCITY(Xm)=0 VELOCITY(Ym)=0 VELOCITY(Zm)=0
VALUE(Um)=0 VALUE(Vm)=0 VALUE(Wm)=0
LINE TO (1,-1) TO (1,1) TO (-1,1) TO CLOSE
```

LIMITED REGION 2 'blob' { the embedded blob }

```
z1 = -zsphere
z2 = zsphere
layer 2 k = 0.001
SURFACE 2
VELOCITY(Xm) = Um VELOCITY(Ym) = Vm VELOCITY(Zm) = Wm
VALUE(Um) = -0.25*sin(t)*x/r
VALUE(Vm) = -0.25*sin(t)*y/r
VALUE(Wm) = -0.25*sin(t)*z/r
SURFACE 3
VELOCITY(Xm) = Um VELOCITY(Ym) = Vm VELOCITY(Zm) = Wm
VALUE(Um) = -0.25*sin(t)*x/r
VALUE(Vm) = -0.25*sin(t)*y/r
VALUE(Wm) = -0.25*sin(t)*z/r
START 'ring' (R0,0)
ARC(CENTER=0,0) ANGLE=360 TO CLOSE
```

```
TIME 0 TO 2*pi
```

MONITORS

```
FOR cycle=1
GRID(x,y,z) ON 'blob' ON LAYER 2
CONTOUR(phi) ON y=0
```

PLOTS

```
FOR T = 0 BY pi/20 TO 2*pi
GRID(x,y,z) ON 'blob' ON LAYER 2
CONTOUR(Phi) notags nominmax ON y=0
VECTOR(-k*grad(Phi)) ON y=0
CONTOUR(magnitude(Um,Vm,Wm)) ON y=0
VECTOR(Um,Wm) ON y=0 FIXED RANGE(0,0.25)
ELEVATION(Phi) FROM (0,0,-1) TO (0,0,1)
ELEVATION(magnitude(Um,Vm,Wm)) FROM (0,0,-1) TO (0,0,1)
```

```
END
```

5.2.17.11 3d_bubble_reconnect

```
{ 3D_BUBBLE_RECONNECT.PDE

  This problem illustrates moving meshes and mesh reconnection in 3D.
  A spherical bubble moves through a column.
  A mesh velocity variable is used to compute the mesh coordinates.
}
```

```
TITLE '3D Bubble reconnect -
velocity specification'
```

SELECT

```
overshoot = 1e-5
reconnect(on)
order=2
```

COORDINATES

```
cartesian3
```

VARIABLES

```
Phi(0.001) { the temperature
}
Zm = MOVE(z) { surrogate z
variable}
wm(0.01) { mesh z-velocity }
```

DEFINITIONS

```
K = 1 { default conductivity
}
Vz = 0.1
length=5
```

```
zc = 1 ! bubble center
R0 = 0.5 { bubble radius }
zsphere = SPHERE ((0,0,0),R0)
z1, z2
km =100
```

INITIAL VALUES

```
Phi = 0
wm=0
```

INITIAL EQUATIONS

```
Phi: Div(-k*grad(phi)) = 0
wm: div(km*grad(wm)) = 0
```

EULERIAN EQUATIONS

```
Phi: Div(k*grad(phi)) =
dt(phi)
Zm: dt(Zm) = wm
wm: div(km*grad(wm)) = 0
```

EXTRUSION

```
SURFACE 'Bottom' z = 0
SURFACE 'Sphere Bottom' z=zc-
zsphere
layer "zbubble"
SURFACE 'Sphere Top'
z=zc+zsphere
SURFACE 'Top'
z=length
```

BOUNDARIES

```
SURFACE 1
VALUE(Phi)=0 VELOCITY(Zm)=0 VALUE(wm)=0
```

```

SURFACE 2
  VALUE(wm) = Vz
  VELOCITY(Zm) = Vz
SURFACE 3
  VALUE(wm) = Vz
  VELOCITY(Zm) = Vz
SURFACE 4
  VALUE(Phi)=0 VELOCITY(Zm)=0 VALUE(wm)=0

REGION 1 'box'
  z1=0 z2=0

  START(1,0)
  VALUE(Phi)=0
  natural(wm)=0
  LINE TO (1,1) TO (-1,1) TO(-1,0)
  NATURAL(Phi)=0
  NATURAL(wm)=0
  NOBC(Zm)
  LINE TO CLOSE

LIMITED
REGION 2 'bubble' { the embedded bubble }
  z1 = zc-zsphere
  z2 = zc+zsphere
  layer "zbubble"
  k = 0.001
  mesh_spacing = 0.25
SURFACE 'Sphere Bottom'
  VELOCITY(Zm) = Wm
  VALUE(wm) = Vz
  value(phi)=1
SURFACE 'Sphere Top'
  VELOCITY(Zm) = Wm
  VALUE(wm) = Vz
  value(phi)=1

start(R0,0) arc(center=0,0) angle=180
natural(wm)=0 line to close

TIME 0 TO 30 by 0.1

PLOTS
for t=0
  GRID(x,y,z) ON 'bubble' ON LAYER "zbubble"
for cycle=1
  grid(X,Z) on y=0 paintregions
  grid(X,Y) on surface 'Sphere Bottom'
  grid(Y,Z) on x=0.33
  CONTOUR(wm) notags nominmax ON y=0 as "Mesh Velocity"
  CONTOUR(dt(wm)) notags nominmax ON y=0 as "Mesh Acceleration"
  CONTOUR(phi) notags nominmax ON y=0
  CONTOUR(dt(phi)) notags nominmax ON y=0
  glcontour(wm) on region 1 on layer 1

END

```

5.2.17.12 3d_intrusion_reconnect

```

{ 3D_INTRUSION_RECONNECT.PDE

  This problem illustrates moving meshes in 3D.
  A Gaussian intrusion is forced into a rectangular column.
  The mesh nodes are allowed to move only in Z.
}
TITLE '3D Intrusion with mesh reconnection'

SELECT
  reconnect(on)      { turn on all the default mesh reconnection functions }
  order=2            { Quadratic interpolation }

```


COORDINATES
cartesian3

VARIABLES

```
Phi      { a temperature variable as demonstration }
Zm = MOVE(z) { surrogate variable for mesh Z-coordinates }
wm(threshold=0.01) { mesh z-velocity }
```

DEFINITIONS

```
K = 1      { default thermal conductivity }
Vz = 0.1
length=3
km = 0.2   { Mesh velocity diffusivity }
wid = 0.2
```

INITIAL VALUES

```
Phi = 0
wm=0
```

INITIAL EQUATIONS

```
{ initialize the temperature distribution and mesh velocity distribution }
Phi: div(-k*grad(phi)) = 0
wm: div(grad(wm)) = 0
```

EQUATIONS

```
Phi: div(k*grad(phi)) = dt(phi)
Zm: dt(Zm) = wm
wm: div(km*grad(wm)) = 0
```

EXTRUSION

```
SURFACE 'Bottom'      z = 0
SURFACE 'Top'         z=length
```

BOUNDARIES

SURFACE 1

```
VALUE(Phi)=0
VELOCITY(Zm) = Vz*exp(-x^2/wid^2)
VALUE(wm) = Vz*exp(-x^2/wid^2)
MESH_SPACING = 0.2*(1-0.7*exp(-x^2/wid^2))
```

SURFACE 2

```
VALUE(Phi)=1
VELOCITY(Zm)=0
VALUE(wm)=0
```

REGION 1 'box'

```
START(1,0)
NATURAL(Phi)=0
NATURAL(wm)=0
NOBC(Zm)
LINE TO (1,1) TO (-1,1) TO (-1,0) TO CLOSE
```

TIME 0 TO 10 by 0.1

PLOTS

```
for cycle=1
  GRID(x,y,z) as "3D Mesh"
  GLGRID(x,y,z) as "GL Mesh"
  grid(X,Z) on y=0 as "Front Face Mesh"
  CONTOUR(wm) notags nominmax ON y=0 as "Front Face Mesh Velocity"
  CONTOUR(dt(wm)) notags nominmax ON y=0 as "Front Face Mesh Acceleration"
  contour(phi) on y=0.527 as "Interior plane Phi"
  contour(dt(phi)) on y=0.527 as "Interior plane dt(Phi)"
  GLCONTOUR(phi)
  history(deltat)
```

END

5.2.17.13 gaussian_valve_reconnect

```

{ GAUSSIAN_VALVE_RECONNECT.PDE

  2D_valve in cylinder controlling flow

  Mesh motion is imposed by explicit positions of the endpoints.
  Script developed using compnents from 2d_stretch_xy.pde and flow71.pde
  -- Contributed by Gene DiResta 11/2018

}

TITLE "cylinder with valve"

coordinates ycylinder('r','z')

SELECT
  reconnect(on)

VARIABLES
  phi (Threshold = 10)           {Velocity potential}
  rm = move(r)
  um(0.001)

DEFINITIONS
  H1 = 1/2
  gwid = 0.15
  ms = gwid^2/exp(-(z^2)/gwid^2)
  vm = dt(rm)
  vzf0= 0.4                       { velocity at input end }
  p0= 150                          { inlet pressure }
  dens= 1e1                          { Mass density }
  vrf= dr(phi)                       {velocity components - r }
  vzf= dz(phi)                       {velocity components - z}
  v= vector( vrf,vzf)
  vmf= sqrt( vrf^2+ vzf^2)           { Speed }
  p= p0+ 1/2*dens*(vzf0^2-vmf^2)     { Pressure }

  div_v= dr(r* vrf)/r+ dz( vzf)
  curl_phi= dz( vrf)- dr( vzf)

  zvalve = 1
  zwid = 0.2
  pinch = 0.1
  motion = 0.5*H1*(1-pinch)*(1-cos(pi*min(t,2))) ! time-sinusoidal pinch distance
  shape = exp(-(z/zwid)^2) ! valve shape
  lmove = -H1+motion*shape ! left boundary valve motion
  rmove = H1-motion*shape ! right boundary valve motion
  lvel = dt(lmove) ! left boundary valve velocity
  rvel = -lvel
  !lspace = zwid*exp((max(min(z,0.3),-0.3)/zwid)^2)/5 ! mesh spacing on valve
  !space = zwid*exp((z/zwid)^2)/5 ! mesh spacing on valve

INITIAL VALUES

INITIAL EQUATIONS
  phi: div(grad(phi))= 0

EQUATIONS
  phi: div(grad(phi))= dt(phi)
  Rm: dt(rm) = um
  Um: drr(um) = 0

BOUNDARIES
  REGION 1
    mesh_spacing=lspace
    Start(0,-2*H1)
    natural( phi)= -vzf0 ! Inlet flow

```

```

    value(um)=0
line to (H1,-2*H1)
    natural( phi)= 0
    value(rm)=H1
    value(um)=0
line to(H1,-zvalve*H1)
    natural( phi)= 0
    value(rm)= rmove
    value(um) = rvel           ! valve right side velocity
line to (H1,zvalve*H1)
    natural ( phi)= 0
    value(rm)=H1
    value(um)=0
line to (H1,2*H1)
    value( phi)= 0           ! Velocity potential set to 0
    velocity(rm)=0
    value(um)=0
line to (0,2*H1)
    natural( phi)= 0
    value(rm)=0
    value(um) = 0
line to (0,zvalve*H1)
    natural( phi)= 0
    value(rm)= 0
    value(um)=0           ! Valve left side velocity
line to (0,-zvalve*H1)
    natural( phi)= 0
    value(rm)=0
    value(um)=0
line to close

TIME 0 TO 2.0 by 0.01

PLOTS
for time=0 by 0.01 to endtime
    grid(r,z) zoom(-H1-1/2,-H1-1/2, 2*H1+1,2*H1+1)
    contour( phi)
    contour( vmf) painted as "Fluid Velocity"
    contour( p) painted as "Pressure"
    elevation(p) from (0,-2*H1) to (0, 2*H1) as "Pressure"
    elevation(vzf) from (0,-2*H1) to (0, 2*H1) as "Fluid Velocity"
    vector( v) norm as "Fluid Velocity"

END

```

5.2.17.14 sliptube_explicit_reconnect

```

{
    SLIPTUBE_EXPLICIT_RECONNECT.PDE

    This problem demonstrates mesh reconnection in a thin gap between a rotating and a
    stationary component.
    The structure is similar to an electric motor.

    The gap is split in two to better control the mesh connections.

    We also make use of the EXPLICIT facility to bypass the computation of mesh motion.
}
title
' Tube with slip surface'

variables
u(1) ! a heat variable demonstrates the rotation
xm = move(x)
ym = move(y)

global variables
theta(0.01) ! rotation angle

select
! select the reconnection facility. Link-swaps will be turned on in the gap region.

```

```

reconnect(off)
! select first-order interpolation to increase speed
order=1

definitions
r1 = 0.5
r2 = 1.0
q21= r2/r1
thetadot ! the rotation speed, set differently in each component
thetadot1 = 1 ! the primary rotation speed
eps = 0.02 ! the gap thickness
k = 0.1
source= 0
MP = movable point(r1,0) ! define a movable point on the rotor to monitor motion
MP1 = movable point(-r1,0)

Lagrangian equations
xm: dt(xm) = -ym*thetadot ! mesh x-coordinate = -R*sin(theta)*thetadot
ym: dt(ym) = xm*thetadot ! mesh y-coordinate = R*cos(theta)*thetadot
theta: dt(theta) = thetadot1
! compute the temperature after the motion is complete
then
u: div(k*grad(u)) + source = dt(u)

boundaries
region "Stator" ! the stator
thetadot = 0 ! stationary
k=0.1
! Explicit definition bypasses the solution. # designates the value at an earlier
time.
! these statements guarantee the nodal positions in the stator
EXPLICIT(xm)=xm#1
EXPLICIT(ym)=ym#1

start (r2,0)
value(u)=0
arc to (0,r2) to (-r2,0) to (0,-r2) to close

! define the second of a pair of gap regions
region "Gap2"
thetadot=0 ! the second gap boundary nodes do not move
k = 0.01
reconnect(swap) ! turn on the node-link reconnections in the second gap
start (r1+eps,0)
EXPLICIT(xm)=xm#1 ! freeze the positions of the second gap boundary
EXPLICIT(ym)=ym#1
arc to (0,-(r1+eps)) to (-(r1+eps),0) to (0,r1+eps) to close

! define the first of the pair of gap regions
region "Gap1"
thetadot = thetadot1/2 ! this boundary moves at half the rotor speed
k = 0.01
reconnect(swap) ! activate node-link reconnection in the first gap
start (r1+eps/2,0)
! rotate the inter-gap boundary at half the rotor speed
EXPLICIT(xm) =xm#1*cos(thetadot1*deltat/2) - ym#1*sin(thetadot1*deltat/2)
EXPLICIT(ym) = xm#1*sin(thetadot1*deltat/2) + ym#1*cos(thetadot1*deltat/2)
arc to (0,-(r1+eps/2)) to (-(r1+eps/2),0) to (0,r1+eps/2) to close

! define the rotor region
region "Rotor half"
thetadot = thetadot1 ! rotate at full speed
source = 0
k=0.1
! define the rotor positions
EXPLICIT(xm) =xm#1*cos(thetadot1*deltat) - ym#1*sin(thetadot1*deltat)
EXPLICIT(ym) = xm#1*sin(thetadot1*deltat) + ym#1*cos(thetadot1*deltat)

! use the movable position to start the rotor arc. This allows us to monitor the
motion.
start (MP)
arc to (0,-r1) to (-r1,0) to (0,r1) to close

! Divide the rotor in half, with a heat source in one half, to demonstrate the
solution integrity

```

```

region "Heated Rotor half"
  thetadot = thetadot1
  source = 1
  k=0.1
  EXPLICIT(xm) =xm#1*cos(thetadot1*deltat) - ym#1*sin(thetadot1*deltat)
  EXPLICIT(ym) = xm#1*sin(thetadot1*deltat) + ym#1*cos(thetadot1*deltat)

  start (0,r1)
    arc to (-r1,0) to (0,-r1) line to close

! run for two full rotations
time 0 to 2*2*pi

monitors
  for cycle=1
    grid(x,y) paintregions
    contour(u)
    contour(space_error(u))

    history(theta)

plots
  for t = 0 by pi/4 to endtime
    grid(x,y) paintregions
    contour(u) as "Temperature"
    contour(u) on "Gap1" on "Gap2" as "Gap Temperature"
    contour(source) painted
    ! show the integral of temperature in the gap to determine when the solution has
    stabilized
    history(integral(u,"Gap")) as "Gap Integral"
    ! show the x-position of the moving point to monitor the rotation
    history(xm, r1*cos(theta)) at (MP) as "Position Monitor"

end

```

5.2.18 ODE

5.2.18.1 linearode

```

{ LINEARODE.PDE

  This example shows the application of FlexPDE to the solution of a linear
  first-order differential equation.

  We select the simple example
  
$$dH/dt = a - b*H$$


  This equation has the exact solution
  
$$H(t) = H(0)*exp(-b*t) + (a/b)*(1-exp(-b*t))$$


  The existence of an exact solution allows us to analyze the errors
  in the FlexPDE solution.

  Since FlexPDE requires a spatial domain, we solve the system over
  a simple box with minimum mesh size.

}

title
  "FIRST ORDER ORDINARY DIFFERENTIAL EQUATION"

select
  { Since no spatial information is required, use the minimum grid }
  ngrid=1
  errlim = 1e-4

variables
  { declare Height to be the system variable }
  Height(threshold=1)

definitions
  { define the equation parameters }

```

```

a = 2
b = 0.1
H0 = 100
{ define the exact solution: }
Hexact = H0*exp(-b*t) + (a/b)*(1-exp(-b*t))

initial values
Height = H0

equations
Height : dt(Height) = a - b*Height { The ODE }

boundaries
region 1
start (0,0)
line to (1,0) to (1,1) to (0,1) to close

time 0 to 100

plots
for time = 0,1,10 by 10 to 100
{ Plot the solution: }
history(Height) at (0.5,0.5)
{ Plot the error check: }
history((Height-Hexact)/Hexact) at (0.5,0.5) as "Relative Error"

end

```

5.2.18.2 nonlinode

```

{ NONLINODE.PDE

This example shows the application of FlexPDE to the solution of a
non-linear first-order differential equation.

A liquid flows into the top of a reactor vessel through an unrestricted
pipe and exits from the bottom through a choke valve. This problem is
discussed in detail in Silebi and Schiesser.

This is a problem in viscous flow:

$$dH/dt = a - b*\sqrt{H}$$


The analytic solution satisfies the relation

$$\sqrt{H0} + (a/b)\ln[a-b*\sqrt{H0}] - \sqrt{H} - (a/b)\ln[a-b*\sqrt{H}] = (b/2)*t$$

which can be used as an accuracy check.

Since FlexPDE requires a spatial domain, we solve the equation on
a simple box with minimum mesh size.

}

title
"NONLINEAR FIRST ORDER ORDINARY DIFFERENTIAL EQUATION"

select
{ Since there is no spatial information required, use the minimum grid size }
ngrid=1

variables
{ declare Height to be the system variable }
Height(threshold=1)

definitions
{ define the equation parameters }
a = 2
b = 0.1
H0 = 100
{ define the accuracy check }
T0 = sqrt(H0) + (a/b)*ln(a-b*sqrt(H0))
Tcheck = sqrt(Height) + (a/b)*ln(a-b*sqrt(Height))

initial values
Height = H0

```

```

equations { The ODE }
  Height : dt(Height) = a - b*sqrt(Height)

boundaries
  { define a fictitious spatial domain }
  region 1
    start (0,0)
    line to (1,0) to (1,1) to (0,1) to close

  { define the time range }
  time 0 to 1000

plots
  for t=0, 1, 10 by 10 to endtime
    { Plot the solution: }
    history(Height) at (0.5,0.5)
    { Plot the accuracy check: }
    history((T0 - Tcheck - (b/2)*t)/((b/2)*t)) at (0.5,0.5)
      as "Relative Error"

end

```

5.2.18.3 second_order_time

```

{ SECOND_ORDER_TIME.PDE

This example shows the integration of Bessel's Equation as a test of the
time integration capabilities of FlexPDE.

Bessel's Equation for order zero can be written as
 $t^2*dt(w) + t*dt(w) + t^2*w = 0$ 

Dividing by  $t^2$  and avoiding the pole at  $t=0$ , we can write
 $dt(w) + dt(w)/t + w = 0$ 

FlexPDE cannot directly integrate second order time equations, so we define an
auxiliary variable  $v=dt(w)$  and write a coupled pair of equations
 $dt(v) + v/t + w = 0$ 
 $dt(w) = v$ 

We use a dummy spatial grid of two cells and solve the equation at each node.

You can try varying the value given for ERRLIM[200] to see how it behaves.

}

title "Integration of Bessel's Equation"

select
  ngrid=1
  errlim=1e-4 { increase accuracy to prevent accumulation of errors }

Variables
  v (threshold=0.1)
  w (threshold=0.1)

definitions
  L = sqrt(2)
  t0 = 0.001 { start integration at t=0.001 }

Initial values { Initialize to known values at t=t0 }
  w = 1-2.25*(t0/3)^2
  v = -0.5*t0 + 0.5625*t0*(t0/3)^2

equations
  v: dt(v) +v/t + w = 0
  w: dt(w) = v

boundaries
  region 1
    start(-L,-L) line to (L,-L) to (L,L) to (-L,L) to close

time 0.001 to 4*pi { Exclude t=0 }

plots
  for t=0.01 by 0.01 to 0.1 by 0.1 to 1 by 1 to endtime

```

```

history(w,bessj(0,t)) at (0,0) as "w(t) and BESSJ0(t)"
history(w-bessj(0,t)) at (0,0) as "Absolute Error"
history(v,-bessj(1,t)) at (0,0) as "V(t) and dt(BESSJ0(t))"
history(v+bessj(1,t)) at (0,0) as "slope Error"
history(deltat)

```

```
end
```

5.2.19 Optimization

5.2.19.1 criticality

```
{ CRITICALITY.PDE
```

This problem demonstrates the use of FlexPDE in the solution of optimization problems.

FlexPDE implements the Nelder-Mead "amoeba" algorithm to [minimize](#)^[258] or [maximize](#)^[258] an objective function.

This is not the method of greatest speed, but it is very flexible, and allows FlexPDE to perform optimization searches in a wide range of problem environments.

A simple model of nuclear criticality can be made using a Fick's-Law diffusion equation for single-velocity neutrons.

In this model, the criticality relation can be stated as

$$\text{Div}(D*\text{grad}(N)) - \text{sigmar}*N + (1/k)*\text{nper}*mix*\text{sigmaf}*N = 0,$$
where

N = neutron density
beta = Fick's Law proportionality factor
D = beta/sigmat
k = 1/lambda = "criticality eigenvalue"
mix = fractional content of fissionable material in the source region
nper = number of neutrons produced at each absorption
sigmat = transport cross-section = 1/(transport mean free path)
sigmar = removal cross-section
sigmaf = fission cross section

The system becomes critical when lambda = 1.

```
}
```

```
title 'Nuclear Criticality'
```

```
variables
```

```
  N { neutron Density }
```

```
select
```

```
  modes=1 { calculate only the smallest eigenvalue }
  cell_limit=2000
```

```
definitions
```

```
  source { name the material parameters, values will be declared by region }
  sigmat { transport cross-section }
  sigmar { removal cross-section }
  sigmaf { fission cross-section }
```

```
  beta = 1/3 { Fick's Law proportionality factor }
  nper = 2 { number of neutrons produced per fission }
  convergence = (lambda-1)^2 { optimization parameter: a function with a smooth
minimum at lambda=1 }
```

```
{ Here is the optimization request:
```

```
  Modify "mix" until the eigenvalue "lambda" is 1.0
```

```
  "mix" starts at 0.05, and the initial range of "mix" samples is 0.001
```

```
  Iteration continues until "convergence" is less than OPTERRLIM (default 2e-6) or "mix"
is bracketed to less than OPTERRLIM*mix. }
```

```
minimize(convergence) vs mix (0.05,0.001)
```



```

equations { The neutron density equation: }
N : div(beta/sigmat*grad(N)) + source - sigmar*N + lambda*mix*nper*sigmaf*N = 0

boundaries

region 1 { the bounding region is tenuous }
source=0 sigmar=1 sigmat=2 sigmaf=0
start(0,0)
natural(N)= 0
line to (10,0)
line to (10,10) to (0,10)
line to close

region 2 { this region has fission }
source=0 sigmar=0.1 sigmat=2 sigmaf=1
start(2,2)
line to (8,2) to (8,8) to (2,8) to close

monitors
contour(N) as "Neutron Density"
history(lambda,mix, convergence) report(convergence) report(lambda) report(mix)

plots
grid(x,y)
contour(N) as 'Neutron Density' report(mix) report(lambda) report(mix)
surface(N) as 'Neutron Density'
vector(-beta/sigmat*grad(N)) as 'Neutron Flux'
contour(mix*sigmaf*nper*N) as "Fission Source"
contour(sigmar*N) as "Neutron Absorption"

history (lambda,mix,convergence) report(convergence) report(lambda) report(mix)
history (lambda) vs mix

end

```

5.2.19.2 criticality_size

```
{ CRITICALITY_SIZE.PDE
```

This problem demonstrates the use of FlexPDE in the solution of optimization problems.

FlexPDE implements the Nelder-Mead "amoeba" algorithm to [minimize](#)^[259] or [maximize](#)^[258] an objective function.

This is not the method of greatest speed, but it is very flexible, and allows FlexPDE to perform optimization searches in a wide range of problem environments.

A simple model of nuclear criticality can be made using a Fick's-Law diffusion equation for single-velocity neutrons.

In this model, the criticality relation can be stated as

$$\text{Div}(D*\text{grad}(N)) - \text{sigmar}*N + (1/k)*\text{nper}* \text{sigmaf}*N = 0,$$

where

```

N = neutron density
beta = Fick's Law proportionality factor
D = beta/sigmat
k = 1/lambda = "criticality eigenvalue"
mix = fractional content of fissionable material in the source region
nper = number of neutrons produced at each absorption
sigmat = transport cross-section = 1/(transport mean free path)
sigmar = removal cross-section
sigmaf = fission cross section

```

In this problem, we use the "mix" parameter discovered in [CRITICALITY.PDE](#)^[657] and solve for the critical size of the assembly.

```
This should return us 5.0, the size used in CRITICALITY.PDE.
```

```
}
```

```

title 'Nuclear Criticality'

variables
  N    { neutron Density }

select
  modes=1      { calculate only the smallest eigenvalue }
  cell_limit=2000

definitions
  source      { name the material parameters, values will be declared by region }
  sigmat     { transport cross-section }
  sigmar     { removal cross-section }
  sigmaf     { fission cross-section }
  beta = 1/3  { Fick's Law proportionality factor }
  nper = 2    { number of neutrons produced per fission }
  convergence = (lambda-1)^2 { optimization parameter: a function with a smooth
minimum at lambda=1 }
  Hw         { the outer halfwidth of the structure }
  box = 3*Hw/5 { the halfwidth of the reactive inclusion }
  mix = 0.086052 { as reported by CRITICALITY.PDE }

! Here is the optimization request:
! Modify the halfwidth "Hw" until the eigenvalue "lambda" is 1.0
! "Hw" starts at 10, and the initial range of "Hw" samples is 1.0
! Iteration continues until "convergence" is less than OPTERRLIM (default 2e-6) or "Hw"
! is bracketed to less than OPTERRLIM*Hw.
minimize(convergence) vs Hw (10,1)

equations { The neutron density equation: }
  N : div(beta/sigmat*grad(N)) + source - sigmar*N + lambda*mix*nper*sigmaf*N = 0

boundaries

  region 1 { the bounding region is absorbing }
  source=0 sigmar=1 sigmat=2 sigmaf=0
  start(-Hw,-Hw)
  natural(N)= 0
  line to (Hw,-Hw)
  line to (Hw,Hw) to (-Hw,Hw)
  line to close

  region 2 { this region has fission }
  source=0 sigmar=0.1 sigmat=2 sigmaf=1
  start(-box, -box)
  line to (box, -box) to (box, box) to (-box, box) to close

monitors
  contour(N) as "Neutron Density"
  history(lambda,Hw,convergence)

plots
  grid(x,y)
  contour(N) as 'Neutron Density' report(Hw) report(lambda)
  surface(N) as 'Neutron Density'
  vector(-beta/sigmat*grad(N)) as 'Neutron Flux'
  contour(sigmaf*nper*N) as "Fission Source"
  contour(sigmar*N) as "Neutron Absorption"

  history (lambda)
  history (Hw)
  history (convergence)
  history (lambda) vs Hw

end

```

5.2.19.3 power_control

```
{ POWER_CONTROL.PDE
```

This example shows the use of the [MINIMIZE](#) optimization feature. It is

analogous to the [APPLICATIONS/CONTROL/CONTROL_STEADY.PDE](#)^[37] example.

```

}
we wish to find the required power input to a heater, such that the resulting
average temperature over the domain is a specified value.
}

```

```
TITLE "Optimization using MINIMIZE"
```

```
VARIABLES
temp      { The temperature field }
```

```
DEFINITIONS
setpoint=700      { the desired average temperature }
skintemp=325      { fixed outer boundary temperature }
k=1               { conductivity }
heat=0            { the heat function for the temperature.
                  it is non-zero only in the heater region }
```

```
tcontrol=integral(temp)/integral(1)  { the control function, average temperature }
{ tcontrol=val(temp,0,0)             -- an alternative control method, unused here }
```

```
power      ! total power input
```

```
INITIAL VALUES
temp = setpoint
```

```
EQUATIONS
temp:  div(-k*grad(temp))-heat = 0  { diffusion of temperature field }
```

```
{ Here is the optimization request:
Modify "power" until the average temperature is equal to setpoint.
"power" starts at 50, and the initial range of "power" samples is 20.
"power" is constrained to be greater than 0 and less than 1000.
Iteration continues until "abs(tcontrol-setpoint)" is less than OPTERRLIM (default 2e-
6)
or "power" is bracketed to less than OPTERRLIM*power. }
MINIMIZE abs(tcontrol-setpoint) vs power(50, 20, 0, 1000)
```

```
BOUNDARIES
```

```
REGION 'Insulation'
k=0.1
heat=0
start(-4,-4)
value(temp)=skintemp
line to (4,-4) to (4,4) to (-4,4) to close
```

```
REGION 'Heater'
k=50
heat=power
start(-1,-1) line to (1,-1) to (1,1) to (-1,1) to close
```

```
MONITORS
contour(temp)
report power
report tcontrol
History(abs(tcontrol-setpoint),power)
```

```
PLOTS
contour(temp)
report power
report power*integral(1,'heater') as "Total Power"
report tcontrol as "Average Temp"
elevation(temp) from(-4,0) to (4,0)
History(abs(tcontrol-setpoint),power)
Summary
report power*integral(1,'heater') as "Total Power needed to establish an average
temperature of 700 "
```

END

5.2.19.4 size_control

```
{ SIZE_CONTROL.PDE
```

This example shows the use of the [MINIMIZE](#) ^[259] optimization feature applied to geometric size.

```
We wish to find the correct size of a heater with fixed power input, such that the
resulting
} average temperature over the domain is a specified value.
```

```
TITLE "Optimization of geometry using MINIMIZE"
```

```
VARIABLES
```

```
temp      { The temperature field }
```

```
DEFINITIONS
```

```
setpoint=700      { the desired average temperature }
skintemp=325      { fixed outer boundary temperature }
k=1               { conductivity }
heat=0            { the heat function for the temperature.
                  it is non-zero only in the heater region }
```

```
tcontrol=integral(temp)/integral(1)  { the control function, average temperature }
{ tcontrol=val(temp,0,0)             -- an alternative control method, unused here }
```

```
power = 550.5 ! total power input (as reported by POWER_CONTROL.PDE)
len
```

```
INITIAL VALUES
```

```
temp = setpoint
```

```
EQUATIONS
```

```
temp:  div(-k*grad(temp))-heat = 0  { diffusion of temperature field }
```

```
{ Here is the optimization request:
```

```
Modify "len" until the average temperature is equal to setpoint.
```

```
"len" starts at 1.5, and the initial range of "len" samples is 1.
```

```
"len" is constrained to be greater than 0.1 and less than 4.
```

```
Iteration continues until "abs(tcontrol-setpoint)" is less than OPTERRLIM (default 2e-6)
```

```
or "len" is bracketed to less than OPTERRLIM*len. }
```

```
MINIMIZE abs(tcontrol-setpoint) vs len(1.5, 1, 0.1, 4)
```

```
BOUNDARIES
```

```
REGION 'Insulation'
```

```
k=0.1
```

```
heat=0
```

```
start(-4,-4)
```

```
value(temp)=skintemp
```

```
line to (4,-4) to (4,4) to (-4,4) to close !fixed outer size
```

```
REGION 'Heater'
```

```
k=50
```

```
heat=power/integral(1,'Heater') ! convert total power to power density
```

```
start(-len,-len) line to (len,-len) to (len,len) to (-len,len) to close
```

```
MONITORS
```

```
contour(temp)
```

```
report power
```

```
report tcontrol
```

```
History(abs(tcontrol-setpoint),len)
```

```

PLOTS
  contour(temp)
  report len
  report tcontrol as "Average Temp"
  elevation(temp) from(-4,0) to (4,0)
  History(abs(tcontrol-setpoint),len)
  History(len)
  Summary report len as "Length needed to establish an average temperature of 700 "

END

```

5.2.20 Periodicity

5.2.20.1 1d_periodic

```
{ 1D_PERIODIC.PDE
```

This example shows the use of FlexPDE in one-dimensional applications with periodic boundaries.

The PERIODIC statement appears in the position of a boundary condition, but the syntax is slightly different, and the requirements and implications are more extensive.

The syntax in 1D is:

```
POINT PERIODIC()
```

The mapping expressions specify the arithmetic required to convert the immediate point (X) to a remote point (X').

The transformation must be invertible; do not specify constants as mapped coordinates, as this will create a singular transformation.

The periodic boundary statement terminates any boundary conditions in effect, and instead imposes equality of all variables on the two boundaries. It is still possible to state a boundary condition on the remote boundary, but in most cases this would be inappropriate.

The POINT_PERIODIC statement affects only the immediately preceding point.

The next appearing LINE statement terminates the periodic condition unless the periodic statement is repeated.

We will define a periodic segment (-1,1) that is conceptually repeated in + and -x. A heat source H2 is defined in a small subsection (x0,x1) of the line.

Since there are no sidewalls to constrain the solution, we must program a heat sink H1 in the remaining parts of the domain, so that the heat generated by H2 is exactly absorbed by H1.

```
}
```

```
title '1D PERIODIC BOUNDARY TEST'
```

```
coordinates cartesian1
```

```
variables
```

```
u
```

```
definitions
```

```
k
```

```
h
```

```
x0=0.5
```

```
x1=0.8
```

```
h2 = 1
```

```
! the heat source in region 2 (energy per unit length)
```

```
h1 = -(x1-x0)*h2/(2-x1+x0) ! this is the value of H1 which applied over (-1,x0) and
```

```
(x1,1) will balance H2 applied over (x0,x1)
```

```
equations
```

```
u : div(K*grad(u)) + h = 0
```

! since there are no fixed values in the domain, the system is ill-posed (solution is not unique). So we add a constraint to make the solution unique.

```
constraints
```

```
integral(u)=0
```

```
boundaries
```

```

region 1
  k = 1e-3
  h = h1
  start(-1)
  line to (x0) to (x1) to (1)

  point periodic(x-2)

  { an off-center heat source provides the asymmetric conditions to
    demonstrate the periodicity of the solution }
region 2
  h=h2
  k=1e-4
  start(x0) line to (x1)

monitors
  grid(x)
  elevation(u)

plots
  grid(x)
  elevation(u)
  report(h1) report(h2)
  report(integral(h,1)) report(integral(h,2))

end

```

5.2.20.2 2d_wave_propagation

```

{
  2D_WAVE_PROPAGATION.PDE

  This test shows a wave pattern propagating across a square, with periodic boundaries
  at the edges.
  It demonstrates that the Periodic boundary maintains solution integrity with time
  dependence.
}
TITLE      '2D wave propagation '

COORDINATES
  CARTESIAN2

VARIABLES
  w(0)

select
  errlim = 1e-4

DEFINITIONS
  tend=4.0
  u = 1
  v = 1

INITIAL VALUES
  w=COS(PI*x)*COS(PI*y)

EQUATIONS
  w : DT(w) - u*DX(w) - v*DY(w) = 0

BOUNDARIES
  REGION 1
  { Periodic bottom boundary }
  start(-1,-1)
  periodic(x,y+2) line to (1,-1)

  { Periodic right boundary }
  periodic(x-2,y) line to (1,1)

  { Image of periodic bottom boundary }
  line to (-1,1)

```

```
{ Image of periodic right boundary }
line to close
```

```
TIME 0 TO tend
```

```
PLOTS
  FOR t=0 BY tend/50 to tend
    surface(w)
    surface(dx(w))
    surface(dy(w))
```

```
END
```

5.2.20.3 3d_antiperiodic

```
{ 3D_ANTIPERIODIC.PDE
```

This example shows the use of FlexPDE in a 3D problem with azimuthal anti-periodicity.
(See the example [ANTIPERIODIC.PDE](#)^[662] for notes on antiperiodic boundaries.)

In this problem we create a repeated 45-degree segment of a ring.

```
}
```

```
title '3D AZIMUTHAL ANTIPERIODIC TEST'
```

```
coordinates cartesian3
```

```
Variables
```

```
u
```

```
definitions
```

```
k = 1
{ angular size of the repeated segment: }
an = pi/4
{ the sine and cosine for transformation }
crot = cos(an)
srot = sin(an)
H = 0
xc = 1.5
yc = 0.2
rc = 0.1
```

```
equations
```

```
u : div(k*grad(u)) + H = 0
```

```
extrusion z=0,0.4,0.6,1
```

```
boundaries
```

```
region 1
```

```
{ this line forms the remote boundary for the later periodic statement }
start(1,0) line to (2,0)
```

```
value(u) = 0 arc(center=0,0) to (2*crot,2*srot)
```

```
{ The following line segment is periodic under an angular rotation.
  The mapping expressions take each point on the line into a corresponding
  point in the base line. Note that although all the mapped y-coordinates
  will be zero, we give the general expression so that the transformation
  will be invertible. }
```

```
antiperiodic(x*crot+y*srot, -x*srot+y*crot)
line to (crot,srot)
```

```
value(u)=0
```


```
arc(center= 0,0) to close
```

```
limited region 2
```

```
layer 2 H = 1
```

```
start(xc-rc,0) line to (xc+rc,0) to (xc+rc,rc) to (xc-rc,rc) to close
```

```
limited region 3
```

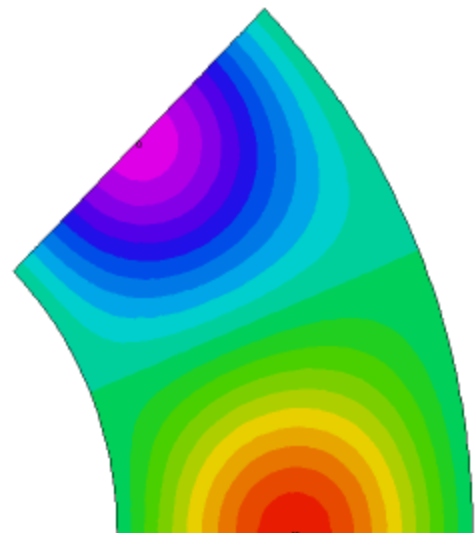

```

layer 2 H = -1
start((xc-rc)*crot,(xc-rc)*srot)
line to ((xc+rc)*crot,(xc+rc)*srot)
      to ((xc+rc)*crot+rc*srot,(xc+rc)*srot-rc*crot)
      to ((xc-rc)*crot+rc*srot,(xc-rc)*srot-rc*crot) to close

monitors
  grid(x,y,z)
  contour(u) on z=0.1
  contour(u) on z=0.5
  contour(u) on z=0.9

plots
  grid(x,y,z)
  contour(u) on z=0.1      painted
  contour(u) on z=0.5      painted
  contour(u) on z=0.9      painted
end

```

5.2.20.4 3d_periodic_exchange

```
{ 3D_PERIODIC_EXCHANGE.PDE
```

This example shows the use of FlexPDE in a 3D problem with azimuthal periodicity. In this problem we create a repeated 45-degree segment of a ring, and make the end values of U and V exchange.

```
}
```

```
title '3D PERIODIC EXCHANGE TEST'
```

```
coordinates cartesian3
```

```
variables
```

```
  u,v
```

```
definitions
```

```
  k = 1
```

```
  an = pi/4
```

```
  crot = cos(an)      { this is the angular size of the repeated segment }
```

```
  srot = sin(an)     { the sine and cosine needed in the transformation }
```

```
  H = 0
```

```
  xc = 1.5
```

```
  yc = 0.2
```

```
  rc = 0.1
```

```
! construct an array of angles distributed throughout the figure
```

```
arcangle = array (0 by an/30 to an)
```

```
! construct arrays of U and V at the points on the arc at R=xc, Z=0.5 (to be
evaluated at plot time)
```

```
arcu = array for a(0 by an/30 to an) : eval(u, xc*cos(a), xc*sin(a), 0.5)
```

```
arcv = array for a(0 by an/30 to an) : eval(v, xc*cos(a), xc*sin(a), 0.5)
```

```
equations
```

```
  u : div(k*grad(u)) + H = 0
```

```
  v : div(k*grad(v)) - H = 0
```

```
extrusion z=0,0.4,0.6,1
```

```
boundaries
```

```
  region 1
```

```
  { this line forms the remote boundary for the later periodic statement }
```

```
  start(1,0) line to (2,0)
```

```
  value(u) = 0 arc(center=0,0) to (2*crot,2*srot)
```

```
  { The following line segment is periodic under an angular rotation.
```

```
    The mapping expressions take each point on the line into a corresponding
    point in the base line. Note that although all the mapped y-coordinates
    will be zero, we give the general expression so that the transformation
    will be invertible. }
```

```
  periodic(x*crot+y*srot, -x*srot+y*crot)
```



```

    { map U to opposite V, and V to opposite U, so that U at 45 degrees is V at
zero degrees and vice versa }
    map(u)=v
    map(v)=u
    line to (crot,srot)

    value(u)=0
    arc(center= 0,0) to close

    limited region 2
    layer 2 H = 1
    start(xc-rc,0) line to (xc+rc,0) to (xc+rc,rc) to (xc-rc,rc) to close

    limited region 3
    layer 2 H = -1
    start((xc-rc)*crot,(xc-rc)*srot)
    line to ((xc+rc)*crot,(xc+rc)*srot)
        to ((xc+rc)*crot+rc*srot,(xc+rc)*srot-rc*crot)
        to ((xc-rc)*crot+rc*srot,(xc-rc)*srot-rc*crot) to close

monitors
grid(x,y,z)
contour(u) on z=0.1
contour(u) on z=0.5
contour(u) on z=0.9

plots
grid(x,y,z)
contour(u) on z=0.1 painted as "U on Z=0.1"
contour(v) on z=0.1 painted as "V on Z=0.1"
! plot the arrays of U and V along the arc at R=xc, Z=0.5
elevation(arcu,arcv) vs arcangle as "U and V vs angle at R="+$(xc)+" Z=0.5"
contour(u) on z=0.5 painted as "U on Z=0.5"
contour(v) on z=0.5 painted as "V on Z=0.5"
contour(u) on z=0.9 painted as "U on Z=0.9"
contour(v) on z=0.9 painted as "V on Z=0.9"
end

```

5.2.20.5 3d_xperiodic

```
{ 3D_XPERIODIC.PDE
```

This example shows the use of FlexPDE in 3D applications with periodic boundaries.

The [PERIODIC](#)^[258] statement appears in the position of a boundary condition, but the syntax is slightly different, and the requirements and implications are more extensive.

The syntax is:

```
PERIODIC(X_mapping,Y_mapping)
```

The mapping expressions specify the arithmetic required to convert a point (X,Y) in the immediate boundary to a point (X',Y') on a remote boundary. The mapping expressions must result in each point on the immediate boundary mapping to a point on the remote boundary. Segment endpoints must map to segment endpoints. The transformation must be invertible; do not specify constants as mapped coordinates, as this will create a singular transformation.

The periodic boundary statement terminates any boundary conditions in effect, and instead imposes equality of all variables on the two boundaries. It is still possible to state a boundary condition on the remote boundary, but in most cases this would be inappropriate.

The periodic statement affects only the next following [LINE](#)^[247] or [ARC](#)^[247] path. These paths may contain more than one segment, but the next appearing LINE or ARC statement terminates the periodic condition unless the periodic statement is repeated.

In this problem, we have a heat equation with an off-center source in an irregular figure. The figure is periodic in X, with Y faces held at zero, and Z-faces insulated.

```

}
title '3D X-PERIODIC BOUNDARY TEST'
coordinates

```

```

cartesian3
Variables
  u
definitions
  k = 0.1
  h=0
  x0=0.5  y0=-0.2
  x1=1.1  y1 = 0.2
equations
  u : div(k*grad(u)) + h = 0
extrusion z=0,0.4,0.6,1
boundaries
  region 1
  start(-1,-1)
  value(u)=0  line to (1,-1)  { Force U=0 on Y=-1 }

  { The following arc is required to be a periodic image of an arc
    two units to its left. (This image boundary has not yet been defined.) }
  periodic(x-2,y) arc(center=-1,0) to (1,1)

  value(u)=0  line to (-1,1)      { Force U=0 on Y=1 }

  { The following arc provides the required image boundary for the previous
    periodic statement }
  nobc(u)  { turn off the value BC }
  arc(center= -3,0)  to close


  { an off-center heat source in layer 2 provides the asymmetric conditions to
    demonstrate the periodicity of the solution }
  limited region 2
  layer 2 h=10 k=10
  start(x0,y0) line to (x1,y0) to (x1,y1) to (x0,y1) to close

monitors
  contour(u) on z=0
  contour(u) on z=0.5
  contour(u) on z=1
  contour(u) on y=0

plots
  contour(u) on z=0  painted
  contour(u) on z=0.5  painted
  contour(u) on z=1  painted
  contour(u) on y=0  painted

end

```

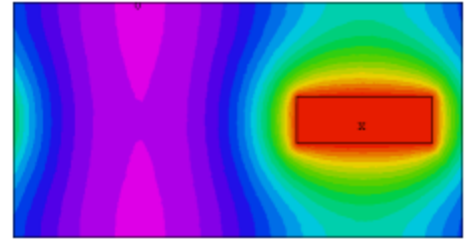

5.2.20.6 3d_zperiodic

```
{ 3D_ZPERIODIC.PDE
```

This example shows the use of FlexPDE in 3D applications with periodic boundaries in the Z-direction.

For Z-periodicity, we merely precede the `EXTRUSION`^[238] statement by the qualifier `PERIODIC`^[250]. The top and bottom surfaces are assumed to match, and values are made equal on the two surfaces.

In this problem we have a heat equation in an irregular figure. An off-center source heats the body, while all the vertical surfaces are held at $U=0$.

```
}
```

```
title '3D Z-PERIODIC BOUNDARY TEST'
```

```
coordinates
  cartesian3
```

```
Variables
  u
```

```

definitions
  k = 0.1
  h=0
  x0=0.3  y0=-0.2
  x1=0.7  y1 = 0.2

equations
  u : div(K*grad(u)) + h = 0

periodic extrusion z=0, 0.8, 1


boundaries
  Region 1
    start(-1,-1)
    value(u)=0
    line to (1,-1)
    arc(center=-1,0) to (1,1)
    line to (-1,1)
    arc(center=-3,0) to close

    { an off-center heat source in layer 2 provides the asymmetric
      conditions to demonstrate the periodicity of the solution }
  limited region 2
    layer 2 h=10 k=10
    surface 1 { include insert patch in surface 1 so surfaces match }
    start(x0,y0) line to (x1,y0) to (x1,y1) to (x0,y1) to close

monitors
  contour(u) on y=0

plots
  grid(x,z) on y=0
  contour(u) on y=0 painted
end

```

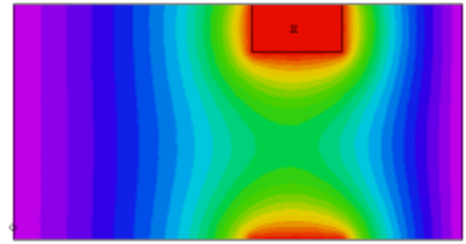

5.2.20.7 antiperiodic

```
{ ANTIPIERIODIC.PDE
```

This example shows the use of FlexPDE in applications with antiperiodic boundaries.

The [ANTIPIERIODIC](#)^[256] statement appears in the position of a boundary condition, but the syntax is slightly different, and the requirements and implications are more extensive.

The syntax is:

```
ANTIPIERIODIC(X_mapping,Y_mapping)
```

The mapping expressions specify the arithmetic required to convert a point (X,Y) in the immediate boundary to a point (X',Y') on a remote boundary. The mapping expressions must result in each point on the immediate boundary mapping to a point on the remote boundary. Segment endpoints must map to segment endpoints. The transformation must be invertible; do not specify constants as mapped coordinates, as this will create a singular transformation.

The antiperiodic boundary statement terminates any boundary conditions in effect, and instead imposes equality of all variables on the two boundaries. It is still possible to state a boundary condition on the remote boundary, but in most cases this would be inappropriate.

The antiperiodic statement affects only the next following [LINE](#)^[247] or [ARC](#)^[247] path. These paths may contain more than one segment, but the next appearing LINE or ARC statement terminates the periodic condition unless the periodic statement is repeated.

```

}
title 'ANTI-PERIODIC BOUNDARY TEST'
Variables
  u
definitions
  k = 0.1
  h=0
equations
  u : div(k*grad(u)) + h = 0
boundaries
  Region 1
    start(-1,-1)
    value(u)=0 line to (1,-1)

    { The following arc is required to be an antiperiodic image of an arc
      two units to its left. (This image boundary has not yet been defined.) }
    antiperiodic(x-2,y) arc(center=-1,0) to (1.2,-0.2)
    antiperiodic(x-2,y) line to (1.2,0.2)
    antiperiodic(x-2,y) arc(center=-1,0) to (1,1)

    value(u)=0 line to (-1,1)

    { The following arc provides the required image boundary for the previous
      antiperiodic statement }
    nobc(u) { turn off the value BC }
    arc(center= -3,0) to (-0.8,0.2) line to (-0.8,-0.2) arc(center=-3,0) to close


    { an off-center heat source provides the asymmetric conditions to
      demonstrate the antiperiodicity of the solution }
    region 2 h=10 k=10
      start(1.2,-0.2) line to (1.2,0.2) to (1,0.2) to (1,-0.2) to close

    region 3 h=-10 k=10
      start(-0.6,-0.2) line to (-0.6,0.2) to (-0.8,0.2) to (-0.8,-0.2) to close

monitors
  grid(x,y)
  contour(u)

plots
  grid(x,y)
  contour(u)
end

```

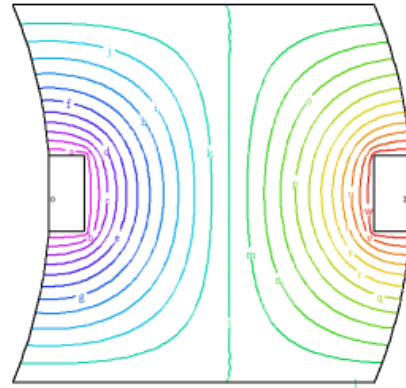

5.2.20.8 azimuthal_periodic

```

{ AZIMUTHAL_PERIODIC.PDE

This example shows the use of FlexPDE in a problem with azimuthal periodicity.
(See the example PERIODIC.PDE 665 for notes on periodic boundaries.)


In this problem we create a repeated 45-degree segment of a ring.
}

```

```

title 'AZIMUTHAL PERIODIC TEST'
Variables
  u
definitions
  k = 1
  { angular size of the repeated segment: }
  an = pi/4
  { the sine and cosine for transformation }
  crot = cos(an)
  srot = sin(an)
  H = 0
  xc = 1.5
  yc = 0.2
  rc = 0.1

```

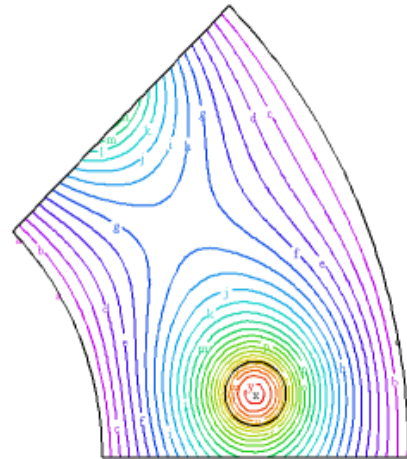

```

equations
  u : div(K*grad(u)) + H = 0
boundaries
  region 1
    { this line forms the remote boundary for the later periodic statement }
    start(1,0) line to (2,0)

    value(u)=0 arc(center=0,0) to (2*crot,2*srot)

    { The following line segment is periodic under an angular rotation.
      The mapping expressions take each point on the line into a corresponding
      point in the base line. Note that although all the mapped y-coordinates
      will be zero, we give the general expression so that the transformation
      will be invertible. }
    periodic(x*crot+y*srot, -x*srot+y*crot)
    line to (crot,srot)

    value(u)=0
    arc(center= 0,0) to close

  region 2
    H = 1
    start(xc-rc,yc) arc(center=xc,yc) angle=360
monitors
  grid(x,y)
  contour(u)
plots
  grid(x,y) contour(u)
end

```

5.2.20.9 periodic+time

```

{ PERIODIC+TIME.PDE
  This example is a time-dependent version of PERIODIC.PDE 665
}
title 'Time-dependent Periodic Boundary Test'
variables
  u(0.01)
definitions
  k = 0.1
  h=0
  x0=0.5 y0=-0.2
  x1=1.1 y1=0.2
equations
  u : div(K*grad(u)) + h = dt(u)
boundaries
  region 1
    start(-1,-1)

```

```

value(u)=0 line to (0.9,-1) to (1,-1)
{ The following arc is required to be a periodic image of an arc
  two units to its left. (This image boundary has not yet been defined.) }
periodic(x-2,y) arc(center=-1,0) to (1,1)

value(u)=0 line to (-1,1)
{ The following arc provides the required image boundary for the previous
  periodic statement }
nobc(u) { turn off the value BC }
arc(center= -3,0) to close

{ an off-center heat source provides the asymmetric conditions to
  demonstrate the periodicity of the solution }
region 2 h=10 k=10
start(x0,y0) line to (x1,y0) to (x1,y1) to (x0,y1) to close

time 0 to 10

monitors
  for cycle=1
    grid(x,y)
    contour(u)

plots
  for cycle=10
    grid(x,y)
    contour(u)

end

```

5.2.20.10 periodic

```
{ PERIODIC.PDE
```

This example shows the use of FlexPDE in applications with periodic boundaries.

The [PERIODIC](#)^[25b] statement appears in the position of a boundary condition, but the syntax is slightly different, and the requirements and implications are more extensive.

The syntax is:

```
PERIODIC(X_mapping,Y_mapping)
```

The mapping expressions specify the arithmetic required to convert a point (X,Y) in the immediate boundary to a point (X',Y') on a remote boundary. The mapping expressions must result in each point on the immediate boundary mapping to a point on the remote boundary. Segment endpoints must map to segment endpoints. The transformation must be invertible; do not specify constants as mapped coordinates, as this will create a singular transformation.

The periodic boundary statement terminates any boundary conditions in effect, and instead imposes equality of all variables on the two boundaries. It is still possible to state a boundary condition on the remote boundary, but in most cases this would be inappropriate.

The periodic statement affects only the next following [LINE](#)^[24a] or [ARC](#)^[24a] path. These paths may contain more than one segment, but the next appearing LINE or ARC statement terminates the periodic condition unless the periodic statement is repeated.

```

}
title 'PERIODIC BOUNDARY TEST'
variables
  u
definitions
  k = 0.1
  h=0
  x0=0.5  y0=-0.2
  x1=1.1  y1=0.2
equations
  u : div(k*grad(u)) + h = 0
boundaries
  region 1
  start(-1,-1)
  value(u)=0   line to (0.9,-1) to (1,-1)

  { The following arc is required to be a periodic image of an arc
    two units to its left. (This image boundary has not yet been defined.) }
  periodic(x-2,y) arc(center=-1,0) to (1,1)

  value(u)=0   line to (-1,1)

  { The following arc provides the required image boundary for the previous
    periodic statement }
  nobc(u) { turn off the value BC }
  arc(center=-3,0) to close


  { an off-center heat source provides the asymmetric conditions to
    demonstrate the periodicity of the solution }
  region 2  h=10 k=10
  start(x0,y0) line to (x1,y0) to (x1,y1) to (x0,y1) to close

monitors
  grid(x,y)
  contour(u)

plots
  grid(x,y)
  contour(u)

end

```

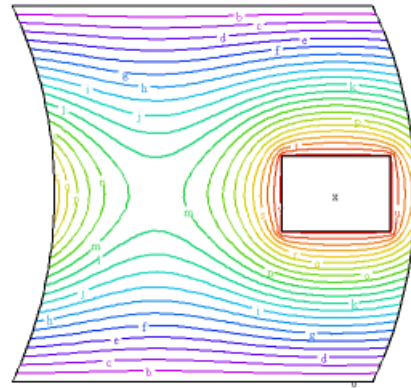

5.2.20.11 periodic_contaminant

```

{ PERIODIC_CONTAMINANT.PDE
  This problem computes the flow of contaminant pulses in a periodic channel section.
}

title 'Periodic Contaminant transport in 2D channel'

variables
  c(0.01)

select
  ngrid=40

definitions
  Lx = 5      Ly = 1.5
  p0 = 2
  dens = 1
  visc0 = 0.04
  visc = visc0
  vxx = -(p0/(2*visc*(2*Lx)))*(Ly^2-y^2)      { open-channel x-velocity }
  u = 0.5*vxx
  v = 0
  speed = sqrt(u^2+v^2)

  Re = globalmax(speed)*(Ly/2)/(visc0/dens)

```

```

Kc = 0.002      { contaminant diffusivity }
wid=0.3
c0=1
cinput = c0*exp(-(x^2+(y-Ly/2)^2)/wid^2)

Initial Values
c = cinput

equations
c: dt(c) + u*dx(c) + v*dy(c) = div(Kc*grad(c))

boundaries
region 1
start(-Lx,0)
load(c)=0
line to (Lx,0)
periodic(x-2*Lx,y)
line to (Lx,Ly)

mesh_spacing=100
load(c)=0
line to(-Lx,Ly)
line to close

time 0 to 10

monitors
for cycle = 10
contour(speed) report(Re)
contour(c) range(0,1) report(Re)

plots
for t=0 by 0.2 to endtime
contour(c) range(0,1) painted report(Re)
contour(u) report(Re)
contour(v) report(Re)
contour(speed) painted report(Re)
vector(u,v) as "flow" report(Re)
contour(dx(u)+dy(v)) as "Continuity Error"

history(integral(c)) range(0,1.2*integral(cinput))
history(c) at (0,0.8) (2,0.8) (3,0.8) (4,0.8) (Lx,0)

end

```

5.2.20.12 periodic_map

```
{ PERIODIC_MAP.PDE
```

This example is a modification of [PERIODIC.PDE](#)^[665], and shows the use of the MAP facility in applications with [periodic boundaries](#)^[256].
(Only FlexPDE versions 7.16 or later support this facility.)

The PERIODIC (or ANTIPERIODIC) statement presets the behavior of all variables. A statement MAP() = 1 or MAP() = -1 may then appear for any number of variables, to independently set the behavior of that variable.
MAP(.)=1 means PERIODIC, MAP(.)=-1 means ANTIPERIODIC

```
}
```

```
title 'MAPPED PERIODIC BOUNDARY TEST'
```

```
variables
u,v
```

```
definitions
k = 0.1
h=0
```



```

x0=0.5 y0=-0.2
x1=1.1 y1=0.2
offset = sqrt(5)-2

select
  debug(periodics)

equations
  u : div(K*grad(u)) + h = 0
  v : div(K*grad(v)) + h = 0

boundaries
  region 1
    start(-1,-1)
    value(u)=0 value(v)=0 line to (0.9,-1) to (1,-1)

    { The following boundary is required to be a periodic image of the boundary
      two units to its left. (This image boundary has not yet been defined.) }
    periodic(x-2,y)
    { The variable U is declared PERIODIC, and the variable V is declared ANTIPERIODIC:
  }

  map(u)=1 map(v)=-1
  { the boundary is declared to be an arc: }
  arc(center=-1,0) to (1,1)

  value(u)=0 value(v)=0 line to (-1,1)

  { The following arc provides the required image boundary for the previous
    periodic statement }
  nobc(u) nobc(v) { turn off the value BC }
  arc(center= -3,0) to close

  { an off-center heat source provides the asymmetric conditions to
    demonstrate the periodicity of the solution }
  region 2 h=10 k=10
    start(x0,y0) line to (x1,y0) to (x1,y1) to (x0,y1) to close

monitors
  grid(x,y)
  contour(u)
  contour(v)

plots
  grid(x,y)
  contour(u)
  contour(v)
  elevation(u,v) from(-1+offset,0) to (1+offset,0)

end

```

5.2.20.13 three-way_periodic_3d

```

{ THREE_WAY PERIODIC.PDE

}

title '3D THREE-WAY PERIODIC BOUNDARY TEST'

coordinates
  cartesian3

Variables
  u

definitions
  k = 20
  h=0
  x0=0.3 y0=0.3 z0 = 0.6
  x1=0.8 y1 = 0.8 z1 = 0.8
  xc = (x0+x1)/2
  yc = (y0+y1)/2

```

```

zc = (z0+z1)/2
equations
  u : div(k*grad(u)) + h = 0
! declare periodicity in z-dimension
periodic extrusion z=0,z0,z1,1
boundaries
  region 1
  h=-20
  start(-1,-1)
  periodic(x,y+2)
  line to (1,-1)

  { The following arc is required to be a periodic image of an arc
    two units to its left. (This image boundary has not yet been defined.) }
  periodic(x-2,y)
  arc(center=-1,0) to (1,1)

  { The following line provides the required image boundary for the previous
    y-periodic statement }
  line to (-1,1)

  { The following arc provides the required image boundary for the previous
    x-periodic statement }
  arc(center= -3,0) to close

  { an off-center heat source in layer 2 provides the asymmetric conditions to
    demonstrate the periodicity of the solution }
  limited region 2
  layer 2 h=20 k=10
  start(x0,y0)
  value(u)=1 line to (x1,y0) to (x1,y1) to (x0,y1) to close

monitors
  contour(u) on z=zc
  contour(u) on y=yc
  contour(u) on x=xc

plots
  contour(u) on z=zc painted as "U(x,y)"
  contour(u) on y=yc painted as "U(x,z)"
  contour(u) on x=xc painted as "U(y,z)"

  elevation(u) from(xc, yc, 0) to (xc, yc, 1)
  elevation(u) from(-1, yc, zc) to (1.5, yc, zc)
  elevation(u) from(xc, -1, zc) to (xc, 1, zc)

  contour(u-eval(u,x,y,z-1)) on z=1
  contour(u-eval(u,x,y-2,z)) on y=1

end

```

5.2.20.14 two-way_periodic

```
{ TWO-WAY_PERIODIC.PDE
```

This example shows the use of FlexPDE in 2D applications with two-way periodic boundaries.

```
}
```

```
title 'TWO-WAY PERIODIC BOUNDARY TEST'
```

```
variables
```

```
  u
```

```
definitions
```

```
  k = 1
```

```
  h=0
```

```
  x0=0.4 x1=0.9 { right box x-coordinates }
```

```
  x2=-0.5 x3=0.0 { left box x-coordinates }
```


```
  y0=-0.7 y1 = -0.3 {y-coordinates for both
```

```
boxes }
```

```
equations
  u : div(K*grad(u)) + h = 0
```

```
boundaries
  region 1
```

```
  { Periodic bottom boundary }
  start(-1,-1)
  periodic(x,y+2) line to (1,-1)
```

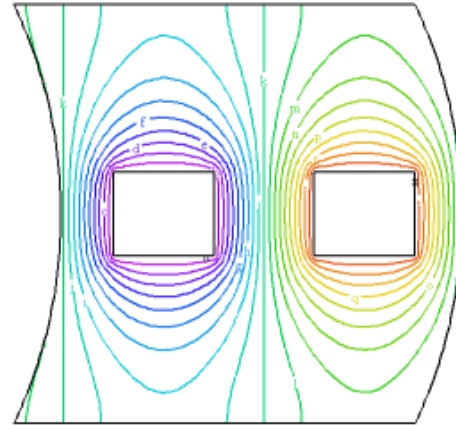

```
  { Periodic right boundary }
  periodic(x-2,y) arc(center=-1,0) to (1,1)
```

```
  { Image of periodic bottom boundary }
  line to (-1,1)
```

```
  { Image of periodic right boundary }
  arc(center= -3,0) to close
```

```
  { off-center hot box }
  start(x0,y0)
  value(u)=1 line to (x1,y0) to (x1,y1) to (x0,y1) to close
```

```
  { off-center cold box }
  start(x2,y0)
  value(u)=-1 line to (x3,y0) to (x3,y1) to (x2,y1) to close
```

```
monitors
  grid(x,y)
  contour(u)
```

```
plots
  grid(x,y)
  contour(u)
```

```
end
```

5.2.20.15 two-way_periodic_3d

```
{ 3D TWO-WAY PERIODIC.PDE
  This example shows the use of FlexPDE in 3D applications with two-way periodic
  boundaries.
}
```

```
title '3D TWO-WAY PERIODIC BOUNDARY TEST'
```

```
coordinates
  cartesian3
```

```
variables
  u
```

```
select
  ngrid=4
```

```
definitions
  k = 0.1
  h=0
  x0=0.3 y0=0.3 z0 = 0.6
  x1=0.8 y1 = 0.8 z1 = 0.8
  xc = (x0+x1)/2
  yc = (y0+y1)/2
  zc = (z0+z1)/2
```

```
equations
```

```

u : div(K*grad(u)) + h = 0
extrusion z=0,z0,z1,1
boundaries

surface 1 value(u)=0
surface 4 value(u)=0

region 1
  start(-1,-1)
  periodic(x,y+2)
  line to (1,-1)

  { The following arc is required to be a periodic image of an arc
    two units to its left. (This image boundary has not yet been defined.) }
  periodic(x-2,y)
  arc(center=-1,0) to (1,1)

! periodic(x,y-2)
  line to (-1,1)

  { The following arc provides the required image boundary for the previous
    x-periodic statement }
  nobc(u) { turn off the value BC }
  arc(center= -3,0) to close

  { an off-center heat source in layer 2 provides the asymmetric conditions to
    demonstrate the periodicity of the solution }
  limited region 2
    layer 2 h=10 k=10
    start(x0,y0) line to (x1,y0) to (x1,y1) to (x0,y1) to close

monitors
  contour(u) on z=zc
  contour(u) on y=yc
  contour(u) on x=xc

plots
  contour(u) on z=zc painted as "U(x,y)"
  contour(u) on y=yc painted as "U(x,z)"
  contour(u) on x=xc painted as "U(y,z)"

  elevation(u) from(xc, yc, 0) to (xc, yc, 1)
  elevation(u) from(-1, yc, zc) to (1.5, yc, zc)
  elevation(u) from(xc, -1, zc) to (xc, 1, zc)

end

```

5.2.21 Plotting

5.2.21.1 3d_ploton

```
{ 3D_PLOTON.PDE
```

This problem shows some of the possible ['ON'](#) ^[27] qualifiers for 3D plots.

```
}
```

```
title '3D Test -- Plot Qualifiers'
```


```
coordinates
  cartesian3
```

```
variables
  u
```

```
definitions
  k = 0.1
  heat = 4
```

```
equations
  u: div(k*grad(u)) + heat = 0
```


```
extrusion
```

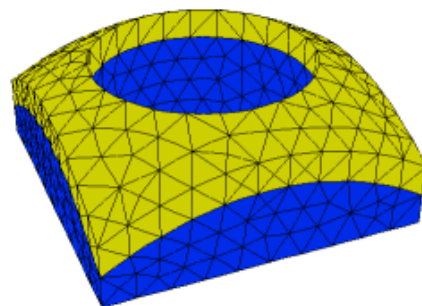

```

surface "S1" z = 0
  layer 'one'
surface "S2" z = 0.8-0.3*(x^2+y^2)
  layer 'two'
surface "S3" z = 1.0-0.3*(x^2+y^2)

```



```

boundaries
  region 1 'outer'
    layer 'two' k = 1
    start(-1,-1)
    value(u) = 0
    line to (1,-1) to (1,1) to (-1,1) to close
  region 2 'plug'
    layer 'two' k = 1
    start 'dot' (0.5,0.5) arc(center=0,0) angle=360

plots
  grid(x,y,z) on "outer" as "Only Region 1, both layers"
  grid(x,y,z) on region 'plug' on layer "two" as "Region 2 Layer 2"
  grid(x,y,z) on region 'plug' on layers "one","two" paintregions as "Region 2, both layers"
  grid(y,z) on x=0 on 'plug' as "Cut plane on region 2"
  contour(u) on x=0.51 on layer "two" as "Solution on X-cut in layer 2"
  contour(u) on z=0.51 on region "Plug" as "Solution on Z-cut in region 2"
  contour(u) on surface "S2" on region "plug" as "Solution on paraboloidal layer interface"
  vector(grad(u)) on surface "S2" on 'outer' as "Flux on layer interface in region 1"

  glcontour(u) on 'outer' on 'two'
  glcontour(k*dx(u)) on 'outer' on 'two'

end

```

5.2.21.2 export_test

```
{ EXPORT_TEST.PDE
```

```
} This sample demonstrates the use of EXPORT selectors in PLOT output.
```

```
title "Simple Heatflow"
```

```
Variables
```

```
Temp { Identify "Temp" as the system variable }
```

```
definitions
```

```
K = 1 { declare and define the conductivity }
source = 4 { declare and define the source }
Texact = 1-x^2-y^2 { for convenience, define the exact solution }
```

```
initial values
```

```
Temp = 0 { unimportant in linear steady-state problems }
```

```
equations
```

```
Temp: div(k*grad(Temp)) + source = 0 { define the heatflow equation }
```

```
boundaries
```

```
Region 1 { define the problem domain }
  start "BDRY" (-1,-1) { ... only one region }
  value(Temp)=Texact { specify the starting point }
  line to (1,-1) { specify Dirichlet boundary at exact solution }
  to (1,1) { walk the boundary }
  to (-1,1)
  to close { bring boundary back to starting point }
```

```
monitors
```

```
contour(Temp) { show the Temperature during solution }
```

```
plots
```

```
contour(Temp) export { write these hardcopy files at completion }
as "Contour Export"
```

```

contour(Temp)      export(20)  as "Contour Export(20)"
contour(Temp)      export traces as "Trace Print"
vector(-dx(Temp),-dy(Temp)) as "Heat Flow" export
elevation(temp) from (-1,-1) to (1,1) export as "Elevation-export"
elevation(temp) from (-1,-1) to (1,1) export(300) as "Elevation-export(300)"
elevation(temp) on "BDRY" export as "Bdry-export"

end

```

5.2.21.3 plot_on_grid

```
{ PLOT_ON_GRID.PDE
```

This is a variation of [BENTBAR.PDE](#)^[457] that makes use of the capability to plot contours on a deformed grid.

The syntax of the plot command is

```
CONTOUR\(data\) ON GRID\(Xposition,Yposition\)[275]
```

```
}
```

```
title "Contour plots on a deformed grid"
```

```
select
  cubic      { Use Cubic Basis }
```

```
variables
  U          { X-displacement }
  V          { Y-displacement }
```

```
definitions
```

```

L = 1          { Bar length }
hL = L/2
w = 0.1       { Bar thickness }
hw = w/2
eps = 0.01*L
I = 2*hw^3/3  { Moment of inertia }

nu = 0.3      { Poisson's Ratio }
E = 2.0e11    { Young's Modulus for Steel (N/M^2) }
              { plane stress coefficients }

G = E/(1-nu^2)
C11 = G
C12 = G*nu
C22 = G
C33 = G*(1-nu)/2

```

```

amplitude=GLOBALMAX(abs(v)) { for grid-plot scaling }
mag=1/amplitude

```

```

force = -250   { total loading force in Newtons (~10 pound force) }
dist = 0.5*force*(hw^2-y^2)/I   { Distributed load }

```

```

Sx = (C11*dx(U) + C12*dy(V))   { Stresses }
Sy = (C12*dx(U) + C22*dy(V))
Txy = C33*(dy(U) + dx(V))

```

```

{ Timoshenko's analytic solution: }
Vexact = (force/(6*E*I))*((L-x)^2*(2*L+x) + 3*nu*x*y^2)
Uexact = (force/(6*E*I))*(3*y*(L^2-x^2) + (2+nu)*y^3 - 6*(1+nu)*hw^2*y)
Sxexact = -force*x*y/I
Txyexact = -0.5*force*(hw^2-y^2)/I

```

```
initial values
```

```

U = 0
V = 0


```

```
equations      { the displacement equations }
```

```

U: dx(Sx) + dy(Txy) = 0
V: dx(Txy) + dy(Sy) = 0

```

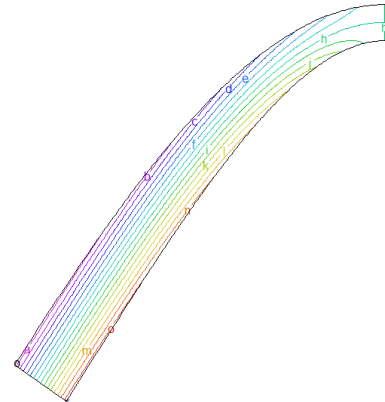

```

boundaries
  region 1
    start (0,-hw)

    load(U)=0          { free boundary on bottom, no normal stress }
    load(V)=0
    line to (L,-hw)

    value(U) = Uexact { clamp the right end }
    mesh_spacing=hw/10
    line to (L,0) point value(V) = 0
    line to (L,hw)

    load(U)=0          { free boundary on top, no normal stress }
    load(V)=0
    mesh_spacing=10
    line to (0,hw)

    load(U) = 0
    load(V) = dist     { apply distributed load to Y-displacement equation }
    line to close

plots
  grid(x+mag*U,y+mag*V) as "deformation" { show final deformed grid }

  ! STANDARD PLOTS:
  contour(U) as "Contour on Static Grid"
  surface(U) as "Surface on Static Grid"

  ! THE DEFORMED PLOTS:
  contour(U) on grid(x+mag*U,y+mag*V) as "Contour on Deformed Grid"
  surface(U) on grid(x+mag*U,y+mag*V) as "Surface on Deformed Grid"

end

```

5.2.21.4 plot_test

```
{ PLOT_TEST.PDE
```

This example shows the use of various options in plotted output.

The problem is the same as [PLATE_CAPACITOR.PDE](#) ^[385].

```
}
```

```
title 'Plate capacitor'
```

```
variables
```

```
v
```

```
definitions
```

```

Lx=2      Ly=1.5
delx=0.25*Ly
d=0.1*Ly  ddy=0.1*d
Ex=-dx(v)  Ey=-dy(v)
Eabs=sqrt(Ex^2+Ey^2)
eps0=8.854e-12
eps
DEx=eps*Ex  DEy=eps*Ey
Dabs=sqrt(DEx^2+DEy^2)
zero=1.e-15

```

```
equations
```

```
v: div(-eps*grad(v)) = 0
```

```
boundaries
```

```

  region 1
    eps=eps0

```

```


  start(-Lx,-Ly) Load(v)=0
  line to (Lx,-Ly) to (Lx,Ly) to (-Lx,Ly) to close

```

```

  start "Plate1" (-delx/2,-d/2) value(v)=0
  line to (delx/2,-d/2) to (delx/2,-d/2-ddy) to(-delx/2,-d/2-ddy)
  to close

```

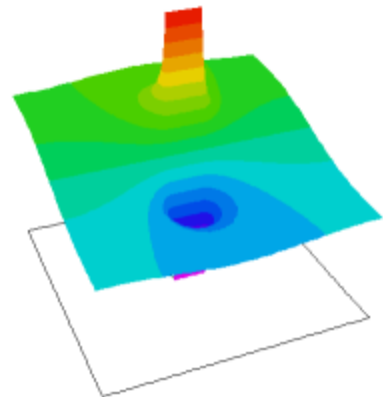

```

start "Plate2" (-delx/2,d/2+ddy) value(v)=1
line to (delx/2,d/2+ddy) to (delx/2,d/2) to(-delx/2,d/2)
to close

region 2 { Dielectric }
eps = 7.0*eps0
start(-delx/2,-d/2)
line to (delx/2,-d/2) to (delx/2,d/2) to(-delx/2,d/2)
to close

MONITORS
contour(v)

PLOTS
! Contour plots
contour(v) as "Potential"
contour(v) contours=50 as "More Contours"
contour(v) contours=10 fixed range=(0.4,0.6) as "Fixed Range"
contour(v) levels=0, 0.1, 0.3, 0.5, 0.7, 0.9 as "Selected Levels"
! contour with stretching zoom
contour(v) zoom(-Lx/2,-Ly/2,Lx,Ly) as "Zoomed Contour (stretched)"
contour(v) on region 2 as "Region 2 Contour"
contour(magnitude(grad(v))) log as "Field (Log divisions)"
integrate
report integral(magnitude(grad(v))) as "Integral Report"
contour(magnitude(grad(v))) as "Field (NO Log divisions)"

! Surface Plots
surface(magnitude(grad(v))) log as "Field (Log divisions)"
integrate
report integral(magnitude(grad(v))) as "Integral Report"
surface(v) as "Surface(V)"
surface(v) gray as "Surface(V) Gray"
surface(v) gray mesh points=20 as "Surface(V) Gray Mesh"

! Vector plot (with 3-argument square zoom)
vector(dx(v),dy(v)) zoom(-Ly/2,-Ly/2,Ly) as " Zoomed Field Vectors (square)"

! Elevations
elevation(v, dy(v)*d) from (0,-Ly) to (0,Ly) points=1000 as "1000 Point Elevation"
integrate
elevation(normal(grad(v))) on "Plate1" as "Elevation Plot on Boundary " integrate
elevation(magnitude(grad(v))) from (0,-0.9*Ly) to (0,0.9*Ly) log as "LOG Field"

! Grid plots
grid(x,y) paintmaterials as "Mesh Plot"
grid(x,y) paintmaterials nolines as "Materials Plot"

end

```

5.2.22 Sequenced Equations

5.2.22.1 equation_iteration

```
{ EQUATION_ITERATION.PDE
```

This example is a modification of the LOWVISC.PDE problem to show the use of the START_ITERATION - END_ITERATION construct. The X and Y velocities (U and V) are calculated independently, but iterated until mutual convergence.

This is not a better way to solve this particular problem, but simply an example of the usage for the START_ITERATION - END_ITERATION construct.

```
}
```

```
title 'Viscous flow in 2D channel, Re > 40'
```

```
variables
u(0.1)
v(0.01)
```



```

p(1)
psi

select
  ngrid=40

definitions
  Lx = 5      Ly = 1.5
  p0 = 2
  speed2 = u^2+v^2
  speed = sqrt(speed2)
  dens = 1
  visc = 0.04
  vxx = -(p0/(2*visc*(2*Lx)))*(Ly^2-y^2) { open-channel x-velocity }

  rball=0.4
  cut = 0.1 { value for bevel at the corners of the obstruction }

  penalty = 100*visc/rball^2
  Re = globalmax(speed)*(Ly/2)/(visc/dens)

  w = zcomp(curl(u,v)) ! vorticity is the source for streamline equation

initial values
  u = 0.5*vxx  v = 0  p = p0*(Lx+x)/(2*Lx)

equations
  ! Iterate U and V until mutual convergence
  start_iteration
    u: visc*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
    p: div(grad(p)) = penalty*(dx(u)+dy(v))
  then
    v: visc*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
    p: div(grad(p)) = penalty*(dx(u)+dy(v))
  end_iteration

  then
    psi: div(grad(psi)) + w = 0 ! solve streamline equation separately from velocities

boundaries
  region 1
    start(-Lx,0)
    load(u) = 0  value(v) = 0  load(p) = 0  value(psi)=0
    line to (Lx/2-rball,0)

    value(u) = 0  value(v) = 0  load(p) = 0
    mesh_spacing=rball/10 ! dense mesh to resolve obstruction
    line to (Lx/2-rball,rball) bevel(cut)
      to (Lx/2+rball,rball) bevel(cut)
      to (Lx/2+rball,0)

    mesh_spacing=10*rball ! cancel dense mesh requirement
    load(u) = 0  value(v) = 0  load(p) = 0
    line to (Lx,0)

    load(u) = 0  value(v) = 0  value(p) = p0  natural(psi)=0
    line to (Lx,Ly)

    value(u) = 0  value(v) = 0  load(p) = 0  natural(psi)=normal(-v,u)
    line to (-Lx,Ly)

    load(u) = 0  value(v) = 0  value(p) = 0  natural(psi)=0
    line to close

monitors
  contour(speed)  report(Re)
  contour(psi) as "Streamlines"
  contour(max(psi,-0.003)) zoom(Lx/2-3*rball,0, 3*rball,3*rball) as "Vortex
Streamlines"
  vector(u,v) as "flow"  zoom(Lx/2-3*rball,0, 3*rball,3*rball) norm

```

```

plots
  contour(u) report(Re)
  contour(v) report(Re)
  contour(speed) painted report(Re)
  vector(u,v) as "flow" report(Re)
  contour(p) as "Pressure" painted
  contour(dx(u)+dy(v)) as "Continuity Error"
  elevation(u) from (-Lx,0) to (-Lx,Ly)
  elevation(u) from (0,0) to (0,Ly)
  elevation(u) from (Lx/2,0) to (Lx/2,Ly)
  elevation(u) from (Lx,0) to (Lx,Ly)
  contour(psi) as "Streamlines"
  contour(max(psi,-0.003)) zoom(Lx/2-3*rball,0, 3*rball,3*rball) as "Vortex
Streamlines"
  vector(u,v) as "flow" zoom(Lx/2-3*rball,0, 3*rball,3*rball) norm

  Transfer(u,v,p) ! write flow solution as initial values for Coupled_contaminant.pde
end

```

5.2.22.2 initialeq

```
{ INITIALEQ.PDE
```

This example illustrates use of the [INITIAL EQUATIONS](#)^[235] section. It is a modification of the [FLOAT_ZONE_PDE](#)^[427] example that first solves for a gaussian initial temperature distribution.

```
}
```

```
title "Float Zone"
```

```
coordinates xycylinder('Z','R')
```

```
variables
```

```
temp (threshold=100)
temp2(threshold=100)
```

```
definitions
```

```
k = 0.85      {thermal conductivity}
cp = 1        { heat capacity }
long = 18
H = 0.4       {free convection boundary coupling}
Ta = 25       {ambient temperature}
A = 4500      {amplitude}
```

```
source = A*exp(-((z-1*t)/.5)^2)*(200/(t+199))
```

```
tsource = time_integral(vol_integral(source))
t1 = time_integral(1.0)
```

```
initial value
```

```
temp = Ta
temp2 = Ta
```

```
initial equations
```

```
Temp: div(k*grad(temp)) + A*exp(-(z-long/2)^2)= 0
```

```
equations
```

```
Temp: div(k*grad(temp)) + source = cp*dt(temp)
Temp2: div(k*grad(temp2)) + source = cp*dt(temp2)
```

```
boundaries
```

```
region 1
start(0,0)
natural(temp) = 0
natural(temp2) = 0
```

```

line to (long,0)
  value(temp) = Ta
  value(temp2) = Ta
line to (long,1)
  natural(temp) = -H*(temp - Ta)
  natural(temp2) = -H*(temp2 - Ta)
line to (0,1)
  value(temp) = Ta
  value(temp2) = Ta
line to close

feature
  start(0.01*long,0) line to (0.01*long,1)

time -0.5 to 19

monitors
  for t = -0.5 by 0.5 to (long + 1)
  elevation(temp, temp2) from (0,1) to (long,1) range=(0,1800) as "Surface Temp"
  contour(temp)
  contour(dt(temp))
  contour(temp2)

plots
  for t = -0.5 by 0.5 to (long + 1)
  elevation(temp, temp2) from (0,0) to (long,0) range=(0,1800) as "Axis Temp"

histories
  history(temp,dt(temp)) at (0,0) (1,0) (2,0) (3,0) (4,0) (5,0) (6,0) (7,0) (8,0)
                        (9,0) (10,0) (11,0) (12,0) (13,0) (14,0) (15,0) (16,0)
                        (17,0) (18,0)
  history(temp2,dt(temp2)) at (0,0) (1,0) (2,0) (3,0) (4,0) (5,0) (6,0) (7,0) (8,0)
                        (9,0) (10,0) (11,0) (12,0) (13,0) (14,0) (15,0) (16,0)
                        (17,0) (18,0)
  history(t1) as "Tintegral(1)"
  history(tsource) as "Tintegral(Source)"

end

```

5.2.22.3 smoothing_discontinuities

```
{ SMOOTHING_DISCONTINUITIES.PDE
```

This problem is a variation of [DIFFUSION.PDE](#)^[448]. It employs an approximation to smooth the effects of discontinuous initial conditions. We specify a discontinuous initial condition, zero internally with a value of 1.0 on the boundary. The equation is $\text{div}(D*\text{grad}(u)) = \text{dt}(u)$. A first-order backward finite-difference approximation to the time derivative is $\text{dt}(u) \sim (u-u_0)/\text{deltat0}$.

This creates an implicit steady-state equation for the value at the end of the initial time deltat0 :

$$\text{div}(D*\text{grad}(u)) = (u - u_0)/\text{deltat0}.$$

We use the [INITIAL EQUATIONS](#)^[238] facility to solve this system before beginning the time evolution.

```
}
```

```
title 'Masked Diffusion'
```

```
variables
  u(threshold=0.1) { fraction of external concentration }
```

```
definitions
  concs = 1.8e8 { surface concentration atom/micron^3}
```

```

D = 1.1e-2                { diffusivity micron^2/hr}
conc = concs*u
cexact1d = concs*erfc(x/(2*sqrt(D*t)))
uexact1d = erfc(x/(2*sqrt(D*t)))    { masked surface flux multiplier }
M = upulse(y-0.3,y-0.7)

u0 = 0
dt0 = 0.05

initial equations
u: div(D*grad(u)) = (u - u0)/dt0    ! finite difference over time for a first step

equations
u : div(D*grad(u)) = dt(u)

boundaries
region 1
start(0,0)
natural(u) = 0
line to (1,0) to (1,1) to (0,1)
value(u) = M
line to close

feature                { a "gridding feature" to help localize the activity }
start (0.02,0.3) line to (0.02,0.7)

time dt0 to 1 by 0.001

plots
for t=dt0 0.1 by 0.05 to 0.2 by 0.1 to endtime
contour(u)
surface(u)
elevation(u,uexact1d) from (0,0.5) to (1,0.5)
elevation(u-uexact1d) from (0,0.5) to (1,0.5)

histories
history(u) at (0.05,0.5) (0.1,0.5) (0.15,0.5) (0.2,0.5)

end

```

5.2.22.4 theneq+time

```
{ THENEQ+TIME.PDE
```

This example demonstrates the use of [sequenced equations](#)^[233] in time-dependent problems.

The variable U is given a source consistent with the desired solution of

$$U = A - (x^2 + y^2)$$

The variable V has a source equal to -U. The analytic solution to this equation is

$$V = A*(x^2 + y^2)/4 - (x^4 + y^4)/12$$

The variable V therefore depends strongly on U, but U is unaffected by V.

In this case, we can separate the equations and solve for V in a THEN clause.

```

}
title 'sequenced equations in time-dependent systems'
select ngrid=40
variables
u(0.01),v(0.01)
definitions
k = 1
a=2
! analytic solutions
u0 = (a-x^2-y^2)
v0 = (a*(x^2+y^2)/4-(x^4+y^4)/12)
equations

```

```

u: div(K*grad(u)) + 4 = dt(u)
then
v: div(K*grad(v)) - u = dt(v)

boundaries
Region 1
start(-1,-1)
! ramp the boundary values, so that the initial BV's are consistent with the
initial interior values.
value(u)=u0*Uramp(t, t-10)
value(v)=v0*Uramp(t, t-10)
line to (1,-1) to (1,1) to (-1,1) to close

time 0 to 100

plots
for cycle=10
contour(u) paint
surface(u)
contour(v) paint
surface(v)
elevation(u,div(K*grad(v))) from(-1,0) to (1,0)
history(u,v) at (0,0)

end

```

5.2.22.5 theneq

```

{ THENEQ.PDE
  This example demonstrates the use of sequenced equations233 in a steady-state
  problem.
  The equations are not coupled, and are solved individually.
}
title 'Sequenced Equations'

select
errlim=1e-5
ngrid=50

Variables
u,v,w

definitions
k1 = 1
k2 = 2
k3 = 3
u0 = 1-x^2-y^2
v0 = 2-x^2-y^2
w0 = 3-x^2-y^2
sourceu = 4*k1
sourcev = 4*k2
sourcew = 4*k3

equations
u: div(K1*grad(u)) +sourceu = 0
then
v: div(K2*grad(v)) +sourcev = 0
then
w: div(K3*grad(w)) +sourcew = 0

boundaries
Region 1
start(-1,-1)
value(u)=u0 value(v)=v0 value(w)=w0
line to (1,-1) to (1,1) to (-1,1) to close

plots
surface(u) paint as "First"
surface(v) paint as "Second"
surface(w) paint as "Third"
elevation(u,v,w,su,sv,sw) from (-1,0) to (1,0)

end

```

5.2.23 Stop+Restart

5.2.23.1 restart_export

```
{ RESTART_EXPORT.PDE
```

This example demonstrates the [RESTART](#)^[227] facilities of FlexPDE. The problem is a copy of [BUOYANT+TIME.PDE](#)^[399], with restart transfer file output every 10 units of problem time.

The associated script [RESTART_IMPORT.PDE](#)^[682] reads one of these transfer files to resume the computation from the time of the file output.

Alternatively, the Finish Timestep item on the [Stop menu](#)^[114] could be used with the preference setting to automatically save a final transfer file. This file could also be used in [RESTART_IMPORT.PDE](#)^[682] to resume the computation from the point of the interrupt.

```
}
```

```
TITLE "Stop and Restart Test - Export"
```

VARIABLES

```
temp(100)
psi(0.001)
w(1)
```

DEFINITIONS

```
Lx = 1      Ly = 0.5
Rad = 0.5*(Lx^2+Ly^2)/Ly
Gy = 980
```

```
sigma_top = 0.01      { surface heat loss coefficient }
sigma_bowl = 1         { bowl heat loss coefficient }
k = 0.0004             { thermal conductivity }
```

```
alpha = 0.001         { thermal expansion coefficient }
visc = 1
```

```
heatin = min(10,t)
t0 = 50
```

```
rho0 = 1
rho = rho0*(1 - alpha*temp)
cp = 1
```

```
u = dy(psi)
v = -dx(psi)
```

```
penalty = 5000
```

EQUATIONS

```
temp: div(k*grad(temp)) = rho0*cp*(dt(temp) + u*dx(temp) + v*dy(temp))
psi:  div(grad(psi)) + w = 0
w:    dt(w) + u*dx(w) + v*dy(w) = visc*div(grad(w)) - Gy*dx(rho)
```

BOUNDARIES

```
region 1
```

```
{ on the arc of the bowl, set Psi=0, apply conduction loss to T,
  and apply penalty function to w to enforce no-slip condition. }
```

```
start(0,0)
natural(temp) = -sigma_bowl*temp
value(psi) = 0
natural(w)=penalty*tangential(u,v)
arc (center=0,Rad) to (Lx,Ly)
```

```
{ on the top, continue the prior BC for Psi,
  but apply a heat input and loss to T.
  Apply natural=0 BC (no vorticity transport) for w }
```

```

load(temp) = heatin*exp(-(10*x/Lx)^2) - sigma_top*temp
natural(w)=0
line to (0,Ly)

{ in the symmetry plane assert w=0, with a reflective BC for T }
value(w)=0
load(temp) = 0
line to close

TIME 0 to 10

MONITORS
for cycle=5 { watch what's happening }
contour(temp) as "Temperature"
contour(psi) as "Stream Function"
contour(w) as "Vorticity"
vector(curl(psi)) as "Flow Velocity" norm

PLOTS
for t = 1 by 1 to 10 by 10 to endtime
grid(x,y)
contour(temp) as "Temperature" painted
contour(psi) as "Stream Function"
contour(w) as "Vorticity" painted
vector(curl(psi)) as "Flow velocity" norm
contour(rho) as "Density" painted

!>>>> HERE IS THE RESTART TRANSFER COMMAND:
for t=5 by 5 to endtime
export restart

HISTORIES
history(temp) at (0.1*Lx,Ly) (0.2*Lx,Ly) (0.5*Lx,Ly) (0.8*Lx,Ly)
(0.7*Lx,0.5*Ly) (0.04*Lx,0.1*ly) as "Temperature"
history(u) at (0.1*Lx,Ly) (0.2*Lx,Ly) (0.5*Lx,Ly) (0.8*Lx,Ly)
(0.7*Lx,0.5*Ly) (0.04*Lx,0.2*Ly) as "X-velocity"
history(v) at (0.04*Lx,0.1*ly) as "Y-velocity"
history(v) at (0.04*Lx,0.1*ly) vs sqrt(t) as "Y-velocity"

END

```

5.2.23.2 restart_import

```

{ RESTART_IMPORT.PDE

This example reads the RESTART[227] transfer file created by
RESTART\_EXPORT.PDE[687] and resumes execution at the exported time.

}

TITLE 'Stop and Restart Test - Import'

VARIABLES
temp(100)
psi(0.001)
w(1)

DEFINITIONS
Lx = 1 Ly = 0.5
Rad = 0.5*(Lx^2+Ly^2)/Ly
Gy = 980

sigma_top = 0.01 { surface heat loss coefficient }
sigma_bowl = 1 { bowl heat loss coefficient }
k = 0.0004 { thermal conductivity }

alpha = 0.001 { thermal expansion coefficient }
visc = 1

heatin = min(10,t)

```

```

t0 = 50

rho0 = 1
rho = rho0*(1 - alpha*temp)
cp = 1

u = dy(psi)
v = -dx(psi)

penalty = 5000

{ Read in the file exported by restart_export.pde.
  Use the imported mesh and problem time. }

INITIAL VALUES
restart("restart_export_output/restart_export_restart.xfr")

EQUATIONS
temp: div(k*grad(temp)) = rho0*cp*(dt(temp) + u*dx(temp) + v*dy(temp))
psi:  div(grad(psi)) + w = 0
w:    dt(w) + u*dx(w) + v*dy(w) = visc*div(grad(w)) - Gy*dx(rho)

BOUNDARIES
region 1

{ on the arc of the bowl, set Psi=0, apply conduction loss to T,
  and apply penalty function to w to enforce no-slip condition. }
start(0,0)
natural(temp) = -sigma_bowl*temp
value(psi) = 0
natural(w)=penalty*tangential(u,v)
arc (center=0,Rad) to (Lx,Ly)

{ on the top, continue the prior BC for Psi,
  but apply a heat input and loss to T.
  Apply natural=0 BC (no vorticity transport) for w }
load(temp) = heatin*exp(-(10*x/Lx)^2) - sigma_top*temp
natural(w)=0
line to (0,Ly)

{ in the symmetry plane assert w=0, with a reflective BC for T }
value(w)=0
load(temp) = 0
line to close

TIME 0 to 100

MONITORS
for cycle=5 { watch what's happening }
contour(temp) as "Temperature"
contour(psi) as "Stream Function"
contour(w) as "Vorticity"
vector(curl(psi)) as "Flow Velocity" norm

PLOTS
for t = 1 by 1 to 10 by 10 to endtime
grid(x,y)
contour(temp) as "Temperature" painted
contour(psi) as "Stream Function"
contour(w) as "Vorticity" painted
vector(curl(psi)) as "Flow Velocity" norm
contour(rho) as "Density" painted

HISTORIES
history(temp) at (0.1*Lx,Ly) (0.2*Lx,Ly) (0.5*Lx,Ly) (0.8*Lx,Ly)
(0.7*Lx,0.5*Ly) (0.04*Lx,0.1*ly) as "Temperature"
history(u) at (0.1*Lx,Ly) (0.2*Lx,Ly) (0.5*Lx,Ly) (0.8*Lx,Ly)
(0.7*Lx,0.5*Ly) (0.04*Lx,0.2*Ly) as "X-velocity"
history(v) at (0.04*Lx,0.1*ly) as "Y-velocity"
history(v) at (0.04*Lx,0.1*ly) vs sqrt(t) as "Y-velocity"
history(psi) at (0.52,0.38)

```


END

5.2.24 Variable_Types

5.2.24.1 array_variables

```
{ ARRAY_VARIABLES.PDE
```

This example demonstrates the use of [ARRAY_VARIABLES](#)^[212].
A set of heat equations is solved as a demonstration.

```
}
```

```
title 'ARRAY variable test'
```

```
variables
  U=array[5]           { an array of field variables }
```

```
global variables
  g(threshold=0.1) = array[5] { and an array of global variables }
```

```
definitions
  u0 = 1-x^2-y^2
  s = array(1,2,3,4,5) { each equation has a different source }
```

```
{ use initial equations to diffuse the otherwise discontinuous initial value caused by
value BC }
```

```
initial equations
  repeat i=1 to 5
    U[i]: del2(u[i]) = 0
  endrepeat
```

```
equations
  repeat i=1 to 5
    U[i]: del2(u[i]) +s[i] = dt(u[i])
    g[i]: dt(g[i]) = i-g[i]
  endrepeat
```

```
boundaries
  Region 1
    start(-1,-1)
    repeat i=1 to 5
      value(u[i])=u0
    endrepeat
    line to (1,-1) to (1,1) to (-1,1) to close
```

```
time 0 to 10
```

```
plots
  for cycle=10
    contour(u_1)           ! variables may be indexed with underscores
    repeat i=1 to 5
      contour(u[i]) as "U_"+$i ! variables may be indexed with brackets
    endrepeat
    history(g)
    history(u) at (0,0) (1/4,1/4) (1/2,1/2) (3/4,3/4)
    vtk(u,g)
    table(u,g)
    transfer(u,g)
```

```
end
```

5.2.24.2 complex_emw21

```
{ COMPLEX_EMW21.PDE
```

This problem is an image of "Backstrom_Books|waves|Electrodynamics|emw21.pde"
rewritten in terms of [complex](#)^[123] variables.

```

}
TITLE                               { emw21.pde }
'Plane Wave in a Conductor'
SELECT
  errlim= 1e-3                          { Limit of relative error }

VARIABLES
  Ez = complex(Ezr,Ezi)                 { Real and imaginary parts }

DEFINITIONS
  Lx= 1.0                               Ly= 0.2 { SI units throughout }
  eps0= 8.85e-12                         eps   { Domain size }
  mu0= 4*pi*1e-7                         mu    { Permittivity }
  sigma                                  { Permeability }
  omega= 5e9                              { Electric conductivity }
  Ez_in= 1.0                              { Angular frequency }
  Ep= magnitude(Ez)                     { Input field Ez }
  phase= carg(Ez)/pi*180                { Modulus of Ez }
                                          { Angle }

EQUATIONS
  Ez: del2( Ez)+ mu*omega*complex(eps*omega, -sigma)*Ez= 0

BOUNDARIES
region 'conductor'      eps= eps0      mu= mu0      sigma= 1e-1
  start 'outer' (0,0)
  natural(Ez)= complex(0,0)   line to (Lx,0)
  value(Ez)= complex(0,0)   line to (Lx,Ly)   { Conducting }
  natural(Ez)= complex(0,0)   line to (0,Ly)
  value(Ez)= complex(Ez_in,0) line to close   { Input field }

PLOTS
  elevation( Ez, Ep) from (0,Ly/2) to (Lx,Ly/2)
  elevation( phase) from (0,Ly/2) to (Lx,Ly/2)
  elevation( Ez, Ep) on 'outer'
  contour( Ezr)      contour( Ezi)
END

```

5.2.24.3 complex_sinusoidal_heat

```
{ COMPLEX_SINUSOIDAL_HEAT.PDE
```

This example demonstrates the use of [COMPLEX](#)^[123] variables and [ARRAY](#)^[213] definitions to compute the time-sinusoidal behavior of a rod in a box.

The heat equation is

$$\text{div}(k*\text{grad}(\text{temp})) = cp*dt(\text{temp})$$

If we assume that the sources and solutions are in steady oscillation at a frequency ω , then we can write

$$\text{temp}(x,y,t) = \text{phi}(x,y)*\exp(i*\omega*t) = \text{phi}(x,y)*(\cos(\omega*t) + i*\sin(\omega*t))$$

Substituting this into the heat equation and dividing the $\exp(i*\omega*t)$ out of the result leaves

$$\text{div}(k*\text{grad}(\text{phi})) - i*\omega*cp*\text{phi} = 0$$

The temperature $\text{temp}(x,y,t)$ can be reconstructed at any time by expanding the above definition.

In this example, we construct an array of sample times and the associated arrays of sine and cosine factors. These arrays are then used to display a time history of temperature at various points in the domain.

```
}
```

```
TITLE 'Time Sinusoidal Heat flow around an Insulating blob '
```

```
VARIABLES
  ! define the complex amplitude function phi and its real and imaginary components
  phi=complex(phir,phii)
```

```
DEFINITIONS
  k=1
  ts = array (0 by pi/20 to 2*pi) ! an array of sample times
  fr = cos(ts)                   ! sine and cosine arrays
  fi = sin(ts)
  ! define a function for evaluating a time array of temp(px,py,t) at a point
  temp(px, py) = eval(phir,px,py)*fr + eval(phii,px,py)*fi
```

```

EQUATIONS
  phi:  Div(k*grad(phi)) - complex(0,1)*phi= 0

BOUNDARIES

  REGION 1 'box'
  START(-1,-1)
  VALUE(Phi)=complex(0,0)  LINE TO(1,-1)  { Phi=0 in base line }
  NATURAL(Phi)=complex(0,0) LINE TO (1,1)  { normal derivative =0 on right side }
  VALUE(Phi)=complex(1,0)  LINE TO (-1,1)  { Phi = 1 on top }
  NATURAL(Phi)=complex(0,0) LINE TO CLOSE  { normal derivative =0 on left side }

  REGION 2 'rod'  { the embedded circular rod }
  k=0.01
  START 'ring' (1/2,0)
  ARC(CENTER=0,0) ANGLE=360 TO FINISH

PLOTS
  CONTOUR(Phir)          ! plot the real part of phi
  REPORT(k) REPORT(INTEGRAL(Phir, 'rod'))
  CONTOUR(Phii)         ! plot the imaginary part of phi
  REPORT(k) REPORT(INTEGRAL(Phii, 'rod'))

  ! reconstruct the temperature distribution at a few selected times
  REPEAT tx=0 by pi/2 to 2*pi
  SURFACE(phir*cos(tx)+phii*sin(tx)) as "Phi at t="+$[4]tx
  ENDREPEAT

  ! plot the time history at a few selected positions
  ELEVATION(temp(0,0), temp(0,0.2), temp(0,0.4), temp(0,0.5)) vs ts as "Phi(t) at x=0,
  Y=(0, 0.2 ,0.4, 0.5)"

  VECTOR(-k*grad(Phir))

  ! plot a lineout of phir and phii through the domain
  ELEVATION(Phi) FROM (0,-1) to (0,1)
  ! plot the real component of flux on the surface of the rod
  ELEVATION(Normal(-k*grad(Phir))) ON 'ring'

END

```

5.2.24.4 complex_variables

```
{ COMPLEX_VARIABLES.PDE
```

This example demonstrates the use of complex variables in FlexPDE.

Declaring a variable `COMPLEX`^[123] causes the definition of two subsidiary variables, either named by default or by use choice. These variables represent the real and imaginary parts of the complex variable.

```
}
```

```
title 'Complex variables test'
```

```
variables
```

```
U = complex (Ur,Ui)  { creates variables (Ur,Ui) }
```

```
definitions
```

```
u0 = 1-x^2-y^2
s = complex(4,x)
```

```
equations
```

```
{ create two coupled scalar equations, one for Ur and one for Ui }
U: del2(U) + conj(U) + s = 0
```

```
boundaries
```

```
Region 1
start(-1,-1)
value(Ur)=u0      { apply BC to Ur.  Ui defaults to natural(Ui)=0 }
line to (1,-1) to (1,1) to (-1,1) to close
```

```
plots
```

```
contour(Ur,Ui)      { plot both Ur and Ui overlaid }
contour(Real(U),Imag(U))  { an equivalent representation }
```

```

contour(U)           { another equivalent representation }
vector(U)           { plot vectors with Ur as X component and Ui as Y component }

elevation(U,s) from(-1,0) to (1,0) { plot three traces: Ur, Ui and S }
vtk(U,s)            { test various export forms }
transfer(U,s)

end

```

5.2.24.5 complex+time

```

{ COMPLEX+TIME.PDE
  This example shows the use of complex[125] variables in time-dependent systems.
  The equation that is solved is not intended to represent any real application.
}
title 'Complex transient equations'
Variables
  U(0.01) = complex (Ur,Ui)           { creates variables Ur and Ui }
definitions
  u0 = 1-x^2-y^2
  s = complex(4,x)
equations
  { create two scalar equations, one for Ur and one for Ui }
  U: del2(U) +s = dt(U)
boundaries
  Region 1
    start(-1,-1)
    natural(Ur)=u0-Ur
    line to (1,-1) to (1,1) to (-1,1) to close
time 0 to 1
plots
  for cycle=10
    contour(Ur,Ui)
    contour(Real(u),Imag(U))
    contour(U)
    vector(U)
    elevation(u,s) from(-1,0) to (1,0)
    history(u,s) at (0,0)
  end

```

5.2.24.6 inactive_variables

```

{ INACTIVE_VARIABLES.PDE
  This example demonstrates the use of variables absent in selected regions.
  The problem is a modification of LOWVISC.PDE[414], in which the bottom half of the
  channel
  has been filled with a solid.
  The fluid equations are declared INACTIVE[138] in the solid region, but a temperature
  equation has been added that is active everywhere.
  The bottom of the solid is held at temperature = 0, while the fluid has an incoming
  temperature of 1.
  We solve the equations in sequence: first the fluid equations, then the temperature.
}
title 'Variables inactive in regions'
variables

```

```

u(0.1)
v(0.01)
p(0.1)
temp(0.1)

definitions
  Lx = 5          Ly = 1.5
  Gx = 0          Gy = 0
  u0 = 0          { default initial u-velocity }
  p0 = 0          { default initial pressure }
  pin=2          { inlet pressure }
  speed2 = u^2+v^2
  speed = sqrt(speed2)
  dens = 1
  visc = 0.04
  vxx = (p0/(2*visc*(2*Lx)))*y^2*(Ly-y)^2 { open-channel x-velocity }
  k = 0.1        { default thermal conductivity }

  rball=0.5
  cut = 0.1      { bevel the corners of the obstruction }

  penalty = 100*visc/rball^2
  Re = globalmax(speed)*(Ly/2)/(visc/dens)

initial values
  u = u0   v = 0   p = p0

equations
  u: visc*div(grad(u)) - dx(p) = dens*(u*dx(u) + v*dy(u))
  v: visc*div(grad(v)) - dy(p) = dens*(u*dx(v) + v*dy(v))
  p: div(grad(p)) = penalty*(dx(u)+dy(v))
then
  temp: div(k*grad(temp)) - u*dx(temp) - v*dy(temp) = 0

Boundaries
{ bound the entire region, placing temperature boundary conditions }
region 1
  INACTIVE (u,v,p) { Inactivate the fluid in this region }
  start(-Lx,-Ly)
  value(temp)=0    line to (Lx,-Ly)
  natural(temp)=0  line to (Lx,0)
  value(temp)=1    line to (Lx,Ly) { inlet fluid temp = 1 }
  natural(temp)=0  line to (-Lx,Ly)
  natural(temp)=-k*dx(temp) line to close { outlet diffusive temperature flux }

{ overlay the fluid region onto the total domain, including obstruction,
and place fluid boundary conditions }
region 2
  u0 = 0.5*vxx   P0=pin*x/(2*Lx) { initial values in fluid region }
  k = 0.01      { fluid thermal conductivity }
  start(-Lx,0)
  value(u)=0   value(v) = 0
  line to (Lx/2-rball,0)
  to (Lx/2-rball,rball) bevel(cut)
  to (Lx/2+rball,rball) bevel(cut)
  to (Lx/2+rball,0)
  to (Lx,0)
  load(u) = 0   value(v) = 0   value(p) = pin
  line to (Lx,Ly)
  value(u) = 0   value(v) = 0   load(p) = 0
  line to (-Lx,Ly)
  load(u) = 0   value(v) = 0   value(p) = 0
  line to close

monitors
  contour(speed)
  contour(u)   report(Re)
  contour(v)   report(Re)
  contour(p)   as "Pressure" painted
  contour(temp)

plots
  contour(u)   report(Re)
  contour(v)   report(Re)
  contour(p)   as "Pressure" painted
  contour(temp)
  contour(speed) painted   report(Re)

```

```

vector(u,v) as "flow" report(Re)
contour(dx(u)+dy(v)) as "Continuity Error"

end

```

5.2.24.7 vector_lowvisc

```

{ VECTOR_LOWVISC.PDE
  This example is an implementation of LOWVISC.PDE[414] using vector variables[212].
}

title 'Viscous flow in 2D channel, Re > 40'

select errlim = 0.005

variables
  vel(0.01) = vector(u,v)
  p(1)

definitions
  Lx = 5      Ly = 1.5
  Gx = 0      Gy = 0
  p0 = 2
  speed2 = u^2+v^2
  speed = sqrt(speed2)
  dens = 1
  visc = 0.04
  vxx = -(p0/(2*visc*(2*Lx)))*(Ly^2-y^2)      { open-channel x-velocity }

  rball = 0.4
  cut = 0.1      { value for bevel at the corners of the obstruction }

  penalty = 100*visc/rball^2
  Re = globalmax(speed)*(Ly/2)/(visc/dens)

initial values
  vel = vector(0.5*vxx ,0)
  p = p0*(Lx+x)/(2*Lx)

equations
  vel: visc*div(grad(vel)) - grad(p) = dens*dot(vel,grad(vel))
  p: div(grad(p)) = penalty*div(vel)

Boundaries
  region 1
  start(-Lx,0)
  load(u) = 0 value(v) = 0 load(p) = 0
  line to (Lx/2-rball,0)

  value(vel)=vector(0,0) load(p)= 0
  line to (Lx/2-rball,rball) bevel(cut)
  to (Lx/2+rball,rball) bevel(cut)
  to (Lx/2+rball,0)

  load(u) = 0 value(v) = 0 load(p) = 0
  line to (Lx,0)

  load(u) = 0 value(v) = 0 value(p) = p0
  line to (Lx,Ly)

  value(vel)=vector(0,0) load(p) = 0
  line to (-Lx,Ly)

  load(u) = 0 value(v) = 0 value(p) = 0
  line to close

monitors
  contour(speed)

plots
  contour(u) report(Re)
  contour(v) report(Re)
  contour(speed) painted report(Re)
  vector(u,v) as "flow" report(Re)

```

```

contour(p) as "Pressure" painted
contour(dx(u)+dy(v)) as "Continuity Error"
elevation(u) from (-Lx,0) to (-Lx,Ly)
elevation(u) from (0,0) to (0,Ly)
elevation(u) from (Lx/2,0) to (Lx/2,Ly)
elevation(u) from (Lx,0) to (Lx,Ly)

end

```

5.2.24.8 vector_variables

```
{ VECTOR_VARIABLES.PDE
```

This example demonstrates the use of [vector-valued variables](#)^[212]. The equations are not intended to represent any real application, but merely to show some vector constructs.

```
}
```

```
title 'Vector Variables'
```

```
variables
```

```
U = vector(Ux,Uy) { declares component variables Ux and Uy }
V           { a scalar variable to validate Uy }
```

```
definitions
```

```
u0 = 1-x^2-y^2
u1 = 1+y+x^3
s = vector(4, -6*x)
```

```
equations
```

```
U: div(grad(U)) +s = 0
V: del2(v) +ycomp(s) = 0
```

```
boundaries
```

```
Region 1
start(-1,-1)
value(U)=vector(u0,u1)
value(v)=u1
line to (1,-1) to (1,1) to (-1,1) to close
```

```
plots
```

```
contour(Ux)
contour(Uy,u1)
contour(v,u1)
contour(Ux,Uy)
vector(U)
elevation(u) from(-1,0) to (1,0)
vtk(u,s)
transfer(u,s)
table(u,s)
```

```
end
```

5.2.24.9 vector+time

```
{ VECTOR+TIME.PDE
```

This example demonstrates the use of [Vector variables](#)^[212] in time-dependent problems.

A vector variable is controlled by a heat equation. The X and Y components are given source terms consistent with an arbitrarily chosen final result.

This problem is not intended to represent any real application, but is constructed merely to demonstrate the use of some features of vector variable support in FlexPDE.

```
}
```

```
title 'Vector transient heatflow'
```

```
variables
```

```
{ declare a vector variable with components Ux and Uy.
  Each component is expected to have a variation large compared to 0.01 }
```

```

u(0.01) = vector(Ux,Uy)
{ declare a scalar field variable to validate the y-component }
v(0.01)

definitions
{ Define the expected solutions for the components. }
u0 = (1-x^2-y^2)
u1 = (1+y+x^3)
{ Define source terms that will result in the programmed solutions }
s = vector(4,-6*x)

equations
U: del2(U) +s = dt(U)
v: del2(v) +ycomp(s) = dt(v)

boundaries
Region 1
start 'outer' (-1,-1)
{ Apply a time ramp to the value boundary conditions, so that the
  initial boundary values agree with the initial field values. }
value(U)=vector(u0,u1)*uramp(t, t-1)
value(v)=u1*uramp(t, t-1)
line to (1,-1) to (1,1) to (-1,1) to close

time 0 to 5

plots
for cycle=10
{ various uses of vector variables in plot statements: }
contour(Ux, u0)
contour(Uy, u1)
contour(v, u1)
contour(Ux, Uy)
contour(U)
vector(U)
elevation(U, v) from(-1,0) to (1,0)
history(U, v) at(0,0)

elevation(u1, Uy, v) on 'outer'
elevation(u0, Ux) on 'outer'
elevation(normal(grad(Ux)), normal(grad(u0))) on 'outer'
elevation(normal(grad(v)), normal(grad(Uy)), normal(grad(u1))) on 'outer'

end

```


Index

- " -

"Include" Files 165

- # -

147, 165

- \$ -

\$ 177

- . -

.INI file 28
 .PDE file 4, 163
 .PG6 file 275
 .PG7 file 4

- _ -

_DEBUG.TXT file 4
 _EIG.TXT file 4
 _INITIALMESH.XFR file 4
 _LOG.TXT file 4
 _RESTART.XFR file 4

- 1 -

1D
 boundary conditions 254
 coordinates 207

- 2 -

2D
 coordinates 207

- 3 -

3D
 coordinates 207
 PLOTS 262
 Problems 94, 99

- A -

About banner 2
 ABS function 173
 Accuracy
 Controlling 66
 Threshold 210

Adaptive Mesh Refinement 303, 365
 Add 183
 ALE 140, 236
 ALIAS 205
 aliasing coordinates 207
 Analytic Functions 173
 Animation 362
 ANTIPERIODIC Boundary Conditions 256
 ARC 54, 241
 ARCCOS function 173
 ARCSIN function 173
 ARCTAN function 173
 AREA_INTEGRAL 67, 188
 AREA_INTEGRATE 264
 Arithmetic Operators 183
 ARRAY

Definition 215
 Size 215
 Variables 212

ARRAYS

Using 150

AS 'string' 265

ASPECT 197

AT 286

ATAN2 function 173

AutoCAD 157

AUTOHIST 205, 286

AUTOMESH 197

AUTOSTAGE 199

AUTOTRANSFER 197

- B -

Batch runs 287

Bessel Function 173

BESSJ function 173

BESSY function 173

Bevels 251

BINTEGRAL 67, 186

BIPRECON 204

Bitmaps 275

BLACK 205, 265

BLOCK 224

BMP 275

BOLD 205

BOUNDARIES 49, 54, 99, 241

Paths and Path Names 241

Search 182

Boundary Conditions 230, 301

1D 254

3D 110, 254

ANTIPERIODIC 256

CONTACT 251, 255

Default 251

Dirichlet 251

Boundary Conditions 230, 301

Discontinuous 354
 Flux 88, 251
 JUMP 255
 LOAD 251
 NATURAL 51, 58, 85, 251, 351
 NOBC 251
 PERIODIC 256
 Point Load 253
 Point Value 253
 Remain in effect 251
 Syntax 253
 Terminating 251
 VALUE 51, 58, 251
 VELOCITY 251

Boundary Paths and Path Names 241**Boundary Search 182****Break 260****- C -****Canister Example 107****CARG 183****cartesian 207****CARTESIAN1 207****CARTESIAN2 207****CARTESIAN3 207****case sensitivity 53, 165****CDF output 147, 276****CDFGRID 205****CEILING function 174****CELL_LIMIT 197****CELL_SIZE 193****CENTER 241****CEXP 183****CHANGELIM 84, 200****CHECK_DUP_REGIONS 198****CHECK_TABLES 200, 223****Colors**

Spectral 207
 Thermal 207

Command-line

Parameters 155
 Running without graphics 156
 Switches 155

Commas 171**Comments 167****COMPLEX**

Definitions 220
 Operators 183
 Variables 123, 211

Complex Eigenvalues 235**Components**

Tensor 192
 Vector 191

conditional expressions 194**CONJ 183****CONST**

Array 215
 definitions 214
 Matrix 217

Constants 172**CONSTRAINTS 238****CONTACT 251, 255****Contact Resistance 89****CONTOUR 59****CONTOUR plot 262****CONTOURGRID 205****CONTOURS 205, 265****Controls**

Global Graphics 205
 Mesh Generation 197
 Solution 199

Controls Menu 10**coordinates**

1D 207
 2D 207
 3D 207
 aliasing 207
 Cartesian 207
 CARTESIAN1 207
 CARTESIAN2 207
 CARTESIAN3 207
 CYLINDER1 207
 Cylindrical 207
 renaming 207
 scaling 360
 SPHERE1 207
 Transformation 207
 XCYLINDER 207
 YCYLINDER 207

COS function 173**COSH function 173****CRITICAL 260****CROSS product 190****CUBIC 200****CURL Operator 184****Curl Theorem 86****CURRENT_DIRECTORY 193****CURVE 54, 243****CURVEGRID 198****Cut Planes 272****CWD 193****CYCLE plot interval 274****CYLINDER 115, 238****CYLINDER1 207****cylindrical 207****- D -****Data Fitting 613****Decimal Numbers 172****Decoupling Variables 91****DEFINITIONS 49, 58, 214**

DEFINITIONS 49, 58, 214

Array 215
Function 220
Matrix 217
Point 222
Stage 221

DEL2 - Laplacian Operator 184**DELAY 200****Dependent Variables 209****Derivative operators 184****Derivatives**

high order 232

Descriptor formatting 165**Differential Operators 184, 232****Differentiation**

Notation 53
Suppressing 228

DIPRECON 204**DIRECT 200****DIRECTLIMIT 200****Dirichlet Boundary Conditions 251****Discontinuities 354****Discontinuous Variables 89****Display**

Modifiers 264
Specifications 262

DIV - Divergence Operator 184**Divergence Theorem 86****Divide 183****Domain**

Description 54
Menu 6
Review 16

Dongle

Registration 32, 38
Upgrading 38

DOTproduct

Tensor 192
Vector 190

DROPOUT 265**DXF 157****- E -****EDGE_DISTANCE function 174****Edit Menu 6****Edit while Run 24****Editing Problem Descriptors 14****Eigenvalue 193**

Summary 81

Eigenvalues 78, 235**Electromagnetics 290****Electrostatics 290, 304****ELEVATION 59**

Plot 262, 272

ELEVATIONGRID 205**Elliptical segments 242****EMF 265****Empty Layers in 3D 249****END 287****END_ITERATION 233****ENDLABEL 244****ENDREPEAT 195****Engineering Notation 172****EPS 265****EQUATIONS 49, 53**

and Variables 233
Initial 235
Iteration 233
Section 232
Sequencing 233

ERF function 173**ERFC function 173****ERRLIM 66, 200, 210****Error 274**

Estimates 358
Function 173
Tolerance 66

Eulerian 140, 236**EVAL function 182****Examples 371**

Constraints 185
Graphics 285
Integrals 185
Simple 166
Tutorial 60

Excludes 249**EXP function 173****EXPLICIT 139****Exponential Integral - EXPINT 173****EXPORT 147, 265**

Data 276
Graphics 275
Movie 26

Export Plot 21**expressions 194****EXTRUSION 95, 99**

Notation 95
Section 238

- F -**FEA 365****FEATURE_INDUCTION 198****FEATUREPLOT 205****Features 249****FIELDLINES 266****FIELDMAP plot 263****File**

Drag-and-drop 7
Extension 4, 163
Input 4
Menu 6, 7

File

Name 4, 163
Output 4

FILE 'string' 266**Fillets** 251**FINALLY**

Equation Sequencing 233

Find 14**FINISH** 241**Finite Element Mesh** 56**Finite Element Methods** 300, 365**FIRSTPARTS** 201**FIT Function** 178**FIXDT** 201**FIXED RANGE** 266**FlexPDE** 365

Application 49
Facilities 48
Overview 46
Script 49

FLOOR function 174**Flux Boundary Conditions** 88, 251**Font** 14, 30, 205

BOLD 205
ITALIC 206
SANSERIF 207
SERIF 207

FORMAT 147**FORMAT 'string'** 266**Formatting** 165**FRAME** 266**FRONT** 258**Function definition** 220**Functions**

Analytic 173
Non-analytic 174
String 177

fuzzy IF 181**- G -****Galerkin** 365**GAMMA function** 173**GLCONTOUR plot** 263**GLGRID plot** 263**Global Graphics Controls** 205**GLOBAL VARIABLES** 213**GLOBALMAX function** 174**GLOBALMAX_X function** 174**GLOBALMAX_Y function** 174**GLOBALMAX_Z function** 174**GLOBALMIN function** 174**GLOBALMIN_X function** 174**GLOBALMIN_Y function** 174**GLOBALMIN_Z function** 174**GLSURFACE plot** 263**GRAD - Gradient Operator** 184**Graphic Display modifiers** 264**Graphical Output** 59**Graphics**

Export 275
Global Controls 205
Running without 156

Graphics Examples 285**GRAY** 205, 267**Grid Control Features** 249**GRID plot** 263**GRIDARC** 198**GRIDLIMIT** 198**GUI**

Running without 156

Guidelines for Problem Setup 51, 52**- H -****HALT** 260**Hardcopy** 275**HARDMONITOR** 206**Heat Equation** 86**Help Menu** 6**HISTORIES**

Section 286
Staged Problems 286
Windowing 286

- I -**ICCG** 204**IF** 194**ILUPRECON** 204**IMAG** 183**Implicit Curves** 243**import**

DXF 157
mesh 157
OBJ 157

Importing Data from Other Applications 150**INACTIVE** 135**include files** 165**Inconsistent Initial Conditions** 77**INITGRIDLIMIT** 198**Initial Conditions** 77, 354**INITIAL EQUATIONS** 235**INITIAL VALUES** 49, 84, 231**input** 163**Installation** 2**Instantaneous Switching** 77**INTEGRAL** 67, 188, 189**Integral Rules** 301**Integrals** 67, 71

3D 117
Area 188

Integrals 67, 71
 Constraints 238
 Line 186
 Operators 185
 Surface 187
 Time 186
 Volume 188, 189

INTEGRATE 267

Integration by Parts 86, 301

Internet Key 35

ITALIC 206

ITERATE

 Equations 233
 Selector 201

- J -

JPEG 267

JUMP 89, 92, 255

- L -

LABEL 244

Labeled Boundary Paths 244

Lagrange 140, 236

LAMBDA 193

LANCZOS 204

LAYER 95, 99

 Extrusion 97, 238
 Shaped Interfaces 113

LEVELS 267

License 35, 38, 41, 44

 Registration 32, 33

LIMIT 260

LIMITED REGIONS 105, 248

LINE 54, 241

LINE LIST 244

LINE_INTEGRAL 67, 186

LINE_INTEGRATE 267

LINUPDATE 201

Linux 2

LIST 226, 241

Literal Strings 172

LN function 173

LOAD 251

LOG 267

LOG10 function 173

logarithm 173

LOGLIMIT 206

LUMP function 178

- M -

MacOS 2

Magnetic Field 86

Magnetic Vector Potential 290

Magnetostatics 290

MAGNITUDE of vector 190

MAP 256

Material

 Parameters 58, 98, 246
 Properties 58, 98, 246

MATERIALS 229

MATRICES

 Using 150

MATRIX

 Definition 217
 Size 217

MAX function 174

Maximize

 Plot 21
 section 258

Maximum Value 174

Maxwell's Equations 290

Menu 6

MERGE 268

MERGEDIST 198

MESH 268

 import 157

Mesh Generation

 Adaptive 365
 Controls 197, 249
 MESH_DENSITY 228
 MESH_SPACING 56, 228

Mesh Refinement

 Controls 144
 FRONT 258
 RESOLVE 259

MESH_DENSITY 228

MESH_SPACING 228

Metafile 264

MIN function 174

Minimize

 section 259

MOD function 174

Modal Analysis 78, 235

MODE SUMMARY plot 264

MODES 201

Modify Menu 6

Modulo 174

MONITORS 59, 261

 Steady State 274
 Time Selection 274

MOVABLE 222

MOVE 211

Movie 26

 Making 362

Moving Meshes 140, 211, 236

 Balancing 141
 Example 142
 Reconnection 144

Multiple processors 154, 203

Multiply 183

- N -

Named Boundary Paths 243

NATURAL 251

Boundary Condition 51, 58, 85, 86, 301, 351

Network License Manager 41

NEWTON 201, 352

Newton-Raphson Iteration 84

Next 26

NGRID 198

NOBC 251

NODE POINT (Node Placement) 250

NODELIMIT 197

NOHEADER 268

NOLINES 268

NOMERGE 268

NOMINMAX 206, 268

Non-Analytic Functions 174

NONLINEAR 201

Coefficients and Equations 82

Problems 84, 152, 352

NONSYMMETRIC 201

NORM 268

NORMAL component 190

NOTAGS 206, 268

Notation 53

NOTIFY_DONE 201

NOTIPS 206, 269

NRMATRIX 203

NRMINSTEP 201

NRSLOPE 202

Numbering and Naming Regions 251

Numeric

Constants 172

Range 172

Reports 273

- O -

OBJ 157

ON

Equation 262, 269, 271

GRID 269

LAYER 120, 269, 271

REGION 120, 269, 271

Selectors 271

SURFACE 120, 262, 269, 271

One-Dimensional Problems 93

Operators

Arithmetic 183

COMPLEX 183

Differential 184

Integral 185

Relational 189

Smoothing 356

String 190

Tensor 192

Vector 190

OPTERRLIM 202

Optimization 258, 259

ORDER 202, 211

Ordering Regions 250

ORTHOMIN 204

oscillation 354

OVERSHOOT 202

- P -

PAINTED 206, 269

PAINTGRID 206

PAINTMATERIALS 206, 269

PAINTREGIONS 206, 269

Parameter Studies 68

Parameterized Definitions 220

Parameters

Material 58, 246

redefining 214

Regional 246, 247

PASSIVE Modifier 228

Paths and Path Names 241

PENWIDTH 206, 269

PERIODIC Boundary Conditions 256

PI 193

PLANE 115, 238

Plot

Cutplanes 272

Domain 271

Elevation 272

Export 21, 265, 267, 269, 270

FIELDLINES 266

Fixed Range 266

Integrate 267

Labels 22

Maximize 21

Menu 6

Modifiers 264

On Grid 273

POINTS 269

Print 21

Range 264, 270

Restore 21

Rotate 22

Scaling 266

Time Selection 274

View Saved Files 26

Windows 20

Zoom 22, 270

PLOTINTEGRATE 206

PLOTS 49, 59, 261

Cutplane 106, 120

Display 262

Print 269

PLOTS 49, 59, 261
 Printonly 270
 Time Selection 274
 Viewpoint 270
PNG 269, 275
POINT 241
 Components 222
 Definitions 222
 LOAD Boundary Conditions 253
 Movable 222
 VALUE Boundary Conditions 253
POINTS 269
Post-processing 146
PostScript 264
Potential 290
Power 183
PPM 275
PRECONDITION 202
PREFER_SPEED 202, 352
PREFER_STABILITY 202, 352
Preferences
 Menu 6
 Tabs 28
Preparing a Descriptor File 163
Previous 26
PRINT 269
Print Plot 21
Print Script 14
PRINTMERGE 206
PRINTONLY 270
Problem Descriptor Structure 163, 164
Problem Setup Guidelines 51, 52
Problem Solving Environment 46
Projection 99
Properties
 Material 58, 246
 Regional 246
Proxy 31
pulse function 176
PURGE 144

- Q -

QUADRATIC 202
questions 159
quoted strings 172

- R -

R 193
RADIUS 193, 241
RAMP function 176, 179
RANDOM function 174
RANDOM_SEED 202
RANGE 270
REAL 183

RECONNECT 144
REGION 54, 99
Regional Parameter Values 246
Regions
 1D 246
 3D 247
 Excluded 249
 Numbering and naming 251
 Ordering 250
 Overlaying 245
Registering 33, 35, 38, 41, 44
REGRID 199
REINITIALIZE 202
Relational Operators 189
REMATRIX 203, 352
renaming coordinates 207
REPEAT 195
Repeated Text 195
REPORT 67, 273
Reporting numbers 273
Reserved Words and Symbols 168
RESOLVE 259
RESTART 26
 Input 227
 Output 277
Restore Plot 21
Rhino 157
ROTATE 241
Rotate Plot 22
ROUND function 174
Run Menu 6

- S -

Samples 371
SANSERIF 207
SAVE function 180
SCALAR VARIABLES 213
Script 163
 Interpretation 65
script editing module 48
Scripting Language 46
SECTION
 BOUNDARIES 241
 BOUNDARY CONDITIONS 230
 CONSTRAINTS 238
 COORDINATES 207
 DEFINITIONS 214
 details 196
 END 287
 EQUATIONS 232
 EXTRUSION 238
 FRONT 258
 GLOBAL VARIABLES 213
 HISTORIES 286
 INITIAL VALUES 231
 MATERIALS 229

SECTION

MAXIMIZE 258
MINIMIZE 259
MONITORS 261
 names 164
PLOTS 261
RESOLVE 259
SELECT 197
TIME 260
TITLE 196
VARIABLES 209
SELECT 49, 197
Semicolons 171
Separators 171
SERIF 207
Settings
 Font 30
 General 28
 License Registration 32
 Web Proxy 31
Shaped Layer Interfaces 113
SIGN function 174
SIN function 173
SINH function 173
SINTEGRAL 187
SIZEOF 215
SMOOTH 224
SMOOTHINIT 199
Solution Controls 199
Solution Method 365
SPACE_ERROR function 174
Spaces 171
SPECTRAL_COLORS 207
SPHERE 115, 238
SPHERE1 207
SPLINE 224, 241
SPLIT 144
SQRT function 173
STAGE 193
STAGED
 Definitions 221
 Geometry 221
 Parameters 68
STAGEGRID 199
STAGES 68, 203, 221
START 54, 241
START_ITERATION 233
Starting FlexPDE 2
Status Panel 19
step function 176
Stop 260
Stop Menu 6, 11
String
 Functions 177
 Literal 172
 Operators 190

SUBSPACE 203
Subtract 183
SUM function 180
SUMMARY 68, 81
SUMMARY plot 264
SURF_INTEGRAL 187
SURFACE 59, 95, 99
 Extrusion 238
Surface Generators 238
Surface Integrals 117
SURFACE plot 264
Surface-Generating Functions 115
SURFACEGRID 207
SVG 270
SWAGE function 181
SWAP 144
Switches
 Command-line 155
symbolic equation analyzer 48

- T -

TABLE
 File format 225
 Input function 223
 Modifiers 224
 Output 147, 277
 usage 150
Tabledef Input 224
TABULATE definitions 226
TAN function 173
TANGENTIAL component 190
TANH function 173
TE and TM Modes 338
TECPLOT output 147, 277
Tensor Operators 192
TERRLIM 203
Text Strings 172
TEXTSIZE 207
THEN
 Equation Sequencing 233
THERMAL_COLORS 207
THETA 193
Threads 154, 203
 Setting the number used 28
Three-Dimensional Problems 94, 99
THRESHOLD 210
Time
 Critical 260
 Halt 260
 Integration 303
 Range 260
Time Dependence 74
 Things to avoid 77
TIME_ERROR function 174
TIME_INTEGRAL 186

TIMEMAX function 174
TIMEMAX_T function 174
TIMEMIN function 174
TIMEMIN_T function 174
TINTEGRAL 186
TITLE 49, 196
Tool Bar 13
TRANSFER
 Exporting Data 147
 File format 278
 File format v6 283
 Output 277
 Post-processing 146
 Restart 277
 Statement 227
TRANSFER6
 Output 278
TRANSFERMESH
 Output 277
 Post-processing 146
 Statement 227
TRANSFERMESHTIME 227
Transferring Data 147
TRANSPOSE
 Matrix 217
 Tensor 192
trigonometric functions 173

- U -

Unit Functions 176
UNORMAL 190
Updates
 By pass Auto Check 6
 Check for 6
UPFACTOR 203
UPULSE function 176
UPWIND 203
URAMP function 176
User Guide 46
USTEP function 176

- V -

VAL function 182
VALUE 251
 Boundary Condition 51, 58
 Initial 231
VANDENBERG 204
VARIABLES 49, 53
 and Equations 233
 Array 212
 Complex 123, 211
 Dependent 209
 Explicit 139
 Global 213
 Order 211

 Regional 135
 Threshold 210
 Vector 130, 212
VECTOR 59
 components 191
 composition 190
 Curvilinear Derivatives 132
 operators 190
 Plot 264
 Potential 290
 Variables 130, 212
VECTORGRID 207
VELOCITY 251
 Boundary Condition 141
Version 4
 Converting to version 5 363
Version 5
 Converting from version 4 363
 Converting to version 6 363
Version 6
 Converting from version 5 363
 Converting to version 7 364
Version 7
 Converting from version 6 364
VERSUS 286
View
 Saved Graphics Files 26
View Menu 6
VIEWPOINT 207, 270
Visit 147
Visualization 147
VOID
 Compartments 105
 Layers 249
VOL_INTEGRAL 67, 188, 189
VOL_INTEGRATE 270
Volume Integrals 117
VTK output 147, 278
VTKLIN 278

- W -

Waveguides
 Homogeneous 337
 Non-Homogeneous 342
Web Proxy 31
While the Problem Runs 18
white space 171
WINDOW 286
Window Tiling 274
Windows 2

- X -

XBOUNDARY 182
XCOMP vector operator 191
XCYLINDER 207

XERRLIM 203
XMERGEDIST 199
XPM 275
XServer
 Running without 156
XXCOMP 192
X-Y 99
XYCOMP 192
X-Z 99
XZCOMP 192

- Y -

YBOUNDARY 182
YCOMP vector operator 191
YCYLINDER 207
YMERGEDIST 199
YXCOMP 192
YYCOMP 192
YZCOMP 192

- Z -

ZBOUNDARY 182
ZCOMP vector operator 191
Z-dimension 99
ZMERGEDIST 199
ZOOM 270
Zoom Plot 22
ZXCOMP 192
ZYCOMP 192
ZZCOMP 192
